

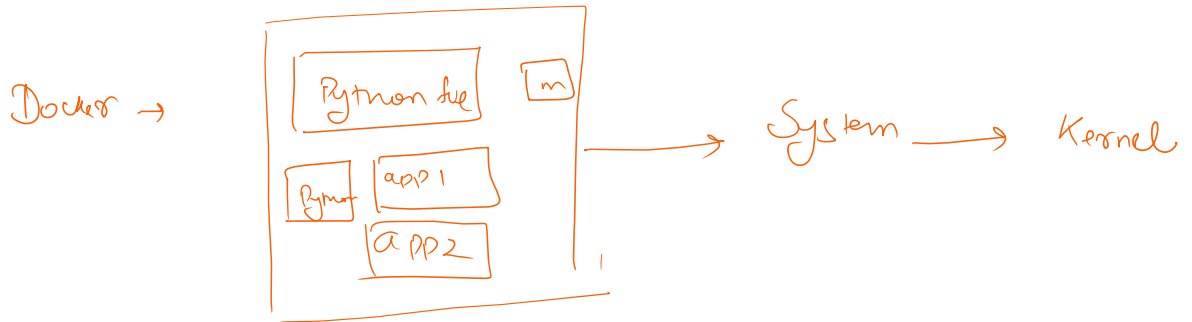
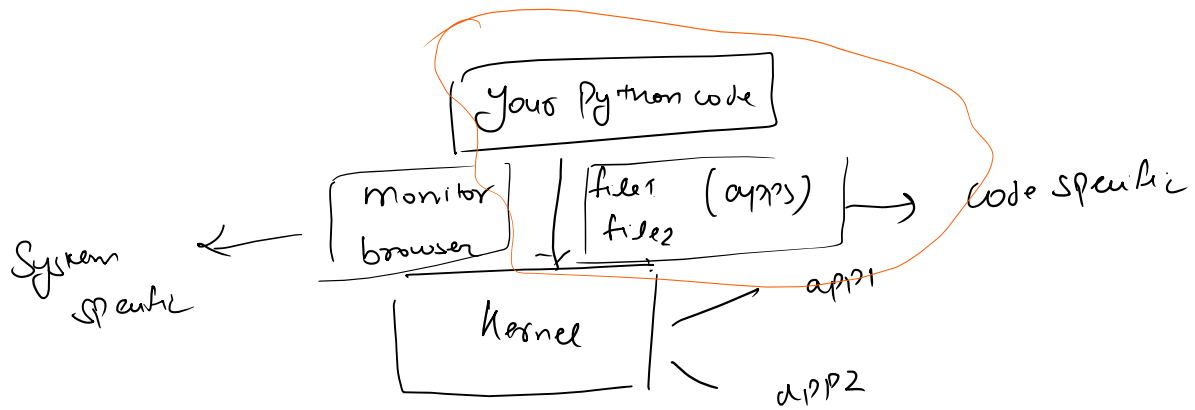


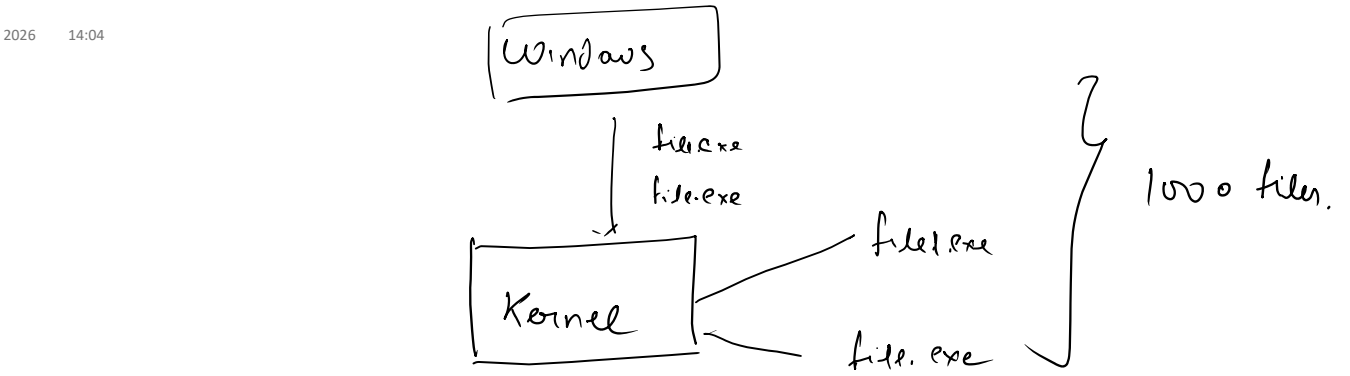

Docker → WSL2 → Virtual Box
On Windows

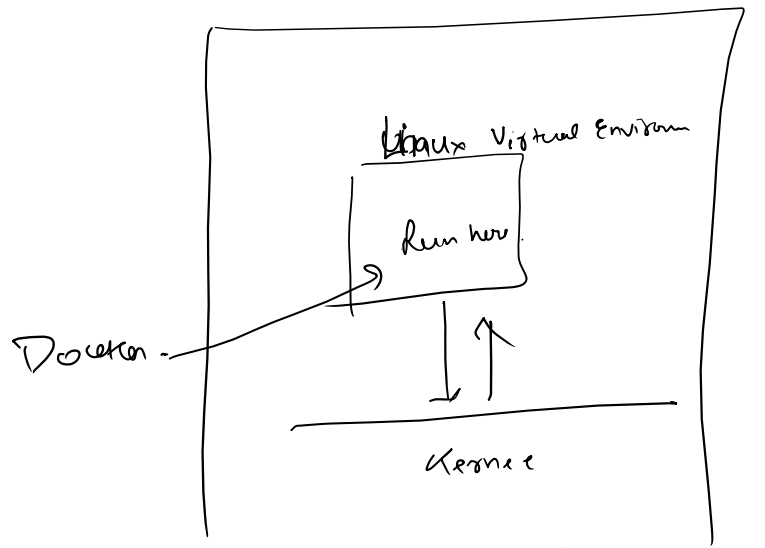

Then Docker is set up correctly and you can move on to packaging the app.
The next step is to define the image files:

Dockerfile and .dockerignore.

For your project, the image should include only:

fastapi_app.py, rag_core.py, utils.py, prompts/, and requirements.txt

It should exclude:

data/, *.ipynb, __pycache__/, .git/, and .env*

After that, the flow is:

```
docker build -t session1-rag .
```

```
docker tag session1-rag yourdockerhubusername/session1-rag:latest
```

```
docker login
```

```
docker push yourdockerhubusername/session1-rag:latest
```

And your friends will run:

```
docker pull yourdockerhubusername/session1-rag:latest
```

```
docker run --env-file .env -p 8000:8000 yourdockerhubusername/session1-rag:latest
```

If you want, next I can give you the exact contents of the Dockerfile and .dockerignore without editing anything yet.