


User Story Ingestion

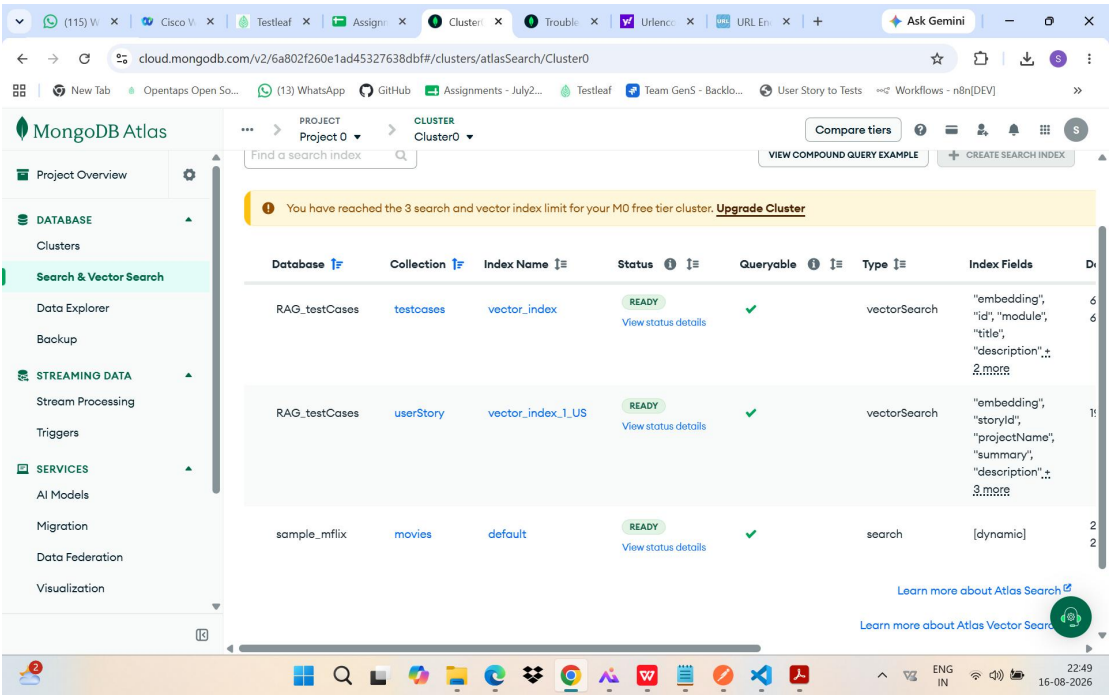

```
{
  "fields": [
    { "type": "vector", "path": "embedding", "numDimensions": 1024, "similarity": "cosine" },
    { "type": "filter", "path": "storyId" },
    { "type": "filter", "path": "projectId" },
    { "type": "filter", "path": "summary" },
    { "type": "filter", "path": "description" },
    { "type": "filter", "path": "acceptanceCriteria" },
    { "type": "filter", "path": "priority" },
    { "type": "filter", "path": "parentSummary" }
  ]
}
```

The top part of the image shows a web browser window displaying the MongoDB Atlas interface. The URL is `cloud.mongodb.com/v2/6a802f260e1ad45327638dbf8/clusters/atlasSearch/Cluster0?collectionName=userStory&database=RAG_testCases&ind...`. The left sidebar shows the 'Search & Vector Search' section with 'Index Overview' selected. The main content area shows the 'Filter Fields' configuration for the 'vector_index_1_US' index. The filter fields are:


Filter Path	Field Name
Filter Path	storyId
Filter Path	projectId
Filter Path	summary
Filter Path	description
Filter Path	acceptanceCriteria
Filter Path	priority
Filter Path	parentSummary

The bottom part of the image shows a VS Code editor window with the file explorer on the left showing the project structure. The main editor shows the `stories.json` file with the following content:


```
{
  "collectionName": "stories",
  "filterFields": [
    {
      "filterPath": "storyId",
      "fieldName": "storyId"
    },
    {
      "filterPath": "projectId",
      "fieldName": "projectId"
    },
    {
      "filterPath": "summary",
      "fieldName": "summary"
    },
    {
      "filterPath": "description",
      "fieldName": "description"
    },
    {
      "filterPath": "acceptanceCriteria",
      "fieldName": "acceptanceCriteria"
    },
    {
      "filterPath": "priority",
      "fieldName": "priority"
    },
    {
      "filterPath": "parentSummary",
      "fieldName": "parentSummary"
    }
  ],
  "indexName": "vector_index_1_US",
  "indexType": "vector",
  "source": "collection",
  "sourceType": "excel",
  "importedAt": "2026-08-16T17:07:49.807Z",
  "originalRowIndex": 1
}
```

The terminal at the bottom shows the command `node src/scripts/data-conversion/excel-to-userstories.js` being executed. The output shows the script loading the Excel file and processing the data.

node src/scripts/data-conversion/excel-to-userstories.js

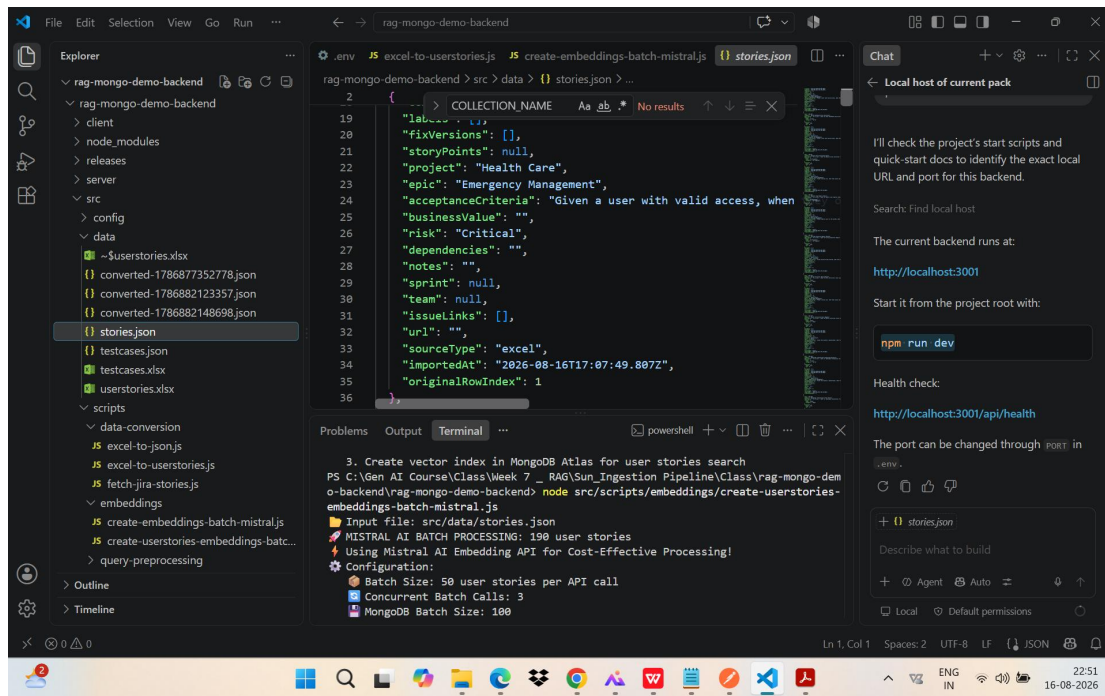

node src/scripts/embeddings/create-userstories-embeddings-batch-mistral.js

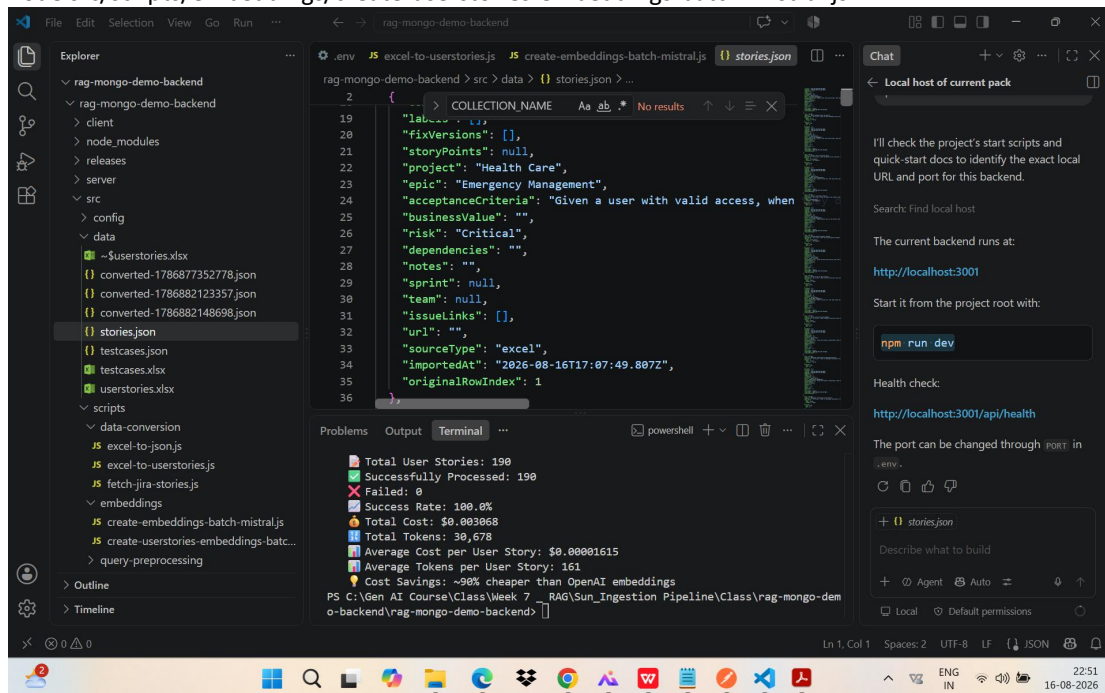

The screenshot displays the MongoDB Cloud Portal interface. At the top, the navigation bar shows the organization 'Sam's Org - 2026-08-15' and the project 'Project 0'. The main content area is titled 'Data Explorer' and shows a cluster named 'Cluster0'. Under 'Cluster0', there is a collection named 'RAG_testCases' and a document named 'userStory'. The document details are displayed in a JSON format, showing fields like '_id', 'key', 'summary', 'description', 'status', 'priority', 'assignee', 'reporter', 'created', 'updated', 'components', and 'labels'. The bottom status bar indicates 'Alert System Status: All Good' and provides links to 'Status', 'Terms', 'Privacy', 'Atlas Blog', and 'Contact Sales'.