

A practical beginner guide to the STACK API

Sam Fearn


Durham University

October 22nd, 2026



Aims

- Explain the basics of what the STACK API is/does.
- Workshop converting a sample tex file into html with an embedded example stack question (follow-along).
- We will use Docker Desktop (`https://www.docker.com/products/docker-desktop/`).

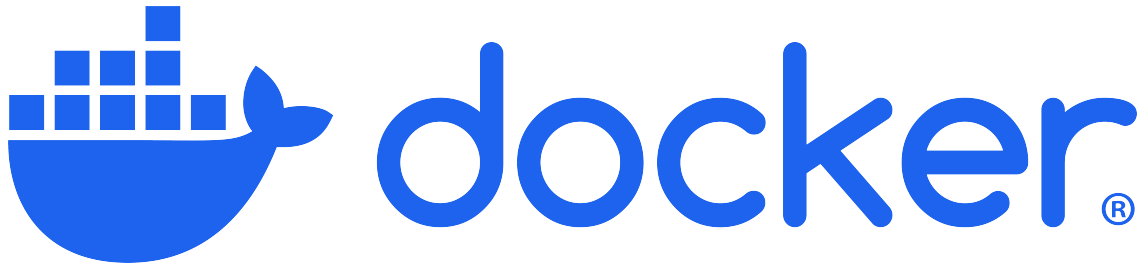

Moodle Quizzes

https://www.docker.com/products/docker-desktop/



STACK is an excellent tool for automating mathematics assessment, and as a Moodle quiz question plugin instructors can:

Moodle Quizzes

https://www.docker.com/products/docker-desktop/



STACK is an excellent tool for automating mathematics assessment, and as a Moodle quiz question plugin instructors can:

- Use STACK for formal assessments, with exportable grade data,

Moodle Quizzes

https://www.docker.com/products/docker-desktop/



STACK is an excellent tool for automating mathematics assessment, and as a Moodle quiz question plugin instructors can:

- Use STACK for formal assessments, with exportable grade data,
- Use question behaviours to control how students interact with the questions,

Moodle Quizzes

https://www.docker.com/products/docker-desktop/



STACK is an excellent tool for automating mathematics assessment, and as a Moodle quiz question plugin instructors can:

- Use STACK for formal assessments, with exportable grade data,
- Use question behaviours to control how students interact with the questions,
- Control timed release windows, with user/group overrides,

Moodle Quizzes

https://www.docker.com/products/docker-desktop/



STACK is an excellent tool for automating mathematics assessment, and as a Moodle quiz question plugin instructors can:

- Use STACK for formal assessments, with exportable grade data,
- Use question behaviours to control how students interact with the questions,
- Control timed release windows, with user/group overrides,
- Use activity completion settings to further control access.

Moodle Quizzes

https://www.docker.com/products/docker-desktop/




STACK is an excellent tool for automating mathematics assessment, and as a Moodle quiz question plugin instructors can:

- Use STACK for formal assessments, with exportable grade data,
- Use question behaviours to control how students interact with the questions,
- Control timed release windows, with user/group overrides,
- Use activity completion settings to further control access.

Most of these features are likely necessary for *summative* assessment (assessment *of* learning), but may not be for *formative* assessment (assessment *for* learning).


Formative engagement barrier?

https://www.docker.com/products/docker-desktop/

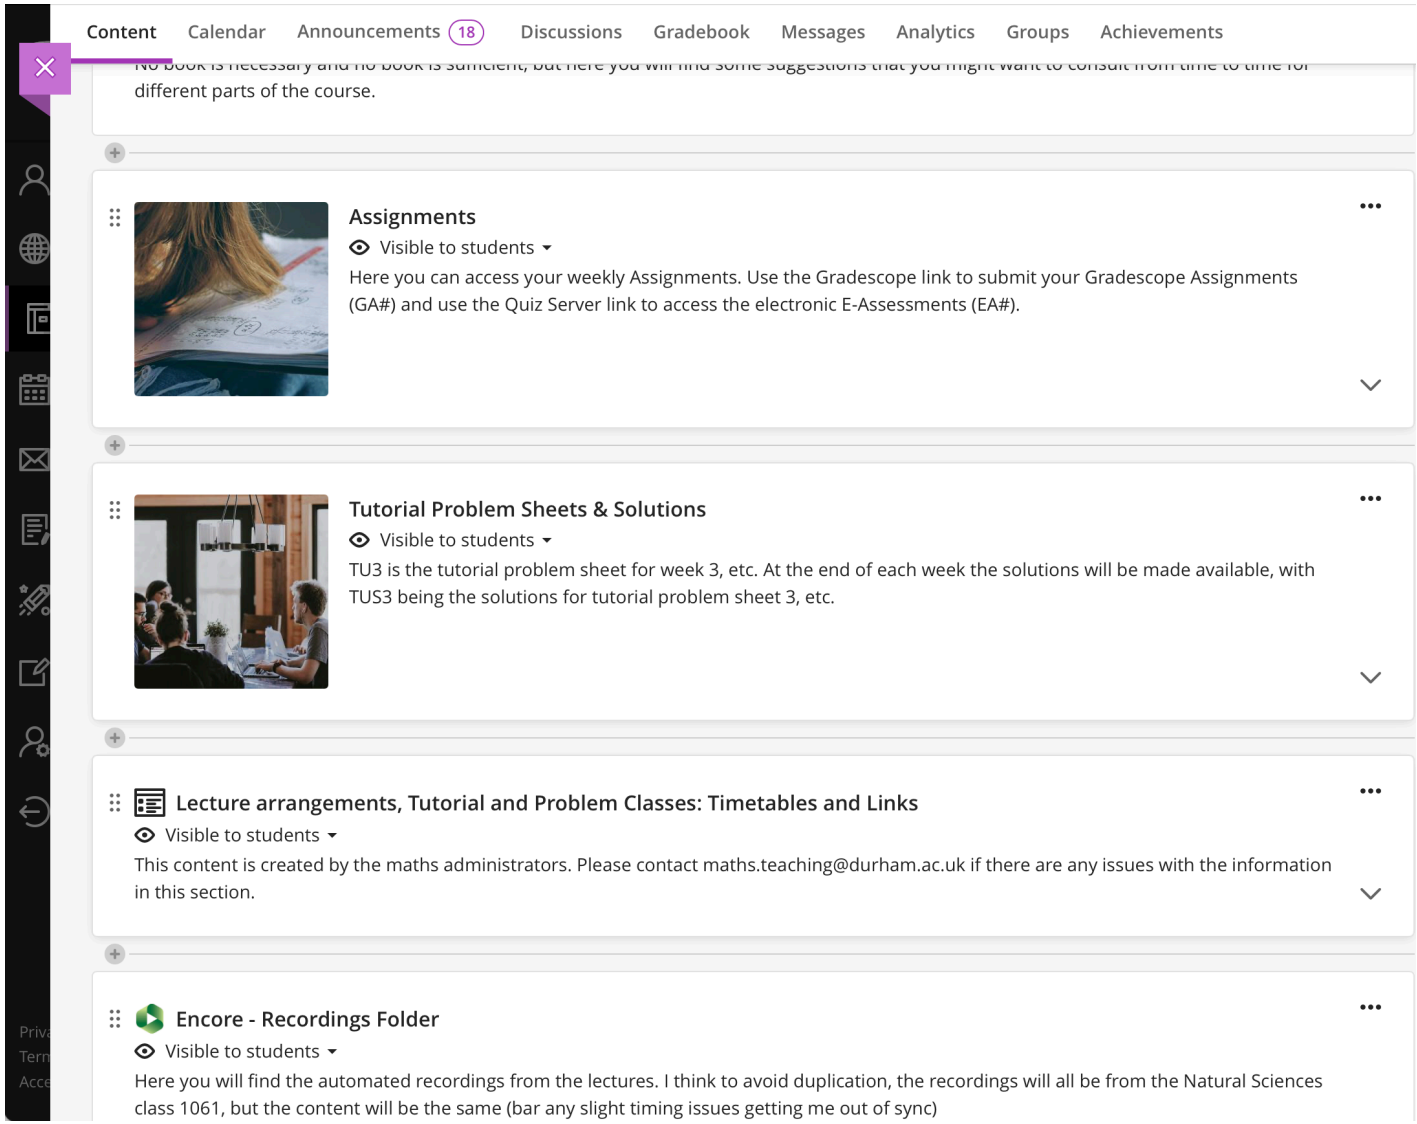


Formative engagement barrier?

https://www.docker.com/products/docker-desktop/

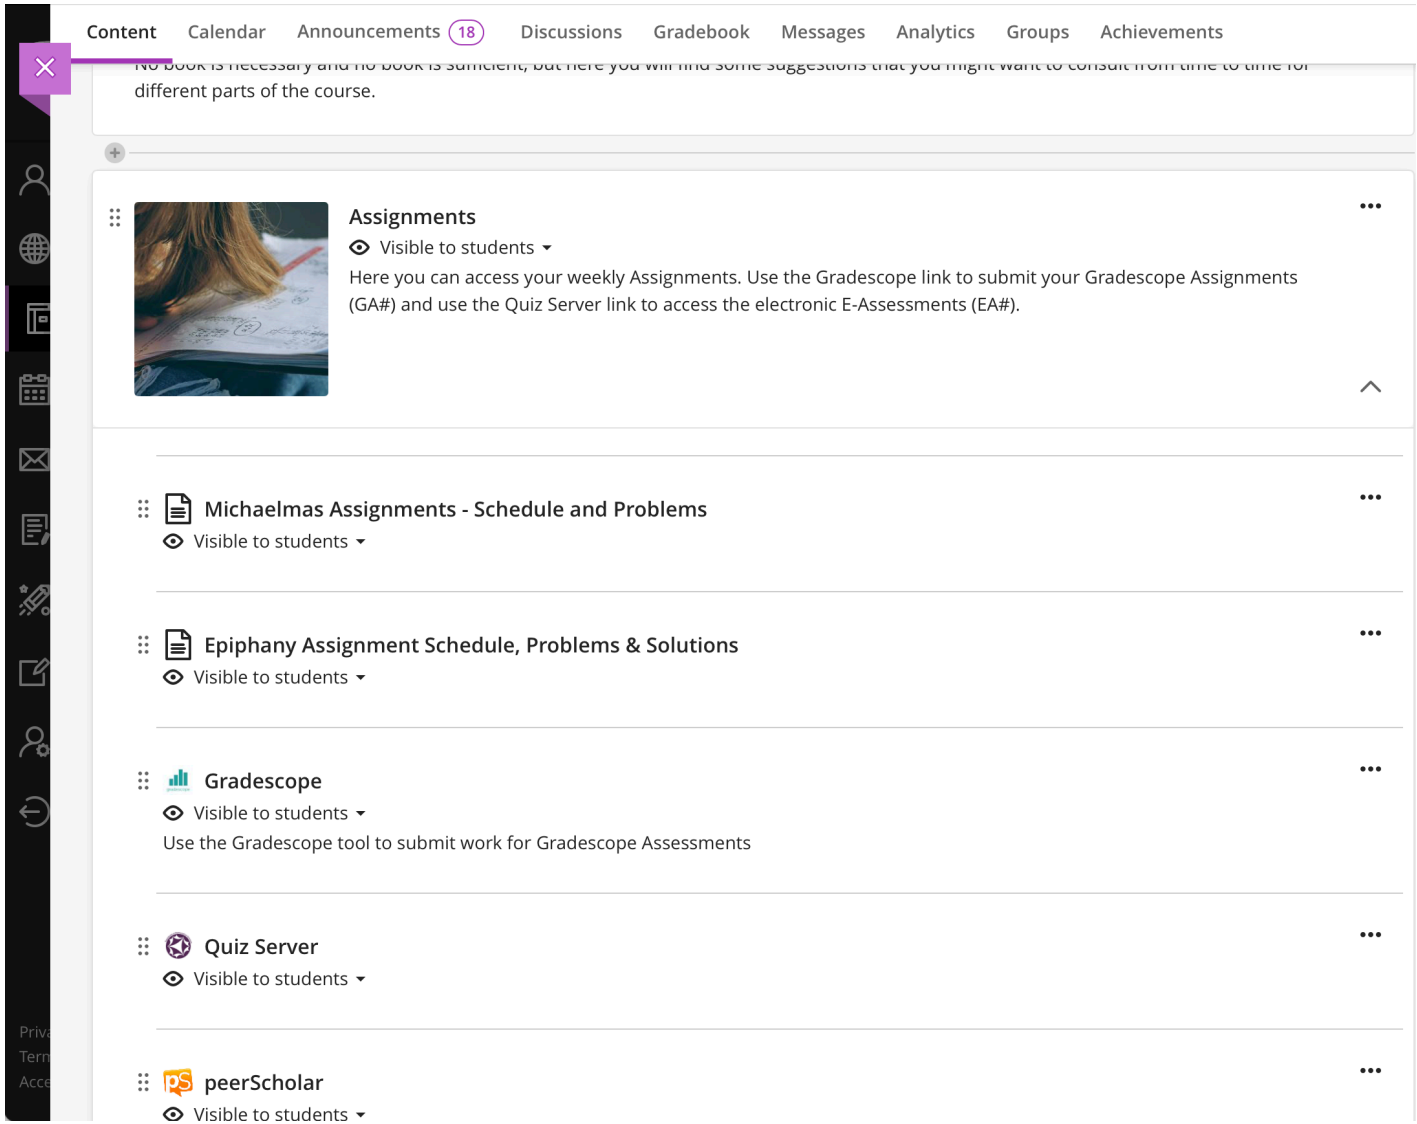


Formative engagement barrier?

https://www.docker.com/products/docker-desktop/

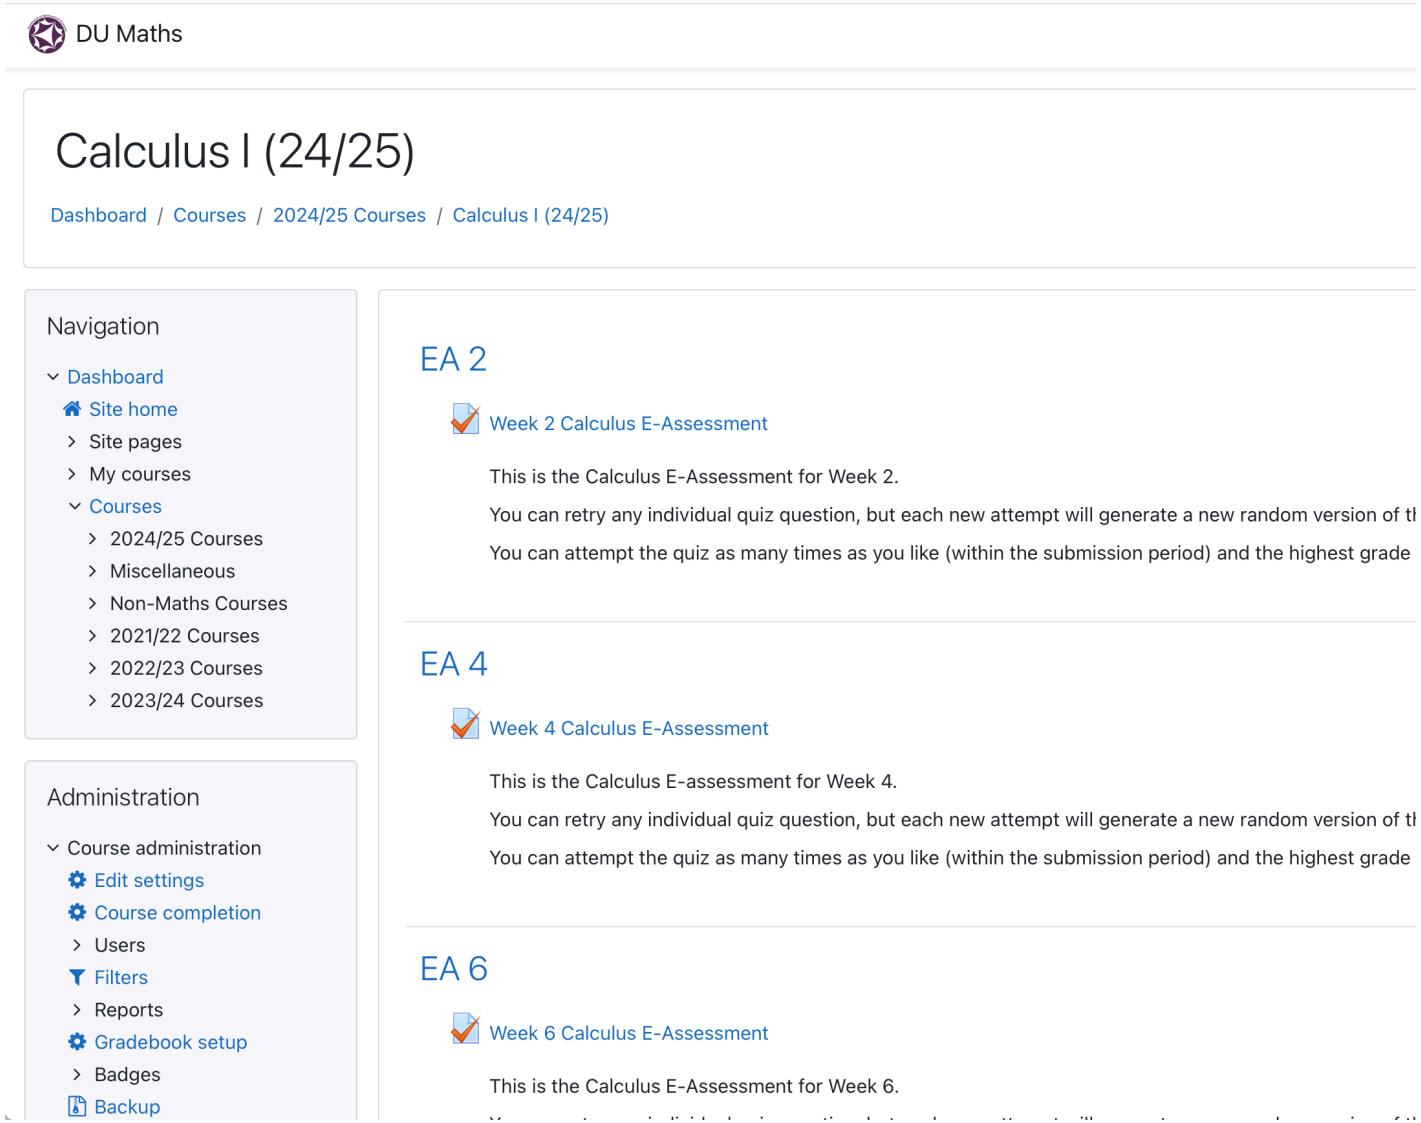


Formative engagement barrier?

https://www.docker.com/products/docker-desktop/

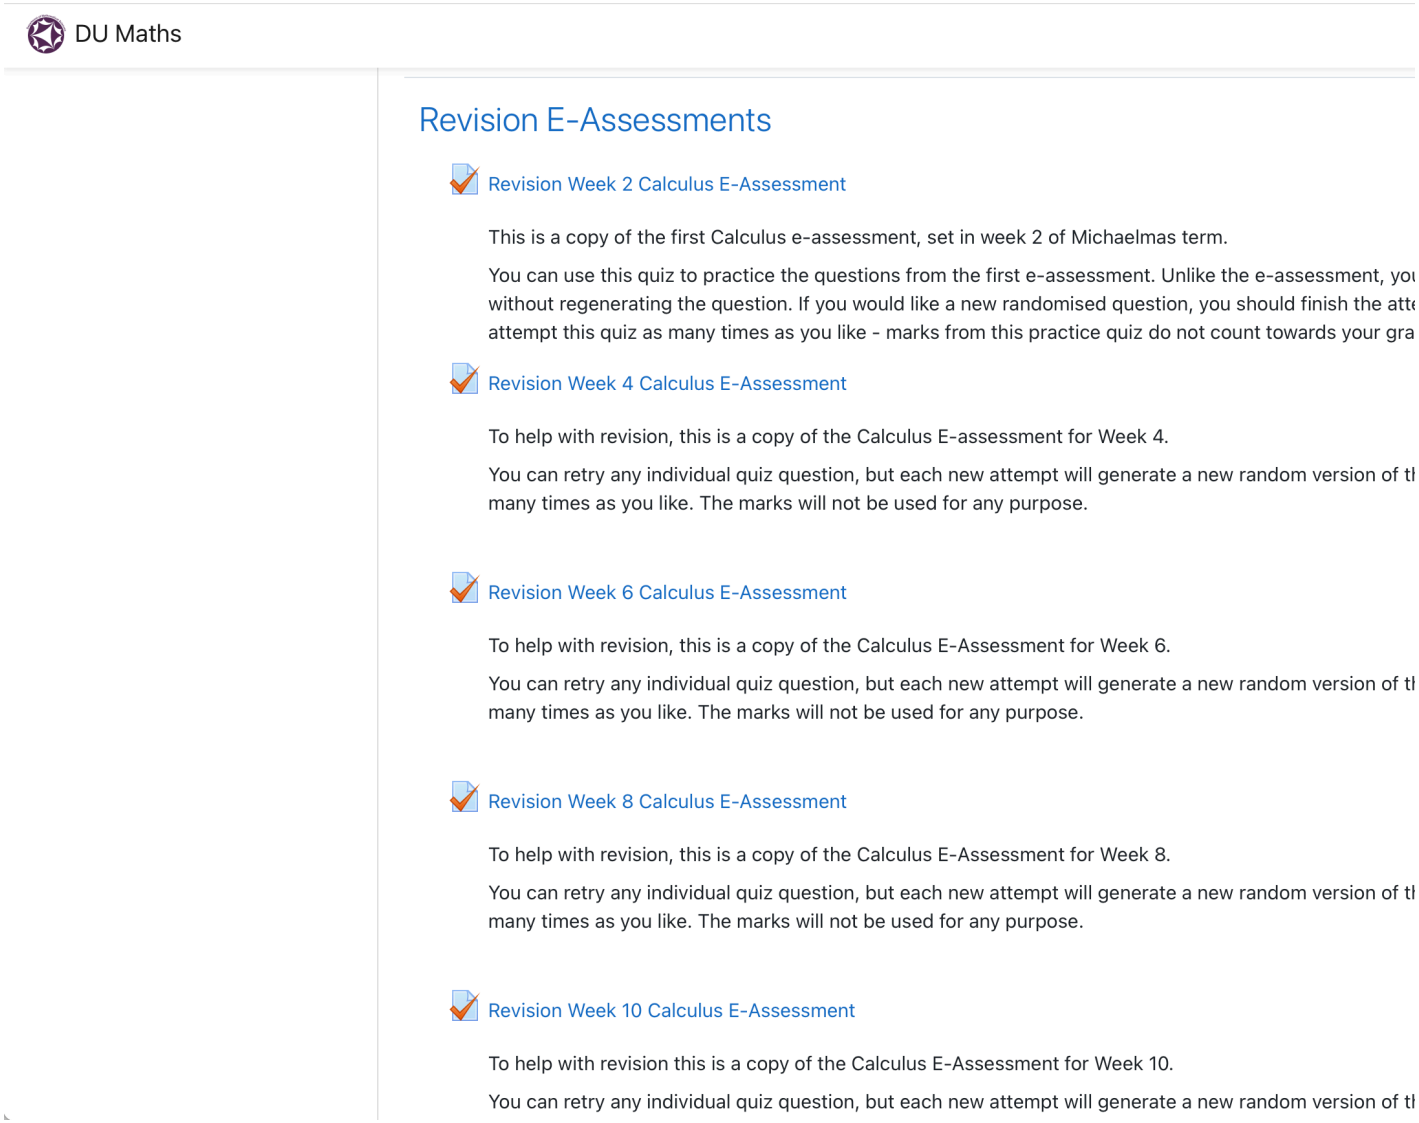


Formative engagement barrier?

https://www.docker.com/products/docker-desktop/

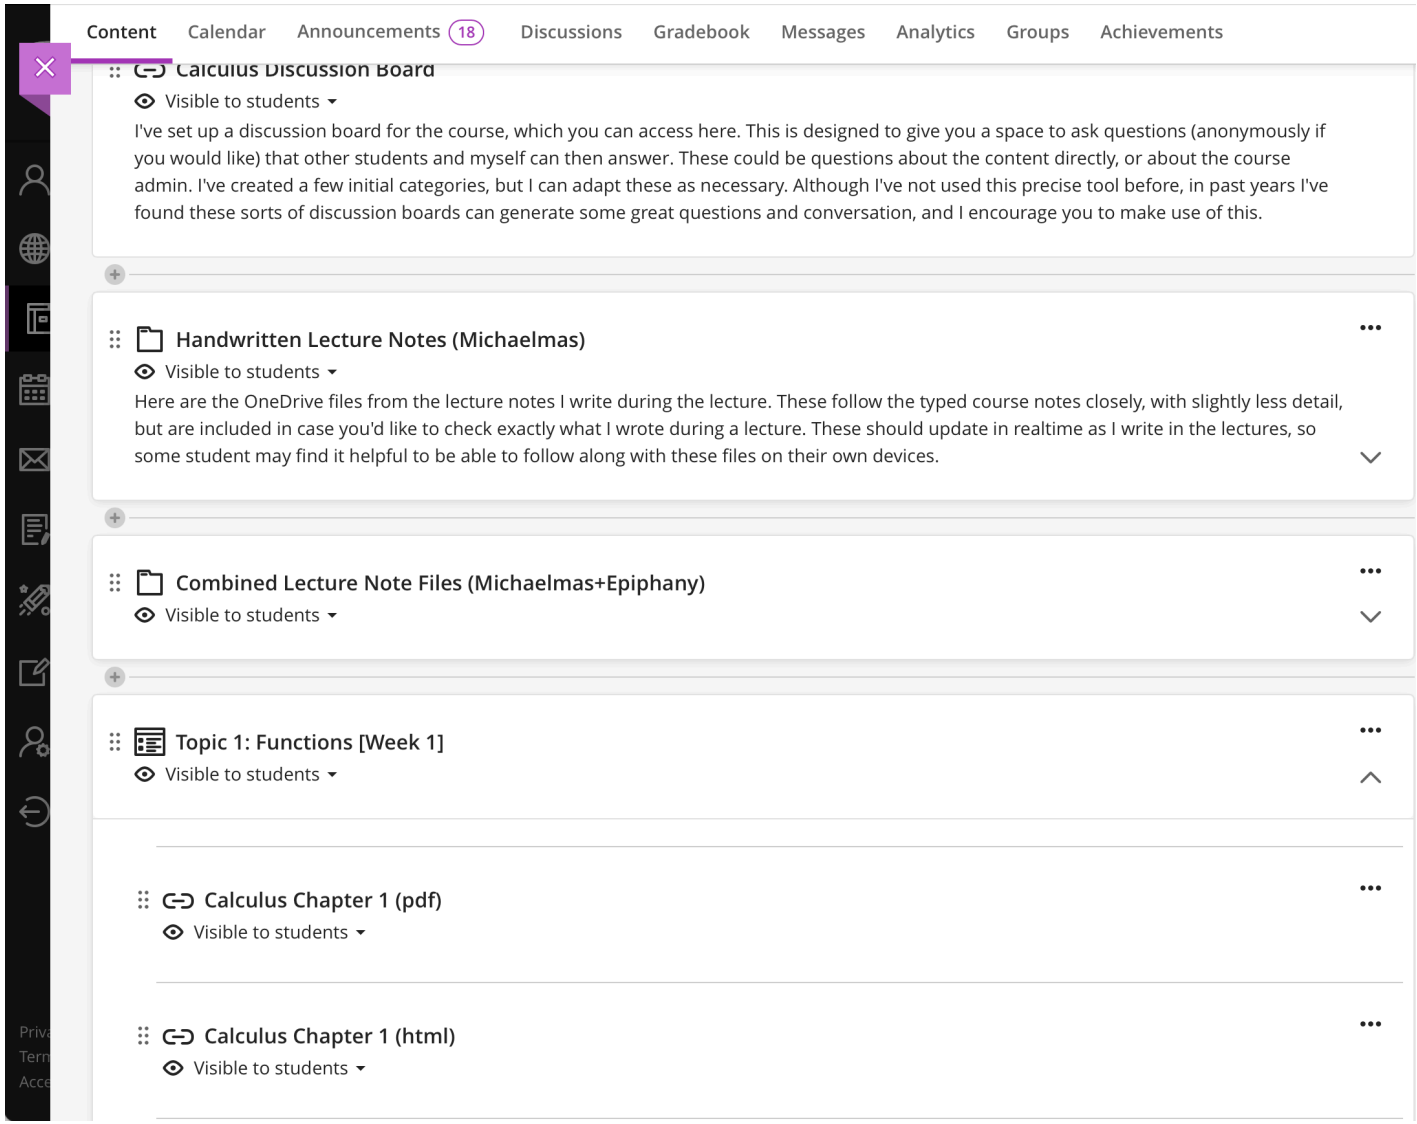

Formative engagement barrier?

https://www.docker.com/products/docker-desktop/

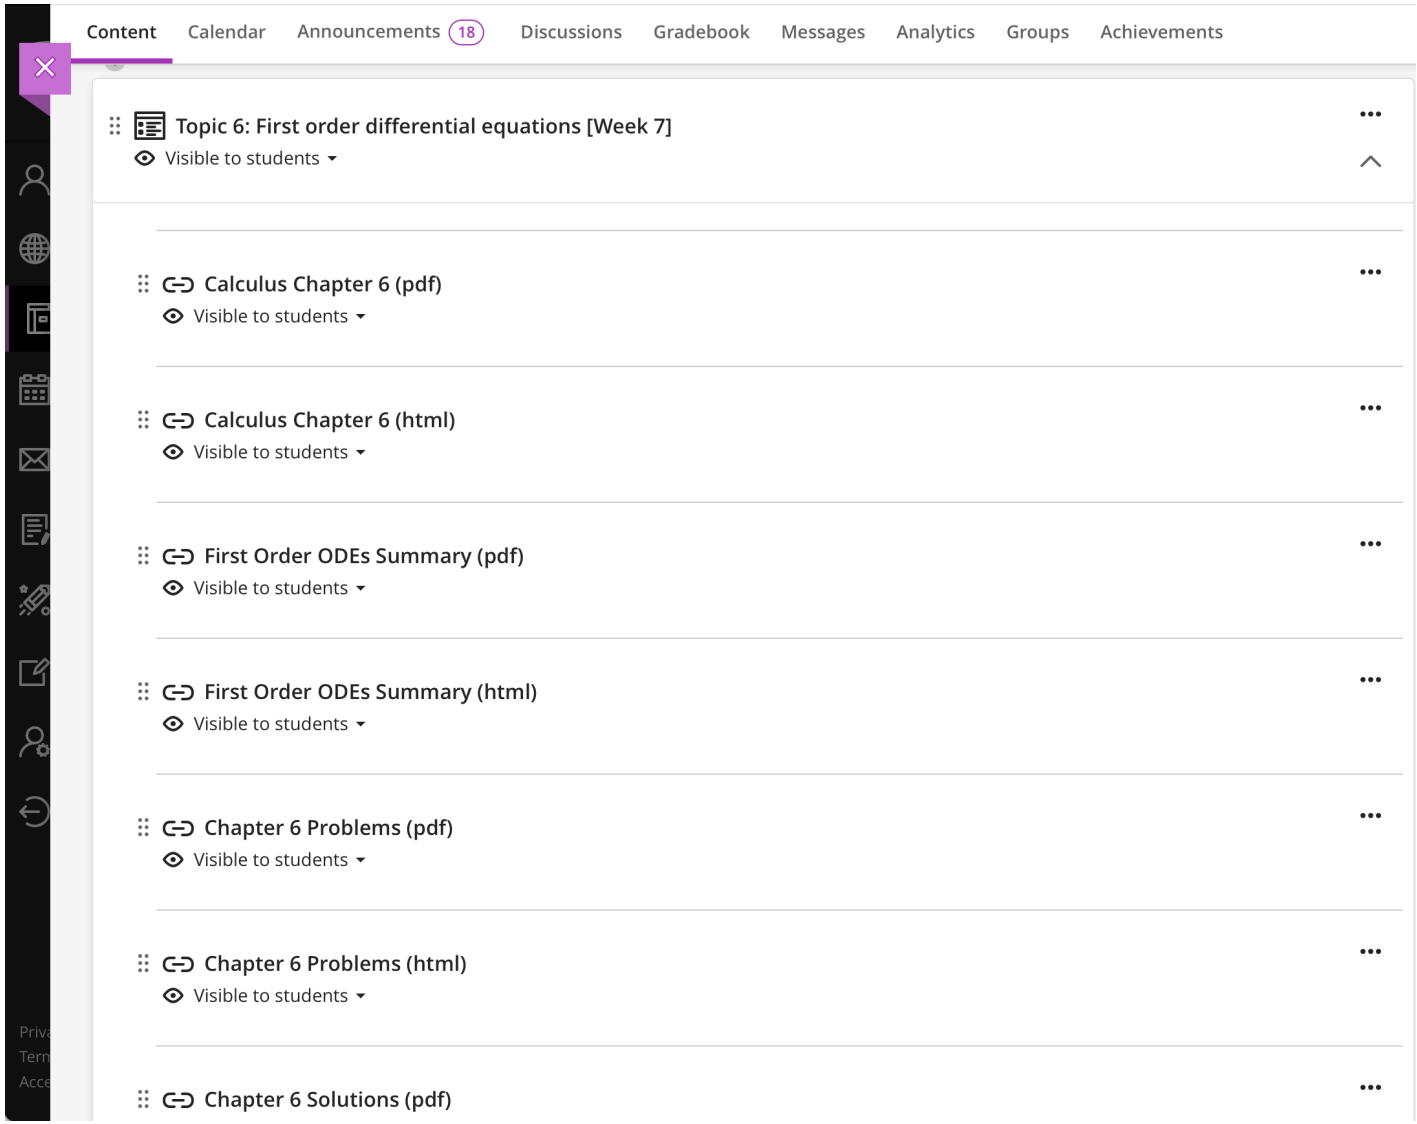

Formative engagement barrier?

https://www.docker.com/products/docker-desktop/

6.5 Bernoulli equations

A **Bernoulli equation** is a nonlinear ODE of the form

$$y' + p(x)y = q(x)y^n$$

where $n \neq 0, 1$, otherwise the equation is simply linear.

These ODEs can be solved by first performing the substitution $v = y^{1-n}$, which converts the equation to a linear ODE for $v(x)$.

Eg. Solve

$$y' - \frac{2y}{x} = -x^2y^2.$$

This is a Bernoulli equation with $n = 2$ hence put $v = \frac{1}{y}$, which gives $v' = -\frac{y'}{y^2}$.
Dividing the ODE by y^2 yields

$$\frac{y'}{y^2} - \frac{2}{xy} = -x^2$$

which in terms of v is

$$-v' - \frac{2v}{x} = -x^2$$

ie the linear equation

$$v' + \frac{2}{x}v = x^2.$$


We solve this with an integrating factor $I = \exp\left(\int \frac{2}{x}\,dx\right) = \exp(2\log x) = x^2$ as

$$v = \frac{1}{x^2}\int x^2x^2\,dx = \frac{1}{x^2}\left(\frac{1}{5}x^5 + \frac{c}{5}\right).$$

So finally

$$y = \frac{1}{v} = \frac{5x^2}{x^5 + c}.$$

Questions in notes

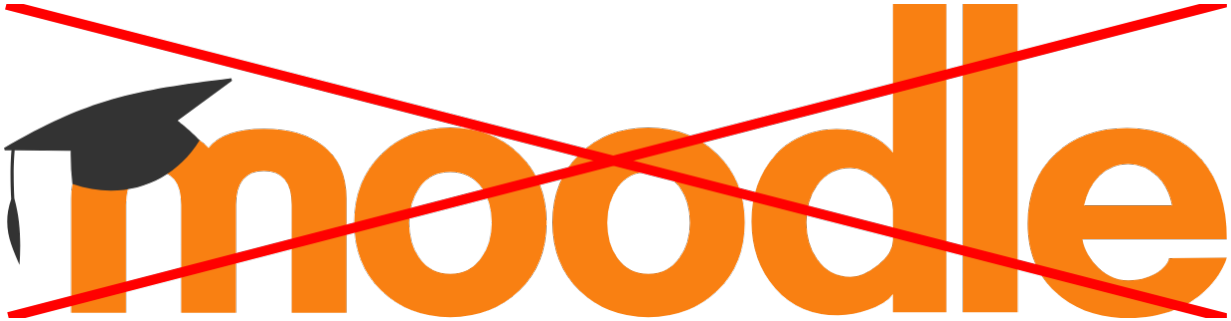


The STACK API allows questions to be used outside of Moodle, allowing for the possibility of embedding STACK questions directly inside html lecture notes.

DEMO

Setup

The STACK API can be installed and run via Docker.

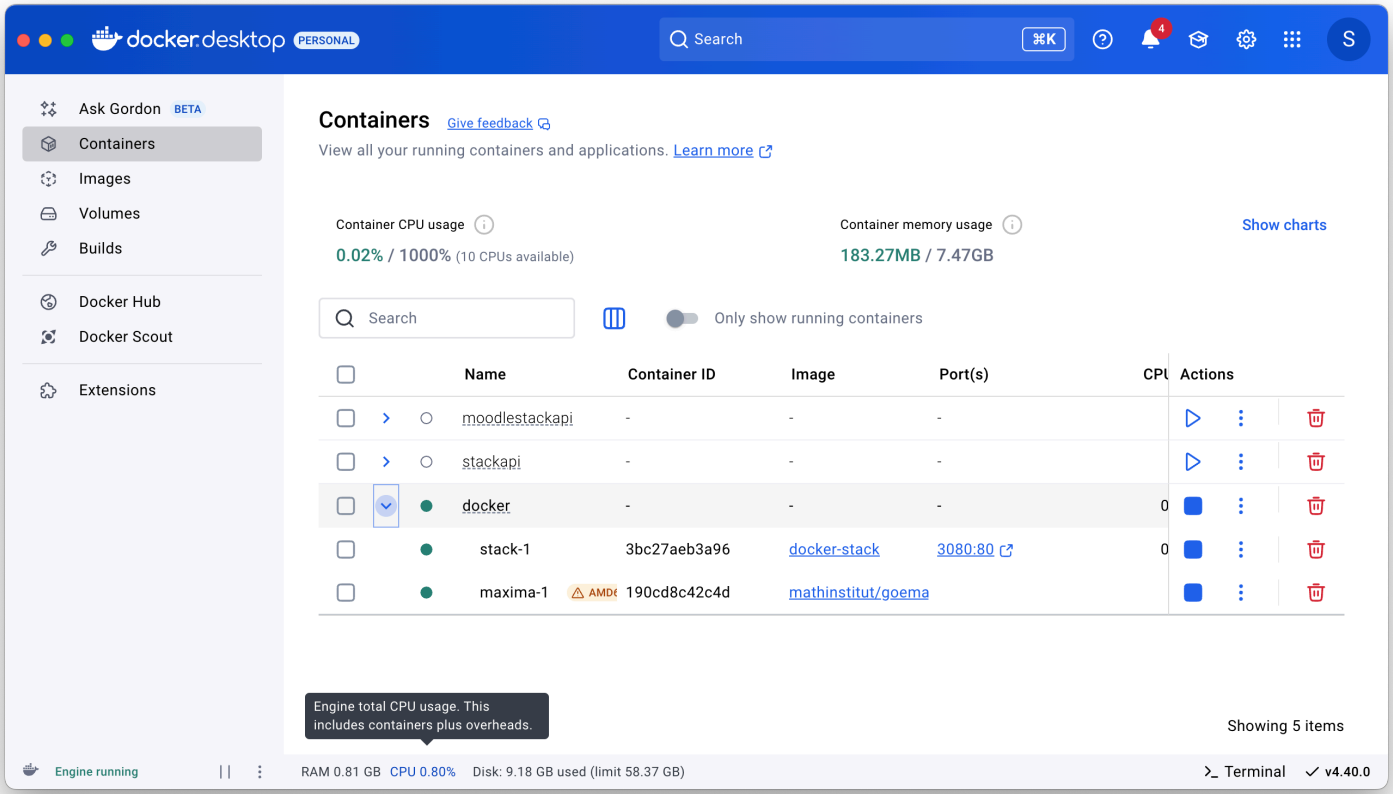

We can then communicate with the API at localhost:3080.

Setup



The STACK API can be installed and run via Docker.
We can then communicate with the API at localhost:3080.

The API provides 5 routes:

- (localhost:3080)/render

Setup



The STACK API can be installed and run via Docker.
We can then communicate with the API at localhost:3080.

The API provides 5 routes:

- (localhost:3080)/render
- /validate

Setup



The STACK API can be installed and run via Docker.
We can then communicate with the API at localhost:3080.

The API provides 5 routes:

- (localhost:3080)/render
- /validate
- /grade

Setup



The STACK API can be installed and run via Docker.
We can then communicate with the API at localhost:3080.

The API provides 5 routes:

- (localhost:3080)/render
- /validate
- /grade
- /download

Setup



The STACK API can be installed and run via Docker.
We can then communicate with the API at localhost:3080.

The API provides 5 routes:

- (localhost:3080)/render
- /validate
- /grade
- /download
- /test

Setup



The STACK API can be installed and run via Docker.
We can then communicate with the API at localhost:3080.

The API provides 5 routes:

- (localhost:3080)/render
- /validate
- /grade
- /download
- /test

Each route expects to receive a POST request, whose body is a JSON object containing the question XML (and possibly other fields).

Each route responds with a JSON object.

Embedding questions in notes

- The notes shown in the demo were originally written in LaTeX.

Embedding questions in notes

- The notes shown in the demo were originally written in LaTeX.
- A new markdown source file was created using Pandoc, plus some custom extensions.

Embedding questions in notes

- The notes shown in the demo were originally written in LaTeX.
- A new markdown source file was created using Pandoc, plus some custom extensions. The mathematics (inline and display) remains in LaTeX.

Embedding questions in notes

- The notes shown in the demo were originally written in LaTeX.
- A new markdown source file was created using Pandoc, plus some custom extensions. The mathematics (inline and display) remains in LaTeX.
- This markdown can then be processed (again, Pandoc+) into both html and pdf outputs

Embedding questions in notes

- The notes shown in the demo were originally written in LaTeX.
- A new markdown source file was created using Pandoc, plus some custom extensions. The mathematics (inline and display) remains in LaTeX.
- This markdown can then be processed (again, Pandoc+) into both html and pdf outputs (can also go straight to html from LaTeX if preferred).

Embedding questions in notes

- The notes shown in the demo were originally written in LaTeX.
- A new markdown source file was created using Pandoc, plus some custom extensions. The mathematics (inline and display) remains in LaTeX.
- This markdown can then be processed (again, Pandoc+) into both html and pdf outputs (can also go straight to html from LaTeX if preferred).
- The required questions should be exported from Moodle in Moodle XML format.

Embedding questions in notes

- The notes shown in the demo were originally written in LaTeX.
- A new markdown source file was created using Pandoc, plus some custom extensions. The mathematics (inline and display) remains in LaTeX.
- This markdown can then be processed (again, Pandoc+) into both html and pdf outputs (can also go straight to html from LaTeX if preferred).
- The required questions should be exported from Moodle in Moodle XML format.
- Question blocks are included in the markdown using the following syntax:

  ```
  ::: {.que .stack data-qid="XXXX"}:::
  ```

  where `XXXX` is the Question Name of the required question contained in the Moodle XML.

Embedding questions in notes

- The notes shown in the demo were originally written in LaTeX.
- A new markdown source file was created using Pandoc, plus some custom extensions. The mathematics (inline and display) remains in LaTeX.
- This markdown can then be processed (again, Pandoc+) into both html and pdf outputs (can also go straight to html from LaTeX if preferred).
- The required questions should be exported from Moodle in Moodle XML format.
- Question blocks are included in the markdown using the following syntax:

  ```
  ::: {.que .stack data-qid="XXXX"}:::
  ```

  where `XXXX` is the Question Name of the required question contained in the Moodle XML.

  If going straight to html, the following can instead be inserted into the html directly:

  ```
  <div class="que stack" data-qid="XXXX''></div>.
  ```

Embedding questions in notes

- The notes shown in the demo were originally written in LaTeX.
- A new markdown source file was created using Pandoc, plus some custom extensions. The mathematics (inline and display) remains in LaTeX.
- This markdown can then be processed (again, Pandoc+) into both html and pdf outputs (can also go straight to html from LaTeX if preferred).
- The required questions should be exported from Moodle in Moodle XML format.
- Question blocks are included in the markdown using the following syntax:

  ```
  ::: {.que .stack data-qid="XXXX"}:::
  ```

  where `XXXX` is the Question Name of the required question contained in the Moodle XML.
- The html notes and question XML file/s (as well as an additional 'stackapicalls.js') are hosted on an appropriate webserver.


Process - key steps

The notes load some JS, based on the code used in the example '(localhost:3080)/stack.php' page.

Process - key steps

The notes load some JS, based on the code used in the example '(localhost:3080)/stack.php' page.


- The (empty) divs of class "que stack" from before are numbered and populated, initially containing a button to generate a question.

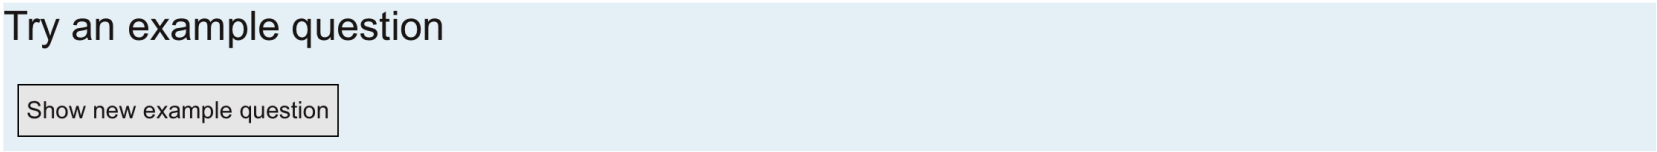

Process - key steps

The notes load some JS, based on the code used in the example '(localhost:3080)/stack.php' page.


- The (empty) divs of class "que stack" from before are numbered and populated, initially containing a button to generate a question.
- This button gets the XML of the question from a preconfigured list of XML files, and passes this to the /render route, before rendering the response.

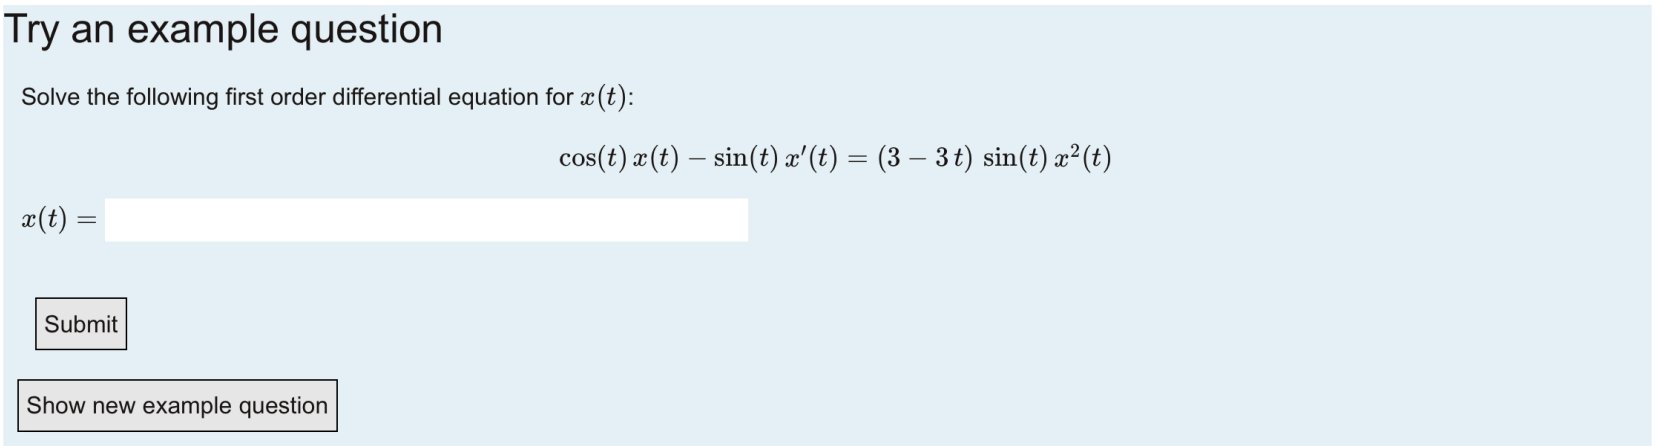

Process - key steps

The notes load some JS, based on the code used in the example '(localhost:3080)/stack.php' page.

- The (empty) divs of class "que stack" from before are numbered and populated, initially containing a button to generate a question.
- This button gets the XML of the question from a preconfigured list of XML files, and passes this to the /render route, before rendering the response.
- Event listeners are attached to the inputs to call the /validate route when the input changes.

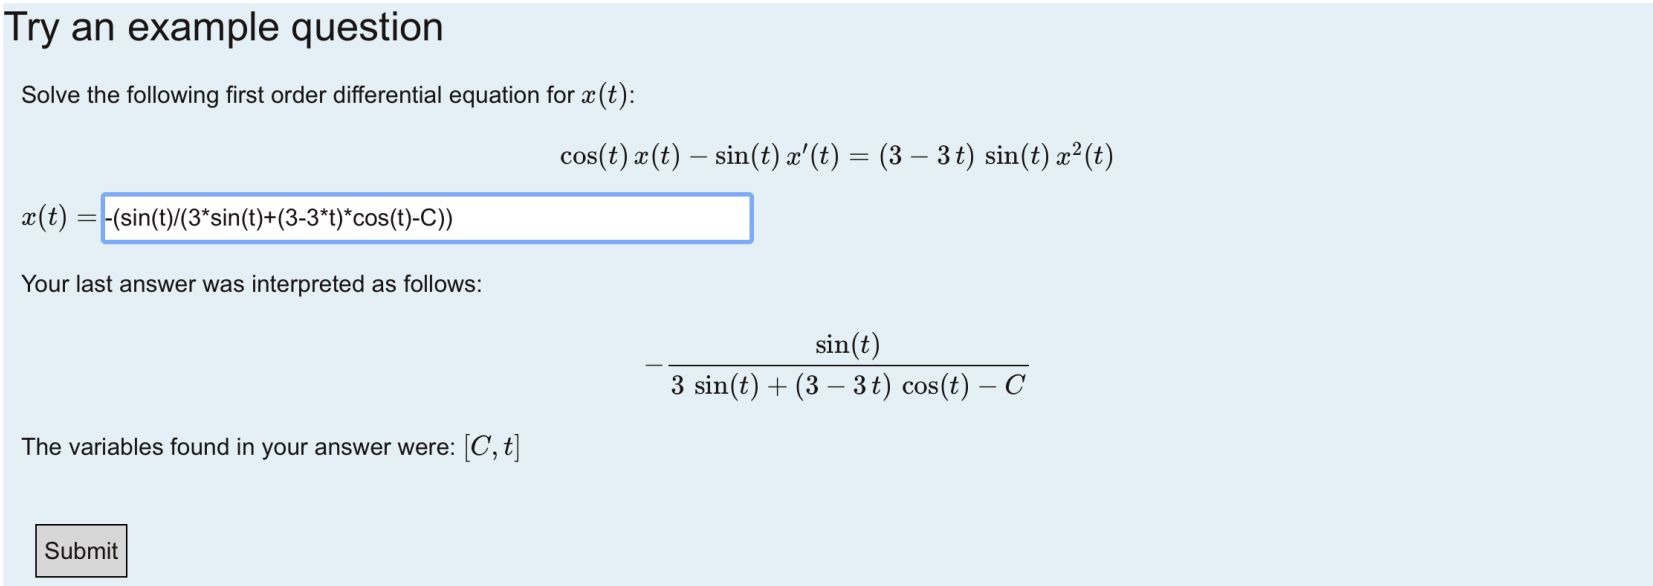

Process - key steps

The notes load some JS, based on the code used in the example '(localhost:3080)/stack.php' page.

- The (empty) divs of class "que stack" from before are numbered and populated, initially containing a button to generate a question.
- This button gets the XML of the question from a preconfigured list of XML files, and passes this to the /render route, before rendering the response.
- Event listeners are attached to the inputs to call the /validate route when the input changes.
- A random seed is used for the render, so the seed is attached to the answer submit button.

Process - key steps

The notes load some JS, based on the code used in the example '(localhost:3080)/stack.php' page.

- The (empty) divs of class "que stack" from before are numbered and populated, initially containing a button to generate a question.
- This button gets the XML of the question from a preconfigured list of XML files, and passes this to the /render route, before rendering the response.
- Event listeners are attached to the inputs to call the /validate route when the input changes.
- A random seed is used for the render, so the seed is attached to the answer submit button.
- The answer submit button calls the /grade route, passing the xml as before, with the matching seed to the /render call. The response from this is then rendered to the page.

Process - key steps

$$-\frac{\sin(t)}{3\,\sin(t)+(3-3\,t)\,\cos(t)-C}$$

The variables found in your answer were: $[C, t]$

Correct answer, well done.

- Your answer satisfies the differential equation.
- Your general solution contains an unknown constant as expected.

Marks for this submission: 1.00 / 1.00.

Submit

General feedback:

This is a Bernoulli differential equation. To solve this question, you should first write the ODE in the form

$$x^{-n}\frac{dx}{dt}+p(t)x^{1-n}=q(t),$$

for some n. If you then make the substitution $v=x^{1-n}$, then this ODE becomes a linear ODE in terms of v. Once you've solved this ODE for v, you then need to use the substitution in order to find the required solution for x.

Score: 1.00 out of 1

Show new example question

Notes and caveats

- Currently, the routes expect the question xml to be sent as part of the request. This means a knowledgeable user can obtain the full question xml.

Notes and caveats

- Currently, the routes expect the question xml to be sent as part of the request. This means a knowledgeable user can obtain the full question xml. This may not be acceptable if the same questions appear in formal assessments.

Notes and caveats

- Currently, the routes expect the question xml to be sent as part of the request. This means a knowledgeable user can obtain the full question xml. This may not be acceptable if the same questions appear in formal assessments.
- Similarly, the response from /render contains the model answer.

Notes and caveats

- Currently, the routes expect the question xml to be sent as part of the request. This means a knowledgeable user can obtain the full question xml. This may not be acceptable if the same questions appear in formal assessments.
- Similarly, the response from /render contains the model answer. This is useful for a 'reveal answer/s', even if the general/specific feedback doesn't contain this.

Notes and caveats

- Currently, the routes expect the question xml to be sent as part of the request. This means a knowledgeable user can obtain the full question xml. This may not be acceptable if the same questions appear in formal assessments.
- Similarly, the response from /render contains the model answer. This is useful for a 'reveal answer/s', even if the general/specific feedback doesn't contain this.
- In the example, the questions are essentially always in 'Adaptive mode'.

Conclusions

- html lecture notes are more accessible for all users, and should be standard.

Conclusions


- html lecture notes are more accessible for all users, and should be standard.
- In addition, they provide possibilities for enhanced interactivity, for example by embedding STACK questions directly into the notes.

Conclusions

- html lecture notes are more accessible for all users, and should be standard.
- In addition, they provide possibilities for enhanced interactivity, for example by embedding STACK questions directly into the notes.
- This in turn enables closer integration of course materials, which I expect will lead to students making better use of practice questions.


Conclusions

- html lecture notes are more accessible for all users, and should be standard.
- In addition, they provide possibilities for enhanced interactivity, for example by embedding STACK questions directly into the notes.
- This in turn enables closer integration of course materials, which I expect will lead to students making better use of practice questions.
- We can also embed other interactive elements: Desmos

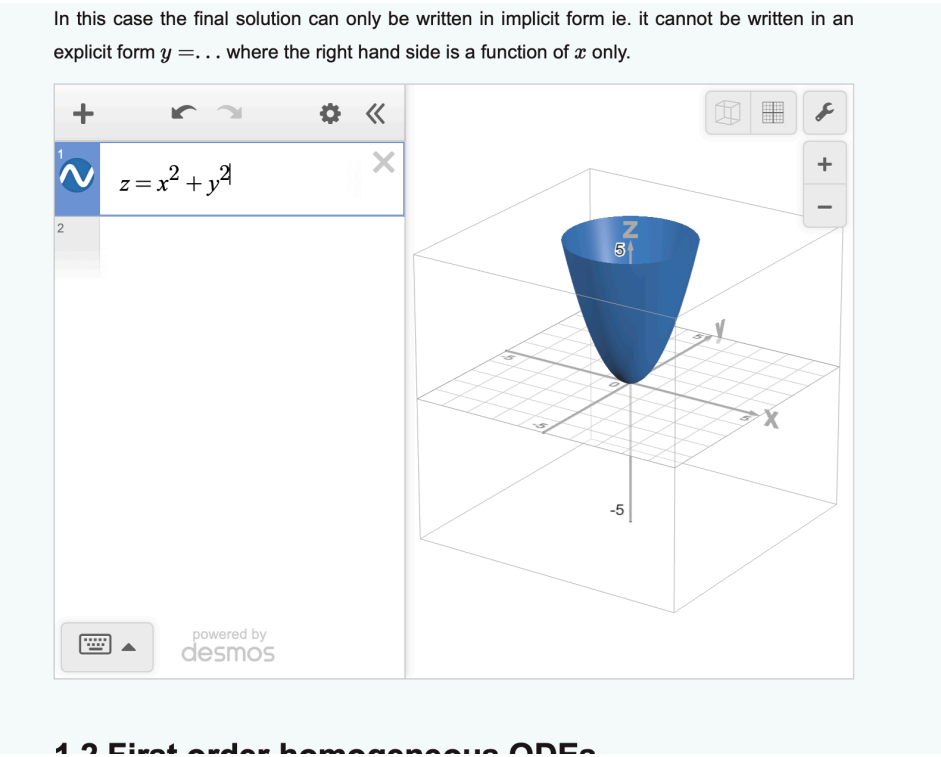

Conclusions


- html lecture notes are more accessible for all users, and should be standard.
- In addition, they provide possibilities for enhanced interactivity, for example by embedding STACK questions directly into the notes.
- This in turn enables closer integration of course materials, which I expect will lead to students making better use of practice questions.
- We can also embed other interactive elements: Desmos, Geogebra

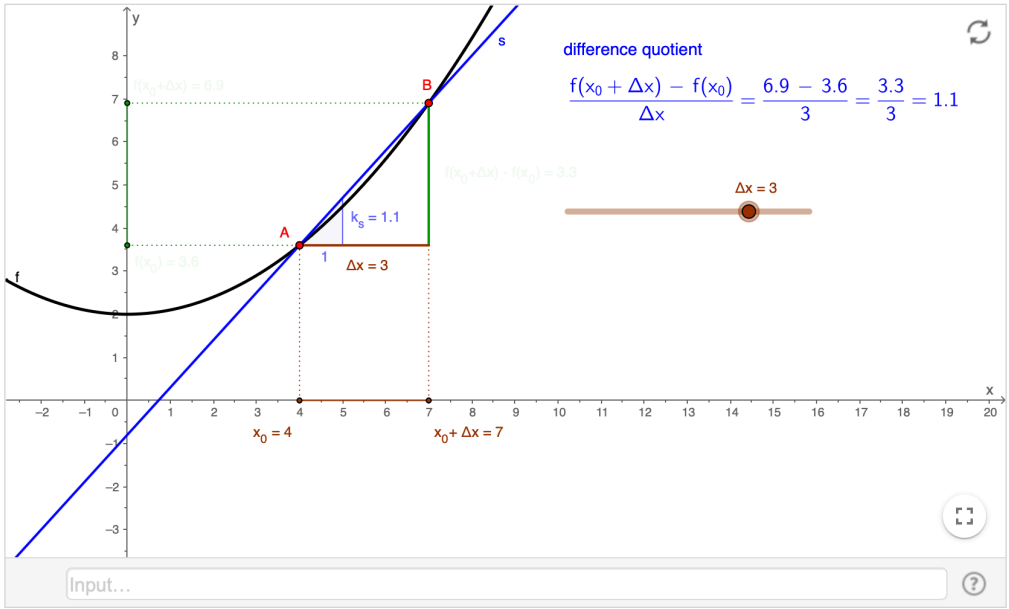

Andreas Lindner


Conclusions

- html lecture notes are more accessible for all users, and should be standard.
- In addition, they provide possibilities for enhanced interactivity, for example by embedding STACK questions directly into the notes.
- This in turn enables closer integration of course materials, which I expect will lead to students making better use of practice questions.
- We can also embed other interactive elements: Desmos, Geogebra, JupyterLite

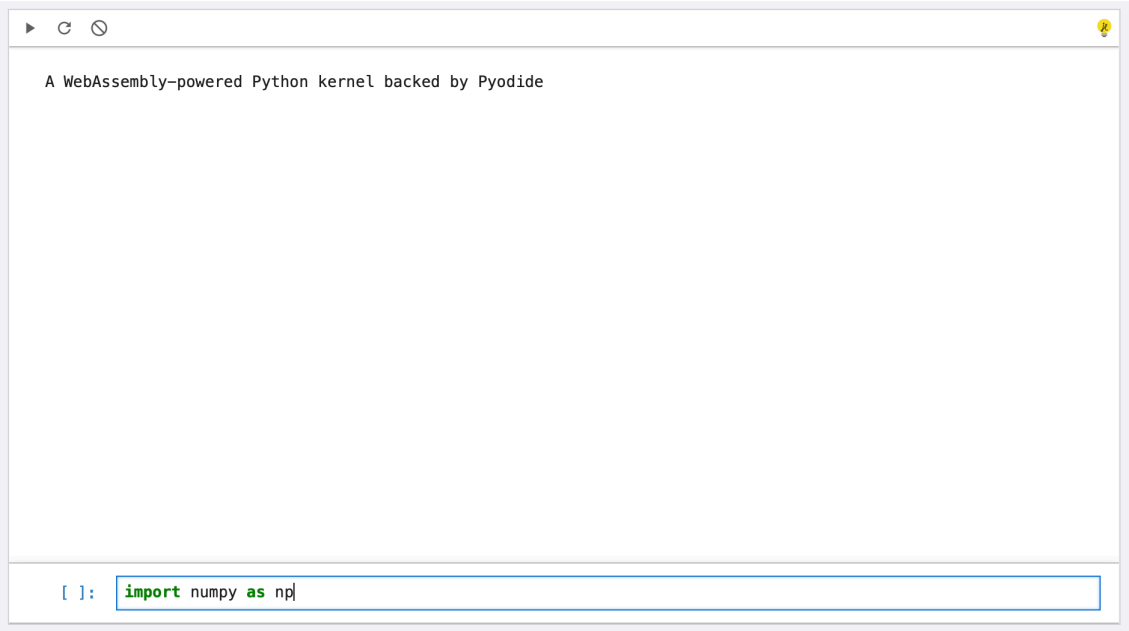

Conclusions

- html lecture notes are more accessible for all users, and should be standard.
- In addition, they provide possibilities for enhanced interactivity, for example by embedding STACK questions directly into the notes.
- This in turn enables closer integration of course materials, which I expect will lead to students making better use of practice questions.
- We can also embed other interactive elements: Desmos, Geogebra, JupyterLite, Visual PDE

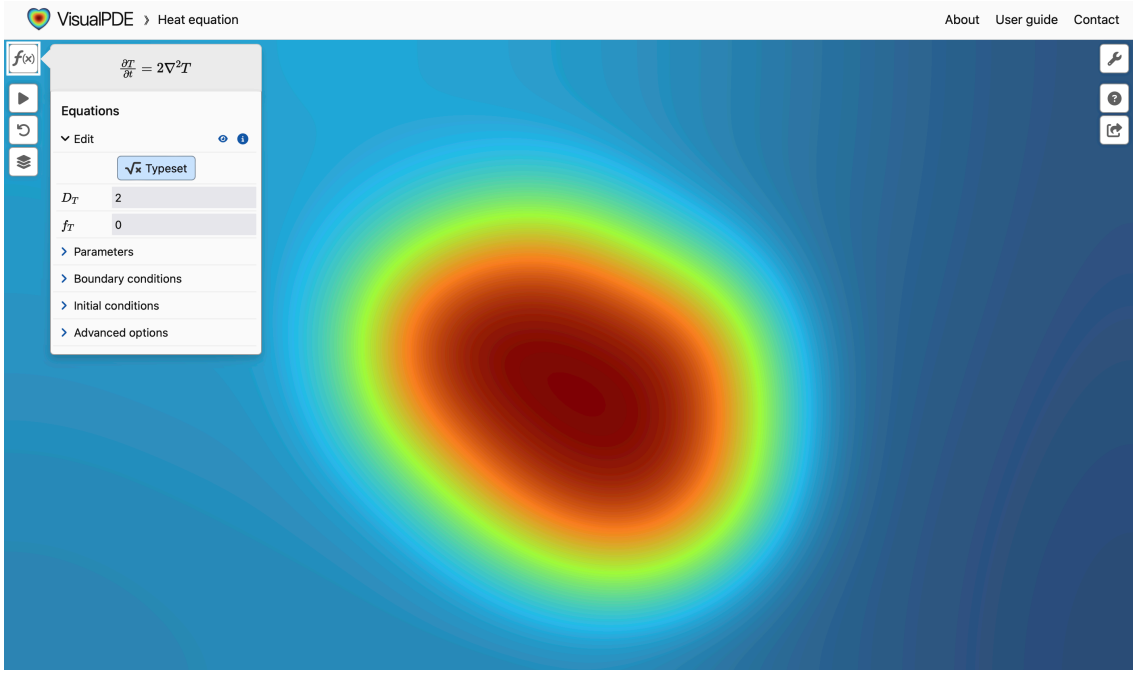

Conclusions

- html lecture notes are more accessible for all users, and should be standard.
- In addition, they provide possibilities for enhanced interactivity, for example by embedding STACK questions directly into the notes.
- This in turn enables closer integration of course materials, which I expect will lead to students making better use of practice questions.
- We can also embed other interactive elements: Desmos, Geogebra, JupyterLite, Visual PDE, ...

Conclusions

- html lecture notes are more accessible for all users, and should be standard.
- In addition, they provide possibilities for enhanced interactivity, for example by embedding STACK questions directly into the notes.
- This in turn enables closer integration of course materials, which I expect will lead to students making better use of practice questions.
- We can also embed other interactive elements: Desmos, Geogebra, JupyterLite, Visual PDE, ...
- While formal assessment questions are good to include, there is also (massive) scope for additional questions (and proofs), and more scaffolded examples.

Thanks for listening!

Any Questions/Comments?