

NYPDData

Samuel Head

2023-08-18

R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.

When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document.

Before we begin the assignment we are first going to load the packages needed to perform our analysis of the NYPD Shooting Incident Data.

```
library(tidyverse)
```

```
## -- Attaching core tidyverse packages ----- tidyverse 2.0.0 --
## v dplyr      1.1.2      v readr      2.1.4
## v forcats    1.0.0      v stringr   1.5.0
## v ggplot2    3.4.2      v tibble    3.2.1
## v lubridate  1.9.2      v tidyr     1.3.0
## v purrr      1.0.1
## -- Conflicts ----- tidyverse_conflicts() --
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()     masks stats::lag()
## i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become errors
```

```
library(lubridate)
```

Step One: Start an RMD document

Start an RMD document that describes and imports the shooting project data set in a reproducible manner.

Uploading Data

The next step in our process is to upload the NYPD Shooting Incident Data. The data is currently a CSV file that we downloaded from the internet. Note: Having trouble downloading CSV to computer then uploading to R Studio. Solution, copy the direct link and have RStudio read csv from URL.

```
url <- "https://data.cityofnewyork.us/api/views/833y-fsy8/rows.csv?accessType=DOWNLOAD"
nypd_data <- read_csv(url)
```

```
## Rows: 27312 Columns: 21
## -- Column specification -----
## Delimiter: ","
## chr  (12): OCCUR_DATE, BORO, LOC_OF_OCCUR_DESC, LOC_CLASSFCTN_DESC, LOCATION...
## dbl  (7): INCIDENT_KEY, PRECINCT, JURISDICTION_CODE, X_COORD_CD, Y_COORD_CD...
## lgl  (1): STATISTICAL_MURDER_FLAG
## time (1): OCCUR_TIME
##
## i Use 'spec()' to retrieve the full column specification for this data.
## i Specify the column types or set 'show_col_types = FALSE' to quiet this message.
```

After uploading the data, we run a test to make sure the data was properly retrieved from the website.

```
nypd_data
```

```
## # A tibble: 27,312 x 21
##   INCIDENT_KEY OCCUR_DATE OCCUR_TIME BORO      LOC_OF_OCCUR_DESC PRECINCT
##   <dbl> <chr>      <time> <chr>      <chr>              <dbl>
## 1  228798151 05/27/2021 21:30    QUEENS    <NA>              105
## 2  137471050 06/27/2014 17:40    BRONX     <NA>              40
## 3  147998800 11/21/2015 03:56    QUEENS    <NA>              108
## 4  146837977 10/09/2015 18:30    BRONX     <NA>              44
## 5   58921844 02/19/2009 22:58    BRONX     <NA>              47
## 6  219559682 10/21/2020 21:36    BROOKLYN  <NA>              81
## 7   85295722 06/17/2012 22:47    QUEENS    <NA>              114
## 8   71662474 03/08/2010 19:41    BROOKLYN  <NA>              81
## 9   83002139 02/05/2012 05:45    QUEENS    <NA>              105
## 10  86437261 08/26/2012 01:10    QUEENS    <NA>              101
## # i 27,302 more rows
## # i 15 more variables: JURISDICTION_CODE <dbl>, LOC_CLASSFCTN_DESC <chr>,
## #   LOCATION_DESC <chr>, STATISTICAL_MURDER_FLAG <lgl>, PERP_AGE_GROUP <chr>,
## #   PERP_SEX <chr>, PERP_RACE <chr>, VIC_AGE_GROUP <chr>, VIC_SEX <chr>,
## #   VIC_RACE <chr>, X_COORD_CD <dbl>, Y_COORD_CD <dbl>, Latitude <dbl>,
## #   Longitude <dbl>, Lon_Lat <chr>
```

As of this step we have successfully created a RStudio Markdown file and have successfully uploaded the required data for this assignment.

Describe Data

From viewing the data. The files contains multiple columns labeled: INCIDENT_KEY, OCCUR_DAT, OCCUR_TIME, BORO, LOC_OF_OCCUR_DESC, PRESCINT, JURISDICTION_CODE, LOC_CLASSFCTN_DESC, LOCATION_DESC, STATISTICAL_MURDER_FLAG, PERP_AGE_GROUP, PERP_RACE, VIC_AGE_GROUP, VIC_SEX, VIC_RACE, X_COOR, Y_COOR, LATITUDE, LONGITUDE, LON_LAT. The dataset contain columns that are misssing data. For my analysis I will also not be utilizing all the columns. Thereore, I need to hihglihgt which columns I will be using for my analysis. The data also hold information regarding shooting incident in New York. I will be able to learn more about the data as I go through my analysis.

We can also summarize the data using the summary function.

```
summary(nypd_data)
```

```
## INCIDENT_KEY      OCCUR_DATE      OCCUR_TIME      BORO
## Min.   : 9953245    Length:27312    Length:27312    Length:27312
## 1st Qu.: 63860880    Class :character Class1:hms      Class :character
## Median : 90372218    Mode  :character Class2:difftime Mode  :character
## Mean   :120860536                    Mode  :numeric
## 3rd Qu.:188810230
## Max.   :261190187
##
## LOC_OF_OCCUR_DESC  PRECINCT      JURISDICTION_CODE LOC_CLASSFCTN_DESC
## Length:27312      Min.   : 1.00    Min.   :0.0000    Length:27312
## Class :character  1st Qu.: 44.00  1st Qu.:0.0000    Class :character
## Mode  :character  Median : 68.00  Median :0.0000    Mode  :character
##                      Mean   : 65.64  Mean   :0.3269
##                      3rd Qu.: 81.00  3rd Qu.:0.0000
##                      Max.   :123.00  Max.   :2.0000
##                      NA's   :2
## LOCATION_DESC      STATISTICAL_MURDER_FLAG PERP_AGE_GROUP
## Length:27312      Mode :logical    Length:27312
## Class :character  FALSE:22046      Class :character
## Mode  :character  TRUE :5266       Mode  :character
##
##
##
## PERP_SEX          PERP_RACE          VIC_AGE_GROUP          VIC_SEX
## Length:27312      Length:27312      Length:27312      Length:27312
## Class :character  Class :character  Class :character  Class :character
## Mode  :character  Mode  :character  Mode  :character  Mode  :character
##
##
##
## VIC_RACE          X_COORD_CD          Y_COORD_CD          Latitude
## Length:27312      Min.   : 914928    Min.   :125757    Min.   :40.51
## Class :character  1st Qu.:1000028    1st Qu.:182834    1st Qu.:40.67
## Mode  :character  Median :1007731    Median :194487    Median :40.70
##                      Mean   :1009449    Mean   :208127    Mean   :40.74
##                      3rd Qu.:1016838    3rd Qu.:239518    3rd Qu.:40.82
##                      Max.   :1066815    Max.   :271128    Max.   :40.91
##                      NA's   :10
## Longitude        Lon_Lat
## Min.   : -74.25    Length:27312
## 1st Qu.: -73.94    Class :character
## Median : -73.92    Mode  :character
## Mean   : -73.91
## 3rd Qu.: -73.88
## Max.   : -73.70
## NA's   :10
```

Step 2: Tidy and Transform Data

Add to your Rmd document a summary of the data and clean up your dataset by changing appropriate variables to factor and date types and getting rid of any columns not needed. Show the summary of your data to be sure there is no missing data. If there is missing data, describe how you plan to handle it.

Our goal is to clean our data now. First we want to find which columns are unnecessary and which columns are the wrong data type. The columns that I want to keep for my analysis are: -Incident_Key -Occur_Date -Occur_Time -Boro -Precinct

I also noticed that the OCCUR_DATE is in the wrong format. I need to change the format from character to date. I would also like to create a more condensed data frame containing only the columns that I am interested in.

```
data_frame = nypd_data %>%  
  select(c(INCIDENT_KEY, OCCUR_DATE, OCCUR_TIME, BORO, PRECINCT)) %>%  
  mutate(OCCUR_DATE = mdy(OCCUR_DATE))  
  
data_frame
```

```
## # A tibble: 27,312 x 5  
##   INCIDENT_KEY OCCUR_DATE OCCUR_TIME BORO      PRECINCT  
##           <dbl> <date>      <time>   <chr>      <dbl>  
## 1    228798151 2021-05-27 21:30    QUEENS      105  
## 2    137471050 2014-06-27 17:40    BRONX        40  
## 3    147998800 2015-11-21 03:56    QUEENS     108  
## 4    146837977 2015-10-09 18:30    BRONX        44  
## 5     58921844 2009-02-19 22:58    BRONX        47  
## 6    219559682 2020-10-21 21:36    BROOKLYN     81  
## 7     85295722 2012-06-17 22:47    QUEENS     114  
## 8     71662474 2010-03-08 19:41    BROOKLYN     81  
## 9     83002139 2012-02-05 05:45    QUEENS     105  
## 10    86437261 2012-08-26 01:10    QUEENS     101  
## # i 27,302 more rows
```

Next, I am producing a summary of the new data frame.

```
summary(data_frame)
```

```
##   INCIDENT_KEY      OCCUR_DATE      OCCUR_TIME      BORO  
## Min.   : 9953245   Min.   :2006-01-01   Length:27312   Length:27312  
## 1st Qu.: 63860880   1st Qu.:2009-07-18   Class1:hms     Class :character  
## Median : 90372218   Median :2013-04-29   Class2:difftime Mode  :character  
## Mean   :120860536   Mean   :2014-01-06   Mode  :numeric  
## 3rd Qu.:188810230   3rd Qu.:2018-10-15  
## Max.   :261190187   Max.   :2022-12-31  
##   PRECINCT  
## Min.   : 1.00  
## 1st Qu.: 44.00  
## Median : 68.00  
## Mean   : 65.64  
## 3rd Qu.: 81.00  
## Max.   :123.00
```

Step 3: Add visualizations and Analysis

Add at least two different visualizations & some analysis to your Rmd. Does this raise additional questions that you should investigate?

From what I can tell, there seems to be no missing information. Therefore, I can continue with my analysis. For the next step of the project I have to add a minimum of two visualizations and some analysis to my R markdown.

For the first half of my visualization and analysis portion. I would like to see which areas have the highest crime. I can do this by analyzing the dataframe to see which BORO occurs most in the data. For the second half of my analysis, I will be determining which year did the most cases appear. These two analyses can help provide insight into which area has the most shootings and if crime has increased, decreased, or has not changed over the years. To begin the analysis portion, we need to find how many distinct BORO and which years the incidents occur.

First analysis and visualization

```
unique_cities <- unique(data_frame$BORO)
```

```
unique_cities
```

```
## [1] "QUEENS"      "BRONX"      "BROOKLYN"   "MANHATTAN"  
## [5] "STATEN ISLAND"
```

Since, we have now identified the unique cities in the data we can use them to further our analysis. Create a loop to count how often each city occurs in the dataframe. We can create a loop to do though the BORO column and count the number of time each city name occurred.

```
Queens = 0  
Bronx = 0  
Brooklyn = 0  
Manhattan = 0  
StatenIsland = 0  
  
for (i in 1:length(data_frame$BORO)){  
  if (data_frame$BORO[i] == "QUEENS")  
  {  
    Queens = Queens +1  
  }  
  else if (data_frame$BORO[i] == "BRONX")  
  {  
    Bronx = Bronx +1  
  }  
  else if (data_frame$BORO[i] == "BROOKLYN")  
  {  
    Brooklyn = Brooklyn +1  
  }  
  else if (data_frame$BORO[i] == "MANHATTAN" )  
  {  
    Manhattan = Manhattan +1  
  }  
}
```

```

}
else if (data_frame$BORO[i]== "STATEN ISLAND")
{
  StatenIsland = StatenIsland +1
}
}

```

```

total = Queens + Bronx+ Brooklyn + Manhattan+ StatenIsland
print(paste("There was a total of ", total, " cases throughout Queens, Bronx, Brooklyn, Manhattan, and Staten Island."))

```

```

## [1] "There was a total of 27312 cases throughout Queens, Bronx, Brooklyn, Manhattan, and Staten Island."

```

```

print(paste("There was a total of", Bronx," cases in the Bronx."))

```

```

## [1] "There was a total of 7937 cases in the Bronx."

```

```

print(paste("There was a total of", Queens," cases in the Queens."))

```

```

## [1] "There was a total of 4094 cases in the Queens."

```

```

print(paste("There was a total of", Brooklyn," cases in the Brooklyn."))

```

```

## [1] "There was a total of 10933 cases in the Brooklyn."

```

```

print(paste("There was a total of", Manhattan," cases in the Manhattan."))

```

```

## [1] "There was a total of 3572 cases in the Manhattan."

```

```

print(paste("There was a total of", StatenIsland," cases in the Staten Island."))

```

```

## [1] "There was a total of 776 cases in the Staten Island."

```

Since we know which cities are involved and how many cases occur in each city. We can now create a bar graph to represent the data given.

```

cities <- c("Bronx", "Queens", "Brooklyn", "Manhattan", "Staten Island")
total_cases <- c( Bronx, Queens, Brooklyn, Manhattan, StatenIsland)


df <-data.frame(cities, total_cases)

bar <- ggplot(data = df, aes(x = cities, y = total_cases)) +
  geom_bar(stat = "identity", color = "blue", fill = "blue")+
  labs(title = "Total Number of Shooting Incidents Covering Five Cities In New York", x= "Cities", y = "Total Cases")
  theme_minimal()

bar

```

Total Number of Shooting Incidents Covering Five Cities In New York

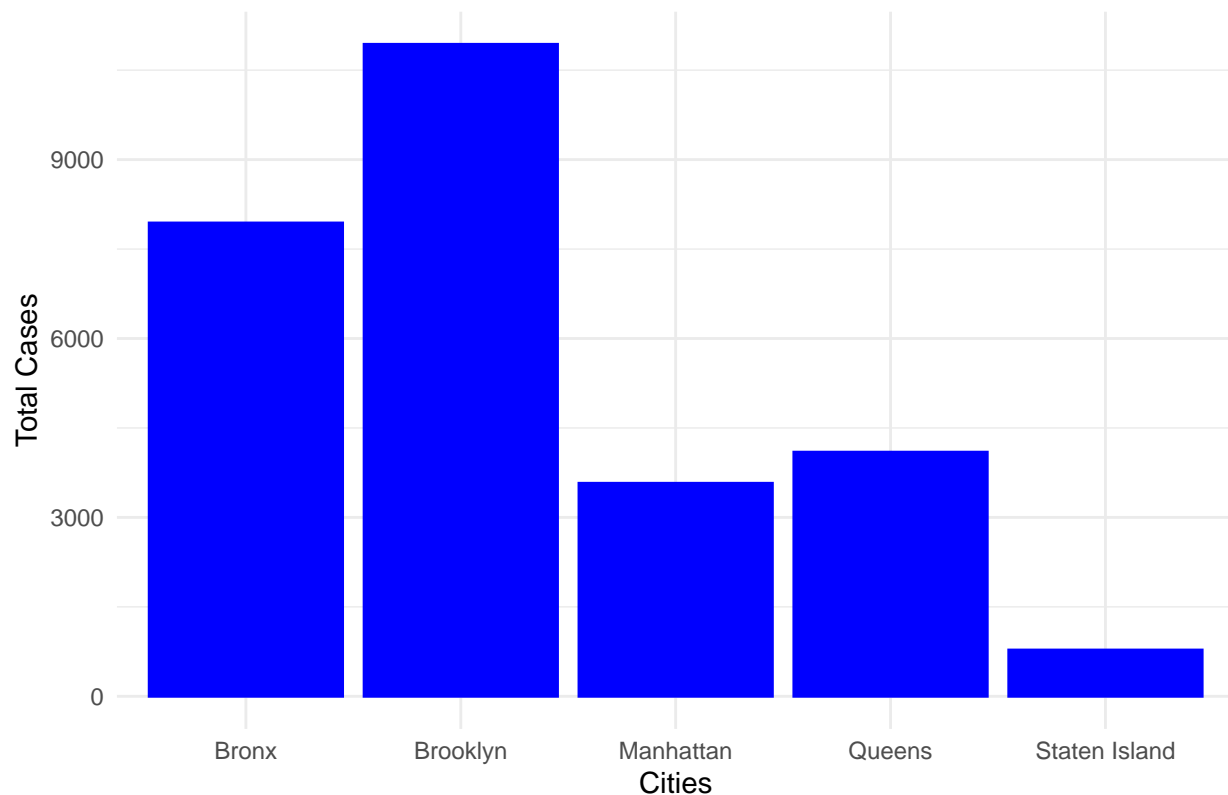

From observing the above graph we can tell that the city that has the most incidents is Brooklyn while the city with the least amount of incidents is Staten Island.

Second analysis and visualization

For the next portion of my analysis I will determine which year had the most crime. I will begin by editing the the data frame. I am going to separate OCCUR_DATE into three sections: Year, Month, and Day. By doing this I can create a loop to go thru each year and tally how many cases occurred in each year.

```
data_frame2 <- separate(data_frame, col = OCCUR_DATE, into = c("Year", "Month", "Day"), sep = "-")
```

I am going to find the max and min of the years that the incidents occurred to determine which years the data set covers. I am also going to determine which days the data set being and ends to determine if the data cover each year completely.

```
begin_year <- min(data_frame2$Year)
end_year <- max(data_frame2$Year)

begin_day <- min(data_frame$OCCUR_DATE)
end_day <- max(data_frame$OCCUR_DATE)

print(paste("The data set begins recording data in", begin_year, "until", end_year, "."))
```

```
## [1] "The data set begins recording data in 2006 until 2022 ."
```

```
print(paste("The data set begins recording data on", begin_day, "until", end_day, "."))
```

```
## [1] "The data set begins recording data on 2006-01-01 until 2022-12-31 ."
```

The incidents are recorded from 2006 to 2022. Therefore, we can create a loop to tally the number of incidents for each year. The incidents cover a span of 16 years.

```
total_2006 = 0
total_2007 = 0
total_2008 = 0
total_2009 = 0
total_2010 = 0
total_2011 = 0
total_2012 = 0
total_2013 = 0
total_2014 = 0
total_2015 = 0
total_2016 = 0
total_2017 = 0
total_2018 = 0
total_2019 = 0
total_2020 = 0
total_2021 = 0
total_2022 = 0

for (i in 1:length(data_frame2$Year))
{
  if (data_frame2$Year[i] == 2006)
  {
    total_2006 = total_2006 + 1
  }
  else if (data_frame2$Year[i] == 2007)
  {
    total_2007 = total_2007 + 1
  }
  else if (data_frame2$Year[i] == 2008)
  {
    total_2008 = total_2008 + 1
  }
  else if (data_frame2$Year[i] == 2009)
  {
    total_2009 = total_2009 + 1
  }
  else if (data_frame2$Year[i] == 2010)
  {
    total_2010 = total_2010 + 1
  }
  else if (data_frame2$Year[i] == 2011)
  {
    total_2011 = total_2011 + 1
  }
  else if (data_frame2$Year[i] == 2012)
```



```

{
  total_2012 = total_2012 + 1
}
else if (data_frame2$Year[i] == 2013)
{
  total_2013 = total_2013 + 1
}
else if (data_frame2$Year[i] == 2014)
{
  total_2014 = total_2014 + 1
}
else if (data_frame2$Year[i] == 2015)
{
  total_2015 = total_2015 + 1
}
else if (data_frame2$Year[i] == 2016)
{
  total_2016 = total_2016 + 1
}
else if (data_frame2$Year[i] == 2017)
{
  total_2017 = total_2017 + 1
}
else if (data_frame2$Year[i] == 2018)
{
  total_2018 = total_2018 + 1
}
else if (data_frame2$Year[i] == 2019)
{
  total_2019 = total_2019 + 1
}
else if (data_frame2$Year[i] == 2020)
{
  total_2020 = total_2020 + 1
}
else if (data_frame2$Year[i] == 2021)
{
  total_2021 = total_2021 + 1
}
else if (data_frame2$Year[i] == 2022)
{
  total_2022 = total_2022 + 1
}
}

print(paste("The was a total of", total_2006, "shooting incidents in 2006."))

## [1] "The was a total of 2055 shooting incidents in 2006."

print(paste("The was a total of", total_2007, "shooting incidents in 2007."))

## [1] "The was a total of 1887 shooting incidents in 2007."

```

```
print(paste("The was a total of", total_2008, "shooting incidents in 2008.))
```

```
## [1] "The was a total of 1959 shooting incidents in 2008."
```

```
print(paste("The was a total of", total_2009, "shooting incidents in 2009.))
```

```
## [1] "The was a total of 1828 shooting incidents in 2009."
```

```
print(paste("The was a total of", total_2010, "shooting incidents in 2010.))
```

```
## [1] "The was a total of 1912 shooting incidents in 2010."
```

```
print(paste("The was a total of", total_2011, "shooting incidents in 2011.))
```

```
## [1] "The was a total of 1939 shooting incidents in 2011."
```

```
print(paste("The was a total of", total_2012, "shooting incidents in 2012.))
```

```
## [1] "The was a total of 1717 shooting incidents in 2012."
```

```
print(paste("The was a total of", total_2013, "shooting incidents in 2013.))
```

```
## [1] "The was a total of 1339 shooting incidents in 2013."
```

```
print(paste("The was a total of", total_2014, "shooting incidents in 2014.))
```

```
## [1] "The was a total of 1464 shooting incidents in 2014."
```

```
print(paste("The was a total of", total_2015, "shooting incidents in 2015.))
```

```
## [1] "The was a total of 1434 shooting incidents in 2015."
```

```
print(paste("The was a total of", total_2016, "shooting incidents in 2016.))
```

```
## [1] "The was a total of 1208 shooting incidents in 2016."
```

```
print(paste("The was a total of", total_2017, "shooting incidents in 2017.))
```

```
## [1] "The was a total of 970 shooting incidents in 2017."
```

```
print(paste("The was a total of", total_2018, "shooting incidents in 2018.))
```

```
## [1] "The was a total of 958 shooting incidents in 2018."
```

```
print(paste("The was a total of", total_2019, "shooting incidents in 2019."))
```

```
## [1] "The was a total of 967 shooting incidents in 2019."
```

```
print(paste("The was a total of", total_2020, "shooting incidents in 2020."))
```

```
## [1] "The was a total of 1948 shooting incidents in 2020."
```

```
print(paste("The was a total of", total_2021, "shooting incidents in 2021."))
```

```
## [1] "The was a total of 2011 shooting incidents in 2021."
```

```
print(paste("The was a total of", total_2022, "shooting incidents in 2022."))
```

```
## [1] "The was a total of 1716 shooting incidents in 2022."
```

Now that I have determined how many incidents occur in each year. I am going to create a visualization to help display the information I found.


```
indv_years <- c(2006,2007,2008,2009,2010,2011,2012,2013,2014,2015,2016,2017,2018,2019,2020,2021,2022)
total_cases_year <- c(total_2006, total_2007,total_2008,total_2009,total_2010,total_2011,total_2012,tot

df <-data.frame(indv_years, total_cases_year)

bar2 <- ggplot(data = df, aes(x = indv_years, y = total_cases_year)) +
  geom_bar(stat = "identity", color = "blue", fill = "blue")+
  labs(title = "Total Shooting That Occurred in Each Year in New York", x ="Year", y = "Total Incidents
  theme_minimal()

bar2
```

Total Shooting That Occurred in Each Year in New York

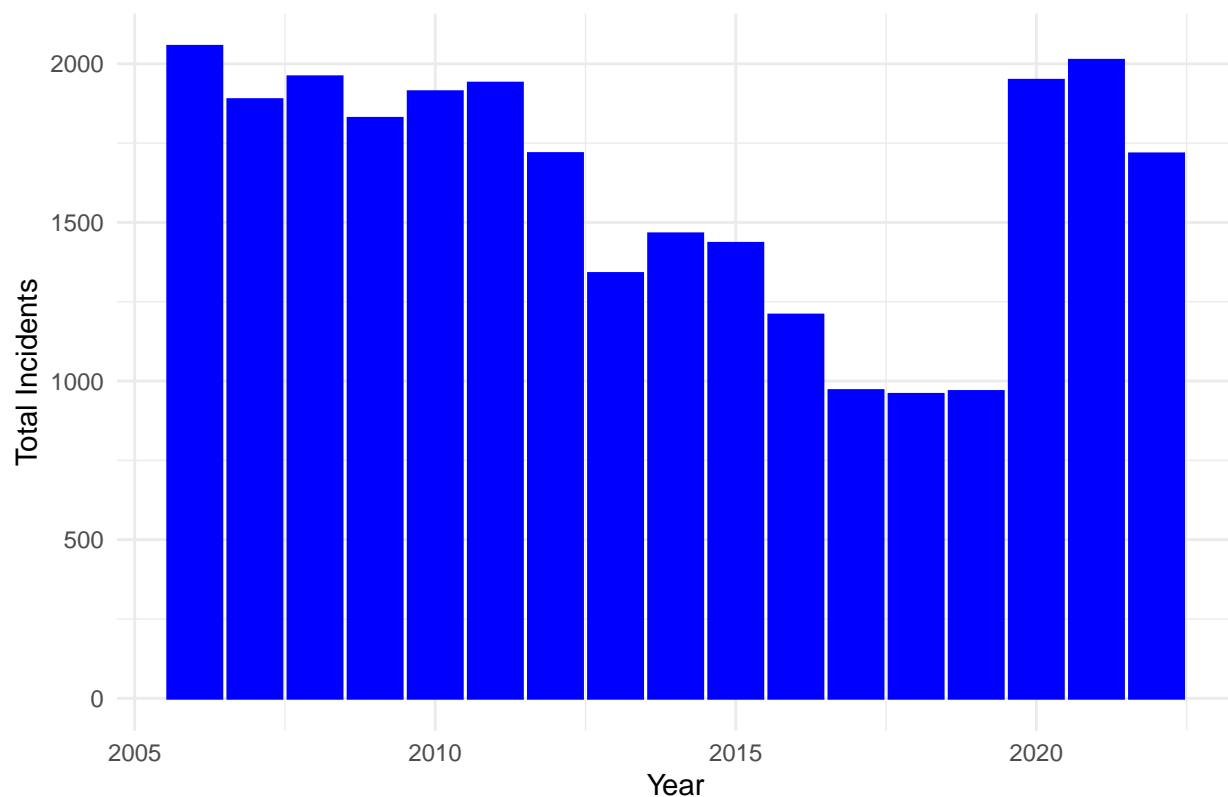

Model Lastly, I need to include a model to go along with my above diagrams. I am going to model a predictive line of the total number of cases throughout the years over the above bar graph containing the total number of cases each year.

```
mod<- lm(total_cases_year ~ indv_years, data = df)
summary(mod)
```

```
##
## Call:
## lm(formula = total_cases_year ~ indv_years, data = df)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -534.7 -301.6   42.6  176.6  642.2
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  70028.29   36459.62   1.921  0.0740 .
## indv_years    -33.97     18.10  -1.877  0.0802 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 365.7 on 15 degrees of freedom
## Multiple R-squared:  0.1901, Adjusted R-squared:  0.1362
## F-statistic: 3.522 on 1 and 15 DF, p-value: 0.08016
```

```

pred = predict(mod)
bar3 <-ggplot(data = df, aes(x = indv_years, y = total_cases_year)) +
  geom_bar(stat = "identity", color = "blue", fill = "blue")+
  labs(title = "Total Shooting That Occurred in Each Year in New York", x ="Year", y = "Total Incidents")
  geom_line(aes(x = indv_years, y = pred), color = "black")
  theme_minimal()

```

```

## List of 97
## $ line :List of 6
## ..$ colour : chr "black"
## ..$ linewidth : num 0.5
## ..$ linetype : num 1
## ..$ lineend : chr "butt"
## ..$ arrow : logi FALSE
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_line" "element"
## $ rect :List of 5
## ..$ fill : chr "white"
## ..$ colour : chr "black"
## ..$ linewidth : num 0.5
## ..$ linetype : num 1
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_rect" "element"
## $ text :List of 11
## ..$ family : chr ""
## ..$ face : chr "plain"
## ..$ colour : chr "black"
## ..$ size : num 11
## ..$ hjust : num 0.5
## ..$ vjust : num 0.5
## ..$ angle : num 0
## ..$ lineheight : num 0.9
## ..$ margin : 'margin' num [1:4] 0points 0points 0points 0points
## .. ..- attr(*, "unit")= int 8
## ..$ debug : logi FALSE
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ title : NULL
## $ aspect.ratio : NULL
## $ axis.title : NULL
## $ axis.title.x :List of 11
## ..$ family : NULL
## ..$ face : NULL
## ..$ colour : NULL
## ..$ size : NULL
## ..$ hjust : NULL
## ..$ vjust : num 1
## ..$ angle : NULL
## ..$ lineheight : NULL
## ..$ margin : 'margin' num [1:4] 2.75points 0points 0points 0points
## .. ..- attr(*, "unit")= int 8
## ..$ debug : NULL
## ..$ inherit.blank: logi TRUE

```

```

##   ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ axis.title.x.top           :List of 11
##   ..$ family                : NULL
##   ..$ face                  : NULL
##   ..$ colour                 : NULL
##   ..$ size                   : NULL
##   ..$ hjust                  : NULL
##   ..$ vjust                  : num 0
##   ..$ angle                  : NULL
##   ..$ lineheight             : NULL
##   ..$ margin                 : 'margin' num [1:4] 0points 0points 2.75points 0points
##   .. ..- attr(*, "unit")= int 8
##   ..$ debug                  : NULL
##   ..$ inherit.blank: logi TRUE
##   ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ axis.title.x.bottom        : NULL
## $ axis.title.y               :List of 11
##   ..$ family                : NULL
##   ..$ face                  : NULL
##   ..$ colour                 : NULL
##   ..$ size                   : NULL
##   ..$ hjust                  : NULL
##   ..$ vjust                  : num 1
##   ..$ angle                  : num 90
##   ..$ lineheight             : NULL
##   ..$ margin                 : 'margin' num [1:4] 0points 2.75points 0points 0points
##   .. ..- attr(*, "unit")= int 8
##   ..$ debug                  : NULL
##   ..$ inherit.blank: logi TRUE
##   ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ axis.title.y.left          : NULL
## $ axis.title.y.right         :List of 11
##   ..$ family                : NULL
##   ..$ face                  : NULL
##   ..$ colour                 : NULL
##   ..$ size                   : NULL
##   ..$ hjust                  : NULL
##   ..$ vjust                  : num 0
##   ..$ angle                  : num -90
##   ..$ lineheight             : NULL
##   ..$ margin                 : 'margin' num [1:4] 0points 0points 0points 2.75points
##   .. ..- attr(*, "unit")= int 8
##   ..$ debug                  : NULL
##   ..$ inherit.blank: logi TRUE
##   ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ axis.text                  :List of 11
##   ..$ family                : NULL
##   ..$ face                  : NULL
##   ..$ colour                 : chr "grey30"
##   ..$ size                   : 'rel' num 0.8
##   ..$ hjust                  : NULL
##   ..$ vjust                  : NULL
##   ..$ angle                  : NULL
##   ..$ lineheight             : NULL

```

```

## ..$ margin      : NULL
## ..$ debug       : NULL
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ axis.text.x      :List of 11
## ..$ family       : NULL
## ..$ face         : NULL
## ..$ colour       : NULL
## ..$ size         : NULL
## ..$ hjust        : NULL
## ..$ vjust        : num 1
## ..$ angle        : NULL
## ..$ lineheight   : NULL
## ..$ margin       : 'margin' num [1:4] 2.2points 0points 0points 0points
## ..- attr(*, "unit")= int 8
## ..$ debug       : NULL
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ axis.text.x.top   :List of 11
## ..$ family       : NULL
## ..$ face         : NULL
## ..$ colour       : NULL
## ..$ size         : NULL
## ..$ hjust        : NULL
## ..$ vjust        : num 0
## ..$ angle        : NULL
## ..$ lineheight   : NULL
## ..$ margin       : 'margin' num [1:4] 0points 0points 2.2points 0points
## ..- attr(*, "unit")= int 8
## ..$ debug       : NULL
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ axis.text.x.bottom : NULL
## $ axis.text.y      :List of 11
## ..$ family       : NULL
## ..$ face         : NULL
## ..$ colour       : NULL
## ..$ size         : NULL
## ..$ hjust        : num 1
## ..$ vjust        : NULL
## ..$ angle        : NULL
## ..$ lineheight   : NULL
## ..$ margin       : 'margin' num [1:4] 0points 2.2points 0points 0points
## ..- attr(*, "unit")= int 8
## ..$ debug       : NULL
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ axis.text.y.left  : NULL
## $ axis.text.y.right :List of 11
## ..$ family       : NULL
## ..$ face         : NULL
## ..$ colour       : NULL
## ..$ size         : NULL
## ..$ hjust        : num 0

```

```

## ..$ vjust          : NULL
## ..$ angle          : NULL
## ..$ lineheight     : NULL
## ..$ margin         : 'margin' num [1:4] 0points 0points 0points 2.2points
## ..- attr(*, "unit")= int 8
## ..$ debug          : NULL
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ axis.ticks        : list()
## ..- attr(*, "class")= chr [1:2] "element_blank" "element"
## $ axis.ticks.x       : NULL
## $ axis.ticks.x.top   : NULL
## $ axis.ticks.x.bottom : NULL
## $ axis.ticks.y       : NULL
## $ axis.ticks.y.left  : NULL
## $ axis.ticks.y.right : NULL
## $ axis.ticks.length  : 'simpleUnit' num 2.75points
## ..- attr(*, "unit")= int 8
## $ axis.ticks.length.x : NULL
## $ axis.ticks.length.x.top : NULL
## $ axis.ticks.length.x.bottom: NULL
## $ axis.ticks.length.y : NULL
## $ axis.ticks.length.y.left : NULL
## $ axis.ticks.length.y.right : NULL
## $ axis.line          : list()
## ..- attr(*, "class")= chr [1:2] "element_blank" "element"
## $ axis.line.x        : NULL
## $ axis.line.x.top    : NULL
## $ axis.line.x.bottom : NULL
## $ axis.line.y        : NULL
## $ axis.line.y.left   : NULL
## $ axis.line.y.right  : NULL
## $ legend.background  : list()
## ..- attr(*, "class")= chr [1:2] "element_blank" "element"
## $ legend.margin      : 'margin' num [1:4] 5.5points 5.5points 5.5points 5.5points
## ..- attr(*, "unit")= int 8
## $ legend.spacing     : 'simpleUnit' num 11points
## ..- attr(*, "unit")= int 8
## $ legend.spacing.x   : NULL
## $ legend.spacing.y   : NULL
## $ legend.key         : list()
## ..- attr(*, "class")= chr [1:2] "element_blank" "element"
## $ legend.key.size    : 'simpleUnit' num 1.2lines
## ..- attr(*, "unit")= int 3
## $ legend.key.height  : NULL
## $ legend.key.width   : NULL
## $ legend.text        :List of 11
## ..$ family          : NULL
## ..$ face            : NULL
## ..$ colour          : NULL
## ..$ size            : 'rel' num 0.8
## ..$ hjust           : NULL
## ..$ vjust           : NULL
## ..$ angle           : NULL

```



```

## ..$ lineheight : NULL
## ..$ margin : NULL
## ..$ debug : NULL
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ legend.text.align : NULL
## $ legend.title :List of 11
## ..$ family : NULL
## ..$ face : NULL
## ..$ colour : NULL
## ..$ size : NULL
## ..$ hjust : num 0
## ..$ vjust : NULL
## ..$ angle : NULL
## ..$ lineheight : NULL
## ..$ margin : NULL
## ..$ debug : NULL
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ legend.title.align : NULL
## $ legend.position : chr "right"
## $ legend.direction : NULL
## $ legend.justification : chr "center"
## $ legend.box : NULL
## $ legend.box.just : NULL
## $ legend.box.margin : 'margin' num [1:4] 0cm 0cm 0cm 0cm
## ..- attr(*, "unit")= int 1
## $ legend.box.background : list()
## ..- attr(*, "class")= chr [1:2] "element_blank" "element"
## $ legend.box.spacing : 'simpleUnit' num 11points
## ..- attr(*, "unit")= int 8
## $ panel.background : list()
## ..- attr(*, "class")= chr [1:2] "element_blank" "element"
## $ panel.border : list()
## ..- attr(*, "class")= chr [1:2] "element_blank" "element"
## $ panel.spacing : 'simpleUnit' num 5.5points
## ..- attr(*, "unit")= int 8
## $ panel.spacing.x : NULL
## $ panel.spacing.y : NULL
## $ panel.grid :List of 6
## ..$ colour : chr "grey92"
## ..$ linewidth : NULL
## ..$ linetype : NULL
## ..$ lineend : NULL
## ..$ arrow : logi FALSE
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_line" "element"
## $ panel.grid.major : NULL
## $ panel.grid.minor :List of 6
## ..$ colour : NULL
## ..$ linewidth : 'rel' num 0.5
## ..$ linetype : NULL
## ..$ lineend : NULL
## ..$ arrow : logi FALSE

```

```

## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_line" "element"
## $ panel.grid.major.x      : NULL
## $ panel.grid.major.y      : NULL
## $ panel.grid.minor.x      : NULL
## $ panel.grid.minor.y      : NULL
## $ panel.ontop              : logi FALSE
## $ plot.background          : list()
## ..- attr(*, "class")= chr [1:2] "element_blank" "element"
## $ plot.title                :List of 11
## ..$ family                 : NULL
## ..$ face                   : NULL
## ..$ colour                 : NULL
## ..$ size                   : 'rel' num 1.2
## ..$ hjust                  : num 0
## ..$ vjust                  : num 1
## ..$ angle                  : NULL
## ..$ lineheight             : NULL
## ..$ margin                 : 'margin' num [1:4] 0points 0points 5.5points 0points
## .. ..- attr(*, "unit")= int 8
## ..$ debug                  : NULL
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ plot.title.position       : chr "panel"
## $ plot.subtitle             :List of 11
## ..$ family                 : NULL
## ..$ face                   : NULL
## ..$ colour                 : NULL
## ..$ size                   : NULL
## ..$ hjust                  : num 0
## ..$ vjust                  : num 1
## ..$ angle                  : NULL
## ..$ lineheight             : NULL
## ..$ margin                 : 'margin' num [1:4] 0points 0points 5.5points 0points
## .. ..- attr(*, "unit")= int 8
## ..$ debug                  : NULL
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ plot.caption              :List of 11
## ..$ family                 : NULL
## ..$ face                   : NULL
## ..$ colour                 : NULL
## ..$ size                   : 'rel' num 0.8
## ..$ hjust                  : num 1
## ..$ vjust                  : num 1
## ..$ angle                  : NULL
## ..$ lineheight             : NULL
## ..$ margin                 : 'margin' num [1:4] 5.5points 0points 0points 0points
## .. ..- attr(*, "unit")= int 8
## ..$ debug                  : NULL
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ plot.caption.position     : chr "panel"
## $ plot.tag                  :List of 11

```


```

## ..$ family      : NULL
## ..$ face        : NULL
## ..$ colour      : NULL
## ..$ size        : 'rel' num 1.2
## ..$ hjust       : num 0.5
## ..$ vjust       : num 0.5
## ..$ angle       : NULL
## ..$ lineheight  : NULL
## ..$ margin      : NULL
## ..$ debug       : NULL
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ plot.tag.position : chr "topleft"
## $ plot.margin       : 'margin' num [1:4] 5.5points 5.5points 5.5points 5.5points
## ..- attr(*, "unit")= int 8
## $ strip.background  : list()
## ..- attr(*, "class")= chr [1:2] "element_blank" "element"
## $ strip.background.x : NULL
## $ strip.background.y : NULL
## $ strip.clip         : chr "inherit"
## $ strip.placement    : chr "inside"
## $ strip.text         :List of 11
## ..$ family      : NULL
## ..$ face        : NULL
## ..$ colour      : chr "grey10"
## ..$ size        : 'rel' num 0.8
## ..$ hjust       : NULL
## ..$ vjust       : NULL
## ..$ angle       : NULL
## ..$ lineheight  : NULL
## ..$ margin      : 'margin' num [1:4] 4.4points 4.4points 4.4points 4.4points
## .. ..- attr(*, "unit")= int 8
## ..$ debug       : NULL
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ strip.text.x      : NULL
## $ strip.text.x.bottom : NULL
## $ strip.text.x.top   : NULL
## $ strip.text.y       :List of 11
## ..$ family      : NULL
## ..$ face        : NULL
## ..$ colour      : NULL
## ..$ size        : NULL
## ..$ hjust       : NULL
## ..$ vjust       : NULL
## ..$ angle       : num -90
## ..$ lineheight  : NULL
## ..$ margin      : NULL
## ..$ debug       : NULL
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ strip.text.y.left :List of 11
## ..$ family      : NULL
## ..$ face        : NULL

```

```
## ..$ colour      : NULL
## ..$ size        : NULL
## ..$ hjust       : NULL
## ..$ vjust       : NULL
## ..$ angle       : num 90
## ..$ lineheight  : NULL
## ..$ margin      : NULL
## ..$ debug       : NULL
## ..$ inherit.blank: logi TRUE
## ..- attr(*, "class")= chr [1:2] "element_text" "element"
## $ strip.text.y.right : NULL
## $ strip.switch.pad.grid : 'simpleUnit' num 2.75points
## ..- attr(*, "unit")= int 8
## $ strip.switch.pad.wrap : 'simpleUnit' num 2.75points
## ..- attr(*, "unit")= int 8
## - attr(*, "class")= chr [1:2] "theme" "gg"
## - attr(*, "complete")= logi TRUE
## - attr(*, "validate")= logi TRUE
```

bar3

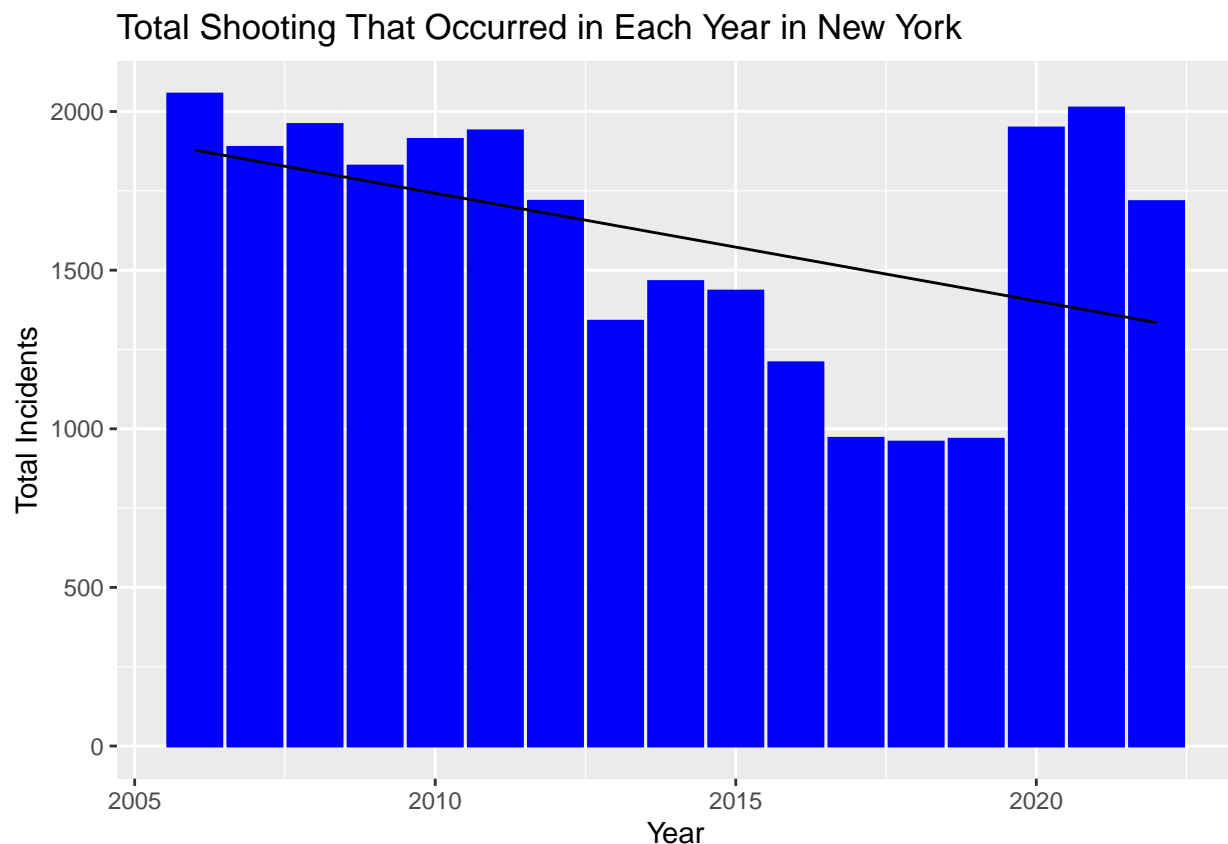

Questions that arose from analysis

During my analysis there were additionally questions that arose. While analysing the total cases per year and total cases per city there were multiple question that arose that could use further analysis. 1) How does crime overlap with the time of the year? For instance, is there more or less crime in the summer versus the winter? 2) how do individual cities crime rates differ throughout the year? We analyzed the overall state

but how have individual cities total incidents change throughout the year? Are cities reporting more or less incidents. 3) How many incidents occurred that have not been documented? 4) How does age and race relate to incident rate?

All of these questions arose and could use further analysis.

Step 4: Add bias Identification

Write the conclusion to your project report and include any possible sources of bias. Be sure to identify what your personal bias might be and how you have mitigated that.

To conclude my report, I discovered that there was a total of 27,312 shooting incident cases that spread across five distinct districts in New York over the course of 16 year (2006-2022). The city that experienced the most incidents over these years was Brooklyn while the least being Staten Island. Additionally, over the years New York experienced the most incidents in 2006. With the least amount of incidents being in 2018. From the analysis, the overall number of shooting incidents seemed to be decreasing until recent years where a large increase occurred in 2020. Overall, from the model that overlaps the bar graph containing the number of total incidents the trend shows a decreasing amount of incidents over the years.

During the analysis I came across selection bias. I wanted to focus on specific years. For instance, specifically studying the number of incidents during a designated timeline such as the most recent years (2020-2022). However, I furthered my analysis to cover the whole timeline that occurred in the data set (2006-2022). Expanding my analysis to cover the whole data set helped to mitigate bias because during the most recent years there was a spike in incidents. Without acknowledging the previous decrease in incidents my analysis would have greatly differed.