

# Bringing Knowledge Through AI and SMS

Sam Heather  
Department of Computer Science,  
The University of York,  
`sam@heather.sh`

February 4, 2015

## Abstract

In remote Africa, there are millions of disadvantaged and uneducated individuals, who, in the vast-majority, do not have access to the internet and the access to knowledge that this brings. Outside of their immediate friends and family, individuals can not get access to the information they need on anything from their own body to social problems.

In many parts of the world, the number of people without access to the internet, but access to a mobile phone, is significant. This project aims to research and develop a system capable of bringing knowledge through a question and answer based interactive system, in the language natively spoken by the user, through the use of a simple Artificial Intelligence and an SMS interface. The system will be expandable, such that it can be adjusted to handle questions on any knowledge area.

This project raises ethical issues relating to the responsibility of providing accurate information when in a position of trust, the ethics of machine translation and maintaining user privacy.

It is early days so it is normal that many things are missing from the abstract. You should keep in mind that it should include later on few sentences on method/experiment, result and conclusion.

# Contents

<b>1</b>	<b>Useful thoughts from Lilian</b>	<b>8</b>
<b>2</b>	<b>Introduction</b>	<b>9</b>
2.1	Background of this project . . . . .	9
2.2	Motivation for this project . . . . .	9
2.3	Aims of this project . . . . .	10
2.4	Structure of this report . . . . .	11
2.5	Assumptions Within This Project . . . . .	12
<b>3</b>	<b>Literature Review</b>	<b>13</b>
3.1	Previous work using SMS . . . . .	13
3.2	Ethical Issues . . . . .	14
3.2.1	Ethics of Providing Information . . . . .	14
3.2.2	Ethics of Translation . . . . .	15
3.2.3	User Privacy and Data Protection . . . . .	16
3.3	Software Design Life Cycles . . . . .	18
3.3.1	The Waterfall Model . . . . .	18
3.3.2	The Iterative Model . . . . .	19
3.3.3	Boehm's Spiral Model . . . . .	20
3.3.4	Agile Development . . . . .	21
3.3.5	Development Life Cycle Summary . . . . .	22
<b>4</b>	<b>Method and Requirements</b>	<b>23</b>
4.1	Plan for Software Development . . . . .	23
4.2	Requirements . . . . .	23
4.2.1	Use Cases / User Goals . . . . .	23
4.2.2	User Requirements . . . . .	23
4.2.3	System Requirements - Functional . . . . .	24
4.2.4	System Requirements - Non-Functional . . . . .	24
4.3	Evaluating Success . . . . .	25

<b>5 Design</b>	<b>26</b>
5.1 Software Design . . . . .	26
5.1.1 Micro-system for Protecting User Identity . . . . .	26
5.2 Language, Platform and Tools . . . . .	26
5.2.1 Language . . . . .	26
<b>6 Implementation</b>	<b>28</b>
<b>7 Results</b>	<b>29</b>
<b>8 Discussion</b>	<b>30</b>
<b>9 Evaluation</b>	<b>31</b>
<b>10 Extending this project</b>	<b>32</b>
<b>11 Conclusion</b>	<b>33</b>
<b>12 Appendix - Personnas</b>	<b>36</b>
12.1 Nanjala . . . . .	36
12.1.1 Demographics . . . . .	36
12.1.2 Average Day . . . . .	36
12.2 Ethan . . . . .	37
12.2.1 Demographics . . . . .	37
12.2.2 Average Day . . . . .	37
12.3 Cedric . . . . .	38
12.3.1 Demographics . . . . .	38
12.3.2 Average Trip . . . . .	38

## List of Figures

1	Screenshots of Shy iOS App . . . . .	9
2	Google Now information box. Screenshot made on 3rd February 2015. . . . .	13
3	Hashing a phone number using an imaginary hashing algorithm . . . . .	17
4	Waterfall Development Model . . . . .	19
5	Iterative Development Method . . . . .	20
6	Boehm's Spiral Model . . . . .	21

## List of Tables

1	Example of software database: hashed phone numbers paired with a list of previous returned answer ID's. . . . .	17
---	---	----

## **Statement of Ethics**

**Pretty much the most important part - write this!**

## **1 Useful thoughts from Lilian**

Take a quick look at list of other students previous projects to get an idea of how intro/lit review is structured etc.

Remove page number on title page.

Remember to take notes on when I come across problems, for my conclusion.



## 2 Introduction

### 2.1 Background of this project

The inspiration for this project originates from a project the author undertook in September 2014 whilst attending a week long 'hackathon' (Yacht Hack, <http://toughhackers.com/yacht-hack-2014/>), with Julie Markham and Nicholas Hopper, called Shy. On this project, the author co-created a project to prototype a mobile application that would facilitate the immediate answering of questions that fall within certain categories, using a knowledge base, simple machine learning and profiling of users based on their usage history.

One of the initial aims of Shy was to further the transition from e-learning (learning conducted online, usually with the help of a computer) to m-learning (learning using tools available on a mobile device). M-learning is an especially important topic at the moment, due to the high, and increasing, availability of mobile devices worldwide.

A semi-functional prototype was completed for iOS (shown in Figure 1), although question recommendations were evaluated without knowledge of previous material the user had viewed. This meant that, as such there was no knowledge of their interests, explicitly targeted answers for a question and suggestions of questions could not be made.

Up until this point, the service was restricted to working on iOS smart devices only, with poor quality question/answer matching. In the initial project, the knowledge base was built for questions on personal health, sex, relationships and family.

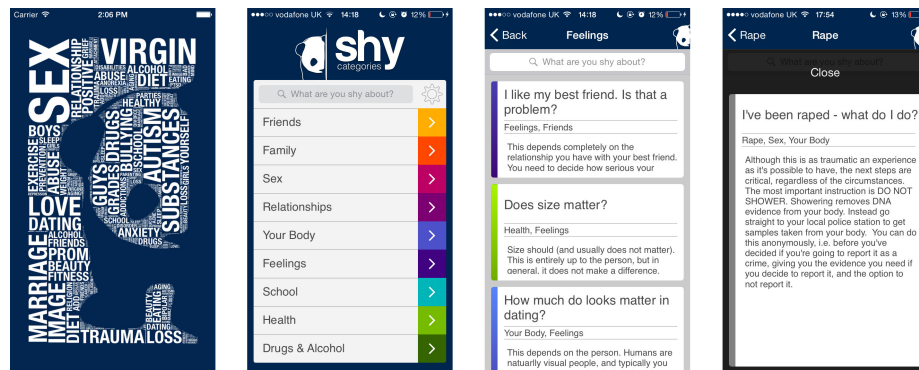


Figure 1: Screenshots of Shy iOS App

### 2.2 Motivation for this project

Access to knowledge is, in the opinion of the author, a critical part of modern life. It's also a Human Right, under Article 27 of the Universal Declaration of Human Rights [1]. We use tools to access knowledge hundreds of times each day, often un-

should add at least one more significant paragraph here, not sure what to write about though

aware that we are doing so. Despite this, hundreds of millions of individuals live without this facility. This project aims to investigate the (technical)(?) problem behind this and to create a technology to give more people access to knowledge, and thus their human rights.

does it really  
investigate the  
(technical)(?)  
problem?

The project also involves the use of a number of systems to work, including machine translation, an SMS input/output system and a system to build a profile on a user, to facilitate high-quality question-answer matching. The system will also feature machine learning, so that as time progresses, the quality of answers it returns increases. This along with complex ethics and privacy issues create an interesting project that draws together many technologies and discussions in a way that can be used as a basis for other projects in the future.

### 2.3 Aims of this project

The first goal of this project is to assess and address the ethical issues that arise from the software that this project aims to create. These include the responsibility the software (and hence the software author) has, because of its position of trust, to provide accurate information and to protect the privacy of its users by using only necessary information, among others. The author will do this by researching ethical issues relating to the technologies that the project will use, for example machine translation. This will then be used to feed the design process of the software and to specify the expected use-case of it. Finally, the resulting software will be evaluated through experimentation, with volunteers been asked to ask a set of questions within a topic area, in a non-English language, and evaluate the relevance of answers returned.

The initial goal for this dissertation project was to focus on questions relating to personal health, sex, relationships and family. This was as a direct result of the focus of 'Shy' (the app motivating this project). Although a health and diseases database was located in the early stages of the project (Diseases Database, [www.diseasesdatabase.com](http://www.diseasesdatabase.com)), it was targeted at professional uses for the data and came with a significant licence fee, as well as complex documentation that the provider insisted on customising specifically for each use-case. Attempts were made to acquire a free academic research licence via email, but these were not responded to. Additionally, as the project progressed in the early stages it became clear that the author's original two-page document discussing ethical considerations with the project did not cover all possible situations. Indeed, the Author and Supervisor were still discovering further significant ethical issues as far as 8 weeks into the project, which would have required a complex ethics panel review, critically delaying this project. Two example ethical issues that occurred were:

- Any application has that dispenses health related information that a user might act upon in a life changing manner HAS to respond with correct information, since an incorrect response could lead to a user taking an action which leads to them harming themselves.
- Privacy is critical since the questions been asked are personal. This could not be

absolutely guaranteed, since a third-party service had to be used to send SMSs and, although unlikely, it was possible that this service could build profiles on users and identify them.

As a result of the above issues with locating a reputable knowledge base and the complex ethical issues, a decision was made in early December 2014 to switch the target topic for questions to Geography and to use Wikipedia as a datasource, since it is openly available, well populated and multiple methods exist for extracting information from it.

## 2.4 Structure of this report

This report starts with a review of pre-existing literature on this topic, in chapter 3, where the author looks at existing software, tools and services of a similar type to those that will be either used in this project or that which this project hopes to create to research the problems that they stumbled across. Comparisons between different software development life-cycles are also discussed.

Chapter 4 describes the method that will be taken to develop the software and service. This covers the software development life-cycle that will be followed, and sets out a plan for when development will take place. Requirements will also be identified, described and categorised as either functional or non-functional. A method of evaluating the success of the software will also be discussed and chosen.

The design of the software, driven from information collected from the requirements, will be set out in Chapter 5. The individual components that make up the technology will be described and discussed, followed by a description of how these modules will interface with each other to build a complete system. Finally, this section will include a description of the platform, language and other tools that will be used.

described and  
discussed, or  
just described?

Chapter 6 contains details about the implementation of the software. This includes information on the tools that were used to create components such as the SMS interface and question/answer matching system.

Results from the evaluation of the system will be presented in Chapter 7. A discussion of these results and their implication on this project is then presented to the reader in Chapter 8.

Chapter 9 contains an evaluation of the software produced and the process taken to complete it. Comparisons will be made to the success criteria, set out for the project in section ;insert number here;.

The authors thoughts on potential future work, building on the work produced in this project, are then displayed in chapter 10.

Finally, the main achievements of this project and then the report is concluded in chapter 11 with final thoughts.

## **2.5 Assumptions Within This Project**

This project will make the assumption that users of this service have basic literacy skills in a language supported by the project. Although this is not a correct assumption world-wide, expanding the remit of this project to include a 'graphical' user interface that works over SMS would scale this project outside of the acceptable/expected range for an undergraduate dissertation.

The main use-case for this project is going to be parts of the world with limited internet access. Although these exist all-over the world, the African continent is typical of this problem so I will focus my research in demonstrating a need for this tool there.

### 3 Literature Review

**The point of this is to show that I 'own' the material and subject (competence). Show different points of view, choose a side, express a view on which I prefer and if I agree, critique. Have objective goals.**

A significant amount of work has previously been undertaken in the area of making knowledge quickly accessible to us in the form of questions and answers. To take one example, consider the situation of trying to find the population of London as quickly as possible. The initial step would be to search for information. In the connected world, this is easy - a simple Google search returns the answers, as shown in Figure 2.



Figure 2: Google Now information box. Screenshot made on 3rd February 2015.

This is easy to do in the developed world, where up to 75% of the population are connected to the internet [2] (with the population of elderly people been largely responsible for the remaining 25% [3]). This contrasts strongly with the situation in the African continent, where, in 2013, internet usage had only reached 16% [2], a figure largely inflated by South Africa, where 5% of the African population generate 2/3 of internet traffic from the African Continent [2].

#### 3.1 Previous work using SMS

Although the above suggests that the African continent is majoritively disconnected, this is not the case. Because of restrictions in the electricity available, the ways in which a mobile phone can be used in Africa have far surpassed those in the developed world [4], in-part due to the low power consumption of a mobile phone. Interesting

such examples include automated services which SMS HIV/AIDS sufferers, reminding them of medication to take, and providing access to current market information for agriculture and farming, saving farmers from making daily trips (often many kilometres) or relying on out-of-date information from a weekly radio broadcast [5].

Interactive systems have also been developed to operate over SMS. One successful example includes mobile money platforms. These allow for users, from any background, to pay and be paid for goods, and to transfer money across long distances, at negligible cost [5]. One of the most highly adopted services is M-Pesa - which, in Kenya alone, was responsible for £5.7 Billion in transfers in 2012<sup>1</sup>. M-Pesa gives users a balance linked to a national ID number, from which they can pay for goods by sending an SMS with a cashier (recipient) number or pay outstanding bills in a similar way. Non-subscribers can also use the system, by depositing money with a M-Pesa cashier in exchange for an access code, which can be sent via SMS to a contact, who can subsequently redeem it with their local cashier [5].

This difference in standard use of cell phones is demonstrated in the International Telecommunications Unions's 2013 report [2], which shows that in Europe, for 790 million mobile subscriptions, 53% of subscribers have mobile internet access (422 million), compared to 17% in Africa (93 million have mobile broadband, out of 545 mobile subscribers). This is due to the prohibitively high cost of accessing data services, regardless of the hardware that the user has. In 2012 in Europe, 500 MB of data per month for 12 months cost 1.2% of the average Gross National Income Per Capita (GNI pc). In Africa, the average price was 30x this, at 36.2% of an individual's GNI pc [6].

## 3.2 Ethical Issues

This project raises a swathe of ethical issues related to translation accuracy, providing information to people in an ethical way and maintaining user privacy.

### 3.2.1 Ethics of Providing Information

One significant issue for this project stems from providing information that may affect an individual or lead them to take a harmful action. **In a similar way to that which a teacher has a responsibility to teach accurate information to a pupil, due to their position of trust, any service relied upon by a user must equally provide accurate information. The result of not doing this could be providing inaccurate information that leads to a user carrying out an action that causes harm.**

**this needs to be waaaayyyy expanded, but I struggled to find information that was useful. There's lots on remote education, and on basic ethics of teaching, but I struggled to find anything specifically relating to ethics of ensuring information you provide is correct (actually I found some material that pointed the other way).**

---

<sup>1</sup>Data from Safaricom, M-Pesa operator in Kenya - actual value 817,085,000,000 Kenyan Shillings, converted to GBP on 1st November 2014 at rate of approximately 0.007.

### 3.2.2 Ethics of Translation

A significant part of this project is represented by the support of multiple languages. It is clear that translation on demand, at scale, needs to be automated by some kind of machine or algorithmic translation.

This project involves two blocks of translation. These are:

- The translation of the user's input into the language of the system (English)
- The translation of the answer to a users question from the system language to their local language.

The second of these raises some issues. To understand these, it is necessary to first understand the two categories of machine translation.

Rule-based machine translation effectively treats human language in a similar style to programming languages. Formal grammars and lexicons are used to represent words that exist in either the source or target language, structures representing the translation of individual words or groups of words. Map structures map individual or groups of words to their translated counterparts, sometimes with multiple results (a 1-many map), from which rules decide which is selected. Maps and rule sets are created by trained computational linguists [7].

More commonly, Statistical Machine Translation (SMT) is used (for example, this is used by Google and Microsoft Bing Translate) [7, 8]. Statistical machine translation learns maps between strings of words of potentially non-equal lengths from pre-existing original texts and their trusted human translations. The accuracy and breadth of language support for translation increases as more source material is analysed by the system, as potentially erroneous or low quality translations can be identified and marked. SMT is also dependent on the quality of the human translation on the input material [7].

The aforementioned issue that is present in statistical machine learning systems comes from the knowledge we assume an individual has and derives from a word. In human translation, this is solved by the translators knowledge of the difference in material culture, allowing them to append necessary information to the resulting translation that the recipient might find useful. In statistical machine learning, cultural awareness of material knowledge is a separate problem on it's own, on this scale. **formal reference to this, probably again from Kenny, but should be able to find better.** To take one example, from Melby (2006),

"when translating a French menu, a human translator might stop to think that an English speaker in France would appreciate being told that a steak tartare is served entirely raw, even if this information is not contained in the original text (because French people might be assumed to know this already). Such a translator would be aware of differences in material cul-

ture, and would be able to empathise with the English speaker who might choose to avoid the dish, given more information” [7, 9]

This issue is a result of the translation engine not been capable of taking as input, and using, a complete representation of the expected cultural differences between those who speak the input language and those who speak the output language [9].

**below should really be expanded and be in the discussion. Explain the decision to keep translated answers in the database, which are pre-approved, to ensure no cultural misunderstandings.**

Because the potential use of this system, regardless of whether this is within this project or by a third-party using the results of this project upon completion, could include distributing information that may be used by an individual making an important decision, cultural confusion such as this could have potentially catastrophic effects.

Lilian: quote taken from [7], but quote is interpreted from [9] - so I think referencing both is correct, but for this reason rather than last reason we discussed?

### 3.2.3 User Privacy and Data Protection

This project uses a simple Artificial Intelligence (AI) to keep a record of information that has already been returned to a user, to attempt to save sending repetitive information (saving the cost of additional SMS). This raises another ethical issue though - a privacy issue. The material that a user has researched is likely to be sensitive - such is the nature of health related questions. This means that the information on a user has to be kept securely, in a way that an individual user can not be identified.

One way of doing this is using a technology called hashing. Ideal hashing is the technique of taking data as an input and generating an output value (called a 'hash') that is unique to an input. Hash functions are ideally one way functions, where given input data X, the output hash will always be Y, whenever and however the hashing algorithm is executed. This allows a users identify (phone number) to be obscured (hashed), in such a way that the mobile number can not be recovered from the database. When a question is received, the phone number (represented by variable X in the above example) can be hashed and the data for this number looked up from the database, without the database application ever been aware of the phone number of the user. In the example in Figure 3, a phone number (X) is used as input to an imaginary hashing function and the output hash (Y) is shown on the right hand side. As just described, this number can then be used as the key for the user information database, shown in Table 1 to retrieve the information needed for the AI.

**reference the above from security engineering ross anderson, chapter 10 and 21?**

In practise it is possible for the output of a hashing algorithm not to be unique to a particular input. This is because the range of possible input values is much smaller than the range of output hashes, and because all valid inputs must map to an output, there is repetition in outputs [10]. This property of hashing algorithms can be a security risk for some use-cases, where hashes are used to verify that data has not changed since been






Figure 3: Hashing a phone number using an imaginary hashing algorithm

userId	userData
8f64B2	{previousQuestions:[13,301,170,577]}
9ac5e3	{previousQuestions:[441,56]}
f9dd7e	{previousQuestions:[301,623,89,280,364,621,209]}

Table 1: Example of software database: hashed phone numbers paired with a list of previous returned answer ID's.

hashed. In this case, a third-party may be attempting to generate alternative, malicious data with the same hash as some pre-existing data, to swap them unnoticed [11]. In the use-case of this project however, hashes are only been used to anonymise phone numbers to some unidentifiable string of characters and numbers, meaning that the above-described collision risk is not a security risk.

Two properties that this project does need from it's hashing algorithm are collision resistance and irreversibility. Collision resistance the property of a hashing algorithm that determines the probability of the same output hash for two distinct random inputs [10]. A high collision resistance is necessary to ensure that two users of the system with distinct phone numbers don't get mapped to the same row in the database, resulting in poor quality question/answer matching.

Irreversibility is a necessary property of the hashing algorithm chosen for this project. This ensures that the key used in the database can not be used to retrieve the phone number of the user, thus protecting their identity. Commonly used hashing algorithm families, such as the MD family (e.g. MD5) and SHA family are all designed to be one-way [12]<sup>2</sup>.

Although hashing algorithms are computationally one-way, they can suffer from another type of vulnerability affecting the security of the original input data. When hashes are used for short strings of information (passwords, for example), a simple way

<sup>2</sup>Bruce Schneier is a fellow at Harvard's Berkman center for internet and society. He has been posting regularly for his newsletter and then blog since 1998 (over 16 years) and has published material related to this field throughout this time. He has been involved in the creation of other cryptographic algorithms, such as the Skein hashing algorithm, blowfish block cipher, so may have a vested interest in dis-crediting other algorithms such as MD5 and SHA. However, the essay cited above is written as a result of the Crypto 2004 Conference in California, Schneier has a world-renowned reputation for cryptography and computer security and the algorithm that he suggests should be used at the end is not one that he has involvement in. For these reasons, I believe this source is reliable.

to try and retrieve the original data is to compute a dictionary of the hashes of lots of common passwords, from which matches can be found. This idea has been extended to produce Precomputed Hash Chains and subsequently Rainbow Tables. These are highly efficient data structures that consist of chains of processed input messages and their hashes (with a reduce function to reach the next item in the chain), allowing original input data to be looked-up from it's hash. Both Precomputed Hash Chains and Rainbow Tables tend to be Terabyte's in size, and as such they only exist in a significant form for the most common hash functions (including MD5 and SHA) [13]. Within this project, this raises privacy implications, as hashes within the database would be 'convertible' to phone numbers.

**perhaps the below should move to method and requirements - TODO needs to be cleaned up as well.**

In modern password authentication, a tool called bcrypt is used, which 'salts' passwords (additional unique data is added to each password before hashing), nullifying the use of Precomputed Hash Chains and subsequently Rainbow Tables. However, this would prevent efficient lookup of phone numbers in the communications part of the application (where answers and sent back to the user). As such, the best way of protecting a users phone number in the event of a database hack is to use a combination of a largely uncommon hashing algorithm, on the basis of it is unlikely anybody will have wasted vast computation power for a table that's useful in such a small number of situations, a hashing algorithm with a large output size, again because it makes a table more infeasible (because of size constraints) and a further change to the output hash, specific to this application. This way, a hacker would need to know this change (from the source code) as well as the password database, to be able to make use of a hashing table. The above is commonly implemented by hashing the result of one hash with another hashing algorithm.

### 3.3 Software Design Life Cycles

There are many software development life cycles that a developer or company has available for them to choose from. Four common ones include the Waterfall Model, Iterative Model, Spiral Model and the Agile Development Model. In order to choose which life cycle suits this project best, research into all four has been carried out.

#### 3.3.1 The Waterfall Model

The waterfall model consists of 5 phases of work, where each leads directly into the next. It is a plan driven development model, which means that all process activities such as the implementation of the project must be planned and scheduled before work on them begins [14]. The five layers are shown in Figure 4 and described below:

1. Requirements. In this stage, both user and system requirements for the project

Do I need to reference that ~~this should be in this section~~, or moved to the "Method and Requirements" section?

are determined after examining the business goals for the project. These form the system specification.

2. Design. In this stage, a plan for the software development is created. The overall architecture for the software is created, the external libraries to be used are chosen and the interaction between different modules is modelled.
3. Implementation. In this stage, the software is implemented to match the design and architecture set out in the Design phase. Unit tests are written to ensure that each module matches its specification.
4. Testing. In this section the system is tested as a whole to test for any bugs that might not be picked up when testing individual modules in isolation. The software is then delivered.
5. Maintenance. Finally, the software is deployed and maintained. This includes making changes to the requirements and subsequently the software (implementation) as the business goals change. [14]

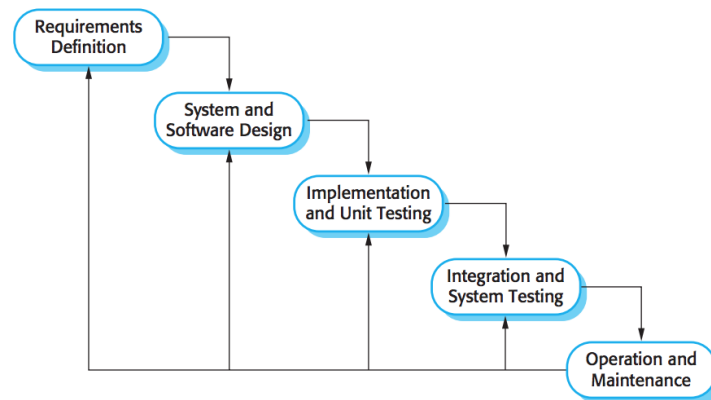


Figure 4: Waterfall Development Model  
source: Sommerville [14]

A key disadvantage of the waterfall model is that once development has moved from one stage to another it can not go back because the model is fixed and progresses in one direction only, until the maintenance step. The main advantage of the Waterfall Model is its simplicity - it is easy to understand and to use, saving time at the start of the project that could be wasted on learning and preparing for a more complex model.

### 3.3.2 The Iterative Model

Iterative development is the practise of splitting the overall development of a project into multiple independent and distinct blocks. A block contains a sequence of tasks

(essentially a mini life cycle) such that each iteration can really be thought of as it's own project. Each iteration tends to focus on a specific set of features, such that when the iteration is complete the overall project is stable and the modules developed to-date can be tested as a whole system [15].

There are a multiple variations of the iterative development method, including Timeboxed Iterative Development (where all iterations have a fixed, inflexible length) and Client-driven Iterative Development (where each iteration contains the features that the client considers have the highest business value) [16].

A common variation is based on the waterfall model, and is shown in Figure 5. The first three tasks in the cycle represent the first four stages in the waterfall model (Requirements, Design, Implementation and Testing), at which point there is the option to either evaluate progress so far, and start another iteration, or to deploy the software and end development. One significant difference between this and the waterfall model is that maintenance is not represented.

A key advantage of the Iterative Model is that it allows for the user to revise their requirements as they progress, making it dynamic and flexible. This is also it's disadvantage, in that the lack of fixed structure can be a weakness unless the project is planned well.

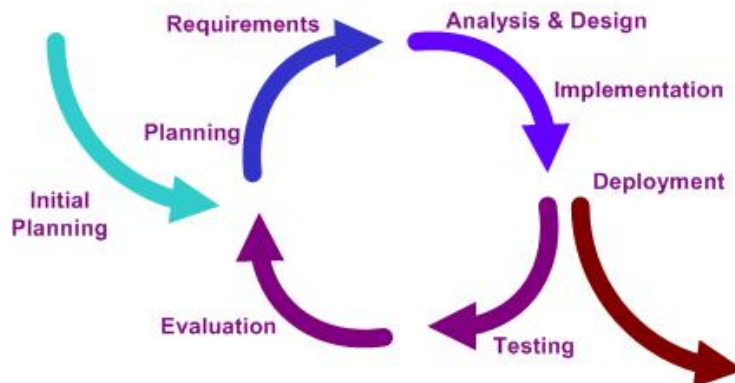


Figure 5: Iterative Development Method

source: [https://commons.wikimedia.org/wiki/File:Iterative\\_development\\_model\\_V2.jpg](https://commons.wikimedia.org/wiki/File:Iterative_development_model_V2.jpg)

### 3.3.3 Boehm's Spiral Model

The Spiral Model was originally developed as a result of the adjustments that were commonly made to the waterfall model in large government projects [17]. The Spiral Model is a general model and can be used as a generator for other more specific models, given the parameters for a project such as it's risks [18]. Models such as the waterfall model are specialisations of the spiral model [18].

Each loop represents a stage of the software development, from planning on the inside loop to system testing and verification on the outside, as shown in Figure 6.

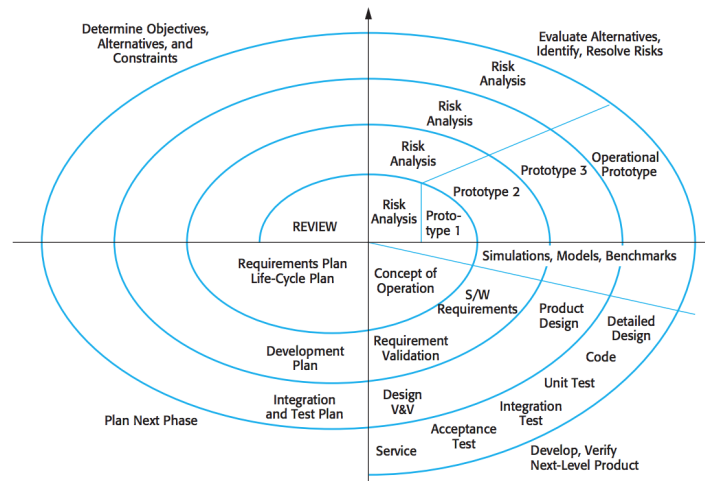


Figure 6: Boehm's Spiral Model  
source: Sommerville [14]

A key advantage of the Spiral Model is the level of detail it models. The stage of a sub-task within the entire development process is represented by the distance from the origin, and each loop is split into small, well described sections. A key disadvantage is that the planning and use of the model is largely driven by the results of complex risk analysis on the sub-tasks [14]. Although this makes it favourable to large organisations, it has the opposite effect for individuals.

A detailed description on the spiral model can be found in Boehm's paper "A spiral model of software development and enhancement", where he published the complete concept [17].

### 3.3.4 Agile Development

Agile Development essentially represents a group of development techniques targeted towards either the development of a small to medium sized product for sale or the development of a custom system within an organisation, where the customer has a high degree of involvement (for example 'Extreme Programming') [14].

Agile development is highly targeted towards teams, with components such as Pair Programming, Collective Ownership, regular meetings and employee health (avoiding overtime) playing an integral part in the model [14].

### 3.3.5 Development Life Cycle Summary

Iterative development has been chosen as the model that this project will follow, based on the following factors:

1. Boehm's Spiral Model and Agile Development are both targeted towards development teams. A significant part of these models relates to team interaction, so they are not appropriate to this project.
2. The Waterfall Model is rigid and inflexible. It does not allow for the changes to the requirements and implementation that might be proposed after evaluating the quality of the first implementation.
3. The Iterative development model can be implemented effectively by a single developer, and supports the adjustment of requirements and implementation in each iteration of the cycle.

I need to add this as a 'pro' above

## 4 Method and Requirements

### 4.1 Plan for Software Development

The Iterative Development Model was selected in Section 3.3.5. Therefore, the development of this service will follow the principles set forth in this process.

### 4.2 Requirements

#### 4.2.1 Use Cases / User Goals

Two personas were created in Appendix Section 12 to represent individuals who may have a need for the work resulting from this project. From these personas, user goals are extracted. These describe what a general user aims to achieve with this service.

1. Nanjala wants to be able to read general information on any given topic.
2. Ethan wants to be able to retrieve facts from direct questions.
3. Both Nanjala and Ethan want to be able to achieve their goals entirely via SMS because of their circumstances.
4. Ethan needs a simple and efficient user interface that allows him to retrieve facts quickly.
5. Ethan wants to be able to feedback into the system when he finds an answer particularly useful or unhelpful.
6. Nanjala wants to be able to show the service to her friends without explaining how to use it every time.
7. Nanjala wants to get recommendations on content she might find interesting.

Haven't  
decided yet if  
this is a feature  
I will  
implement -  
time based!

#### 4.2.2 User Requirements

User goals are distilled into formal user requirements. Each user requirement corresponds directly to the correspondingly numbered user goal.

1. Users must be able to request general or descriptive information on a geographical entity.
2. Users must be able to ask questions requesting a fact or statistic about an entity and get the answer or number they are looking for.
3. Users must be able to interact with the system over SMS.

4. Users must be able to make their queries and get responses quickly.
5. Users must be able to feedback to the system when an answer is of noticeably low or high quality so the system can learn and improve.
6. Users must be able to learn how to use the system themselves and this learning process should be quick.
7. Users must be able to get recommendations on entities they might be interested in, based on previous query history.

Haven't  
decided yet if  
this is a feature  
I will  
implement -  
time based!

#### **4.2.3 System Requirements - Functional**

1. The system will receive queries via SMS, process them and then respond via SMS.
2. The system shall use a datasource that contains both facts and descriptive text on geographical entities to answer queries.
3. The system must be able to parse queries to identify the entity that is been asked about and the specific parameter of that entity that should be returned as the answer to the users query.
4. As well as giving direct facts and statistics, the system should be able to give general descriptive information on an entity.
5. The system must be able to match words of similar meaning to the parameters in the data source. For example, the word 'long' must be matched to the parameter 'length'.
6. The system must learn from user feedback when answers that are returned are of high or low quality an apply this knowledge to future queries.
7. The system must be self-explanatory, with the facility to offer instructions to a user.
8. The system must use user state so that it can accept queries that are dependent on past questions (for example, a query asking for more information or feedback on the quality of a past question).
9. The system must be easy to implement and flexible, to accommodate future projects that make use of adaptations of this project.

#### **4.2.4 System Requirements - Non-Functional**

Fit criterion are stated after each non-functional requirement, which will be used to identify whether a requirement has been met successfully.



1. The system behind the SMS gateway must respond in a timely manner. Fit Criterion: from an SMS been received, a response must be sent within 10 seconds. SMS transmission times on the cellular network and gateway are out of the control of this project, so are not accounted for.
2. The answers returned must be of high quality. Fit Criterion: in testing, the system returns the requested information for at least 80% of queries.
3. Answers that are consistently rated poorly are no returned in fewer cases. Fit Criterion: to determine later
4. Instructions to use the service should be clear and concise, with no ambiguity. Fit Criterion: to determine later - may not keep this
5. The system should accept and be able to process questions in natural human language as opposed to a delimited message.to determine later

### **4.3 Evaluating Success**

## 5 Design

### 5.1 Software Design

#### 5.1.1 Micro-system for Protecting User Identity

In section 3.2.2, the need to protect the privacy of a user and the general technique that will be used (involving irreversible hashing) are described. The design of this system will now be discussed.

The main gateway into the system will be an HTTP call to a Python function, which takes the phone number of the user and the question been asked as its parameters. The header and basic structure of this function is:

```
def entry(userCell , question):  
    hashedCell = someHashFunction(userCell)  
    answer = findAnswer(hashedCell , question)  
    return userCell , answer
```

The userCell is required at the output of the function to determine the number to which a response will be sent. However, as the computation of an answer only requires a general constant representation of user identify, not necessarily the user phone number, the specific value of userCell is not required within the computation of the answer. As such, a hash is passed into the answer-computing function. This hash will be used within the database to store a user's history and profile. This means that only a user's history can be identified from the database, not the actual identity of a user.

### 5.2 Language, Platform and Tools

#### 5.2.1 Language

The language Python has been selected to be the main language in project for three reasons:

1. Python is universally compatible and simple to execute. Once the server application is written, it will be simple to migrate it between machines and make adjustments.
2. Python is commonly used and has significant community support in the form of libraries for all the tools that will be used in this project (for example, libraries for queries databases and for sending text messages).
3. The author has significant expertise in the language, as does Lilian Blot (dissertation Supervisor).

A testing utility will also be created to query the application without using SMS. A simple OS X Cocoa application will be created that queries the HTTP interface with for expected JSON and displays an answer. Objective-C and and Mac OS X were chosen as the language and platform for this as the author has experience with Objective-C and uses a Mac. Because the application is only for testing purposes, there was no requirement for universal compatibility.

double check  
Swift is still  
technically  
Cocoa?

## **6 Implementation**

**This section will contain information on how data is stored, the structure of databases, and the format of and method through which data is sent to an SMS provider.**

## **7 Results**

This section's content...

## **8 Discussion**

This section's content...

## **9 Evaluation**

This section's content...

## 10 Extending this project

**Section not complete** If the author was able to expand this project, areas for expansion include:

- Addressing the issue of literacy
- Automating the expansion of the database



## **11 Conclusion**

This section's content...

Melby reference not right, publisher weird - ask Lilian in next session. Url  
Commented in TEX here

## References

- [1] U. N. international community, “The universal declaration of human rights,” 1948. [Online]. Available: <http://www.un.org/en/documents/udhr>
- [2] I. T. U. (ITU), “Key ict indicators for developed and developing countries and the world (totals and penetration rates),” Geneva, 2013. [Online]. Available: [http://www.itu.int/en/ITU-D/Statistics/Documents/statistics/2013/ITU\\_Key\\_2005-2013\\_ICT\\_data.xls](http://www.itu.int/en/ITU-D/Statistics/Documents/statistics/2013/ITU_Key_2005-2013_ICT_data.xls)
- [3] O. for National Statistics, “Internet access quarterly update, q1 2014 release,” Online report, London, Tech. Rep., 2014. [Online]. Available: <http://www.ons.gov.uk/ons/rel/rdit2/internet-access-quarterly-update/q1-2014/index.html>
- [4] K. Fox. (2011, Jul.) Africa’s mobile economic revolution. [Online]. Available: <http://www.theguardian.com/technology/2011/jul/24/mobile-phones-africa-microfinance-farming>
- [5] J. C. Aker and I. M. Mbiti, “Mobile phones and economic development in africa,” *The Journal of Economic Perspectives*, vol. 24, no. 3, pp. pp. 207–232, 2010. [Online]. Available: <http://www.jstor.org/stable/20799163>
- [6] I. T. Union, “Measuring the information society,” International Telecommunication Union, Geneva, Tech. Rep., 2013. [Online]. Available: [http://www.itu.int/en/ITU-D/Statistics/Documents/publications/mis2013/MIS2013\\_without\\_Annex\\_4.pdf](http://www.itu.int/en/ITU-D/Statistics/Documents/publications/mis2013/MIS2013_without_Annex_4.pdf)
- [7] D. Kenny, “The ethics of machine translation,” 2011.
- [8] G. Inc. (2014) Google research: Find out how our translations are created. [Online]. Available: [http://translate.google.co.uk/about/intl/en\\_ALL/](http://translate.google.co.uk/about/intl/en_ALL/)
- [9] A. K. Melby, “Why cant a computer translate more like a person,” 2006.
- [10] S. Goldwasser and M. Bellare. University Lecture Notes. Accessed: 2014-11-15. [Online]. Available: <http://cseweb.ucsd.edu/~mihir/papers/gb.pdf>
- [11] R. Anderson, *Security Engineering*, 2nd ed. Indiana, United States: Wiley Publishing, Inc., 2008.
- [12] B. Schneier. (2004) Cryptanalysis of md5 and sha: Time for a new standard. Accessed: 2014-11-16. [Online]. Available: [https://www.schneier.com/essays/archives/2004/08/cryptanalysis\\_of\\_md5.html](https://www.schneier.com/essays/archives/2004/08/cryptanalysis_of_md5.html)

- [13] C. Teat and S. Peltsverger, “The security of cryptographic hashes,” in *Proceedings of the 49th Annual Southeast Regional Conference*, ser. ACM-SE '11. New York, NY, USA: ACM, 2011, pp. 103–108. [Online]. Available: <http://doi.acm.org/10.1145/2016039.2016072>
- [14] I. Sommerville, *Software Engineering*. Pearson Education, 2010.
- [15] N. Rahmany. (2012) The differences between life cycle models - advantages and disadvantages. Accessed: 2015-01-27. [Online]. Available: <https://narbit.wordpress.com/2012/06/10/the-differences-between-life-cycle-models-advantages-and-disadvantages/>
- [16] C. Larman, *Agile and iterative development: a manager's guide*. Addison-Wesley Professional, 2004.
- [17] B. Boehm, “A spiral model of software development and enhancement,” *Computer*, vol. 21, no. 5, pp. 61–72, May 1988.
- [18] B. Boehm and W. J. Hansen, “Spiral development: Experience, principles, and refinements,” DTIC Document, Tech. Rep., 2000.

## **12 Appendix - Personnas**

### **12.1 Nanjala**

#### **12.1.1 Demographics**

- Female, Aged 15
- Living in the village of Amuria, Uganda, 300km from the Capital, Kampala. Internet access is difficult and expensive to obtain in Amuria, however there is good mobile network coverage.
- Currently in general education at her village school.
- Nanjala is curious and wants to be able to ask questions and retrieve and read more information at her own leisure. She prefers to be told about something than to learn facts.

#### **12.1.2 Average Day**

In a typical day, Nanjala will rise early to help her family with housework chores, before she prepares for school. Nanjala wants to become a teacher. At school, she studies Science, Maths and Geography, and works hard for her classes and on her homework. Nanjala's school has a small library and a body of students, all of whom are as hard-working as Nanjala, meaning that books are often unavailable when Nanjala would like to look something up. This increases the amount of time that her homework takes, and can even result in her not having access to information when she must go home to her family.

## **12.2 Ethan**

### **12.2.1 Demographics**

- Male, Aged 22
- Living at his family's Ranch in the Australian Outback. Although there is internet access, it's very slow and phone calls / SMS are used whenever possible.
- Ethan is in his final year of studying for a degree in Land Management at the University of Sydney. At the moment he is back home for his Easter holidays.
- Ethan is very conscientious, and wants to contribute his own knowledge to the world - especially to projects that help him. He's written to authors before to point out mistakes in their works.

### **12.2.2 Average Day**

Ethan is a focussed worker and tends to work hard on projects to get them out of the way quickly. His final-year dissertation focusses on the differences in land management around the world, and requires the use of lots of facts and figures, which he has to research. In the morning, Ethan plans what he aims to research and write that day. He then works on parts grouped by section. A few times an hour, Ethan needs to find a relevant fact or figure about a country or geographical structure, such as the population density of a country or the height of a mountain. Getting this information from the internet is very slow - his family share a dial-up modem which can take minutes just to connect and allow a Google search.

## 12.3 Cedric

### 12.3.1 Demographics

- Male, Aged 27
- Lives in Zrich (Switzerland) and goes for regular weekend hiking trips in the Alps, where mobile signal is intermittent . cite this
- Works in a service role in the city and so has little disposable income to spend on guide books for the many places he visits.
- Cedric is a extremely competent hiker, often going off-track and summiting 'difficult' peaks. He likes to be spontaneous, only deciding which peaks he will attempt when he arrives.
- Cedric is very conscientious, and wants to contribute his own knowledge to the world - especially to projects that help him. He's written to authors before to point out mistakes.

### 12.3.2 Average Trip

Cedric likes to get to the mountains early on a Saturday morning or Friday evening to give him as long as possible there. A typical trip will involve an intercity train from the Zrich Hauptbahnhof (main station) to another town, followed by local trains and buses to get into the mountain ranges. There, he will use Swiss Hiking Trail Network signs and local conversations to select a peak or route. Once Cedric has selected a route and is reaching higher ground, he uses a combination of his view and the signage to identify other peaks that he would like to wander around. Cedric only has a non-smart phone with him because a) he can't afford to loose or damage his work phone and b) it would not be useful anyway, since the internet is intermittent. However, he still wishes he could get information like whether there are hike-able routes or the height of a peak a word? that he sees without having to phone friends back in the city.