


## Spring Boot Setup on Android

Download the SMS forwarder app onto an Android with an active SIM card: [app-release](#)

Grant access to install unknown apps on the phone and grant SMS/messaging access.

Connect the phone to your PC via USB. Enable USB debugging.

On Windows, open Command prompt and run **ipconfig** to get the local host IP address of the computer.

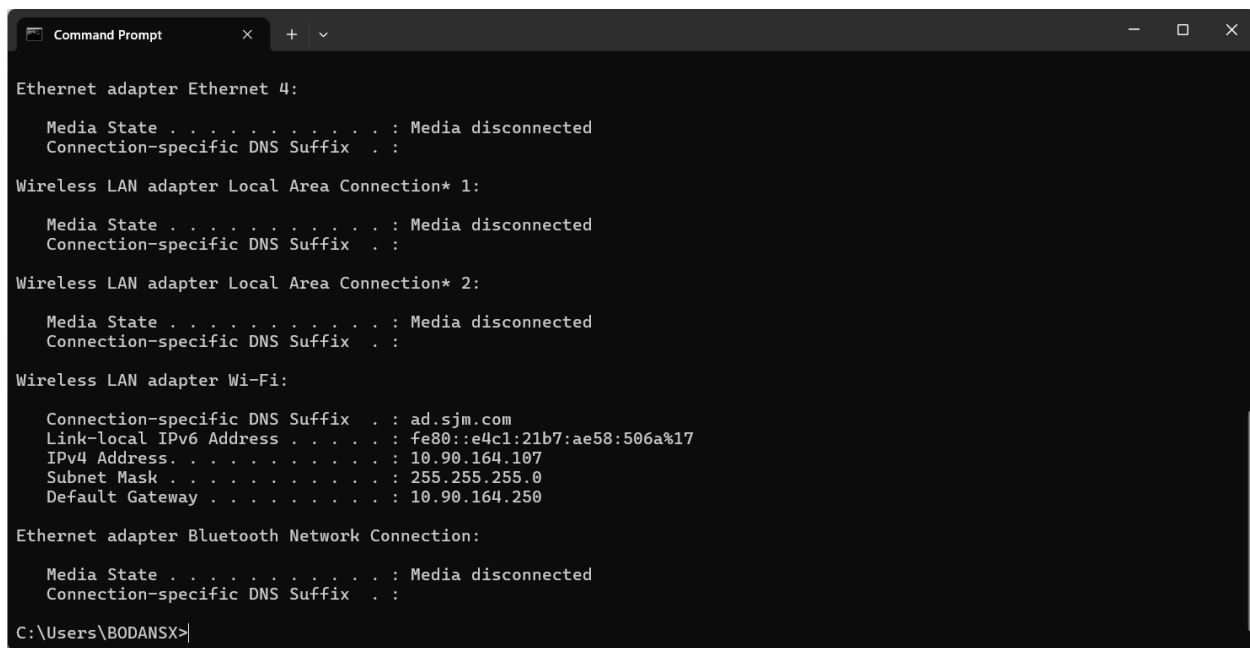A screenshot of a Windows Command Prompt window. The title bar says "Command Prompt". The output shows network configuration for various adapters. Ethernet adapter Ethernet 4: Media State is disconnected. Wireless LAN adapter Local Area Connection\* 1: Media State is disconnected. Wireless LAN adapter Local Area Connection\* 2: Media State is disconnected. Wireless LAN adapter Wi-Fi: Connection-specific DNS Suffix is ad.sjm.com, Link-Local IPv6 Address is fe80::e4c1:21b7:ae58:506a%17, IPv4 Address is 10.90.164.107, Subnet Mask is 255.255.255.0, and Default Gateway is 10.90.164.250. Ethernet adapter Bluetooth Network Connection: Media State is disconnected. The prompt is at C:\Users\BODANSX>.

```
Command Prompt

Ethernet adapter Ethernet 4:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :

Wireless LAN adapter Local Area Connection* 1:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :

Wireless LAN adapter Local Area Connection* 2:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :

Wireless LAN adapter Wi-Fi:

    Connection-specific DNS Suffix  . : ad.sjm.com
    Link-Local IPv6 Address . . . . . : fe80::e4c1:21b7:ae58:506a%17
    IPv4 Address. . . . . : 10.90.164.107
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 10.90.164.250

Ethernet adapter Bluetooth Network Connection:


    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :

C:\Users\BODANSX>
```

On Mac, open Terminal and run **ifconfig | grep "inet"** to get the IP address of your Mac. The code after "inet" is your computer's IP address.

```
Last login: Tue Jul 28 15:33:44 on ttys007
/Users/BODANSX/.zprofile:1: no such file or directory: /opt/hoebrew/bin/brew
BODANSX@M9H7Y7QC4Y ~ % ifconfig | grep "inet"
    inet 127.0.0.1 netmask 0xff000000
    inet6 ::1 prefixlen 128
    inet6 fe80::1%lo0 prefixlen 64 scopeid 0x1
    inet6 fe80::c76:b8df:7f24:cfc1%en0 prefixlen 64 secured scopeid 0xb
    inet 10.90.164.90 netmask 0xffffffff00 broadcast 10.90.164.255
    inet6 fe80::d892:b3ff:fe71:3925%awdl0 prefixlen 64 scopeid 0xd
    inet6 fe80::d892:b3ff:fe71:3925%llw0 prefixlen 64 scopeid 0xe
    inet6 fe80::17c2:810c:f491:7f6%utun0 prefixlen 64 scopeid 0xf
    inet6 fe80::9d09:b736:1bfc:64e0%utun1 prefixlen 64 scopeid 0x10
    inet6 fe80::3a12:fdcd:4af4:7334%utun2 prefixlen 64 scopeid 0x11
    inet6 fe80::ce81:b1c:bd2c:69e%utun3 prefixlen 64 scopeid 0x12
    inet6 fe80::76a6:cdff:feeb:ee25%utun4 prefixlen 64 scopeid 0x13
    inet6 fc00::6440:1 prefixlen 112
    inet 100.64.0.1 --> 100.64.0.1 netmask 0xffff0000
BODANSX@M9H7Y7QC4Y ~ %
```

On the phone, open up the freshly installed SMS forwarder app and press the “+” button on the bottom right corner

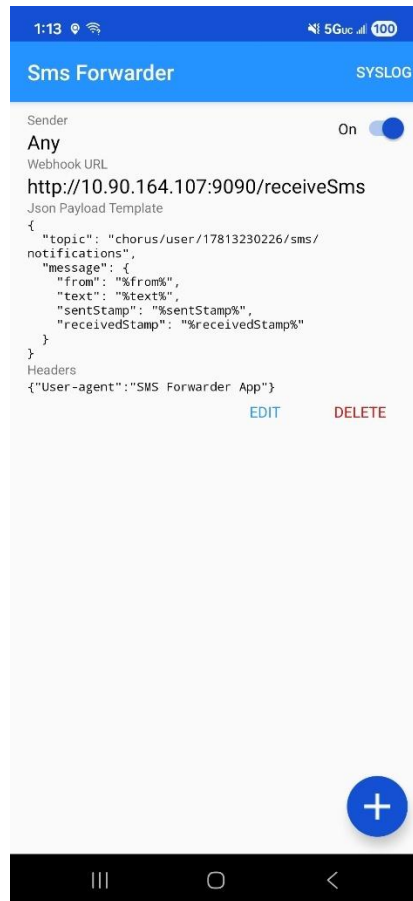

- Type “\*” in the “Sender” section.
- In “Webhook URL”, type “http://<IPv4 Address:9090>/receiveSms”
  - NOTE: The localhost IP address may change when connected to different networks. Double check that SMS forwarder URL matches the computer’s current IP address before running
- Select “any” in “Sim Slot”
- Copy and Paste the JSON below into the “JSON Payload Template”. Replace the phone number in the “topic” with the area code and phone number of the Android phone you downloaded SMS forwarder

```
{
  "topic": "chorus/user/17813230226/sms/notifications",
  "message": {
    "from": "%from%",
    "text": "%text%",
    "sentStamp": "%sentStamp%",
```

```

    "receivedStamp": "%receivedStamp%"
  }
}

```

- Paste the following JSON in “Headers”

```
{“User-agent”:”SMS Forwarder App”}
```

**Routing parameters**

Sender (number or text)

\*

Use \* symbol to catch any SMS

Webhook URL

http://10.90.164.107:9090/receiveSms

**Advanced parameters**

Sim Slot

any

Json Payload Template

```
{
  "topic": "chorus/user/17813230226/sms/notifications",
  "message": {
    "from": "%from%",
    "text": "%text%",
    "sentStamp": "%sentStamp%",
    "receivedStamp": "%receivedStamp%"
  }
}
```

Available placeholders %text%, %from%, %sentStamp%, %receivedStamp%, %sim%

Headers

```
{“User-agent”:”SMS Forwarder App”}
```

Number of retries

20

TEST CANCEL SAVE

- Type “20” for “Number of Entries”
- Tap “Save” button

1:13 5Guc 100

Use \* symbol to catch any SMS

Webhook URL

`http://10.90.164.107:9090/receiveSms`

**Advanced parameters**

Sim Slot

any

Json Payload Template

```
{
  "topic": "chorus/user/17813230226/sms/notifications",
  "message": {
    "from": "%from%",
    "text": "%text%",
    "sentStamp": "%sentStamp%",
    "receivedStamp": "%receivedStamp%"
  }
}
```

Available placeholders %text%, %from%, %sentStamp%, %receivedStamp%, %sim%

Headers

`{"User-agent": "SMS Forwarder App"}`

Number of retries

20

Ignore SSL/TLS certificate errors ☐

Chunked Mode (vs Fixed Length) ☒

TEST CANCEL SAVE

NOTE: your computer's IP address changes based on the WiFi it is connected to. Make sure to check your phones IP address before running test cases. If your IP address changed, press "Edit" and edit the IP address in the "Webhook URL" section

3:43







100

### Routing parameters

Sender (number or text)

\*

Use \* symbol to catch any SMS

Webhook URL

http://192.168.4.30:9090/receiveSms

### Advanced parameters

Sim Slot

any

Json Payload Template

```
{
  "topic": "chorus/user/17813230226/sms/
notifications",
  "message": {
    "from": "%from%",
    "text": "%text%",
    "sentStamp": "%sentStamp%",
    "receivedStamp": "%receivedStamp%"
  }
}
```

Available placeholders %text%, %from%, %sentStamp%, %receivedStamp%, %sim%

Headers

{ "User-agent": "SMS Forwarder App" }

Number of retries

20

TEST

CANCEL

SAVE