


Per-serotype novelty detection — DEPLOYMENT (k=1, threshold = p99 of ID)

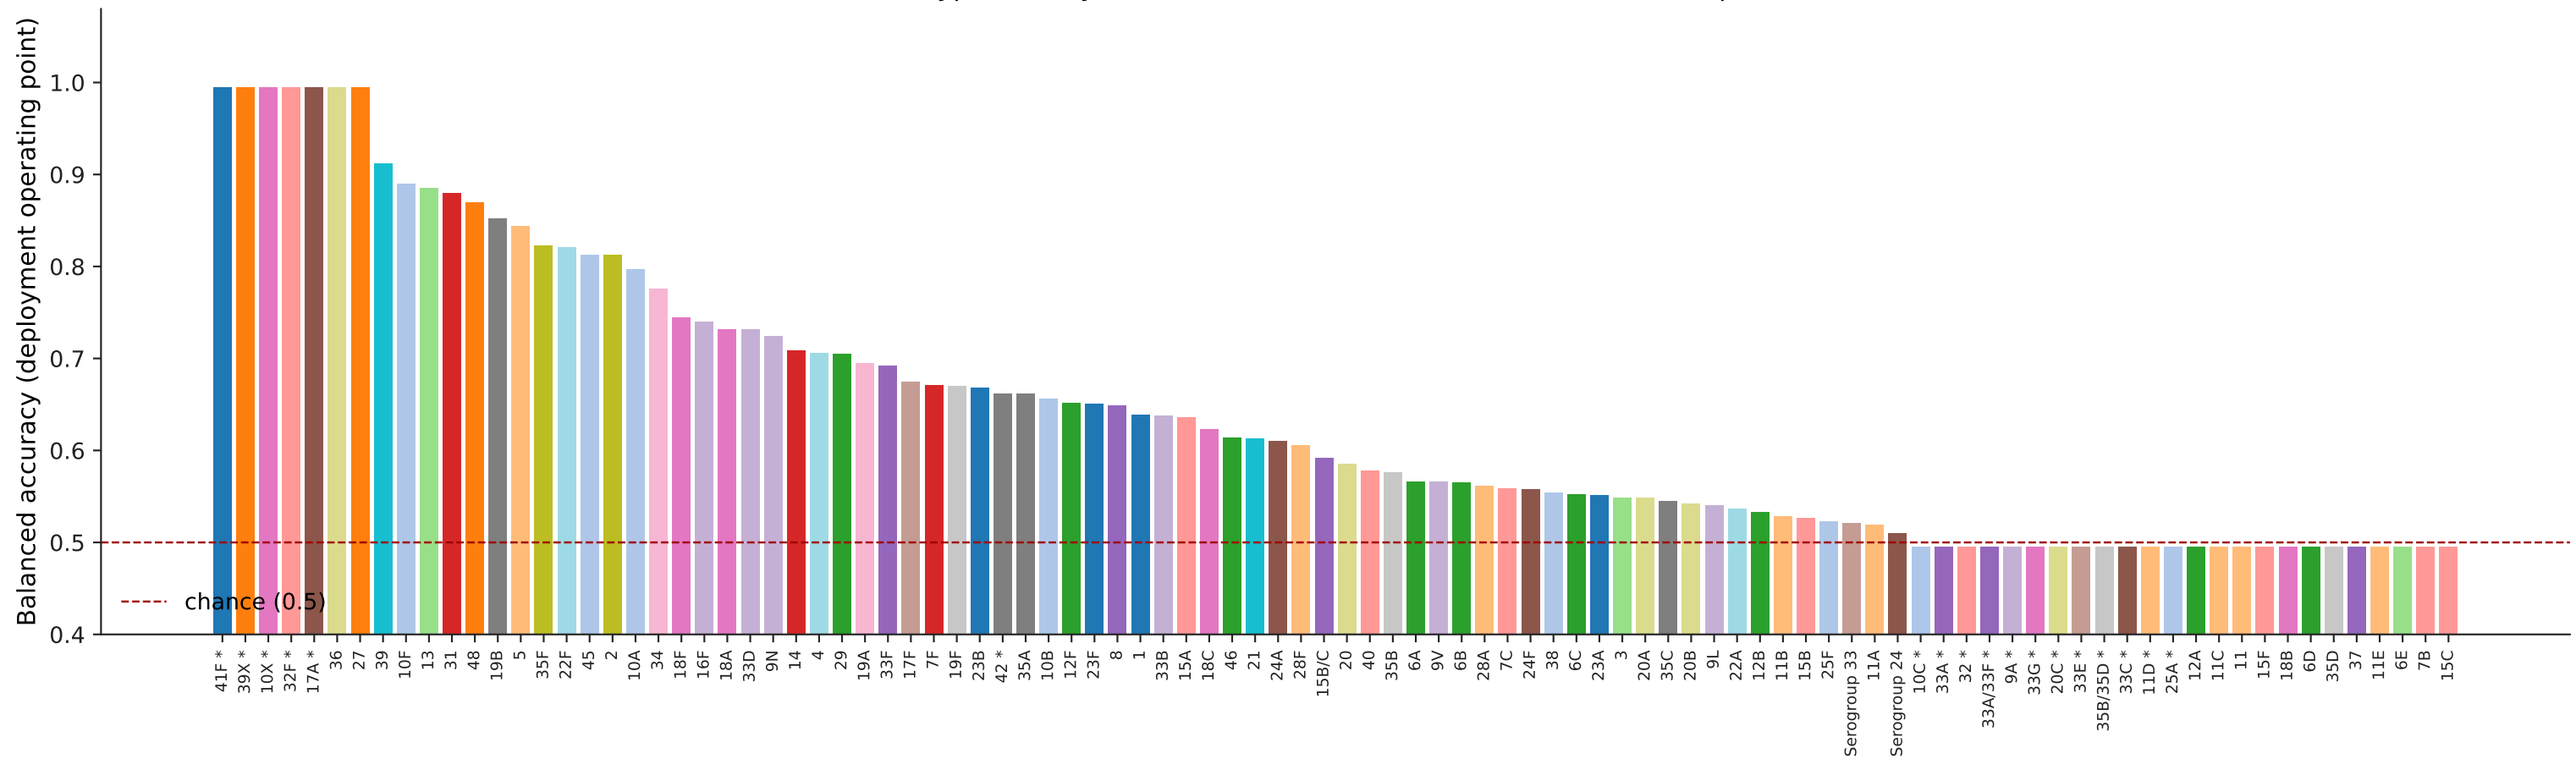

Deployment: fixed k=1, threshold = p99 of ID (train LOO) k-th-NN distances, set WITHOUT the novels (honest). TNR≈99% by construction, so bars track detection rate (TPR). Balanced accuracy = (TPR+TNR)/2; 0.5 = chance. * n_novel<5 (unreliable).