

NAME : SAMIKSHA SHIVAJI BHOSALE

PRN : 202501050011

BATCH : CH1

PRACTICAL 5

PRACTICAL 5.1.1 STACKED PLOT

Create a stacked area plot to visualize the temperature variations for three different cities (City A, City B, and City C) across the months of the year. The temperature data is provided for each city in the editor.

Your task is to:

- Create a stacked area plot using the data.
- Label the x-axis as "Month", the y-axis as "Temperature", and provide the title "Temperature Variation" for the plot.
- Display the plot showing the temperature variation for each city throughout the months of the year.

CODE :

```
import matplotlib.pyplot as plt
```

```
import pandas as pd
```

```
# Data for Months and Temperature for three cities
```

```
data = {  
    'Month': ['January', 'February', 'March', 'April', 'May', 'June', 'July', 'August', 'September',  
    'October', 'November', 'December'],  
    'City_A_Temperature': [5, 7, 10, 13, 17, 20, 22, 21, 18, 12, 8, 6],  
    'City_B_Temperature': [2, 3, 5, 6, 10, 14, 16, 17, 12, 9, 5, 3],  
    'City_C_Temperature': [3, 4, 6, 8, 9, 12, 15, 14, 10, 7, 4, 2]  
}
```

Write your code...

```
df = pd.DataFrame(data)
```

```
plt.stackplot(df["Month"],df["City_A_Temperature"],df["City_B_Temperature"],df["City_C_Temperature"])
```

```
plt.xlabel("Month")
```

```
plt.ylabel("Temperature")
```

```
plt.title("Temperature Variation")
```

```
plt.legend(loc="upper left")
```

```
plt.show()
```

CODETANTRA Home Learn Anywhere 202501050011@mitaoe.ac.in Support Logout


5.1.1: Stacked Plot

Create a stacked area plot using the data.


- Label the x-axis as "Month", the y-axis as "Temperature", and provide the title "Temperature Variation" for the plot.
- Display the plot showing the temperature variation for each city throughout the months of the year.

Sample Test Cases


Test case 1



Expected output



Actual output



1 out of 1 shown test case(s) passed

Test case 1 (252 ms) Debug

Terminal Test cases

< Prev Reset Submit Next >

PRACTICAL 5.2.1 TITANIC DATASET

Write a Python program to analyze and visualize data from the Titanic dataset based on the following instructions:

Dataset Information:

The dataset is stored in a CSV file named `titanic.csv` and has been loaded using the pandas library. It contains the following columns:

- `Pclass`: Passenger class (1 = First, 2 = Second, 3 = Third).
- `Gender`: Gender of the passenger (male/female).
- `Age`: Age of the passenger.
- `Survived`: Survival status (0 = Did not survive, 1 = Survived).
- `Fare`: Ticket fare paid by the passenger.

Visualization:

To represent these trends, you will create 5 visualizations using Matplotlib. The visualizations should be arranged in a 3x2 grid (3 rows and 2 columns).

Visualization Details:

Write the code to create a series of visualizations as follows:

Bar Plot (`Pclass` Distribution):

- Create a bar plot to show the distribution of passengers across the different passenger classes (`Pclass`).
- Use the color `skyblue` for the bars.
- Title the plot as "Passenger Class Distribution".
- Label the x-axis as "`Pclass`" and the y-axis as "Count".

Pie Chart (`Gender` Distribution):

- Create a pie chart to display the distribution of male and female passengers.
- Use `lightblue` for males and `lightcoral` for females.
- Include percentages on the slices (use `autopct='%1.1f%%'`).

- Title the plot as "Gender Distribution".

Histogram (Age Distribution):

- Create a histogram to visualize the distribution of passengers' ages.
- Use lightgreen for the bars with black edges (edgecolor = 'black').
- Set the number of bins to 8 for the histogram.
- Title the plot as "Age Distribution".
- Label the x-axis as "Age" and the y-axis as "Frequency".

Bar Plot (Survival Count):

- Create a bar plot to show the count of passengers who survived and those who did not, based on the Survived column.
- Use the colors lightblue for survivors (1) and lightcoral for non-survivors (0).
- Title the plot as "Survival Count".
- Label the x-axis as "Survived (0 = No, 1 = Yes)" and the y-axis as "Count".

Scatter Plot (Fare vs Age):

- Create a scatter plot to visualize the relationship between the Fare and Age of passengers.
- Use orange for the data points.
- Title the plot as "Fare vs Age".
- Label the x-axis as "Age" and the y-axis as "Fare".

Note: Refer to the displayed plot in the sample test cases for better understanding.

CODE :

```
import pandas as pd
```

```
import matplotlib.pyplot as plt
```

```
# Load the Titanic dataset from the CSV file
```

```
df = pd.read_csv('titanic.csv')
```

```
# Set up the figure for 5 subplots
```

```
fig, axes = plt.subplots(3, 2, figsize=(12, 12))
```

```
# write the code..
```

```
axes[0,0].bar(df["Pclass"].value_counts().index,df["Pclass"].value_counts(),  
color="skyblue")
```

```
axes[0, 0].set_title("Passenger Class Distribution")
```

```
axes[0, 0].set_xlabel("Pclass")
```

```
axes[0, 0].set_ylabel("Count")
```

```
axes[0,1].pie(df["Gender"].value_counts(),labels=df["Gender"].value_counts().index,  
autopct="%1.1f%%", colors=["lightblue", "lightcoral"])
```

```
axes[0, 1].set_title("Gender Distribution")
```

```
axes[1, 0].hist(df["Age"].dropna(), bins=8, color="lightgreen", edgecolor="black")
```

```
axes[1, 0].set_title("Age Distribution")
```

```
axes[1, 0].set_xlabel("Age")
```

```
axes[1, 0].set_ylabel("Frequency")
```

```
axes[1, 1].bar(df["Survived"].value_counts().index,df["Survived"].value_counts(),  
color=["lightblue","lightcoral"])
```

```
axes[1, 1].set_title("Survival Count")
```

```
axes[1, 1].set_xlabel("Survived (0 = No, 1 = Yes)")
```

```
axes[1, 1].set_ylabel("Count")
```

```
axes[2, 0].scatter(df["Age"], df["Fare"], color="orange", edgecolors="black")
```

```
axes[2, 0].set_title("Fare vs Age")
```

```
axes[2, 0].set_xlabel("Age")
```

```
axes[2, 0].set_ylabel("Fare")
```

```
plt.tight_layout()
```

```
plt.show()
```

The screenshot displays the CODETANTRA IDE interface. On the left, a sidebar shows the '5.2.1. Titanic Dataset' section with instructions: 'Use orange for the data points.', 'Title the plot as "Fare vs Age".', and 'Label the x-axis as "Age" and the y-axis as "Fare".'. Below this, 'Sample Test Cases' are listed, including 'Test case 1' which shows a grid of plots: 'Passenger Class Distribution' (bar chart), 'Gender Distribution' (pie chart), 'Age Distribution' (histogram), 'Survival Count' (bar chart), and 'Fare vs Age' (scatter plot). The main area shows a Python code editor with the following code:

```
1 import pandas as pd
2 import matplotlib.pyplot as plt
3
4 # Load the Titanic dataset from the CSV file
5 df = pd.read_csv('titanic.csv')
6
7 # Set up the figure for 5 subplots
8 fig, axes = plt.subplots(3, 2, figsize=(12, 12))
9
10 # write the code..
11
```

Below the code editor, the 'Test case 1' results are shown, indicating '1 out of 1 shown test case(s) passed'. The 'Expected output' and 'Actual output' sections display the same grid of plots as the sample test cases. The bottom of the interface includes a 'Terminal' tab and a 'Test cases' button.

PRACTICAL 5.2.2 HISTOGRAM OF PASSENGER INFORMATION OF TITANIC

Write a Python code to plot a histogram for the distribution of the 'Age' column from the Titanic dataset. The histogram should display the frequency of different age ranges with the following specifications:

1. Use 30 bins for the histogram.
2. Set the edge color of the bars to black (k).
3. Label the x-axis as 'Age' and the y-axis as 'Frequency'.
4. Add the title "Age Distribution" to the histogram.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

PassengerId, Survived, Pclass, Name, Sex, Age, SibSp, Parch, Ticket, Fare, Cabin, Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC
17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S

8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina
Berg)",female,27,0,2,347742,11.1333,,S

10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

Note: Refer to the visible test case for better reference.

CODE :

```
import pandas as pd
```

```
import matplotlib.pyplot as plt
```

```
# Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
# Data Cleaning
```

```
data['Age'].fillna(data['Age'].median(), inplace=True)
```

```
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
```

```
data.drop('Cabin', axis=1, inplace=True)
```

```
# Convert categorical features to numeric
```

```
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
```

```
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)
```

```
# Write your code here for Histogram
```

```
plt.hist(data["Age"], bins=30, edgecolor="k")
```

```
plt.title("Age Distribution")
```

```
plt.xlabel("Age")
```

```
plt.ylabel("Frequency")
```

```
plt.show()
```


CODETANTRA Home Learn Anywhere 202501050011@mitaoe.ac.in Support Logout

5.2.2. Histogram of passenger information of Titanic

Note: Refer to the visible test case for better reference.

Sample Test Cases

Test case 1




The histogram shows the frequency of passenger ages on the Titanic. The x-axis is labeled 'Age' and ranges from 0 to 80. The y-axis is labeled 'Frequency' and ranges from 0 to 250. The distribution is unimodal and slightly right-skewed, with a peak frequency of approximately 240 for ages between 25 and 30.

```
1 import pandas as pd
2 import matplotlib.pyplot as plt
3
4 # Load the Titanic dataset
5 data = pd.read_csv('Titanic-Dataset.csv')
6
7 # Data Cleaning
8 data['Age'].fillna(data['Age'].median(), inplace=True)
9 data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
10 data.drop('Cabin', axis=1, inplace=True)
11
```


Average time: 0.278 s (278.00 ms) Maximum time: 0.278 s (278.00 ms) 1 out of 1 shown test case(s) passed

Test case 1 (278 ms) Debug

Expected output



Actual output



The expected and actual outputs are identical histograms showing the age distribution of passengers. Both show a peak frequency of approximately 240 for ages between 25 and 30.

Terminal Test Cases

< Prev Reset Submit Next >

PRACTICAL 5.2.3 BAR PLOT OF SURVIVAL RATE OF PASSENGERS

Write a Python code to plot a bar chart that shows the count of passengers who survived and did not survive in the Titanic dataset. The chart should display the following specifications:

1. Use the 'Survived' column to show the count of survivors (0 = Did not survive, 1 = Survived).
2. Set the chart type to 'bar'.
3. Add the title "Survival Count" to the chart.
4. Label the x-axis as 'Survived' and the y-axis as 'Count'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

PassengerId, Survived, Pclass, Name, Sex, Age, SibSp, Parch, Ticket, Fare, Cabin, Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC 17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S

8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)",female,27,0,2,347742,11.1333,,S

10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

Note: Refer to the visible test case for better reference.

CODE :

```
import pandas as pd
```

```
import matplotlib.pyplot as plt
```

```
# Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
# Data Cleaning
```

```
data['Age'].fillna(data['Age'].median(), inplace=True)
```

```
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
```

```
data.drop('Cabin', axis=1, inplace=True)
```

```
# Convert categorical features to numeric
```

```
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
```

```
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)
```

```
# Write your code here for Bar Plot for Survival Rate
```


```
survival_counts=data["Survived"].value_counts().plot(kind="bar")
```

```
plt.title("Survival Count")
```

```
plt.xlabel("Survived")
```

```
plt.ylabel("Count")
```

```
plt.show()
```

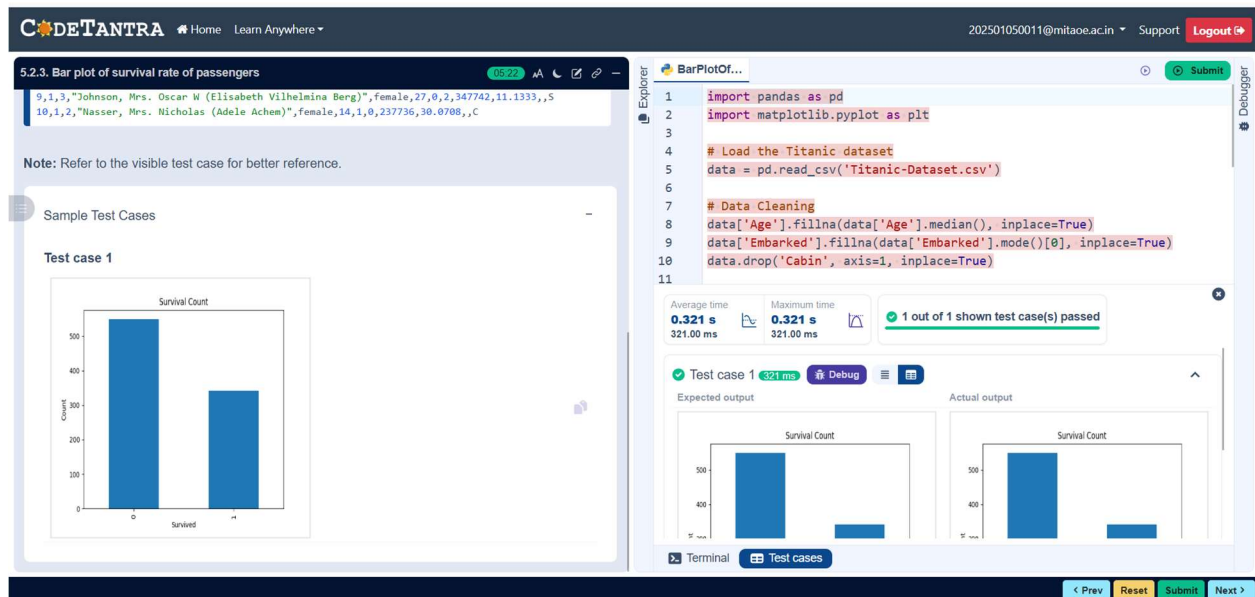

PRACTICAL 5.2.4 BAR PLOT FOR SURVIVAL BY GENDER

Write a Python code to plot a stacked bar chart that shows the count of passengers who survived and did not survive, grouped by gender, in the Titanic dataset. The chart should display the following specifications:

1. Group the data by the 'Sex' column, then use the `value_counts()` function to count the occurrences of survivors (0 = Did not survive, 1 = Survived) for each gender.
2. Use a stacked bar chart to display the survival counts.
3. Add the title "Survival by Gender" to the chart.
4. Label the x-axis as 'Gender' and the y-axis as 'Count'.
5. The legend should indicate 'Not Survived' and 'Survived'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

PassengerId,Survived,Pclass,Name,Sex,Age,SibSp,Parch,Ticket,Fare,Cabin,Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC
17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S

8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina
Berg)",female,27,0,2,347742,11.1333,,S

10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

Note: Refer to the visible test case for better reference.

CODE :

```
import pandas as pd
```

```
import matplotlib.pyplot as plt
```

```

# Load the Titanic dataset

data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning

data['Age'].fillna(data['Age'].median(), inplace=True)

data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)

data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric

data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})

data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)

# Write your code here for Bar Plot for Survival by Gender

survival_counts =
data.groupby("Sex")["Survived"].value_counts().unstack().plot(kind='bar',stacked=True)

plt.title("Survival by Gender")

plt.xlabel("Gender")

plt.ylabel("Count")

plt.legend(["Not Survived","Survived"])

plt.show()

```


CODETANTRA Home Learn Anywhere 202501050011@mitaoe.ac.in Support Logout

5.2.4. Bar Plot for Survival by Gender


Note: Refer to the visible test case for better reference.

Sample Test Cases


Test case 1



Expected output



Actual output



1 out of 1 shown test case(s) passed

Test case 1 360 ms Debug

Terminal Test cases

< Prev Reset Submit Next >

PRACTICAL 5.2.5 BAR PLOT FOR SURVIVAL FOR PCLASS

Write a Python code to plot a stacked bar chart that shows the count of passengers who survived and did not survive, grouped by passenger class (Pclass), in the Titanic dataset. The chart should display the following specifications:

1. Group the data by the Pclass column and count the number of survivors (0 = Did not survive, 1 = Survived) for each class using value_counts().
2. Use a stacked bar chart to display the survival counts.
3. Add the title "Survival by Pclass" to the chart.
4. Label the x-axis as 'Pclass' and the y-axis as 'Count'.
5. The legend should indicate 'Not Survived' and 'Survived'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

PassengerId,Survived,Pclass,Name,Sex,Age,SibSp,Parch,Ticket,Fare,Cabin,Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC
17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S

8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)",female,27,0,2,347742,11.1333,,S

10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

Note:

- Refer to the visible test case for better reference.
- Ensure you use the `groupby()` function with `value_counts()` to count the survivors and non-survivors for each Pclass.
- Do not manually use `size()` or `unstack()` without `value_counts()`. Use the `value_counts()` method for counting survival status directly.

CODE :

```
import pandas as pd
```

```
import matplotlib.pyplot as plt
```

```
# Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
# Data Cleaning
```

```
data['Age'].fillna(data['Age'].median(), inplace=True)
```

```
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
```

```
data.drop('Cabin', axis=1, inplace=True)
```

```
# Convert categorical features to numeric
```

```
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
```

```
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)
```

Write your code here for Bar Plot for Survival by Pclass

```
survival_counts = data.groupby("Pclass")["Survived"].value_counts().unstack().fillna(0)
```

```
survival_counts.plot(kind="bar",stacked=True)
```


```
plt.title("Survival by Pclass")
```

```
plt.xlabel("Pclass")
```

```
plt.ylabel("Count")
```

```
plt.legend(["Not Survived","Survived"])
```

```
plt.show()
```

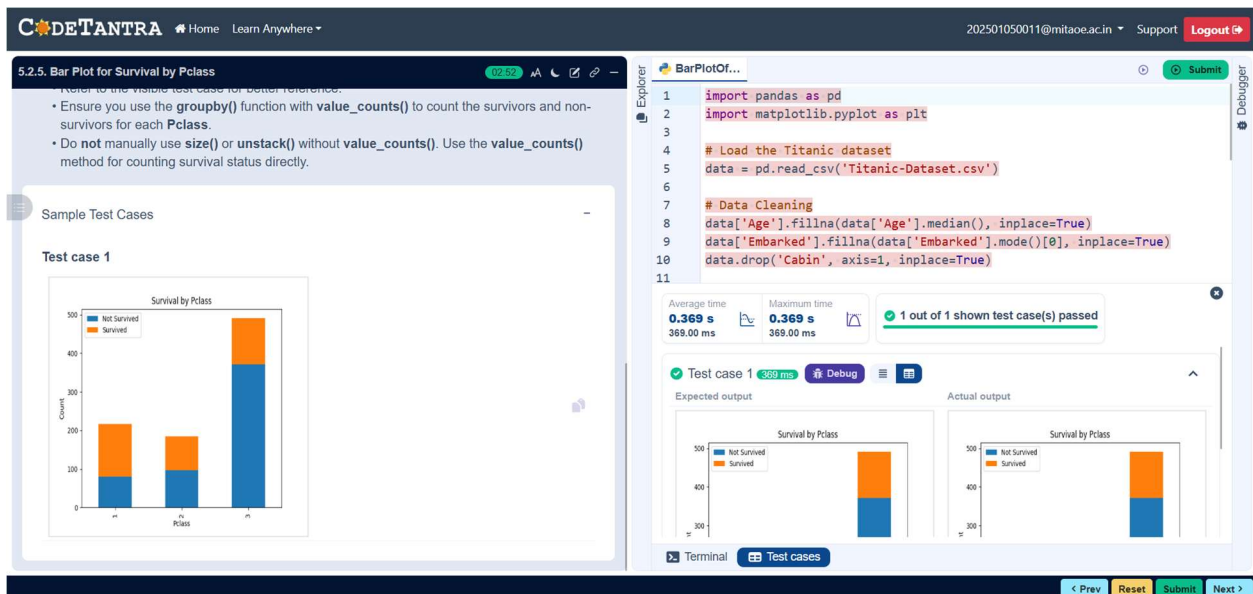

PRACTICAL 5.2.6 BAR PLOT FOR SURVIVAL BY EMBARKED

Write a Python code to plot a stacked bar chart showing the survival count for passengers based on their embarkation location in the Titanic dataset.

The chart should display the following specifications:

1. Use the Embarked column to determine the embarkation location. After converting this column into dummy variables (using `pd.get_dummies()`), plot the survival count based on the Embarked_Q column (representing passengers who embarked from Queenstown) in relation to survival.
2. Set the chart type to 'bar' and make it stacked.
3. Add the title "Survival by Embarked " to the chart.
4. Label the x-axis as 'Embarked' and the y-axis as 'Count'.
5. Include a legend to distinguish between survivors and non-survivors (label the legend as 'Survived' and 'Not Survived').

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

PassengerId, Survived, Pclass, Name, Sex, Age, SibSp, Parch, Ticket, Fare, Cabin, Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC 17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S

8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)",female,27,0,2,347742,11.1333,,S

10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

Note: Refer to the visible test case for better reference.

CODE :

```
import pandas as pd
```

```
import matplotlib.pyplot as plt
```

```
# Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
# Data Cleaning
```

```
data['Age'].fillna(data['Age'].median(), inplace=True)
```

```
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
```

```
data.drop('Cabin', axis=1, inplace=True)
```

```
# Convert categorical features to numeric
```

```
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
```

```
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)
```

```
# Write your code here for Bar Plot for Survival by Embarked
```

```
survival_counts =
```

```
data.groupby("Embarked_Q")["Survived"].value_counts().unstack().fillna(0)
```

```
survival_counts.plot(kind = "bar",stacked = True)
```

```
plt.title("Survival by Embarked")
```

```
plt.xlabel("Embarked")

plt.ylabel("Count")

plt.legend(["Not Survived","Survived"])

plt.show()
```

The screenshot shows the CodeTANTRA IDE interface. On the left, a test case titled "5.2.6. Bar Plot for Survival by Embarked" displays a bar chart. The x-axis is labeled "Embarked" with categories 'S' and 'C'. The y-axis is labeled "Count" ranging from 0 to 800. The legend indicates "Not Survived" in blue and "Survived" in orange. For 'S', the "Not Survived" count is approximately 500 and "Survived" is approximately 300. For 'C', the "Not Survived" count is approximately 50 and "Survived" is approximately 50. On the right, the Python code in the Explorer pane is as follows:

```
1 import pandas as pd
2 import matplotlib.pyplot as plt
3
4 # Load the Titanic dataset
5 data = pd.read_csv('Titanic-Dataset.csv')
6
7 # Data Cleaning
8 data['Age'].fillna(data['Age'].median(), inplace=True)
9 data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
10 data.drop('Cabin', axis=1, inplace=True)
11
```

Below the code, the test results show "1 out of 1 shown test case(s) passed" with an execution time of 0.365 s. The "Expected output" and "Actual output" sections both show the same bar chart as the test case.

PRACTICAL 5.2.7 BOX PLOT FOR AGE DISTRIBUTION

Write a Python code to plot a boxplot that shows the distribution of the 'Age' column from the Titanic dataset across different passenger classes. The boxplot should display the following specifications:

1. Use the Pclass column to group the data for the boxplot.
2. Set the title of the plot to "Age by Pclass".
3. Remove the default subtitle with plt.suptitle("").
4. Label the x-axis as 'Pclass' and the y-axis as 'Age'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	ParCh	Ticket	Fare	Cabin	Embarked
-------------	----------	--------	------	-----	-----	-------	-------	--------	------	-------	----------

--	--	--	--	--	--	--	--	--	--	--	--

Sample Data:

PassengerId,Survived,Pclass,Name,Sex,Age,SibSp,Parch,Ticket,Fare,Cabin,Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC
17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S

8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina
Berg)",female,27,0,2,347742,11.1333,,S

10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

Note: Refer to the visible test case for better reference.

CODE :

```
import pandas as pd
```

```
import matplotlib.pyplot as plt
```

```
# Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
# Data Cleaning
```

```
data['Age'].fillna(data['Age'].median(), inplace=True)
```

```
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
```

```
data.drop('Cabin', axis=1, inplace=True)
```

```
# Convert categorical features to numeric
```

```
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
```

```
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)
```

```
# Write your code here for Box Plot for Age by Pclass
```

```
data.boxplot(column = "Age",by="Pclass")
```

```
plt.title("Age by Pclass")
```

```
plt.suptitle("")
```

```
plt.xlabel("Pclass")
```

```
plt.ylabel("Age")
```

```
plt.show()
```


CODETANTRA Home Learn Anywhere 202501050011@mitaoe.ac.in Support Logout

5.2.7. Box plot for Age Distribution

Note: Refer to the visible test case for better reference.

Sample Test Cases

Test case 1




```
1 import pandas as pd
2 import matplotlib.pyplot as plt
3
4 # Load the Titanic dataset
5 data = pd.read_csv('Titanic-Dataset.csv')
6
7 # Data Cleaning
8 data['Age'].fillna(data['Age'].median(), inplace=True)
9 data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
10 data.drop('Cabin', axis=1, inplace=True)
11
```


Average time: 0.359 s (359.00 ms) Maximum time: 0.359 s (359.00 ms) 1 out of 1 shown test case(s) passed

Test case 1 (359 ms) Debug

Expected output



Actual output



Terminal Test Cases

< Prev Reset Submit Next >

PRACTICAL 5.2.8 BOX PLOT FOR AGE BT SURVIVED

Write a Python code to plot a boxplot that shows the distribution of the 'Age' column from the Titanic dataset based on whether passengers survived or not. The boxplot should display the following specifications:

1. Use the Survived column to group the data for the boxplot (0 = Did not survive, 1 = Survived).
2. Set the title of the plot to "Age by Survival".
3. Remove the default subtitle with plt.suptitle("").
4. Label the x-axis as 'Survived' and the y-axis as 'Age'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

PassengerId, Survived, Pclass, Name, Sex, Age, SibSp, Parch, Ticket, Fare, Cabin, Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC
17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S

8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)",female,27,0,2,347742,11.1333,,S

10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

Note: Refer to the visible test case for better reference.

CODE :

```
import pandas as pd
```

```
import matplotlib.pyplot as plt
```

```
# Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
# Data Cleaning
```

```
data['Age'].fillna(data['Age'].median(), inplace=True)
```

```
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
```

```
data.drop('Cabin', axis=1, inplace=True)
```

```
# Convert categorical features to numeric
```

```
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
```

```
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)
```

```
# Write your code here for Box Plot for Age by Survived
```


```
plt.figure(figsize=(8,6))
```

```
data.boxplot(column="Age",by="Survived")
```

```
plt.title("Age by Survival")
```

```
plt.suptitle("")
```

```
plt.show()
```

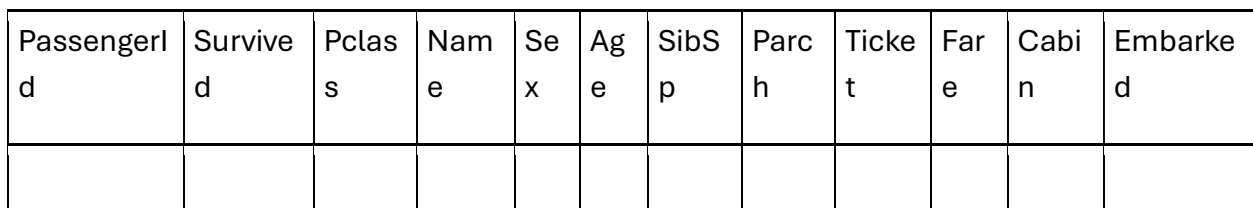

Sample Data:

PassengerId,Survived,Pclass,Name,Sex,Age,SibSp,Parch,Ticket,Fare,Cabin,Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC
17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S

8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina
Berg)",female,27,0,2,347742,11.1333,,S

10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

Note: Refer to the visible test case for better reference.

CODE :

```
import pandas as pd
```

```
import matplotlib.pyplot as plt
```

```
# Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
# Data Cleaning
```

```
data['Age'].fillna(data['Age'].median(), inplace=True)
```

```
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
```

```
data.drop('Cabin', axis=1, inplace=True)
```

```
# Convert categorical features to numeric
```

```
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
```

```
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)
```

```
# Write your code here for Box Plot for Fare by Pclass
```

```
data.boxplot(column="Fare",by="Pclass")
```

```
plt.title("Fare by Pclass")
```

```
plt.suptitle("")
```

```
plt.xlabel("Pclass")
```

```
plt.ylabel("Fare")
```

```
plt.show()
```


CODETANTRA Home Learn Anywhere 202501050011@mitaoe.ac.in Support Logout

5.2.9. Box Plot for Fare by Pclass

Note: Refer to the visible test case for better reference.

Sample Test Cases

Test case 1



```
1 import pandas as pd
2 import matplotlib.pyplot as plt
3
4 # Load the Titanic dataset
5 data = pd.read_csv('Titanic-Dataset.csv')
6
7 # Data Cleaning
8 data['Age'].fillna(data['Age'].median(), inplace=True)
9 data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
10 data.drop('Cabin', axis=1, inplace=True)
11
```

Average time: 0.360 s (360.00 ms) Maximum time: 0.360 s (360.00 ms) 1 out of 1 shown test case(s) passed

Test case 1 (360 ms) Debug

Expected output



Actual output



Terminal Test cases

< Prev Reset Submit Next >

PRACTICAL 5.2.10 SCATTER PLOT FOR AGE VS. FARE

Write a Python code to plot a scatter plot showing the relationship between the 'Age' and 'Fare' columns in the Titanic dataset. The scatter plot should display the following specifications:

1. Use the Age column for the x-axis and the Fare column for the y-axis.
2. Set the title of the plot to "Age vs. Fare".
3. Label the x-axis as 'Age' and the y-axis as 'Fare'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

PassengerId, Survived, Pclass, Name, Sex, Age, SibSp, Parch, Ticket, Fare, Cabin, Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC
17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S

8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina
Berg)",female,27,0,2,347742,11.1333,,S

10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

Note: Refer to the visible test case for better reference.

CODE :

```
import pandas as pd

import matplotlib.pyplot as plt


# Load the Titanic dataset

data = pd.read_csv('Titanic-Dataset.csv')


# Data Cleaning

data['Age'].fillna(data['Age'].median(), inplace=True)

data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)

data.drop('Cabin', axis=1, inplace=True)


# Convert categorical features to numeric

data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})

data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)


# Write your code here for Box Plot for Fare by Pclass

plt.scatter(data["Age"],data["Fare"])

plt.title("Age vs. Fare")

plt.xlabel("Age")

plt.ylabel("Fare")

plt.show()
```

CODETANTRA

Home Learn Anywhere

202501050011@mitaoe.ac.in Support Logout

5.2.10. Scatter Plot for Age vs. Fare

```

5,1,0,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)",female,27,0,2,347742,11.1333,,S
10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

```

Note: Refer to the visible test case for better reference.

Sample Test Cases

Test case 1

AgeFareS...

```

1 import pandas as pd
2 import matplotlib.pyplot as plt
3
4 # Load the Titanic dataset
5 data = pd.read_csv('Titanic-Dataset.csv')
6
7 # Data Cleaning
8 data['Age'].fillna(data['Age'].median(), inplace=True)
9 data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
10 data.drop('Cabin', axis=1, inplace=True)
11

```

Average time 0.268 s 268.00 ms

Maximum time 0.268 s 268.00 ms

1 out of 1 shown test case(s) passed

Test case 1 268 ms

Debug

Expected output

Actual output

Terminal

Test cases

< Prev

Reset

Submit

Next >

PRACTICAL 5.2.11 SCATTER PLOT FOR AGE VS. FARE BY SURVIVED

Write a Python code to plot a scatter plot showing the relationship between the 'Age' and 'Fare' columns in the Titanic dataset, with points color-coded by survival status. The scatter plot should display the following specifications:

1. Use the Age column for the x-axis and the Fare column for the y-axis.
2. Color the points based on the Survived column: Red for passengers who did not survive (Survived = 0). Blue for passengers who survived (Survived = 1).
3. Set the title of the plot to "Age vs. Fare by Survival".
4. Label the x-axis as 'Age' and the y-axis as 'Fare'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	ParCh	Ticket	Fare	Cabin	Embarked

Sample Data:

PassengerId,Survived,Pclass,Name,Sex,Age,SibSp,Parch,Ticket,Fare,Cabin,Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC
17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S

8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina
Berg)",female,27,0,2,347742,11.1333,,S

10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

Note: Refer to the visible test case for better reference.

CODE :

```
import pandas as pd
```

```
import matplotlib.pyplot as plt
```

```
# Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
# Data Cleaning
```

```
data['Age'].fillna(data['Age'].median(), inplace=True)
```

```
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
```

```
data.drop('Cabin', axis=1, inplace=True)
```

```
# Convert categorical features to numeric
```

```
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
```

```
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)
```

```
# Write your code here for Scatter Plot for Age vs. Fare by Survived
```

```
colors=data["Survived"].map({0: "red",1: "blue"})
```

```
plt.scatter(data["Age"],data["Fare"],c=colors)
```

```
plt.title("Age vs. Fare by Survival")
```

```
plt.xlabel("Age")
```

```
plt.ylabel("Fare")
```

```
plt.show()
```

CODETANTRA Home Learn Anywhere 202501050011@mitaoe.ac.in Support Logout


5.2.11. Scatter Plot for Age vs. Fare by Survived

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)",female,27,0,2,347742,11.1333,,S
10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

Note: Refer to the visible test case for better reference.

Sample Test Cases

Test case 1



Average time: 0.325 s (325.00 ms) Maximum time: 0.325 s (325.00 ms) 1 out of 1 shown test case(s) passed

Test case 1 325 ms Debug

Expected output: Age vs. Fare by Survival

Actual output: Age vs. Fare by Survival

Terminal Test cases

< Prev Reset Submit

