SPRINGBOOT

Dependency Injection

Using Constructor

PaymentService.java | OrderService.java | FoodOrderingSystemApplication.java

```java
package com.example.FoodOrderingSystem;
import org.springframework.stereotype.Component;

    @Component
    public class PaymentService {

        public void payment() {  1 usage
            System.out.println("Payment Successful!");
            System.out.println("Payment Method: UPI");
        }
    }
```

PaymentService.java | OrderService.java | FoodOrderingSystemApplication.jav

```java
package com.example.FoodOrderingSystem;

import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.stereotype.Component;

    @Component
    public class OrderService {

        private final PaymentService paymentService;  2 usages

        @Autowired
        public OrderService(PaymentService paymentService) {
            this.paymentService = paymentService;
        }

        public void placeOrder() {  1 usage

            System.out.println("Food Order Details");
            System.out.println("Customer: Kuthbudeen");
            System.out.println("Food: Chicken Burger");
            System.out.println("Price: Rs.300");

            paymentService.payment();

            System.out.println("Order Placed Successfully!");
        }
    }
```

PaymentService.java | OrderService.java | FoodOrderingSystemApplication.java | pom.xml (FoodOrderingSystem)

```java
package com.example.FoodOrderingSystem;

import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;
import org.springframework.boot.CommandLineRunner;

@SpringBootApplication
public class FoodOrderingSystemApplication
        implements CommandLineRunner {

    private final OrderService orderService;  2 usages

    public FoodOrderingSystemApplication(OrderService orderService) {  no usages
        this.orderService = orderService;
    }

    public static void main(String[] args) {

        SpringApplication.run(
                FoodOrderingSystemApplication.class, args);
    }


    @Override
    public void run(String... args) {

        orderService.placeOrder();
    }
}
```

odOrderingSystem > src > main > java > com > example > FoodOrderingSystem > FoodOrderingSystemApplication

```
Food Order Details
Customer: Kuthbudeen
Food: Chicken Burger
Price: Rs.300
Payment Successful!
Payment Method: UPI
Order Placed Successfully!
```

Using Setter

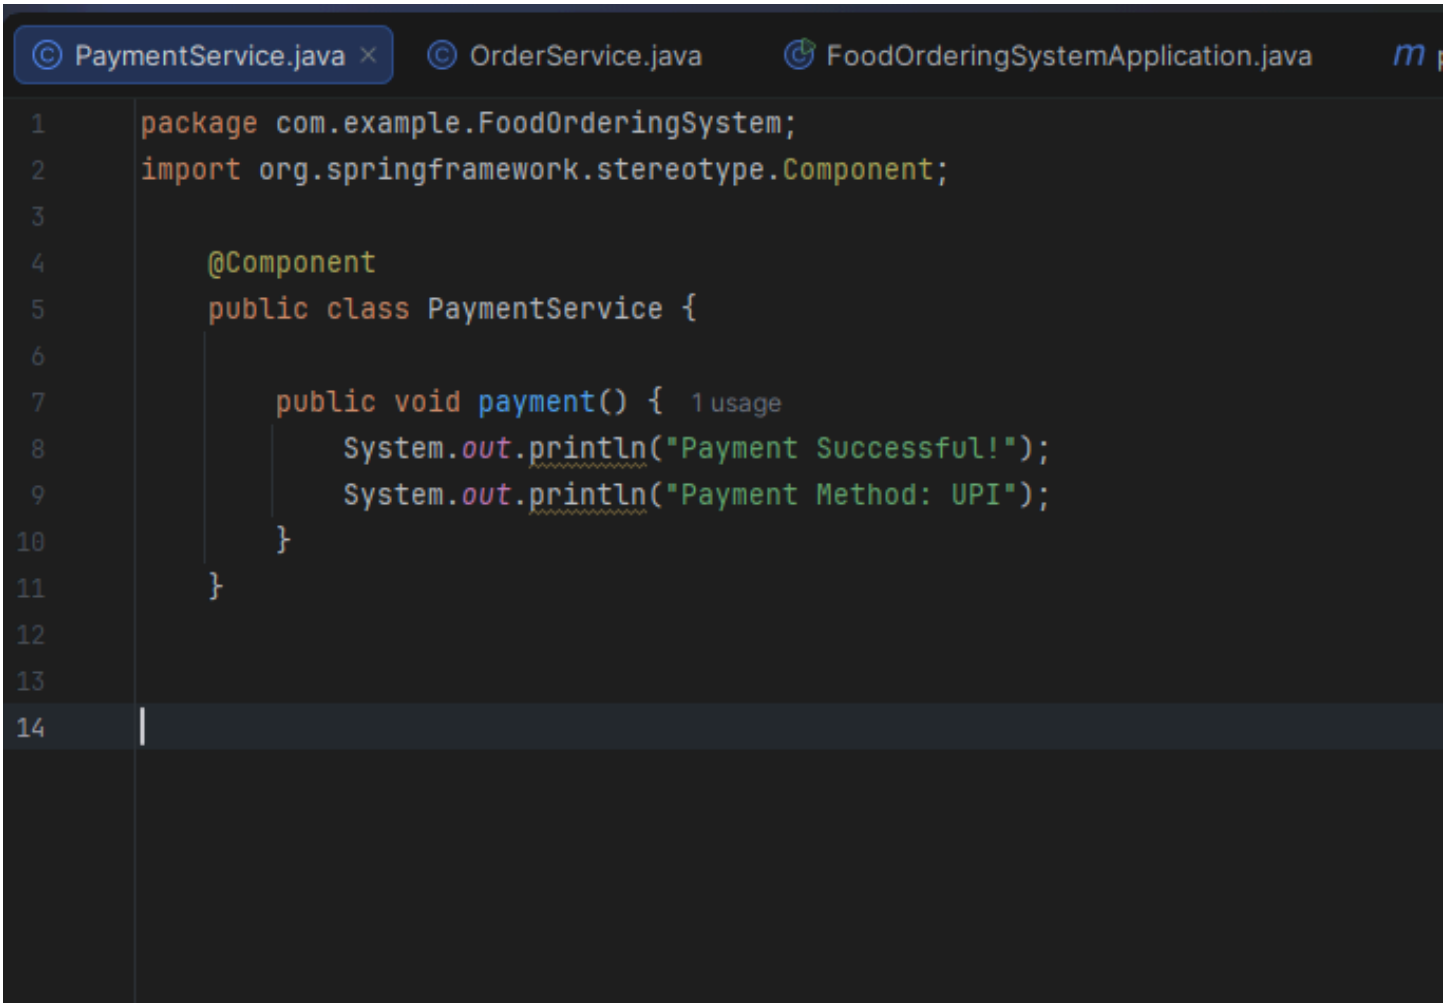

PaymentService.java | OrderService.java | FoodOrderingSystemApplication.java | pom.xml (FoodOrderingSystem

```java
package com.example.FoodOrderingSystem;
import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.stereotype.Component;
@Component
public class OrderService {
    private PaymentService paymentService;  2 usages
    @Autowired
    public void setPaymentService(PaymentService paymentService) {

        this.paymentService = paymentService;

    }
    public void placeOrder() {  1 usage
        System.out.println("----- FOOD ORDER DETAILS -----");

        System.out.println("Customer Name: Samin");
        System.out.println("Food Item: Chicken Cheese Burger");
        System.out.println("Quantity: 2");
        System.out.println("Total Amount: Rs. 300");

        paymentService.payment();
        System.out.println("Order Placed Successfully!");
    }
}
```

PaymentService.java | OrderService.java | FoodOrderingSystemApplication.java | pom.xml (FoodOrderingSystem

```java
package com.example.FoodOrderingSystem;
import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;
import org.springframework.boot.CommandLineRunner;
@SpringBootApplication
public class FoodOrderingSystemApplication
        implements CommandLineRunner {
    private final OrderService orderService; 2 usages

    public FoodOrderingSystemApplication(OrderService orderService) { no usages
        this.orderService = orderService;
    }

    public static void main(String[] args) {

        SpringApplication.run(
                FoodOrderingSystemApplication.class, args);

    }
    @Override
    public void run(String... args) {

        orderService.placeOrder();

    }
}
```

```
----- FOOD ORDER DETAILS -----
Customer Name: Samin
Food Item: Chicken Cheese Burger
Quantity: 2
Total Amount: Rs. 300
Payment Successful!
Payment Method: UPI
Order Placed Successfully!
```

Using Field


PaymentService.java
OrderService.java
FoodOrderingSystemApplication.j
package com.example.FoodOrderingSystem;
import org.springframework.stereotype.Component;
@Component
public class PaymentService {
public void payment() { 1 usage
System.out.println("Payment Successful!");
System.out.println("Payment Method: UPI");
}
}

PaymentService.java | OrderService.java | FoodOrderingSystemApplication.java

```java
package com.example.FoodOrderingSystem;
import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.stereotype.Component;
@Component
public class OrderService {
    @Autowired
    private PaymentService paymentService;
    public void placeOrder() {  1 usage

        System.out.println("----- FOOD ORDER DETAILS -----");

        System.out.println("Customer Name: Sathik");
        System.out.println("Food Item: Chicken Kabab");
        System.out.println("Quantity: 2");
        System.out.println("Total Amount: Rs. 600");

        paymentService.payment();

        System.out.println("Order Placed Successfully!");

    }
}
```

PaymentService.java | OrderService.java | FoodOrderingSystemApplication.java | pom.xml (FoodOrderingSystem)

```java
package com.example.FoodOrderingSystem;
import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;
import org.springframework.boot.CommandLineRunner;
@SpringBootApplication
public class FoodOrderingSystemApplication
        implements CommandLineRunner {

    private final OrderService orderService;  2 usages

    public FoodOrderingSystemApplication(OrderService orderService) {  no usages
        this.orderService = orderService;
    }

    public static void main(String[] args) {

        SpringApplication.run(
                FoodOrderingSystemApplication.class, args);

    }
    @Override
    public void run(String... args) {

        orderService.placeOrder();

    }
}
```

```
----- FOOD ORDER DETAILS -----
Customer Name: Sathik
Food Item: Chicken Kabab
Quantity: 2
Total Amount: Rs. 600
Payment Successful!
Payment Method: UPI
Order Placed Successfully!
```