

Cucumber Report

Mar 11, 2025, 2:13:32 PM

Start : Mar 11, 2:13:22.613 PM

End : Mar 11, 2:13:30.371 PM

Duration : 7.758 s

Features

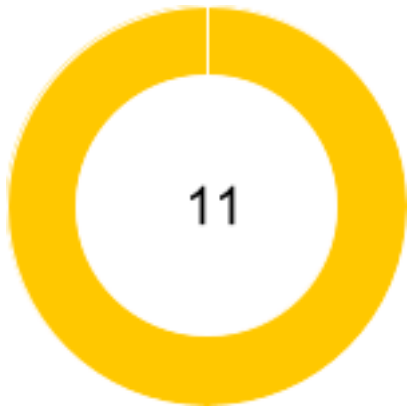
Scenarios

Steps

PASSED - 0
FAILED - 2
SKIPPED - 0

PASSED - 0
FAILED - 3
SKIPPED - 0

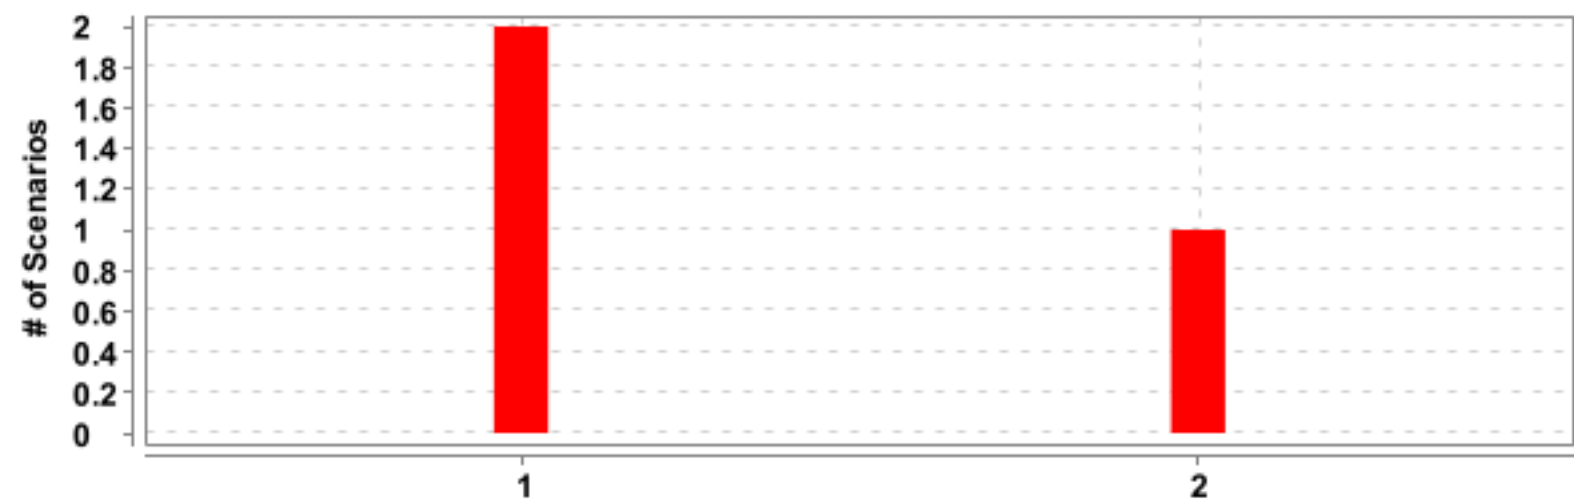
PASSED - 0
FAILED - 0
SKIPPED - 11



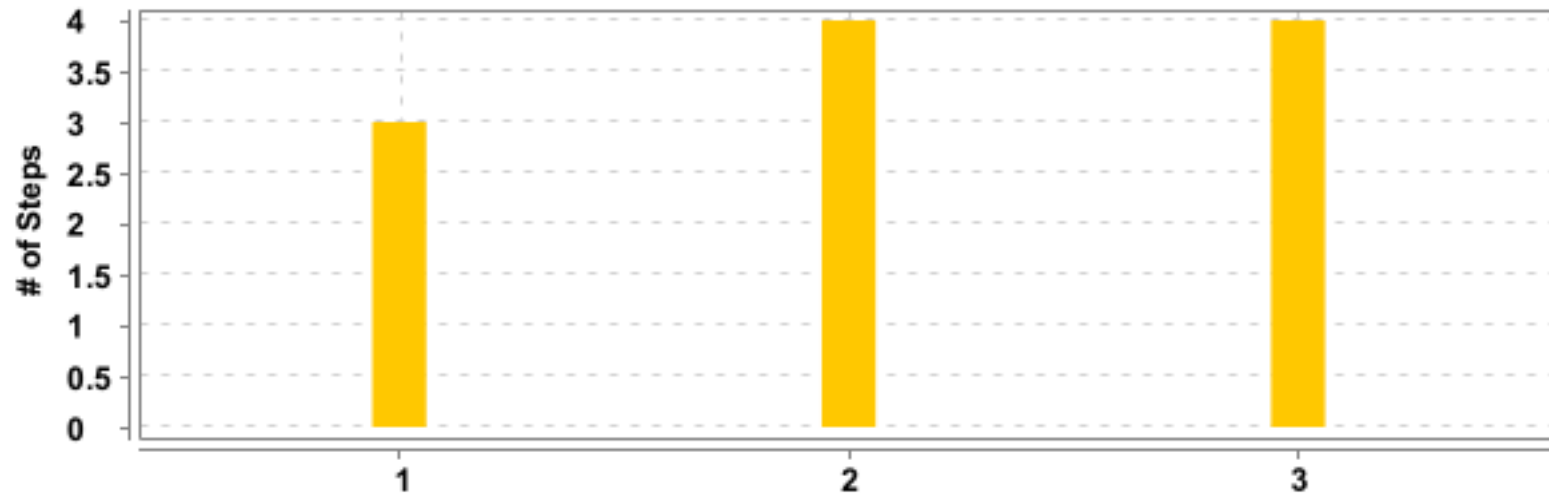
Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Search functionality</u>	7.577 s	2	0	2	0	7	0	0	7
<u>Title of your feature</u>	0.098 s	1	0	1	0	4	0	0	4

#	Feature Name	Scenario Name
1	<u>Search functionality</u>	<u>TC-46 Verify the search result Sorted By price 'High-Low' Option is displaying as expected.</u>
2		<u>TC-0140 Verify the search result Sorted By Name (Z-A) Option is displaying correctly.</u>
3	<u>Title of your feature</u>	<u>TC-0140 Verify the search result Sorted By Name (Z-A) Option is displaying correctly.</u>

TAG	Scenario				Feature			
Name	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>
@tag	2	0	2	0	1	0	1	0
@TC-46	3	0	3	0	2	0	2	0
@search	1	0	1	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>Search functionality</u>	2	0	2	0	7.577 s
2	<u>Title of your feature</u>	1	0	1	0	0.098 s

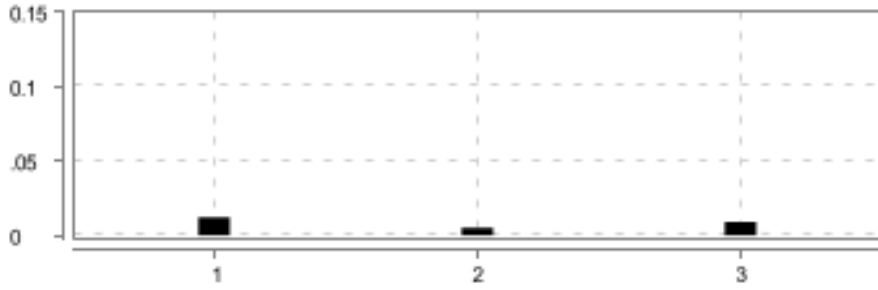



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Search functionality</u>	<u>TC-46Verify the search result Sorted By price 'High-Low'</u> <u>Option is displaying as expected.</u>	3	0	0	3	7.367 s
2		<u>TC-0140 Verify the search result Sorted By Name (Z-A)</u> <u>Option is displaying correctly.</u>	4	0	0	4	0.126 s
3	<u>Title of your feature</u>	<u>TC-0140 Verify the search result Sorted By Name (Z-A)</u> <u>Option is displaying correctly.</u>	4	0	0	4	0.098 s

Search functionality

FAILED	DURATION - 7.577 s	Scenarios Total - 2 Pass - 0 Fail - 2 Skip - 0		Steps Total - 7 Pass - 0 Fail - 0 Skip - 7	
/ 2:13:22.613 PM // 2:13:30.190 PM /					

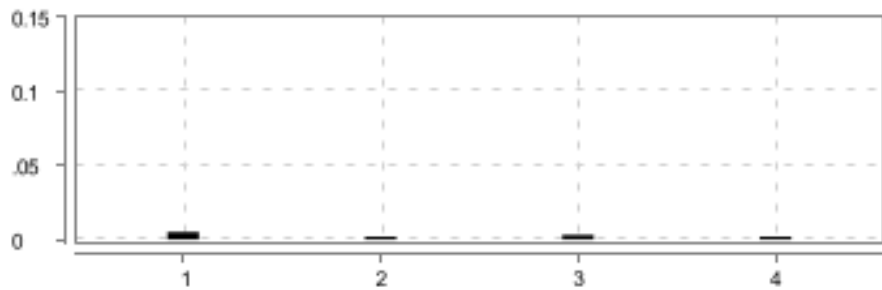

TC-46Verify the search result Sorted By price 'High-Low' Option is displaying as expected.

FAILED	DURATION - 7.367 s		Steps Total - 3 Pass - 0 Fail - 0 Skip - 3	
/ 2:13:22.620 PM // 2:13:29.987 PM /				
Search functionality				
@tag @TC-46				

#	Step / Hook Details	Status	Duration
	<p>BEFORE - com.pdl.hooks.Hooks.setUp()</p> <p>org.openqa.selenium.NoSuchSessionException: invalid session id: session deleted as the browser has closed the connection from disconnected: not connected to DevTools (Session info: chrome=133.0.6943.143) Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '23.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [381035ff0ae906a63779f4a4d70579bc, executeScript {script=return document.readyState, args=[]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 133.0.6943.143, chrome: {chromedriverVersion: 133.0.6943.141 (2a5d6da0d61..., userDataDir: C:\Users\HP\AppData\Local\T..., fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51364}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51364/devtoo..., se:cdpVersion: 133.0.6943.143, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 381035ff0ae906a63779f4a4d70579bc</p> <p>at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191)</p>	FAILED	2.561 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:463) at com.pdl.utilities.CommonMethods\$1.apply(CommonMethods.java:124) at com.pdl.utilities.CommonMethods\$1.apply(CommonMethods.java:1) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:205) at com.pdl.utilities.CommonMethods.waitForPageToLoad(CommonMethods.java:138) at com.pdl.hooks.Hooks.setUp(Hooks.java:67) </pre>		
1	Given Navigate to search home page	SKIPPED	0.012 s
2	And navigate to components and click on monitors and click on it	SKIPPED	0.005 s
3	Then Click on the drop down button and enter price high-Low	SKIPPED	0.009 s
	<p>AFTER - com.pdl.hooks.Hooks.tearDown(io.cucumber.java.Scenario)</p> <pre> org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '23.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [381035ff0ae906a63779f4a4d70579bc, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 133.0.6943.143, chrome: {chromedriverVersion: 133.0.6943.141 (2a5d6da0d61..., userDataDir: C:\Users\HP\AppData\Local\T...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51364}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51364/devtoo..., se:cdpVersion: 133.0.6943.143, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 381035ff0ae906a63779f4a4d70579bc at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.tearDown(Hooks.java:129) </pre>	FAILED	0.038 s

TC-0140 Verify the search result Sorted By Name (Z-A) Option is displaying correctly.

<div>FAILED</div> <div>DURATION - 0.126 s</div>		<div></div>	<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 4</div>	<div></div>
<div>/ 2:13:30.064 PM // 2:13:30.190 PM /</div>				
<div>Search functionality</div>				
<div>@tag @TC-46</div>				

#	Step / Hook Details	Status	Duration
	BEFORE - com.pdl.hooks.Hooks.scenarioName(io.cucumber.java.Scenario) io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)	FAILED	0.029 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:530) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:758) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:453) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:211) </pre> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <pre> at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more </pre> <p>Caused by: org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '23.0.2' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [381035ff0ae906a63779f4a4d70579bc, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 133.0.6943.143, chrome: {chromedriverVersion: 133.0.6943.141 (2a5d6da0d61..., userDataDir: C:\Users\HP\AppData\Local\T...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51364}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51364/devtoo..., se:cdpVersion: 133.0.6943.143, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 381035ff0ae906a63779f4a4d70579bc</p> <pre> at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) </pre>		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
	BEFORE - com.pdl.hooks.Hooks.setUp() io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162)	FAILED	0.038 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:530) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:758) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:453) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:211) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '23.0.2' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [381035ff0ae906a63779f4a4d70579bc, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 133.0.6943.143, chrome: {chromedriverVersion: 133.0.6943.141 (2a5d6da0d61..., userDataDir: C:\Users\HP\AppData\Local\T...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51364}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51364/devtoo..., se:cdpVersion: 133.0.6943.143, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 381035ff0ae906a63779f4a4d70579bc at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
1	Given Navigate to search home page	SKIPPED	0.005 s



#	Step / Hook Details	Status	Duration
2	When Click on search button.	SKIPPED	0.002 s
3	And Enter the product name "PC".	SKIPPED	0.003 s
4	Then Click on sort by 'Z to A' button.	SKIPPED	0.002 s
	<p>AFTER - com.pdl.hooks.Hooks.tearDown(io.cucumber.java.Scenario)</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145)</p>	FAILED	0.014 s

#	Step / Hook Details	Status	Duration
	<p>at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:530) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:758) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:453) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:211)</p> <p>Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '23.0.2' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [381035ff0ae906a63779f4a4d70579bc, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 133.0.6943.143, chrome: {chromedriverVersion: 133.0.6943.141 (2a5d6da0d61..., userDataDir: C:\Users\HP\AppData\Local\T...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51364}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51364/devtoo..., se:cdpVersion: 133.0.6943.143, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 381035ff0ae906a63779f4a4d70579bc</p> <p>at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)</p>		
	AFTER - com.pdl.hooks.Hooks.before(io.cucumber.java.Scenario)	FAILED	0.014 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks		

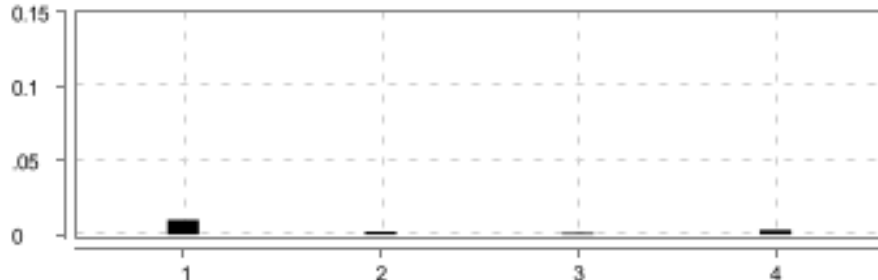

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:530) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:758)		

#	Step / Hook Details	Status	Duration
	<pre> at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:453) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:211) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '23.0.2' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [381035ff0ae906a63779f4a4d70579bc, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 133.0.6943.143, chrome: {chromedriverVersion: 133.0.6943.141 (2a5d6da0d61..., userDataDir: C:\Users\HPV\AppData\Local\T...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51364}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51364/devtoo..., se:cdpVersion: 133.0.6943.143, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 381035ff0ae906a63779f4a4d70579bc at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		

Title of your feature

FAILED	DURATION - 0.098 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 4 Pass - 0 Fail - 0 Skip - 4	
/ 2:13:30.273 PM // 2:13:30.371 PM /					

TC-0140 Verify the search result Sorted By Name (Z-A) Option is displaying correctly.

FAILED	DURATION - 0.098 s		Steps Total - 4 Pass - 0 Fail - 0 Skip - 4	
/ 2:13:30.273 PM // 2:13:30.371 PM /				
Title of your feature				
@search @TC-46				

#	Step / Hook Details	Status	Duration
	BEFORE - com.pdl.hooks.Hooks.scenarioName(io.cucumber.java.Scenario) io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)	FAILED	0.019 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:530) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:758) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:453) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:211) </pre> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <pre> at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more </pre> <p>Caused by: org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.11.0', revision: '040bc5406b'</p> <p>System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '23.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver</p> <p>Command: [381035ff0ae906a63779f4a4d70579bc, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 133.0.6943.143, chrome: {chromedriverVersion: 133.0.6943.141 (2a5d6da0d61..., userDataDir: C:\Users\HP\AppData\Local\T...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51364}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se.cdp: ws://localhost:51364/devtoo..., se.cdpVersion: 133.0.6943.143, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 381035ff0ae906a63779f4a4d70579bc</p> <pre> at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) </pre>		

#	Step / Hook Details	Status	Duration
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
	BEFORE - com.pdl.hooks.Hooks.setUp() io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309)	FAILED	0.014 s

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:530) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:758) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:453) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:211) </p> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <p> at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '23.0.2' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [381035ff0ae906a63779f4a4d70579bc, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 133.0.6943.143, chrome: {chromedriverVersion: 133.0.6943.141 (2a5d6da0d61..., userDataDir: C:\Users\HP\AppData\Local\T...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51364}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51364/devtoo..., se:cdpVersion: 133.0.6943.143, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 381035ff0ae906a63779f4a4d70579bc </p> <p> at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) </p>		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
1	Given Navigate to search home page	SKIPPED	0.010 s
2	When Click on search button.	SKIPPED	0.002 s
3	And Enter the product name "PC".	SKIPPED	0.001 s
4	Then Click on sort by 'Z to A' button.	SKIPPED	0.003 s
	AFTER - com.pdl.hooks.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.013 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)		

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:530) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:758) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:453) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:211) </p> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <p> at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more </p> <p>Caused by: org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '23.0.2' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [381035ff0ae906a63779f4a4d70579bc, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 133.0.6943.143, chrome: {chromedriverVersion: 133.0.6943.141 (2a5d6da0d61..., userDataDir: C:\Users\HP\AppData\Local\T...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51364}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51364/devtoo..., se:cdpVersion: 133.0.6943.143, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 381035ff0ae906a63779f4a4d70579bc</p> <p> at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) </p>		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
	AFTER - com.pdl.hooks.Hooks.before(io.cucumber.java.Scenario) io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)	FAILED	0.015 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:530) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:758) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:453) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:211) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '23.0.2' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [381035ff0ae906a63779f4a4d70579bc, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 133.0.6943.143, chrome: {chromedriverVersion: 133.0.6943.141 (2a5d6da0d61..., userDataDir: C:\Users\HP\AppData\Local\T...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51364}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51364/devtoo..., se:cdpVersion: 133.0.6943.143, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 381035ff0ae906a63779f4a4d70579bc at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:501) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) </pre>		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		