

Cucumber Report

Feb 23, 2025, 3:41:10 PM

Start : Feb 23, 3:40:58.534 PM

End : Feb 23, 3:41:06.509 PM

Duration : 7.975 s

Features

Scenarios

Steps

PASSED - 1
FAILED - 0
SKIPPED - 0

PASSED - 1
FAILED - 0
SKIPPED - 0

PASSED - 2
FAILED - 0
SKIPPED - 0



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Title of your feature</u>	7.975 s	1	1	0	0	2	2	0	0

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@abc	1	1	0	0	1	1	0	0
@VerifyloginwithInvalidCredentials	1	1	0	0	1	1	0	0
@tag	1	1	0	0	1	1	0	0





#	Feature Name	T	P	F	S	Duration
1	<u>Title of your feature</u>	1	1	0	0	7.975 s

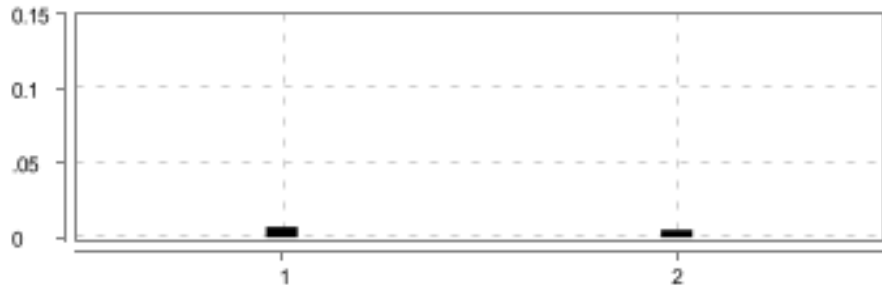



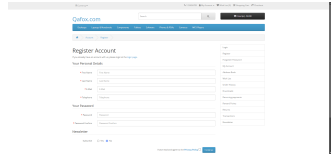
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Title of your feature</u>	<u>running abc tag</u>	2	2	0	0	7.959 s

Title of your feature

PASSED	DURATION - 7.975 s	Scenarios Total - 1 Pass - 1 Fail - 0 Skip - 0		Steps Total - 2 Pass - 2 Fail - 0 Skip - 0	
/ 3:40:58.534 PM // 3:41:06.509 PM /					

running abc tag

<div>PASSED</div>	<div>DURATION - 7.959 s</div>	<div></div>	<div>Steps</div> <div>Total - 2</div> <div>Pass - 2</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 3:40:58.550 PM // 3:41:06.509 PM /</div>				
<div>Title of your feature</div>				
<div>@abc @VerifyloginwithInvalidCredentials @tag</div>				

#	Step / Hook Details	Status	Duration
1	Given I want to write a step with precondition	PASSED	0.007 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	PASSED	0.680 s
	image		
			
2	And some other precondition	PASSED	0.005 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	PASSED	0.189 s
	image		
	