


Database schema: simple version for drawing by hand

A simplified copy of [database-schema.md](#) that is easy to draw in a notebook. It shows the important tables and columns only. For every column and detail, use the full version.

How to read and draw it

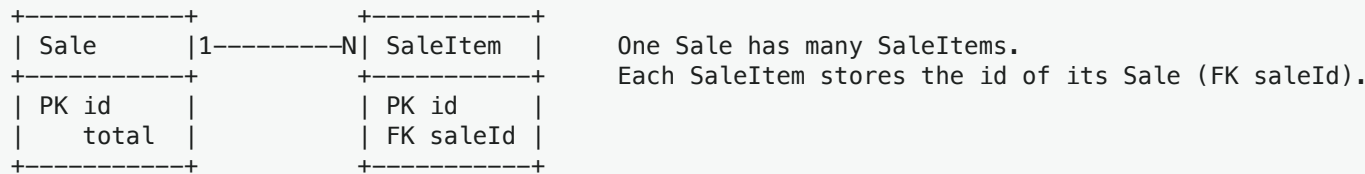

- **Box:** table name on top, then its columns.
- **PK** (primary key): the table's own unique id.
- **FK** (foreign key): the id of a row in another table. `FK productId` points to `Product`. When the other table isn't drawn nearby, its name is in brackets, e.g. `FK userId (User)`.
- **1 ---- N:** one row on the `1` side has many rows on the `N` side. The FK is always in the table on the `N` side.
- **Tips:** the whole-database diagram (section 1) needs a full page, turned sideways. The smaller diagrams after it each fit on half a page. Draw the boxes first, then the lines, then write `1` and `N` at the ends. Use a ruler for straight lines.


Left out to keep it simple:

- `organizationId`. Almost every table has it, because each shop company (organization) has its own data.
 - The `createdAt` / `updatedAt` time columns on most tables.
 - Login token tables (`RefreshToken`, `SupplierRefreshToken`), the `AuditLog` history table, and `TransactionEvent` (the offline POS event log).
-

1. The whole database in one diagram


All 28 main tables and every link between them, in one diagram. Each box lists the type, the column name, the key (PK / FK / UK) and a short note. On GitHub or in VS Code's preview you can zoom and pan it.


- Line ends: a single bar `|` means "one", a crow's foot means "many", and a circle means "zero is allowed". So `Sale | |--o{ SaleItem` reads: one sale has zero or more sale items.
- `StockTransfer` has two links to `Location`, labelled **from** and **to**.

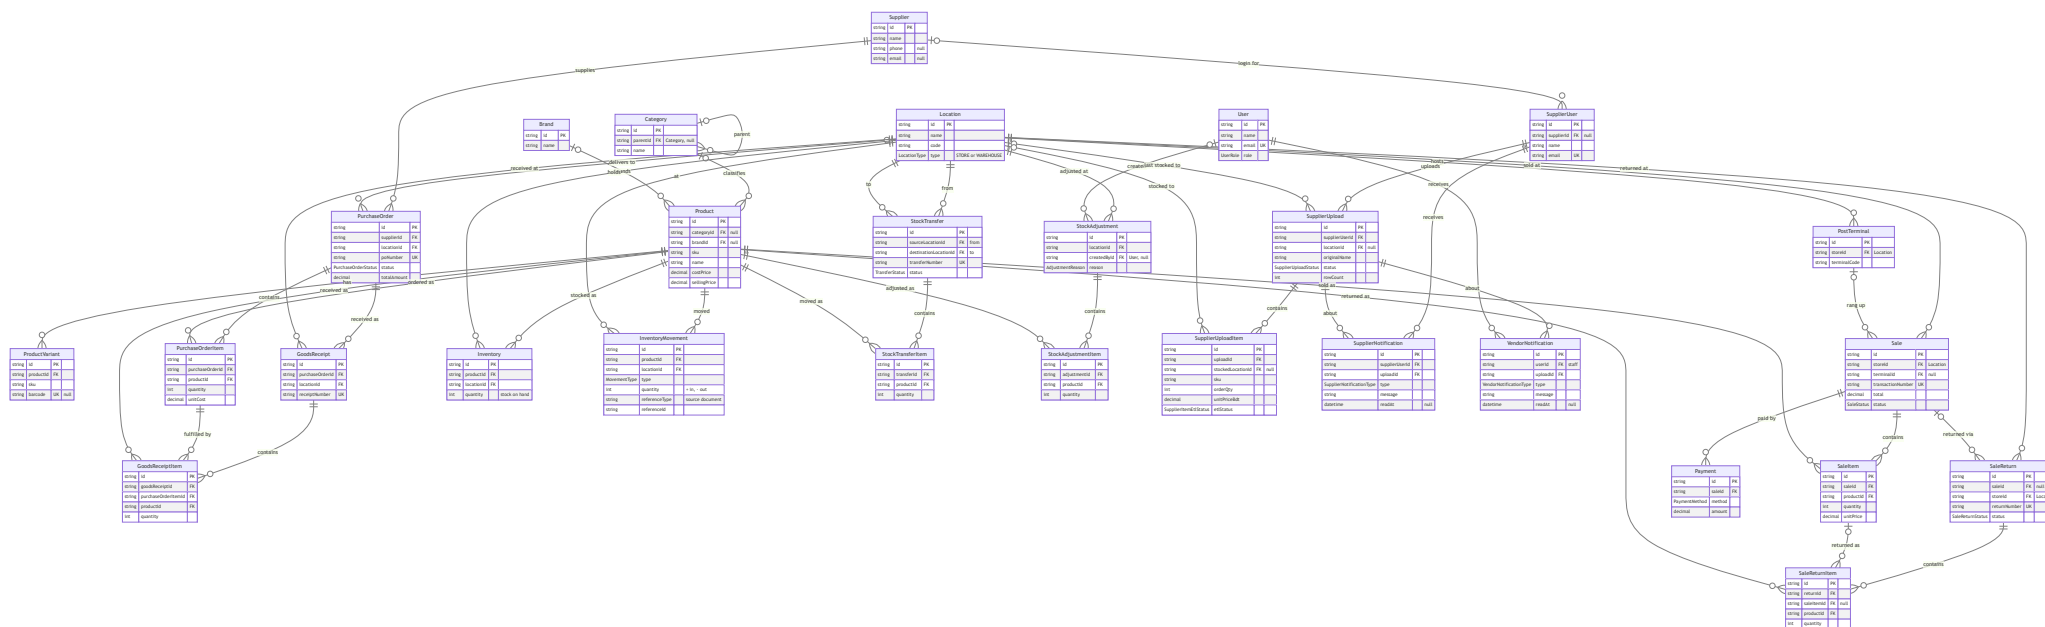

Plain-text version (easier to copy with a ruler)

The same tables and links, drawn with plain characters. `Product` and `Location` are two tall bars because almost every table links to them; a line into a bar is a link to that table. The line around the left side is `User 1 --- N StockAdjustment`.

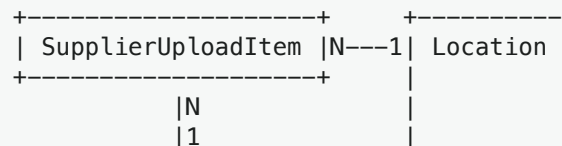


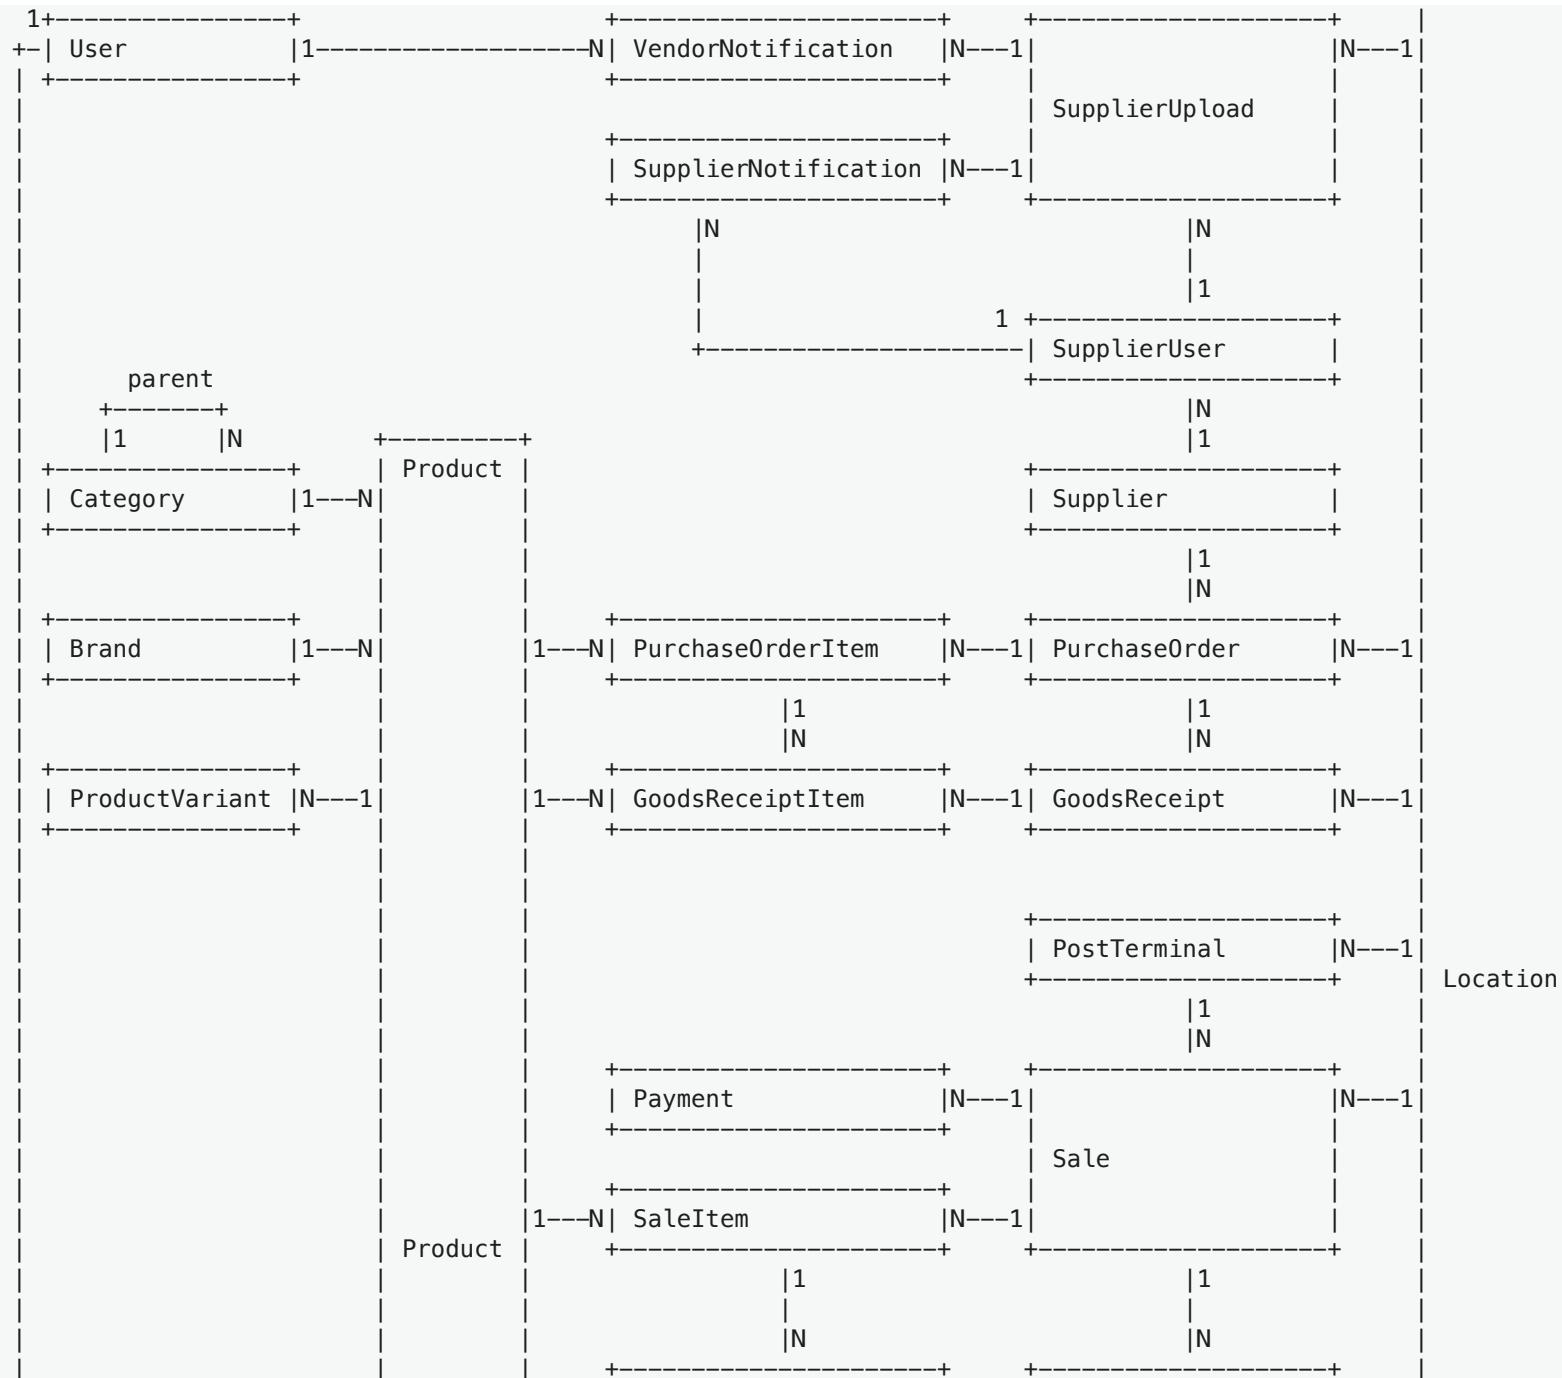

The same tables part by part, with columns


Draw these if you also need the columns. Each fits on half a page.


2. People and places

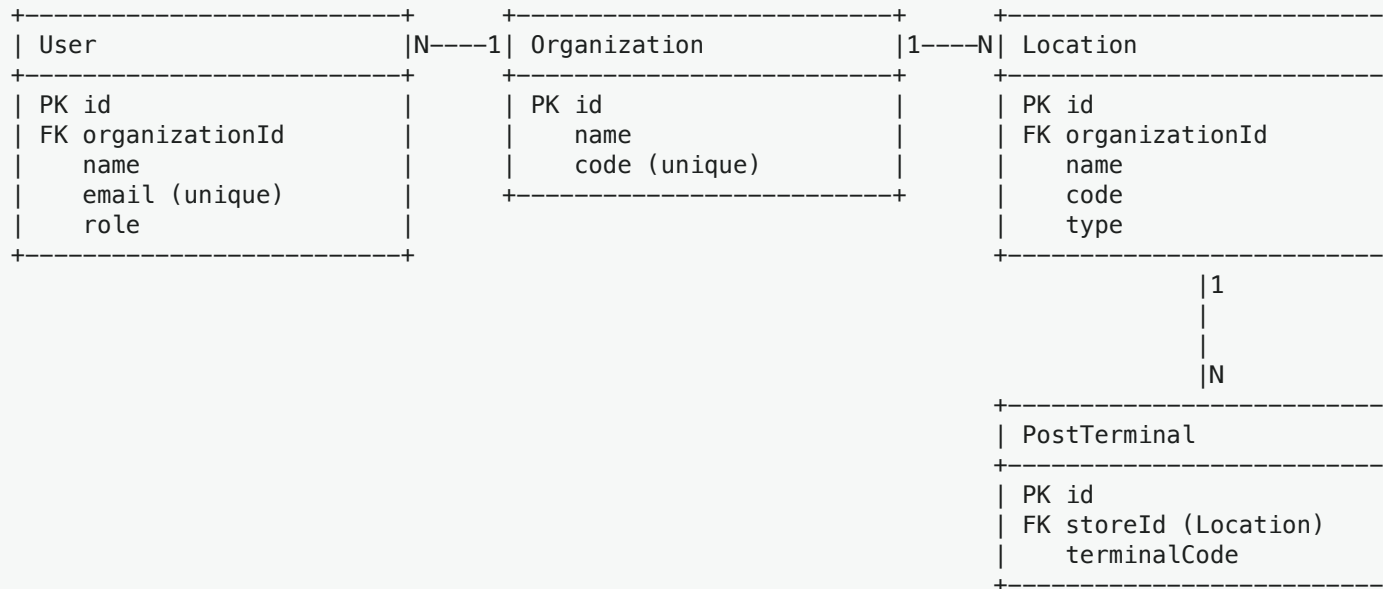

`Location.type` is `STORE` or `WAREHOUSE`. A `PostTerminal` is a till in a store.


3. Products (catalog)

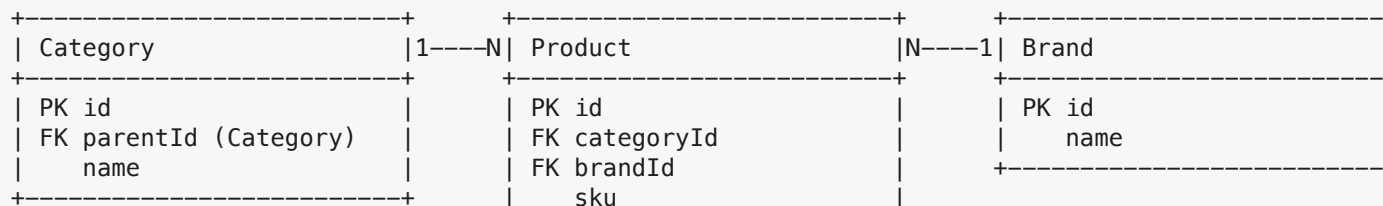

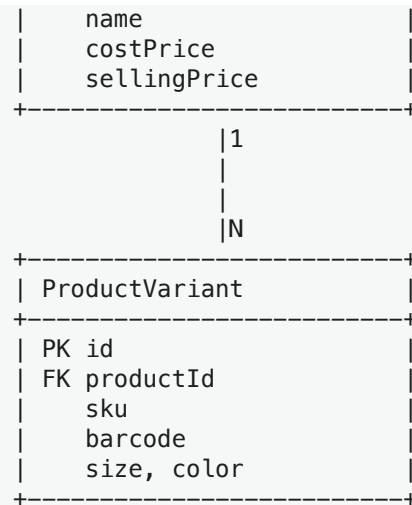

A category can sit inside another category (parentId). A variant is one size or colour of a product, with its own SKU and barcode.


4. Buying from suppliers

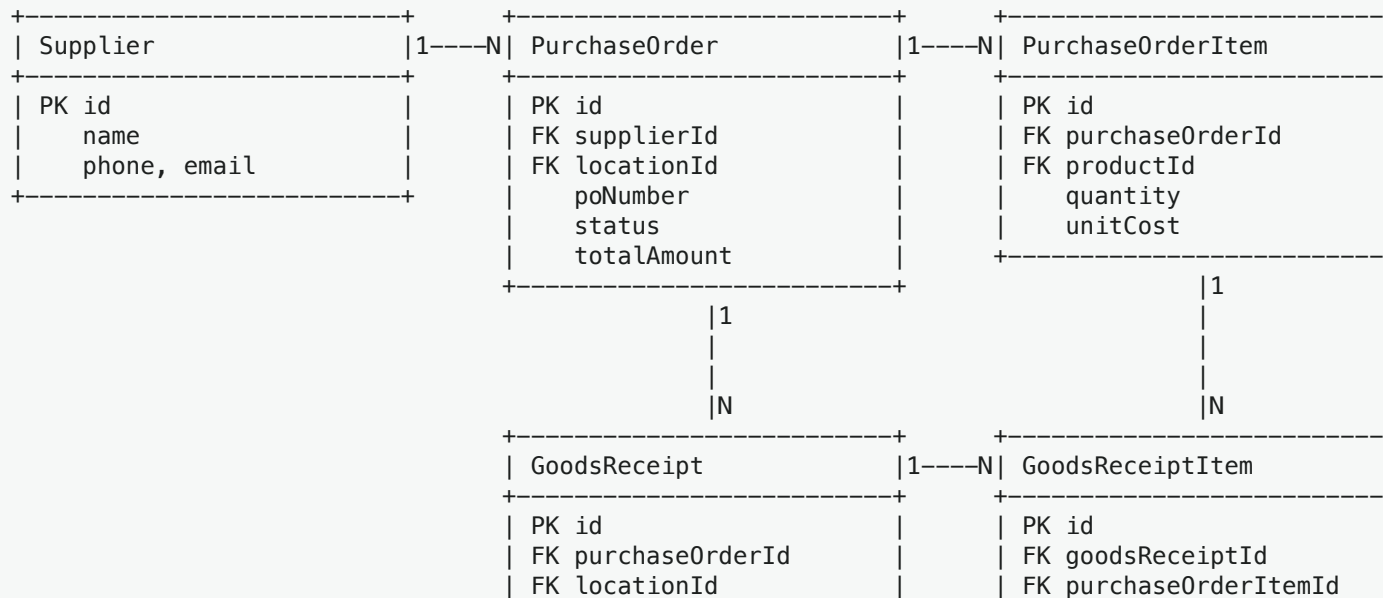

receiptNumber	FK productId
+-----+	+-----+
quantity	


`PurchaseOrder.locationId` and `GoodsReceipt.locationId` point to `Location`. A `GoodsReceipt` records a delivery that arrived for an order.

5. Selling and returns

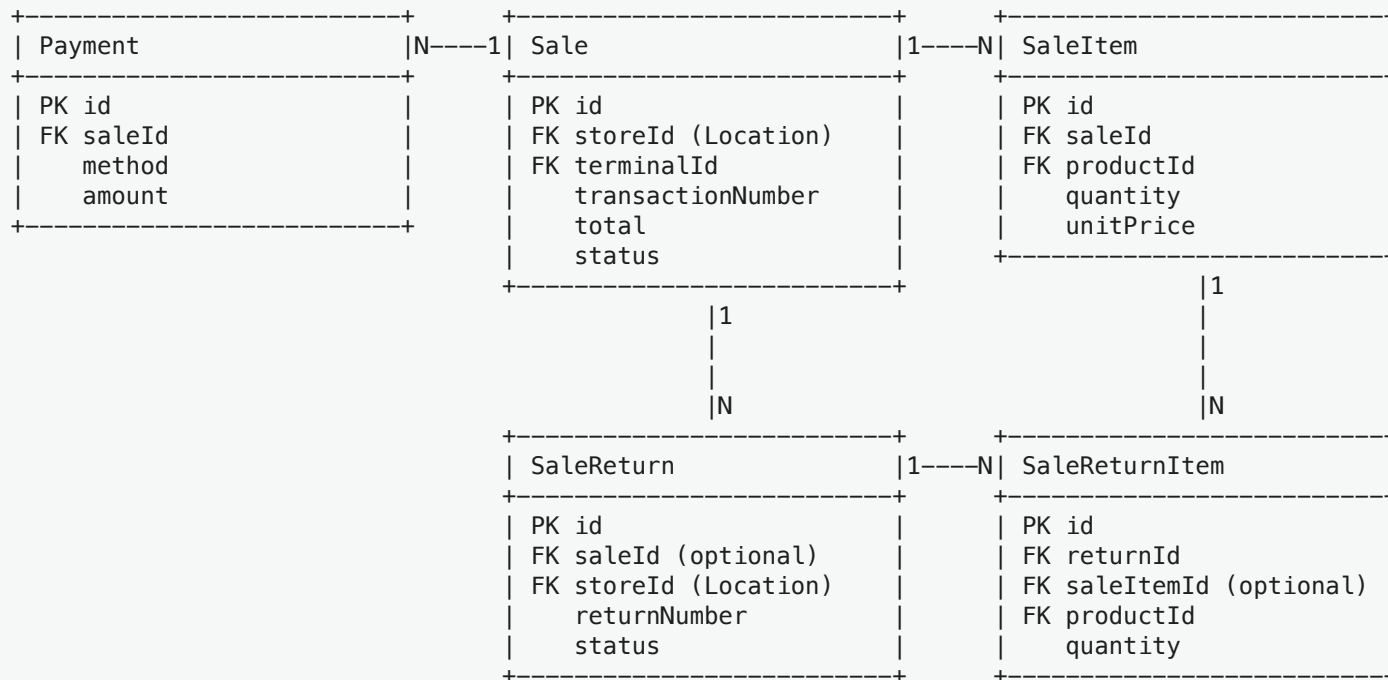

A return can be linked to the original sale, but it doesn't have to be (optional).


6. Stock

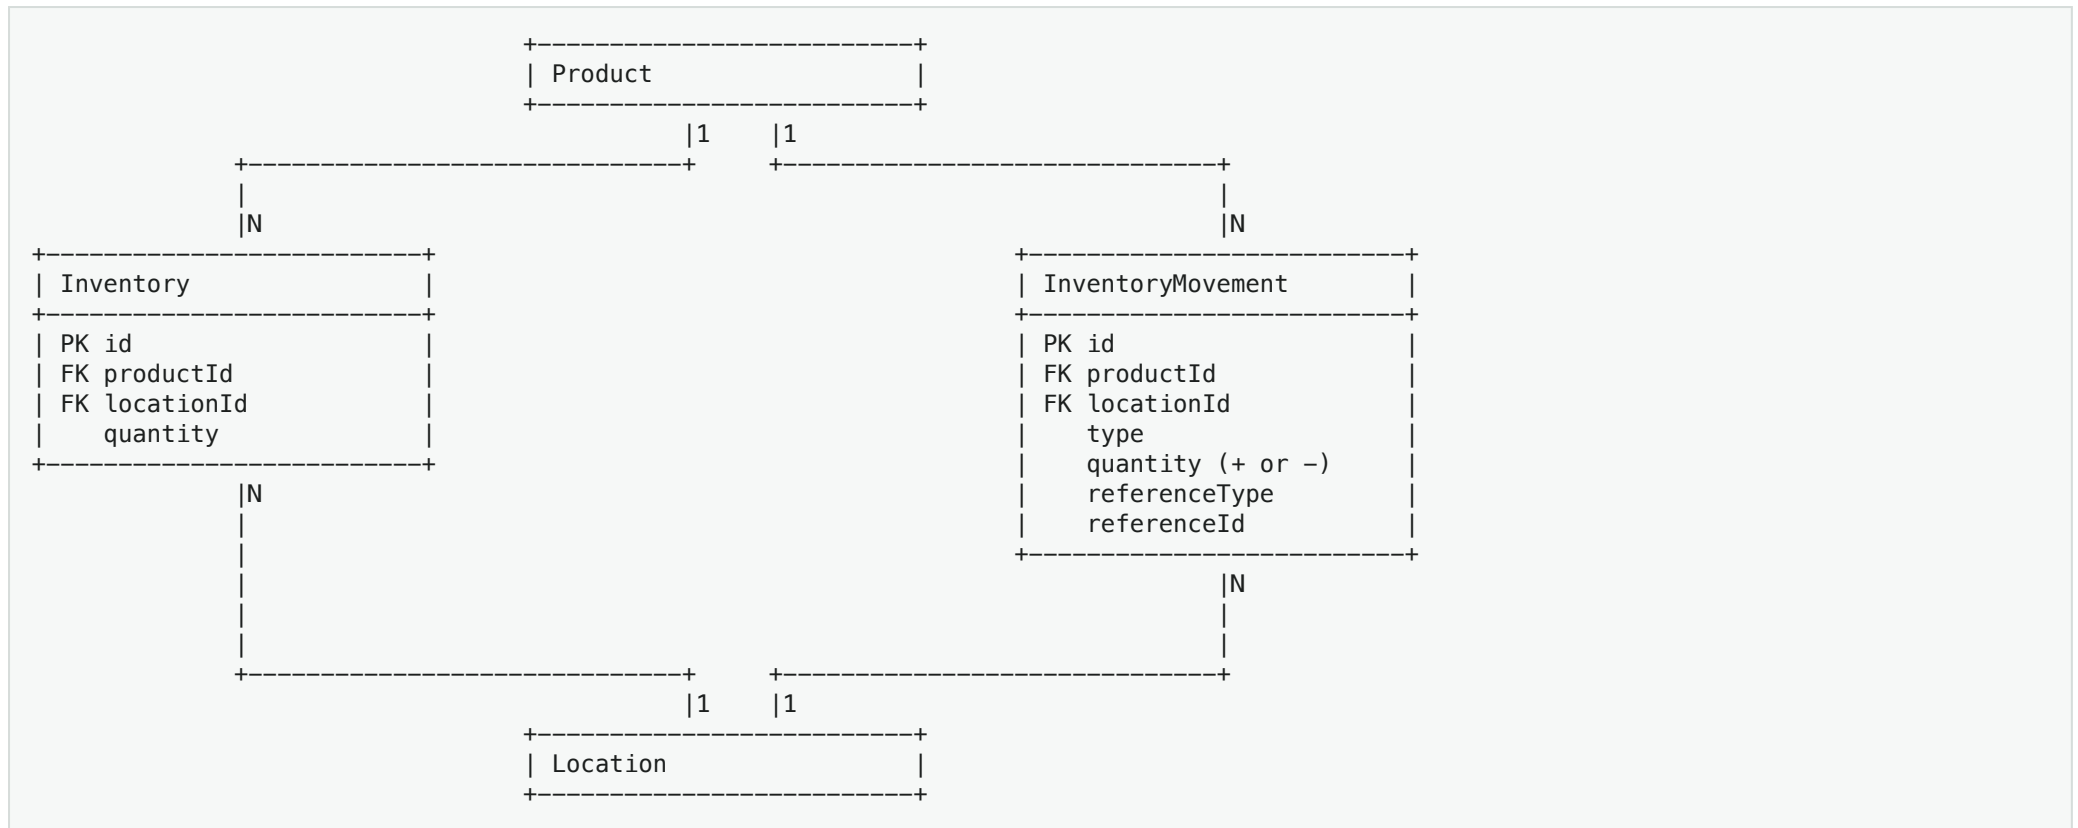

- **Inventory** is the current count of a product in a location.
- **InventoryMovement** is the history: every change (sale, purchase, transfer...) adds a row, with **quantity** positive for stock in and negative for stock out. **referenceType** and **referenceId** say which document caused it.


Moving and correcting stock



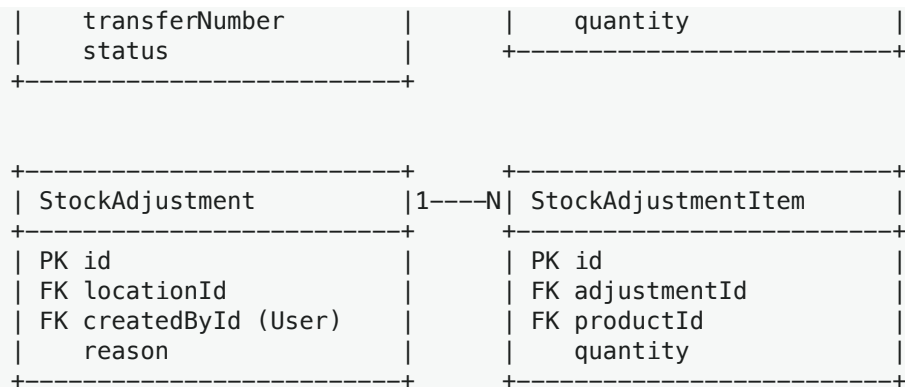

A transfer moves stock from one location to another. An adjustment corrects stock, for example after damage or a stock count.

7. Supplier portal

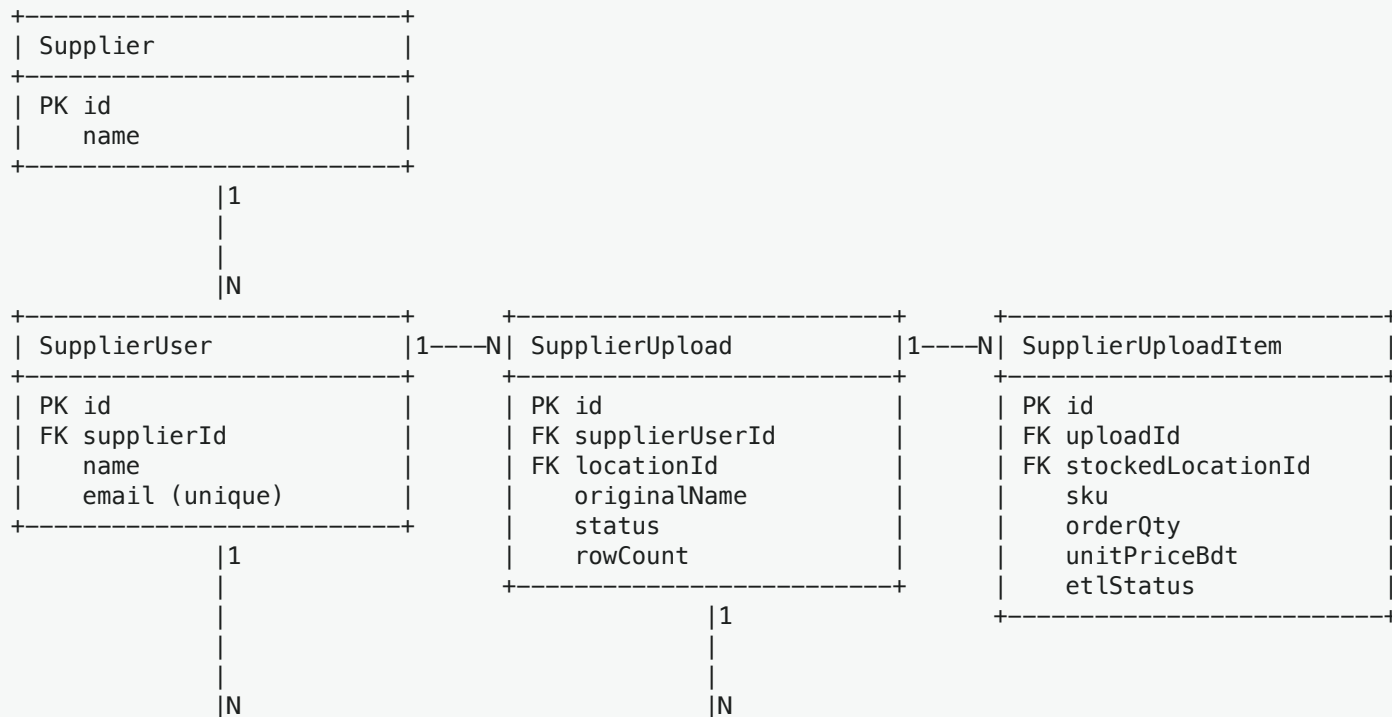

SupplierNotification	VendorNotification
PK id	PK id
FK supplierUserId	FK uploadId
FK uploadId	FK userId (User)
type	type
message	message
readAt	readAt

- A supplier logs in as a `SupplierUser` and uploads a CSV file (`SupplierUpload`). Each row of the file becomes a `SupplierUploadItem`.
- `etlStatus` tracks each row: `NEW` → `GOOD` → `STOCKED` (added to stock), or `NEW` → `INCOMPLETE` → `RETURNED` (sent back to the supplier to fix).
- `SupplierNotification` messages go to the supplier. `VendorNotification` messages go to staff (`User`) when a supplier sends something for review.