

1. Business Problem

1.1 Problem Description

Netflix is all about connecting people to the movies they love. To help customers find those movies, they developed world-class movie recommendation system: CinematchSM. Its job is to predict whether someone will enjoy a movie based on how much they liked or disliked other movies. Netflix use those predictions to make personal movie recommendations based on each customer's unique tastes. And while **Cinematch** is doing pretty well, it can always be made better.

Now there are a lot of interesting alternative approaches to how Cinematch works that netflix haven't tried. Some are described in the literature, some aren't. We're curious whether any of these can beat Cinematch by making better predictions. Because, frankly, if there is a much better approach it could make a big difference to our customers and our business.

Credits: <https://www.netflixprize.com/rules.html>

1.2 Problem Statement

Netflix provided a lot of anonymous rating data, and a prediction accuracy bar that is 10% better than what Cinematch can do on the same training data set. (Accuracy is a measurement of how closely predicted ratings of movies match subsequent actual ratings.)

1.3 Sources

- <https://www.netflixprize.com/rules.html>
- <https://www.kaggle.com/netflix-inc/netflix-prize-data>
- Netflix blog: <https://medium.com/netflix-techblog/netflix-recommendations-beyond-the-5-stars-part-1-55838468f429> (very nice blog)
- surprise library: <http://surpriselib.com/> (we use many models from this library)
- surprise library doc: http://surprise.readthedocs.io/en/stable/getting_started.html (we use many models from this library)
- installing surprise: <https://github.com/NicolasHug/ Surprise#installation>
- Research paper: <http://courses.ischool.berkeley.edu/i290-dm/s11/SECURE/a1-koren.pdf> (most of our work was inspired by this paper)
- SVD Decomposition : <https://www.youtube.com/watch?v=P5mlg91as1c>

1.4 Real world/Business Objectives and constraints

Objectives:

1. Predict the rating that a user would give to a movie that he ahs not yet rated.
2. Minimize the difference between predicted and actual rating (RMSE and MAPE)

Constraints:

1. Some form of interpretability.

2. Machine Learning Problem

2.1 Data

2.1.1 Data Overview

Get the data from : <https://www.kaggle.com/netflix-inc/netflix-prize-data/data>

Data files :

Data files :

- combined_data_1.txt
- combined_data_2.txt
- combined_data_3.txt
- combined_data_4.txt
- movie_titles.csv

The first line of each file [combined_data_1.txt, combined_data_2.txt, combined_data_3.txt, combined_data_4.txt] contains the movie id followed by a colon. Each subsequent line in the file corresponds to a rating from a customer and its date in the following format:

CustomerID,Rating,Date

MovieIDs range from 1 to 17770 sequentially.

CustomerIDs range from 1 to 2649429, with gaps. There are 480189 users.

Ratings are on a five star (integral) scale from 1 to 5.

Dates have the format YYYY-MM-DD.

2.1.2 Example Data point

1:

```
1488844,3,2005-09-06
822109,5,2005-05-13
885013,4,2005-10-19
30878,4,2005-12-26
823519,3,2004-05-03
893988,3,2005-11-17
124105,4,2004-08-05
1248029,3,2004-04-22
1842128,4,2004-05-09
2238063,3,2005-05-11
1503895,4,2005-05-19
2207774,5,2005-06-06
2590061,3,2004-08-12
2442,3,2004-04-14
543865,4,2004-05-28
1209119,4,2004-03-23
804919,4,2004-06-10
1086807,3,2004-12-28
1711859,4,2005-05-08
372233,5,2005-11-23
1080361,3,2005-03-28
1245640,3,2005-12-19
558634,4,2004-12-14
2165002,4,2004-04-06
1181550,3,2004-02-01
1227322,4,2004-02-06
427928,4,2004-02-26
814701,5,2005-09-29
808731,4,2005-10-31
662870,5,2005-08-24
337541,5,2005-03-23
786312,3,2004-11-16
1133214,4,2004-03-07
1537427,4,2004-03-29
1209954,5,2005-05-09
3335563,5,2005-06-10
```

```
2381599,3,2005-09-12
525356,2,2004-07-11
1910569,4,2004-04-12
2263586,4,2004-08-20
2421815,2,2004-02-26
1009622,1,2005-01-19
1481961,2,2005-05-24
401047,4,2005-06-03
2179073,3,2004-08-29
1434636,3,2004-05-01
93986,5,2005-10-06
1308744,5,2005-10-29
2647871,4,2005-12-30
1905581,5,2005-08-16
2508819,3,2004-05-18
1578279,1,2005-05-19
1159695,4,2005-02-15
2588432,3,2005-03-31
2423091,3,2005-09-12
470232,4,2004-04-08
2148699,2,2004-06-05
1342007,3,2004-07-16
466135,4,2004-07-13
2472440,3,2005-08-13
1283744,3,2004-04-17
1927580,4,2004-11-08
716874,5,2005-05-06
4326,4,2005-10-29
```

2.2 Mapping the real world problem to a Machine Learning Problem

2.2.1 Type of Machine Learning Problem

For a given movie and user we need to predict the rating would be given by him/her to the movie.

The given problem is a Recommendation problem

It can also be seen as a Regression problem

2.2.2 Performance metric

- Mean Absolute Percentage Error: https://en.wikipedia.org/wiki/Mean_absolute_percentage_error
- Root Mean Square Error: https://en.wikipedia.org/wiki/Root-mean-square_deviation

2.2.3 Machine Learning Objective and Constraints

1. Minimize RMSE.
2. Try to provide some interpretability.

In [1]:

```
# this is just to know how much time will it take to run this entire ipython notebook
from datetime import datetime
# globalstart = datetime.now()
import pandas as pd
import numpy as np
import matplotlib
matplotlib.use('nbagg')

import matplotlib.pyplot as plt
plt.rcParams.update({'figure.max_open_warning': 0})
```

```
import seaborn as sns
sns.set_style('whitegrid')
import os
from scipy import sparse
from scipy.sparse import csr_matrix

from sklearn.decomposition import TruncatedSVD
from sklearn.metrics.pairwise import cosine_similarity
import random
```

3. Exploratory Data Analysis

3.1 Preprocessing

3.1.1 Converting / Merging whole data to required format: u_i, m_j, r_ij

In [2]:

```
start = datetime.now()
if not os.path.isfile('data.csv'):
    # Create a file 'data.csv' before reading it
    # Read all the files in netflix and store them in one big file('data.csv')
    # We re reading from each of the four files and appendig each rating to a global file
    'train.csv'
    data = open('data.csv', mode='w')

    row = list()
    files=['data_folder/combined_data_1.txt','data_folder/combined_data_2.txt',
           'data_folder/combined_data_3.txt', 'data_folder/combined_data_4.txt']
    for file in files:
        print("Reading ratings from {}".format(file))
        with open(file) as f:
            for line in f:
                del row[:] # you don't have to do this.
                line = line.strip()
                if line.endswith(':'):
                    # All below are ratings for this movie, until another movie appears.
                    movie_id = line.replace(':', '')
                else:
                    row = [x for x in line.split(',') ]
                    row.insert(0, movie_id)
                    data.write(','.join(row))
                    data.write('\n')

            print("Done.\n")
    data.close()
print('Time taken :', datetime.now() - start)
```

Time taken : 0:00:00

In [3]:

```
print("creating the dataframe from data.csv file..")
df = pd.read_csv('data.csv', sep=',',
                 names=['movie', 'user', 'rating', 'date'])
df.date = pd.to_datetime(df.date)
print('Done.\n')

# we are arranging the ratings according to time.
print('Sorting the dataframe by date..')
df.sort_values(by='date', inplace=True)
print('Done..')
```

creating the dataframe from data.csv file..
Done.

Sorting the dataframe by date..

Done..

In [4]:

```
df.head()
```

Out[4]:

	movie	user	rating	date
56431994	10341	510180	4	1999-11-11
9056171	1798	510180	5	1999-11-11
58698779	10774	510180	3	1999-11-11
48101611	8651	510180	2	1999-11-11
81893208	14660	510180	2	1999-11-11

In [5]:

```
df.describe()['rating']
```

Out[5]:

```
count      1.004805e+08
mean        3.604290e+00
std         1.085219e+00
min         1.000000e+00
25%         3.000000e+00
50%         4.000000e+00
75%         4.000000e+00
max         5.000000e+00
Name: rating, dtype: float64
```

3.1.2 Checking for NaN values

In [6]:

```
# just to make sure that all Nan containing rows are deleted..
print("No of Nan values in our dataframe : ", sum(df.isnull().any()))
```

No of Nan values in our dataframe : 0

3.1.3 Removing Duplicates

In [7]:

```
dup_bool = df.duplicated(['movie','user','rating'])
dups = sum(dup_bool) # by considering all columns..( including timestamp)
print("There are {} duplicate rating entries in the data..".format(dups))
```

There are 0 duplicate rating entries in the data..

3.1.4 Basic Statistics (#Ratings, #Users, and #Movies)

In [8]:

```
print("Total data ")
print("-"*50)
print("\nTotal no of ratings :",df.shape[0])
print("Total No of Users      :", len(np.unique(df.user)))
print("Total No of movies     :", len(np.unique(df.movie)))
```

```
print('Total No of movies : ', len(np.unique(df.movie)))
```

Total data

```
-----  
Total no of ratings : 100480507  
Total No of Users   : 480189  
Total No of movies  : 17770
```

3.2 Splitting data into Train and Test(80:20)

In [9]:

```
if not os.path.isfile('train.csv'):  
    # create the dataframe and store it in the disk for offline purposes..  
    df.iloc[:int(df.shape[0]*0.80)].to_csv("train.csv", index=False)  
  
if not os.path.isfile('test.csv'):  
    # create the dataframe and store it in the disk for offline purposes..  
    df.iloc[int(df.shape[0]*0.80):].to_csv("test.csv", index=False)  
  
train_df = pd.read_csv("train.csv", parse_dates=['date'])  
test_df = pd.read_csv("test.csv")
```

3.2.1 Basic Statistics in Train data (#Ratings, #Users, and #Movies)

In [10]:

```
# movies = train_df.movie.value_counts()  
# users = train_df.user.value_counts()  
print("Training data ")  
print("-"*50)  
print("\nTotal no of ratings :", train_df.shape[0])  
print("Total No of Users   :", len(np.unique(train_df.user)))  
print("Total No of movies  :", len(np.unique(train_df.movie)))
```

Training data

```
-----  
Total no of ratings : 80384405  
Total No of Users   : 405041  
Total No of movies  : 17424
```

3.2.2 Basic Statistics in Test data (#Ratings, #Users, and #Movies)

In [11]:

```
print("Test data ")  
print("-"*50)  
print("\nTotal no of ratings :", test_df.shape[0])  
print("Total No of Users   :", len(np.unique(test_df.user)))  
print("Total No of movies  :", len(np.unique(test_df.movie)))
```

Test data

```
-----  
Total no of ratings : 20096102  
Total No of Users   : 349312  
Total No of movies  : 17757
```

3.3 Exploratory Data Analysis on Train data

In [12]:

```
# method to make y-axis more readable
```


```
# method to make y-axis more readable
def human(num, units = 'M'):
    units = units.lower()
    num = float(num)
    if units == 'k':
        return str(num/10**3) + " K"
    elif units == 'm':
        return str(num/10**6) + " M"
    elif units == 'b':
        return str(num/10**9) + " B"
```

3.3.1 Distribution of ratings

In [13]:

```
fig, ax = plt.subplots()
plt.title('Distribution of ratings over Training dataset', fontsize=15)
sns.countplot(train_df.rating)
ax.set_yticklabels([human(item, 'M') for item in ax.get_yticks()])
ax.set_ylabel('No. of Ratings(Millions)')

plt.show()
```

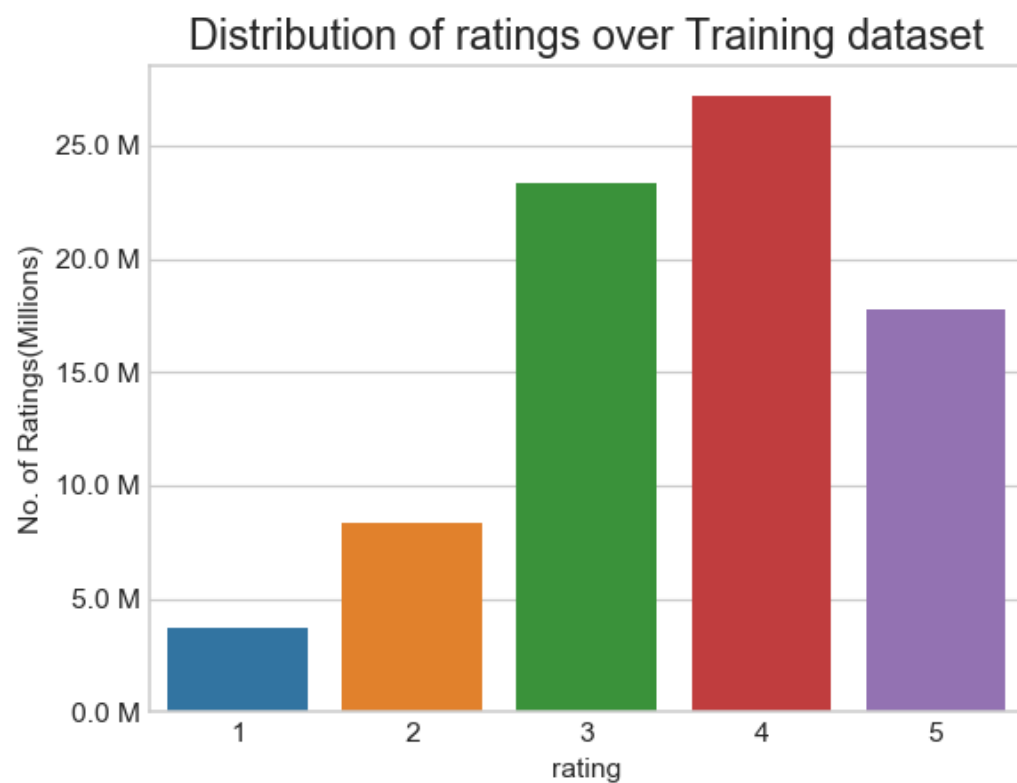

Add new column (week day) to the data set for analysis.

In [14]:

```
# It is used to skip the warning "'SettingWithCopyWarning'.."
pd.options.mode.chained_assignment = None # default='warn'

train_df['day_of_week'] = train_df.date.dt.weekday_name

train_df.tail()
```

Out[14]:


	movie	user	rating	date	day_of_week
80384400	12074	2033618	4	2005-08-08	Monday

80384401	movie	1797061	user	rating	2005-08-08	day_of_week
80384402	10986	1498715	5		2005-08-08	Monday
80384403	14861	500016	4		2005-08-08	Monday
80384404	5926	1044015	5		2005-08-08	Monday

3.3.2 Number of Ratings per a month

In [15]:

```
ax = train_df.resample('m', on='date')['rating'].count().plot()
ax.set_title('No of ratings per month (Training data)')
plt.xlabel('Month')
plt.ylabel('No of ratings(per month)')
ax.set_yticklabels([human(item, 'M') for item in ax.get_yticks()])
plt.show()
```

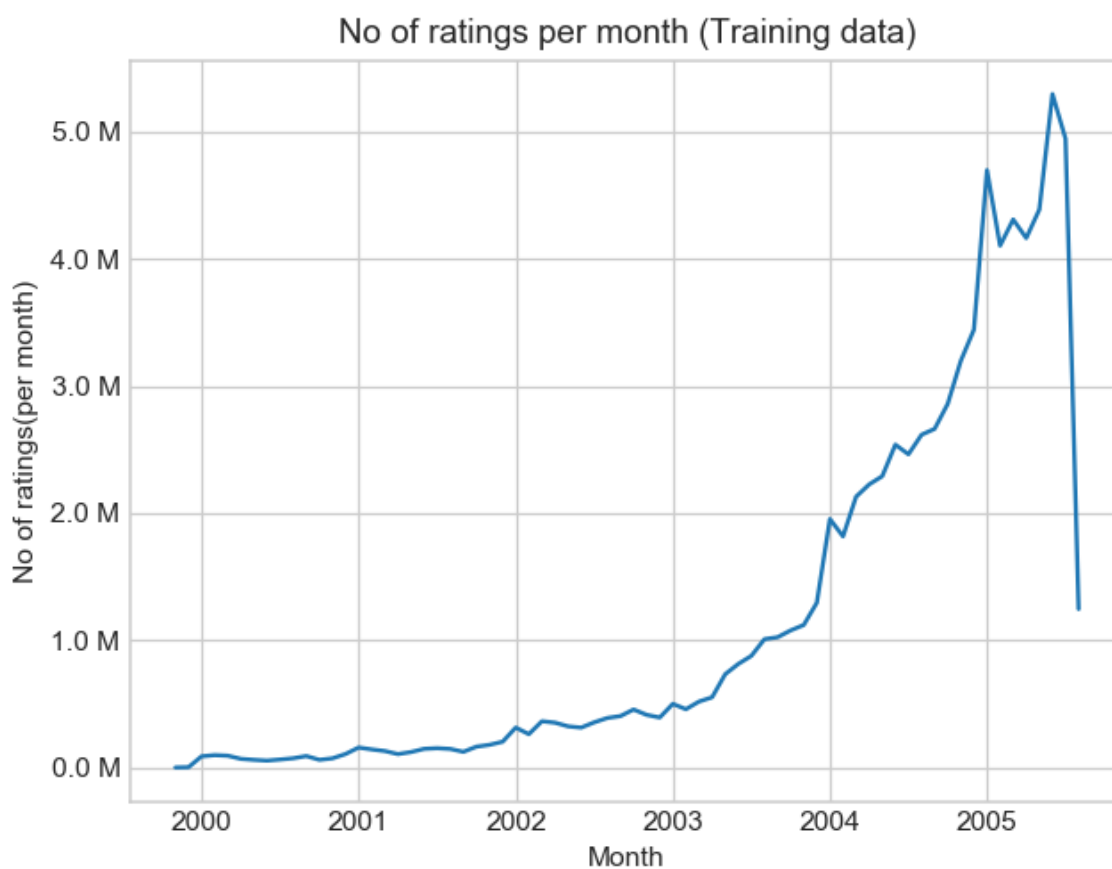

here

3.3.3 Analysis on the Ratings given by user

In [16]:

```
no_of Rated movies per user = train_df.groupby(by='user')['rating'].count().sort_values(ascending=False)
no_of Rated movies per user.head()
```

Out [16]:


```
user
305344      17112
2439493     15896
387418      15402
1639792      9767
1461435      9447
Name: rating, dtype: int64
```

In [17]:

```
fig = plt.figure(figsize=plt.figaspect(.5))


ax1 = plt.subplot(121)
sns.kdeplot(no_of Rated movies per user, shade=True, ax=ax1)
plt.xlabel('No of ratings by user')
plt.title("PDF")

ax2 = plt.subplot(122)
sns.kdeplot(no_of Rated movies per user, shade=True, cumulative=True, ax=ax2)
plt.xlabel('No of ratings by user')
plt.title('CDF')

plt.show()
```

C:\Users\samar\Anaconda3\lib\site-packages\scipy\stats\stats.py:1713: FutureWarning: Using a non-tuple sequence for multidimensional indexing is deprecated; use `arr[tuple(seq)]` instead of `arr[seq]`. In the future this will be interpreted as an array index, `arr[np.array(seq)]`, which will result either in an error or a different result.

```
return np.add.reduce(sorted[indexer] * weights, axis=axis) / sumval
```

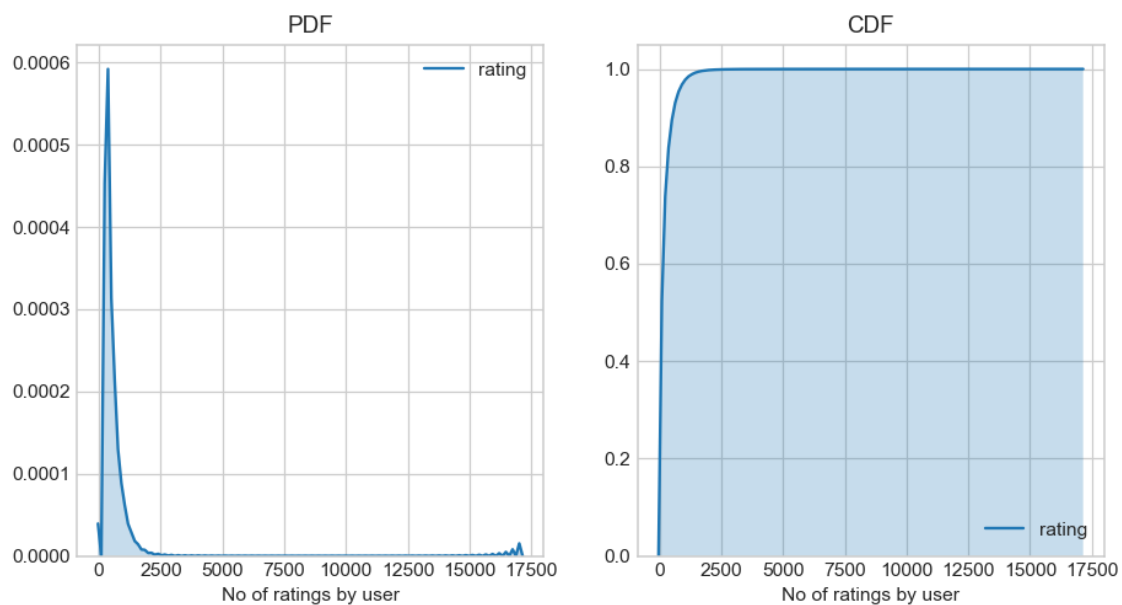

In [18]:

```
no_of Rated movies per user.describe()
```

Out[18]:

```
count      405041.000000
mean         198.459921
std          290.793238
min           1.000000
25%          34.000000
50%          89.000000
75%         245.000000
max         17112.000000
Name: rating, dtype: float64
```

There, is something interesting going on with the quantiles..

In [19]:


```
quantiles = no_of_rated_movies_per_user.quantile(np.arange(0,1.01,0.01), interpolation='higher')
```

In [20]:

```
plt.title("Quantiles and their Values")
quantiles.plot()
# quantiles with 0.05 difference
plt.scatter(x=quantiles.index[::5], y=quantiles.values[::5], c='orange', label="quantiles with 0.05 intervals")
# quantiles with 0.25 difference
plt.scatter(x=quantiles.index[::25], y=quantiles.values[::25], c='m', label = "quantiles with 0.25 intervals")
plt.ylabel('No of ratings by user')
plt.xlabel('Value at the quantile')
plt.legend(loc='best')

# annotate the 25th, 50th, 75th and 100th percentile values....
for x,y in zip(quantiles.index[::25], quantiles.values[::25]):
    plt.annotate(s="({} , {})".format(x,y), xy=(x,y), xytext=(x-0.05, y+500)
                , fontweight='bold')

plt.show()
```

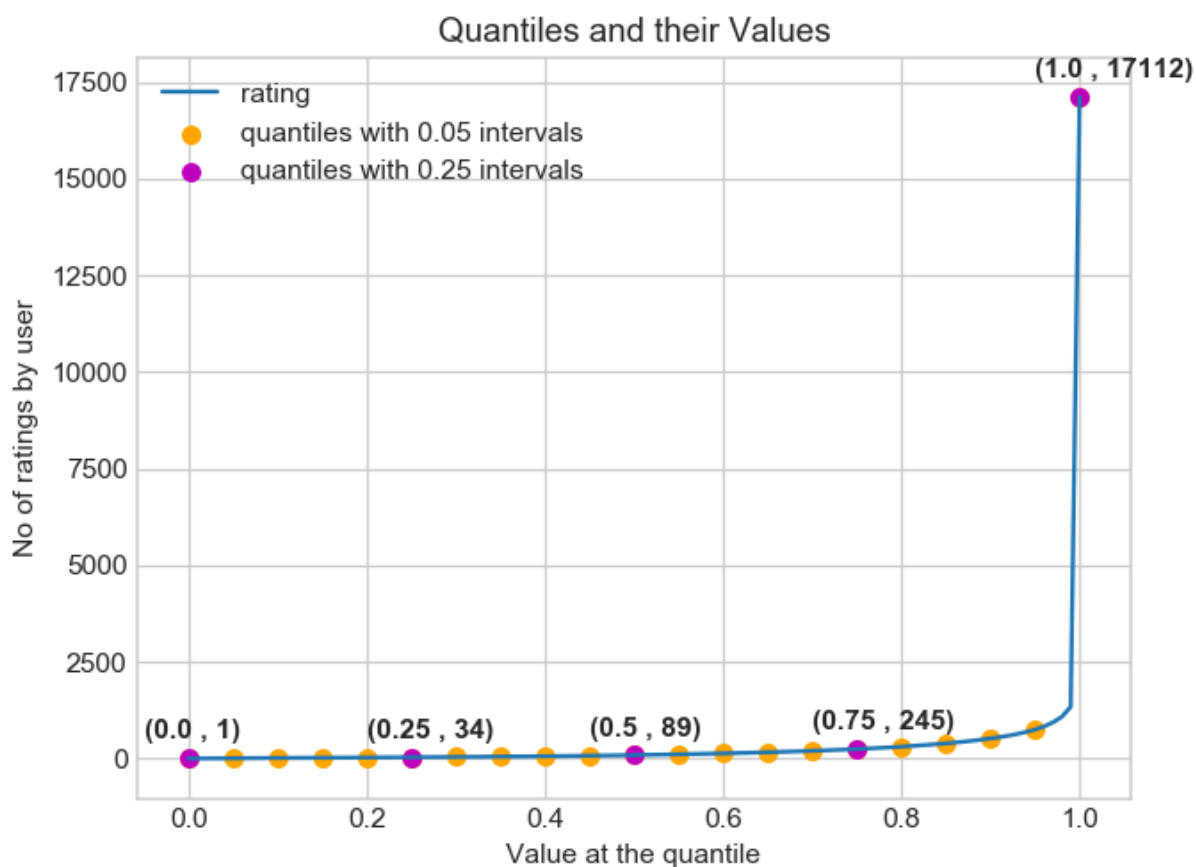

In [21]:

```
quantiles[::5]
```

Out[21]:

```
0.00    1.00
```

```

0.00      1
0.05      7
0.10     15
0.15     21
0.20     27
0.25     34
0.30     41
0.35     50
0.40     60
0.45     73
0.50     89
0.55    109
0.60    133
0.65    163
0.70    199
0.75    245
0.80    307
0.85    392
0.90    520
0.95    749
1.00   17112
Name: rating, dtype: int64

```

how many ratings at the last 5% of all ratings??

In [22]:

```

print('\n No of ratings at last 5 percentile : {}'.format(sum(no_of Rated movies_per_user >= 749)
) )

```

No of ratings at last 5 percentile : 20305

3.3.4 Analysis of ratings of a movie given by a user

In [23]:


```

no_of_ratings_per_movie = train_df.groupby(by='movie')
['rating'].count().sort_values(ascending=False)

fig = plt.figure(figsize=plt.figaspect(.5))
ax = plt.gca()
plt.plot(no_of_ratings_per_movie.values)
plt.title('# RATINGS per Movie')
plt.xlabel('Movie')
plt.ylabel('No of Users who rated a movie')
ax.set_xticklabels([])

plt.show()

```

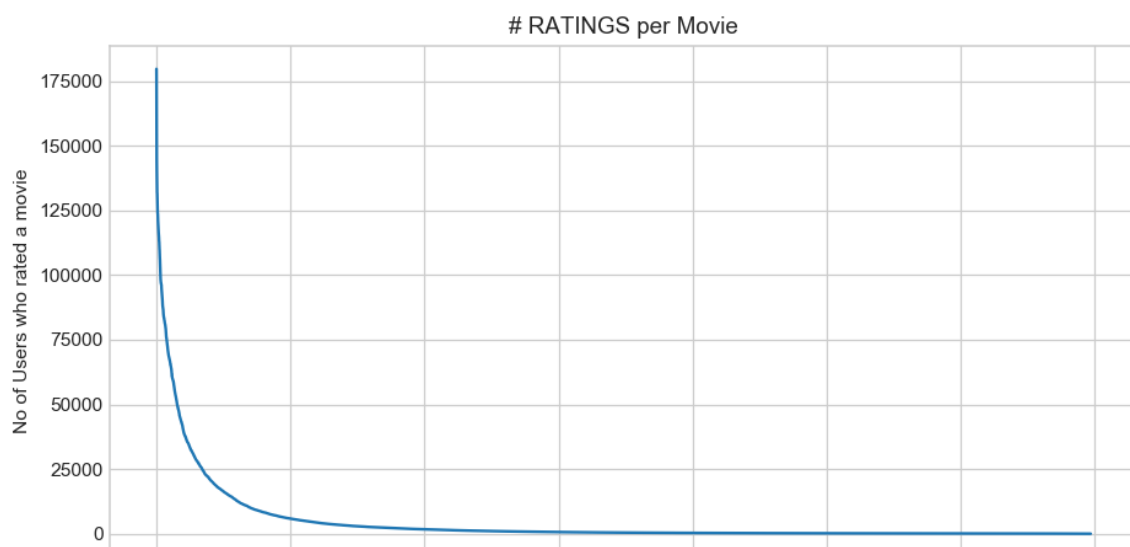


- It is very skewed.. just like number of ratings given per user.

- There are some movies (which are very popular) which are rated by huge number of users.
- But most of the movies (like 90%) got some hundreds of ratings.

3.3.5 Number of ratings on each day of the week


In [24]:


```
fig, ax = plt.subplots()
sns.countplot(x='day_of_week', data=train_df, ax=ax)
plt.title('No of ratings on each day...')
plt.ylabel('Total no of ratings')
plt.xlabel('')
ax.set_yticklabels([human(item, 'M') for item in ax.get_yticks()])
plt.show()
```

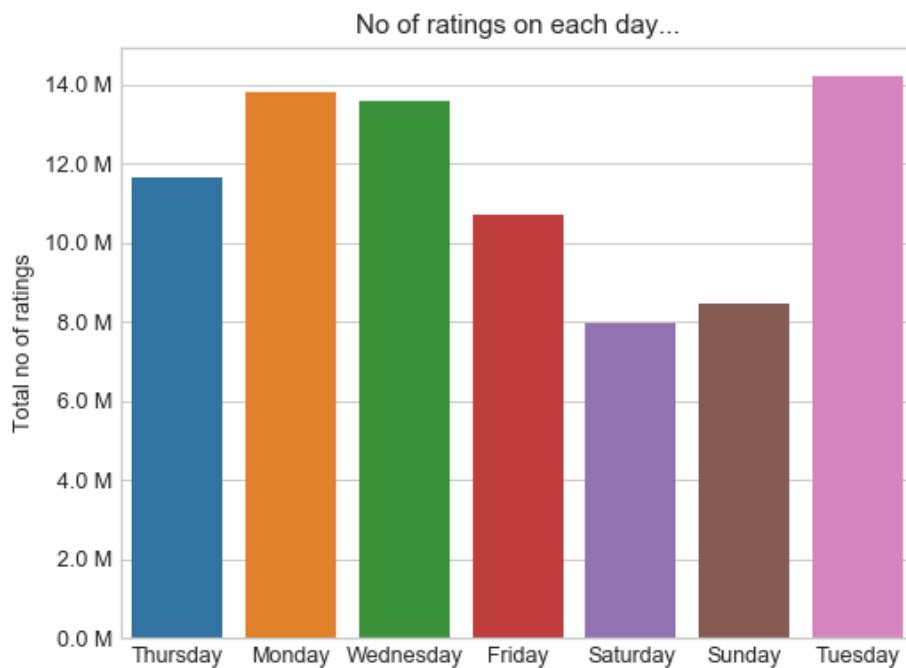

In [25]:

```
start = datetime.now()
fig = plt.figure(figsize=plt.figaspect(.45))
sns.boxplot(y='rating', x='day_of_week', data=train_df)
plt.show()
print(datetime.now() - start)
```

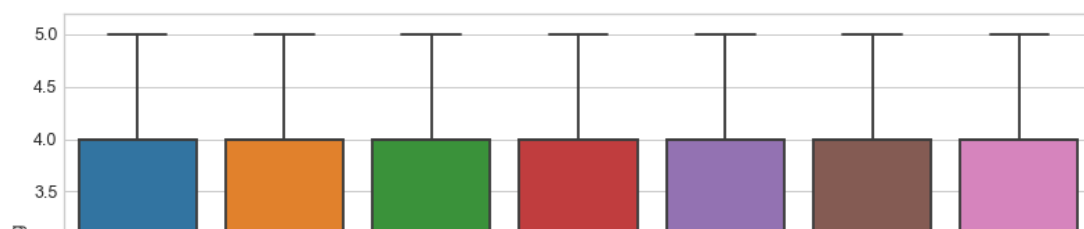

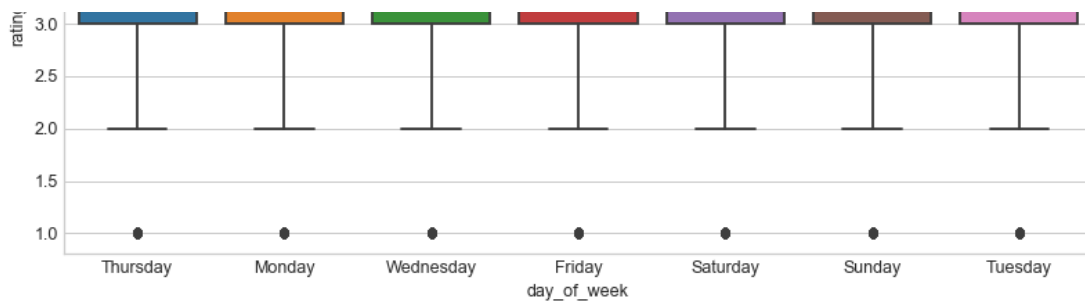

0:00:14.063023

In [26]:

```
avg_week_df = train_df.groupby(by=['day_of_week'])['rating'].mean()
print(" AVerage ratings")
print("-"*30)
print(avg_week_df)
print("\n")
```

```

Average ratings
-----
day_of_week
Friday      3.585274
Monday      3.577250
Saturday     3.591791
Sunday      3.594144
Thursday    3.582463
Tuesday     3.574438
Wednesday   3.583751
Name: rating, dtype: float64

```

3.3.6 Creating sparse matrix from data frame

--	--	--

3.3.6.1 Creating sparse matrix from train data frame

In [27]:

```

start = datetime.now()
if os.path.isfile('train_sparse_matrix.npz'):
    print("It is present in your pwd, getting it from disk....")
    # just get it from the disk instead of computing it
    train_sparse_matrix = sparse.load_npz('train_sparse_matrix.npz')
    print("DONE..")
else:
    print("We are creating sparse_matrix from the dataframe..")
    0
    train_sparse_matrix = sparse.csr_matrix((train_df.rating.values, (train_df.user.values,
                                                                    train_df.movie.values)),)

    print('Done. It\'s shape is : (user, movie) : ',train_sparse_matrix.shape)
    print('Saving it into disk for furthur usage..')
    # save it into disk
    sparse.save_npz("train_sparse_matrix.npz", train_sparse_matrix)
    print('Done..\n')

print(datetime.now() - start)
```

```

It is present in your pwd, getting it from disk....
DONE..
0:00:06.456430

```

The Sparsity of Train Sparse Matrix

In [28]:

```
us,mv = train_sparse_matrix.shape
elem = train_sparse_matrix.count_nonzero()
0
print("Sparsity Of Train matrix : {} % ".format( (1-(elem/(us*mv))) * 100) )
```

Sparsity Of Train matrix : 99.8292709259195 %

3.3.6.2 Creating sparse matrix from test data frame

In [29]:

```
start = datetime.now()
if os.path.isfile('test_sparse_matrix.npz'):
    print("It is present in your pwd, getting it from disk....")
    # just get it from the disk instead of computing it
    test_sparse_matrix = sparse.load_npz('test_sparse_matrix.npz')
    print("DONE..")
else:
    print("We are creating sparse_matrix from the dataframe..")
    # create sparse_matrix and store it for after usage.
    # csr_matrix(data_values, (row_index, col_index), shape_of_matrix)
    # It should be in such a way that, MATRIX[row, col] = data
    test_sparse_matrix = sparse.csr_matrix((test_df.rating.values, (test_df.user.values,
                                                                    test_df.movie.values)))

    print('Done. It\'s shape is : (user, movie) : ',test_sparse_matrix.shape)
    print('Saving it into disk for furthur usage..')
    # save it into disk
    sparse.save_npz("test_sparse_matrix.npz", test_sparse_matrix)
    print('Done..\n')

print(datetime.now() - start)
```

It is present in your pwd, getting it from disk....
DONE..
0:00:02.080479

The Sparsity of Test data Matrix

In [30]:

```
us,mv = test_sparse_matrix.shape
elem = test_sparse_matrix.count_nonzero()

print("Sparsity Of Test matrix : {} % ".format( (1-(elem/(us*mv))) * 100) )
```

Sparsity Of Test matrix : 99.95731772988694 %

3.3.7 Finding Global average of all movie ratings, Average rating per user, and Average rating per movie

In [9]:

```
# get the user averages in dictionary (key: user_id/movie_id, value: avg rating)

def get_average_ratings(sparse_matrix, of_users):

    # average ratings of user/axes
    ax = 1 if of_users else 0 # 1 - User axes, 0 - Movie axes

    # ".A1" is for converting Column_Matrix to 1-D numpy array
    sum_of_ratings = sparse_matrix.sum(axis=ax).A1
    # Boolean matrix of ratings ( whether a user rated that movie or not)
    is_rated = sparse_matrix!=0
```

```

# no of ratings that each user OR movie..
no_of_ratings = isRated.sum(axis=ax).A1

# max_user and max_movie ids in sparse matrix
u,m = sparse_matrix.shape
# create a dictionary of users and their average ratings..
average_ratings = { i : sum_of_ratings[i]/no_of_ratings[i]
                    for i in range(u if of_users else m)
                    if no_of_ratings[i] !=0}

# return that dictionary of average ratings
return average_ratings

```

3.3.7.1 finding global average of all movie ratings

In [32]:

```

train_averages = dict()
# get the global average of ratings in our train set.
train_global_average = train_sparse_matrix.sum()/train_sparse_matrix.count_nonzero()
train_averages['global'] = train_global_average
train_averages

```

Out[32]:

```
{'global': 3.582890686321557}
```

3.3.7.2 finding average rating per user

In [33]:

```

train_averages['user'] = get_average_ratings(train_sparse_matrix, of_users=True)
print('\nAverage rating of user 10 :',train_averages['user'][10])

```

Average rating of user 10 : 3.3781094527363185

3.3.7.3 finding average rating per movie

In [34]:

```

train_averages['movie'] = get_average_ratings(train_sparse_matrix, of_users=False)
print('\n AVerage rating of movie 15 :',train_averages['movie'][15])

```

AVerage rating of movie 15 : 3.3038461538461537

3.3.7.4 PDF's & CDF's of Avg.Ratings of Users & Movies (In Train Data)

In [35]:

```

start = datetime.now()
# draw pdfs for average rating per user and average
fig, (ax1, ax2) = plt.subplots(nrows=1, ncols=2, figsize=plt.figaspect(.5))
fig.suptitle('Avg Ratings per User and per Movie', fontsize=15)

ax1.set_title('Users-Avg-Ratings')
# get the list of average user ratings from the averages dictionary..
user_averages = [rat for rat in train_averages['user'].values()]
sns.distplot(user_averages, ax=ax1, hist=False,
              kde_kws=dict(cumulative=True), label='Cdf')
sns.distplot(user_averages, ax=ax1, hist=False, label='Pdf')

ax2.set_title('Movies-Avg-Rating')
# get the list of movie average ratings from the dictionary..
movie_averages = [rat for rat in train_averages['movie'].values()]
sns.distplot(movie_averages, ax=ax2, hist=False,
              kde_kws=dict(cumulative=True), label='Cdf')

```

```

sns.distplot(movie_averages, ax=ax2, hist=False, label='Pdf')

plt.show()
print(datetime.now() - start)


```

C:\Users\samar\Anaconda3\lib\site-packages\scipy\stats\stats.py:1713: FutureWarning: Using a non-tuple sequence for multidimensional indexing is deprecated; use `arr[tuple(seq)]` instead of `arr[seq]`. In the future this will be interpreted as an array index, `arr[np.array(seq)]`, which will result either in an error or a different result.

```

return np.add.reduce(sorted[indexer] * weights, axis=axis) / sumval

```

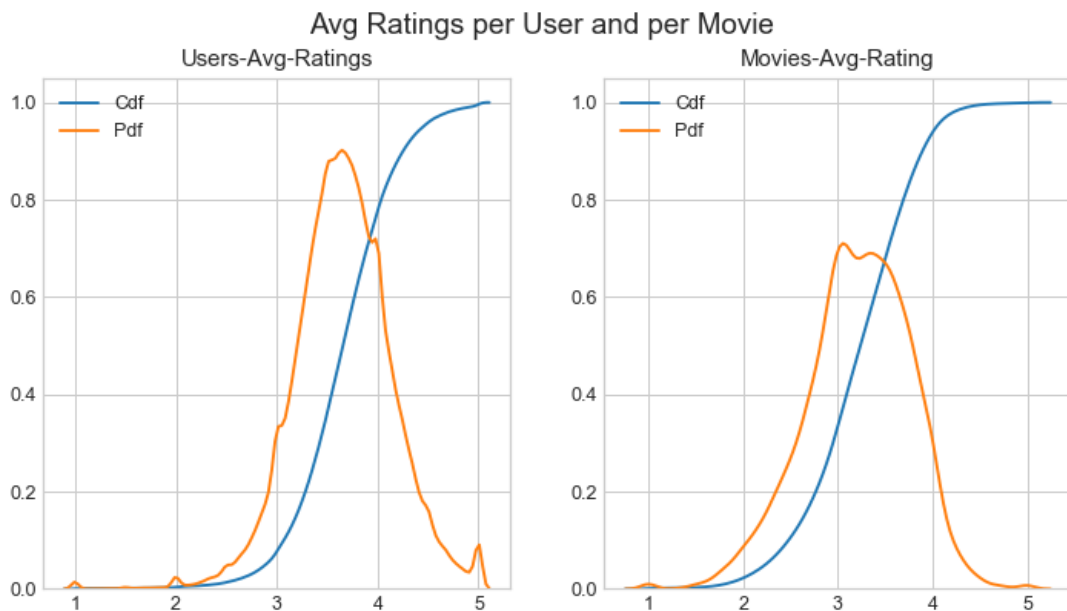

0:01:08.578591

3.3.8 Cold Start problem

3.3.8.1 Cold Start problem with Users

In [36]:

```

total_users = len(np.unique(df.user))
users_train = len(train_averages['user'])
new_users = total_users - users_train

print('\nTotal number of Users :', total_users)
print('\nNumber of Users in Train data :', users_train)
print("\nNo of Users that didn't appear in train data: {} ({} %) \n ".format(new_users,
np.round((new_users/total_users)*100, 2)))

```

Total number of Users : 480189

Number of Users in Train data : 405041

No of Users that didn't appear in train data: 75148(15.65 %)

We might have to handle **new users (75148)** who didn't appear in train data.

3.3.8.2 Cold Start problem with Movies

In [37]:

```
total_movies = len(np.unique(df.movie))
movies_train = len(train_averages['movie'])
new_movies = total_movies - movies_train

print('\nTotal number of Movies  :', total_movies)
print('\nNumber of Users in Train data :', movies_train)
print("\nNo of Movies that didn't appear in train data: {} ({} %) \n ".format(new_movies,
np.round((new_movies/total_movies)*100, 2)))
```

Total number of Movies : 17770

Number of Users in Train data : 17424

No of Movies that didn't appear in train data: 346(1.95 %)

We might have to handle **346 movies** (small comparatively) in test data

3.4 Computing Similarity matrices

3.4.1 Computing User-User Similarity matrix

1. Calculating User User Similarity_Matrix is **not very easy**(unless you have huge Computing Power and lots of time) because of number of. users being large.

- You can try if you want to. Your system could crash or the program stops with **Memory Error**

3.4.1.1 Trying with all dimensions (17k dimensions per user)

In [38]:

```
from sklearn.metrics.pairwise import cosine_similarity

def compute_user_similarity(sparse_matrix, compute_for_few=False, top = 100, verbose=False, verb_for_n_rows = 20,
                           draw_time_taken=True):
    no_of_users, _ = sparse_matrix.shape
    # get the indices of non zero rows(users) from our sparse matrix
    row_ind, col_ind = sparse_matrix.nonzero()
    row_ind = sorted(set(row_ind)) # we don't have to
    time_taken = list() # time taken for finding similar users for an user..

    # we create rows, cols, and data lists.., which can be used to create sparse matrices
    rows, cols, data = list(), list(), list()
    if verbose: print("Computing top",top,"similarities for each user..")

    start = datetime.now()
    temp = 0

    for row in row_ind[:top] if compute_for_few else row_ind:
        temp = temp+1
        prev = datetime.now()

        # get the similarity row for this user with all other users
        sim = cosine_similarity(sparse_matrix.getrow(row), sparse_matrix).ravel()
        # We will get only the top 'top' most similar users and ignore rest of them..
        top_sim_ind = sim.argsort()[::-top:]
        top_sim_val = sim[top_sim_ind]

        # add them to our rows, cols and data
        rows.extend([row]*top)
```

```

cols.extend(top_sim_ind)
data.extend(top_sim_val)
time_taken.append(datetime.now().timestamp() - prev.timestamp())
if verbose:
    if temp%verb_for_n_rows == 0:
        print("computing done for {} users [ time elapsed : {} ]".format(temp, datetime.now()-start))

# lets create sparse matrix out of these and return it
if verbose: print('Creating Sparse matrix from the computed similarities')
#return rows, cols, data

if draw_time_taken:
    plt.plot(time_taken, label = 'time taken for each user')
    plt.plot(np.cumsum(time_taken), label='Total time')
    plt.legend(loc='best')
    plt.xlabel('User')
    plt.ylabel('Time (seconds)')
    plt.show()

return sparse.csr_matrix((data, (rows, cols)), shape=(no_of_users, no_of_users)), time_taken

```

In [41]:

```

start = datetime.now()
u_u_sim_sparse, _ = compute_user_similarity(train_sparse_matrix, compute_for_few=True, top = 100,
                                             verbose=True)
print("-"*100)
print("Time taken :",datetime.now()-start)

```

```

Computing top 100 similarities for each user..
computing done for 20 users [ time elapsed : 0:01:26.144755 ]
computing done for 40 users [ time elapsed : 0:02:56.781883 ]
computing done for 60 users [ time elapsed : 0:04:29.274649 ]
computing done for 80 users [ time elapsed : 0:06:07.231045 ]
computing done for 100 users [ time elapsed : 0:07:48.833767 ]
Creating Sparse matrix from the computed similarities

```

Time taken : 0:08:10.910770

3.4.1.2 Trying with reduced dimensions (Using TruncatedSVD for dimensionality reduction of user vector)

- We have **405,041 users** in our training set and computing similarities between them..(**17K dimensional vector..**) is time consuming..
- From above plot, It took roughly **8.88 sec** for computing similar users for **one user**
- We have **405,041 users** with us in training set.
- $405041 \times 8.88 = 3596764.08\text{sec} = 59946.068\text{ min}$
 - Even if we run on 4 cores parallelly (a typical system now a days), It will still take almost **10 and 1/2 days**.

IDEA: Instead, we will try to reduce the dimensions using SVD, so that it **might** speed up the process...

In [45]:

```
print(train_sparse_matrix.shape)
train_sparse_matrix
```

(2649430, 17771)

Out[45]:

```
<2649430x17771 sparse matrix of type '<class 'numpy.int64'>'
with 80384405 stored elements in Compressed Sparse Row format>
```

In [56]:

```
train_sparse_matrix_1M=train_sparse_matrix[:100000]
train_sparse_matrix_1M
train_sparse_matrix=train_sparse_matrix_1M
train_sparse_matrix
```

Out[56]:

```
<100000x17771 sparse matrix of type '<class 'numpy.int64'>'
with 3003444 stored elements in Compressed Sparse Row format>
```

In [57]:

```
from datetime import datetime
from sklearn.decomposition import TruncatedSVD

start = datetime.now()

# initialize the algorithm with some parameters..
# All of them are default except n_components. n_iter is for Randomized SVD solver.
netflix_svd = TruncatedSVD(n_components=500, algorithm='randomized', random_state=15)
trunc_svd = netflix_svd.fit_transform(train_sparse_matrix)

print(datetime.now()-start)
```

0:00:39.632215

Here,

- $\sum \rightarrow (\text{netflix_svd.singular_values_})$
- $V^T \rightarrow (\text{netflix_svd.components_})$
- U is not returned. instead **Projection_of_X** onto the new vectorspace is returned.
- It uses **randomized svd** internally, which returns **All 3 of them separately**. Use that instead..

In [58]:

```
expl_var = np.cumsum(netflix_svd.explained_variance_ratio_)
```

In [59]:


```
fig, (ax1, ax2) = plt.subplots(nrows=1, ncols=2, figsize=plt.figaspect(.5))

ax1.set_ylabel("Variance Explained", fontsize=15)
ax1.set_xlabel("# Latent Facors", fontsize=15)
ax1.plot(expl_var)
# annotate some (latentfactors, expl_var) to make it clear
ind = [1, 2, 4, 8, 20, 60, 100, 200, 300, 400, 500]
ax1.scatter(x = [i-1 for i in ind], y = expl_var[[i-1 for i in ind]], c='#ff3300')
for i in ind:
    ax1.annotate(s="({}, {})".format(i, np.round(expl_var[i-1], 2)), xy=(i-1, expl_var[i-1]),
                xytext = (i+20, expl_var[i-1] - 0.01), fontweight='bold')

change_in_expl_var = [expl_var[i+1] - expl_var[i] for i in range(len(expl_var)-1)]
ax2.plot(change_in_expl_var)

ax2.set_ylabel("Gain in Var_Expl with One Additional LF", fontsize=10)
ax2.yaxis.set_label_position("right")
ax2.set_xlabel("# Latent Facors", fontsize=20)

plt.show()
```

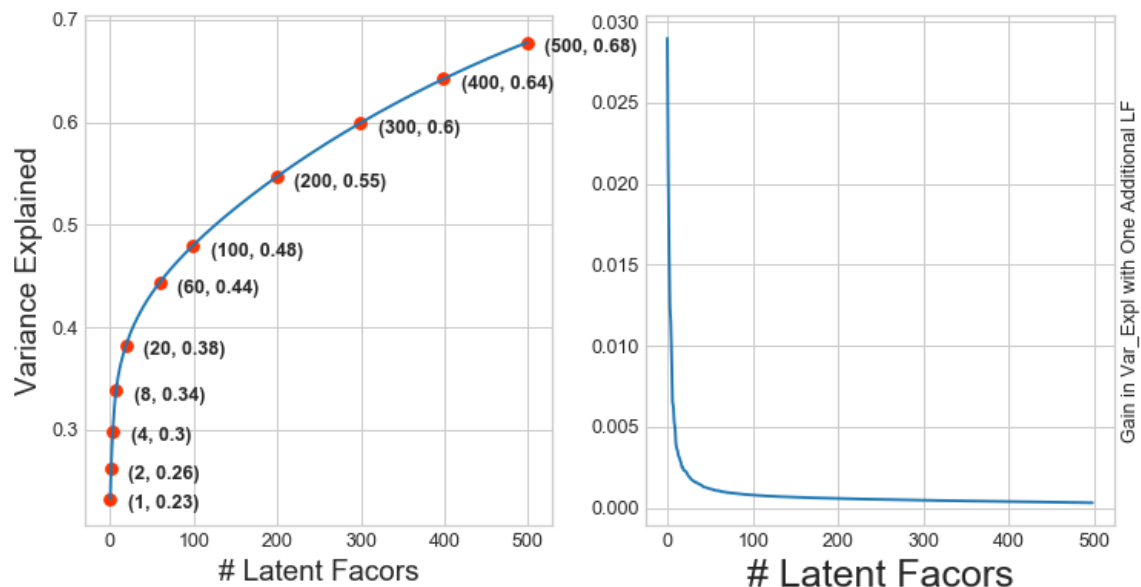

In [60]:

```
for i in ind:
    print("({}, {})".format(i, np.round(expl_var[i-1], 2)))
```

```
(1, 0.23)
(2, 0.26)
(4, 0.3)
(8, 0.34)
(20, 0.38)
(60, 0.44)
(100, 0.48)
(200, 0.55)
(300, 0.6)
(400, 0.64)
(500, 0.68)
```

I think 500 dimensions is good enough

- By just taking **(20 to 30)** latent factors, explained variance that we could get is **20 %**.
- To take it to **60%**, we have to take **almost 400 latent factors**. It is not fare.
- It basically is the **gain of variance explained**, if we **add one additional latent factor to it**.
- By adding one by one latent factor too it, the **_gain in expained variance** with that addition is decreasing. (Obviously, because they are sorted that way).
- **LHS Graph:**
 - **x** --- (No of latent factos),
 - **y** --- (The variance explained by taking x latent factors)
- **More decrease in the line (RHS graph) :**
 - We are getting more expained variance than before.
- **Less decrease in that line (RHS graph) :**
 - We are not getting benifitted from adding latent factor furthur. This is what is shown in the plots.
- **RHS Graph:**
 - **x** --- (No of latent factors),
 - **y** --- (Gain n Expl_Var by taking one additional latent factor)

In [61]:

```
train_sparse_matrix.shape
```

Out[61]:

```
(100000, 17771)
```

In [62]:

```
# Let's project our Original U_M matrix into into 500 Dimensional space...
start = datetime.now()
trunc_matrix = train_sparse_matrix.dot(netflix_svd.components_.T)
print(datetime.now() - start)
```

```
0:00:01.041427
```

In [63]:

```
type(trunc_matrix), trunc_matrix.shape
```

Out[63]:

```
(numpy.ndarray, (100000, 500))
```

- Let's convert this to actual sparse matrix and store it for future purposes

In [64]:

```
if not os.path.isfile('trunc_sparse_matrix.npz'):
    # create that sparse matrix
    trunc_sparse_matrix = sparse.csr_matrix(trunc_matrix)
    # Save this truncated sparse matrix for later usage..
    sparse.save_npz('trunc_sparse_matrix', trunc_sparse_matrix)
else:
    trunc_sparse_matrix = sparse.load_npz('trunc_sparse_matrix.npz')
```

In [65]:

```
trunc_sparse_matrix.shape
```

Out[65]:

```
(2649430, 500)
```


In [67]:

```
start = datetime.now()
```

```
trunc_u_u_sim_matrix, _ = compute_user_similarity(trunc_sparse_matrix, compute_for_row=true, top=50
, verbose=True,
                                                    verb_for_n_rows=10)

print("-"*50)
print("time:",datetime.now()-start)
```

```
Computing top 50 similarities for each user..
computing done for 10 users [   time elapsed : 0:01:57.979468  ]
computing done for 20 users [   time elapsed : 0:03:58.181091  ]
computing done for 30 users [   time elapsed : 0:05:56.015192  ]
computing done for 40 users [   time elapsed : 0:07:55.669322  ]
computing done for 50 users [   time elapsed : 0:09:55.678079  ]
Creating Sparse matrix from the computed similarities
```

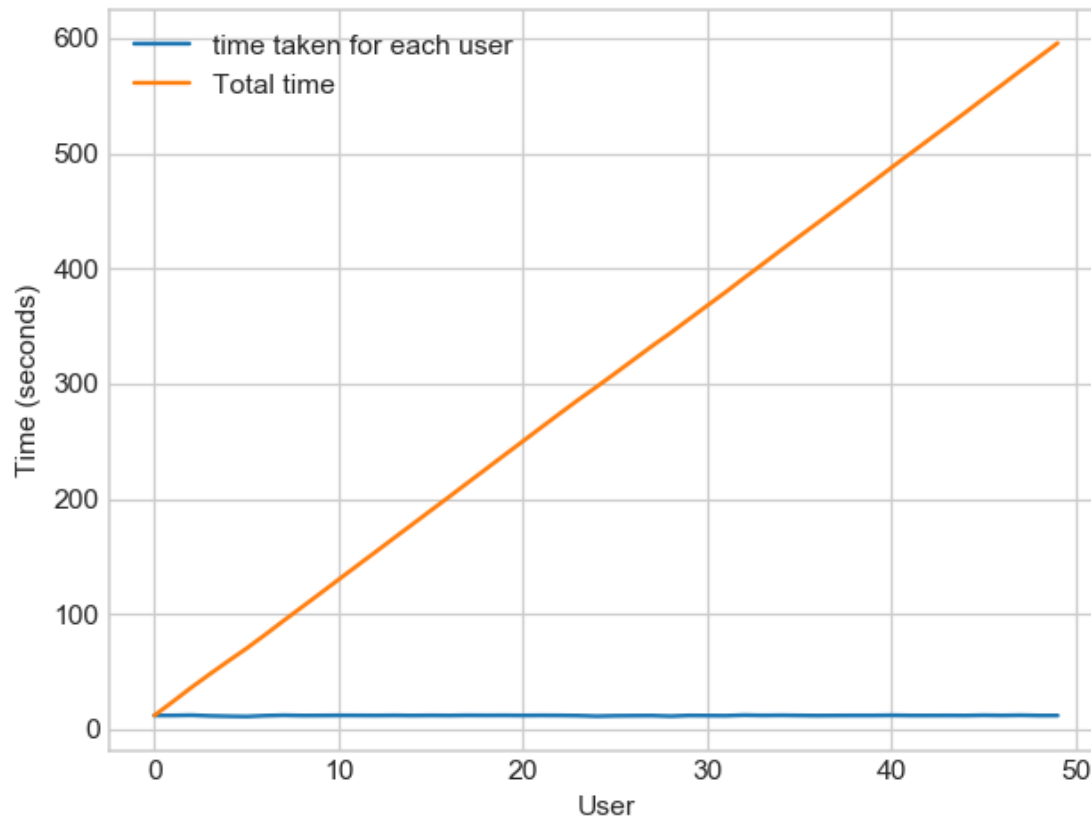

time: 0:10:49.029010

: This is taking more time for each user than Original one.

- from above plot, It took almost **12.18** for computing similar users for **one user**
- We have **405041** users with us in training set.
- { $405041 \times 12.18 = 4933399.38 \text{ sec}$ } $= 82223.323 \text{ min} = 1370.388716667 \text{ hours} = 57.099529861 \text{ days}$...
 - Even we run on 4 cores parallelly (a typical system now a days), It will still take almost **(14 - 15)** days.
- **Why did this happen...??**
 - Just think about it. It's not that difficult.

----- (sparse & dense.....get it ??)-----

Is there any other way to compute user user similarity..??

is there any other way to compute user-user similarity...

-An alternative is to compute similar users for a particular user, whenever required (ie., Run time)

- We maintain a binary Vector for users, which tells us whether we already computed or not..
- ***If not*** :
 - Compute top (let's just say, 1000) most similar users for this given user, and add this to our datastructure, so that we can just access it(similar users) without recomputing it again.
 -
- ***If It is already Computed***:
 - Just get it directly from our datastructure, which has that information.
 - In production time, We might have to recompute similarities, if it is computed a long time ago. Because user preferences changes over time. If we could maintain some kind of Timer, which when expires, we have to update it (recompute it).
 -
- ***Which datastructure to use***:
 - It is purely implementation dependant.
 - One simple method is to maintain a **Dictionary Of Dictionaries**.
 -
 - **key** : **_userid_**
 - **_value_**: **_Again a dictionary_**
 - **key** : **_Similar User_**
 - **_value_**: **_Similarity Value_**

3.4.2 Computing Movie-Movie Similarity matrix

In [0]:

```
start = datetime.now()
if not os.path.isfile('m_m_sim_sparse.npz'):
    print("It seems you don't have that file. Computing movie_movie similarity...")
    start = datetime.now()
    m_m_sim_sparse = cosine_similarity(X=train_sparse_matrix.T, dense_output=False)
    print("Done..")
    # store this sparse matrix in disk before using it. For future purposes.
    print("Saving it to disk without the need of re-computing it again.. ")
    sparse.save_npz("m_m_sim_sparse.npz", m_m_sim_sparse)
    print("Done..")
else:
    print("It is there, We will get it.")
    m_m_sim_sparse = sparse.load_npz("m_m_sim_sparse.npz")
    print("Done ...")

print("It's a ",m_m_sim_sparse.shape," dimensional matrix")

print(datetime.now() - start)
```

```
It seems you don't have that file. Computing movie_movie similarity...
Done..
Saving it to disk without the need of re-computing it again..
Done..
It's a (17771, 17771) dimensional matrix
0:10:02.736054
```

In [0]:

```
m_m_sim_sparse.shape
```

Out[0]:

```
(17771, 17771)
```

- Even though we have similarity measure of each movie, with all other movies, We generally don't care much about least similar movies.
- Most of the times, only top xxx similar items matters. It may be 10 or 100.

- Most of the times, only top_xxx similar items matters. It may be 10 or 100.

- We take only those top similar movie ratings and store them in a saperate dictionary.

In [0]:

```
movie_ids = np.unique(m_m_sim_sparse.nonzero()[1])
```

In [0]:

```
start = datetime.now()
similar_movies = dict()
for movie in movie_ids:
    # get the top similar movies and store them in the dictionary
    sim_movies = m_m_sim_sparse[movie].toarray().ravel().argsort()[::-1][1:]
    similar_movies[movie] = sim_movies[:100]
print(datetime.now() - start)

# just testing similar movies for movie_15
similar_movies[15]
```

0:00:33.411700

Out[0]:

```
array([ 8279,  8013, 16528,  5927, 13105, 12049,  4424, 10193, 17590,
        4549,  3755,   590, 14059, 15144, 15054,  9584,  9071,  6349,
       16402,  3973,  1720,  5370, 16309,  9376,  6116,  4706,  2818,
         778, 15331,  1416, 12979, 17139, 17710,  5452,  2534,   164,
       15188,  8323,  2450, 16331,  9566, 15301, 13213, 14308, 15984,
       10597,  6426,  5500,  7068,  7328,  5720,  9802,   376, 13013,
        8003, 10199,  3338, 15390,  9688, 16455, 11730,  4513,   598,
       12762,  2187,   509,  5865,  9166, 17115, 16334,  1942,  7282,
       17584,  4376,  8988,  8873,  5921,  2716, 14679, 11947, 11981,
        4649,   565, 12954, 10788, 10220, 10963,  9427,  1690,  5107,
       7859,  5969,  1510,  2429,   847,  7845,  6410, 13931,  9840,
       3706])
```

3.4.3 Finding most similar movies using similarity matrix

Does Similarity really works as the way we expected...?

Let's pick some random movie and check for its similar movies....

In [0]:

```
# First Let's load the movie details into soe dataframe..
# movie details are in 'netflix/movie_titles.csv'

movie_titles = pd.read_csv("data_folder/movie_titles.csv", sep=',', header = None,
                           names=['movie_id', 'year_of_release', 'title'], verbose=True,
                           index_col = 'movie_id', encoding = "ISO-8859-1")

movie_titles.head()
```

Tokenization took: 4.50 ms

Type conversion took: 165.72 ms

Parser memory cleanup took: 0.01 ms

Out[0]:

	year_of_release	title
movie_id		
1	2003.0	Dinosaur Planet
2	2004.0	Isle of Man TT 2004 Review
3	1997.0	Character
4	1994.0	Paula Abdul's Get Up & Dance

year_of_release	title
2004.0	The Rise and Fall of ECW
movie_id	

Similar Movies for 'Vampire Journals'

In [0]:

```
mv_id = 67

print("\nMovie ----->", movie_titles.loc[mv_id].values[1])

# getnnz(): Number of stored values, including explicit zero

print("\nIt has {} Ratings from users.".format(train_sparse_matrix[:, mv_id].getnnz()))

print("\nWe have {} movies which are similar to this and we will get only top most..".format(m_m_sim_sparse[:, mv_id].getnnz()))
```

Movie -----> Vampire Journals

It has 270 Ratings from users.

We have 17284 movies which are similar to this and we will get only top most..

In [0]:

```
similarities = m_m_sim_sparse[mv_id].toarray().ravel()

similar_indices = similarities.argsort()[::-1][1:]


similarities[similar_indices]

sim_indices = similarities.argsort()[::-1][1:] # It will sort and reverse the array and ignore its
similarity (ie., 1)

# and return its indices(movie_ids)
```

In [0]:

```
plt.plot(similarities[sim_indices], label='All the ratings')
plt.plot(similarities[sim_indices[:100]], label='top 100 similar movies')
plt.title("Similar Movies of {} (movie_id)".format(mv_id), fontsize=20)
plt.xlabel("Movies (Not Movie_Ids)", fontsize=15)
plt.ylabel("Cosine Similarity", fontsize=15)
plt.legend()
plt.show()
```

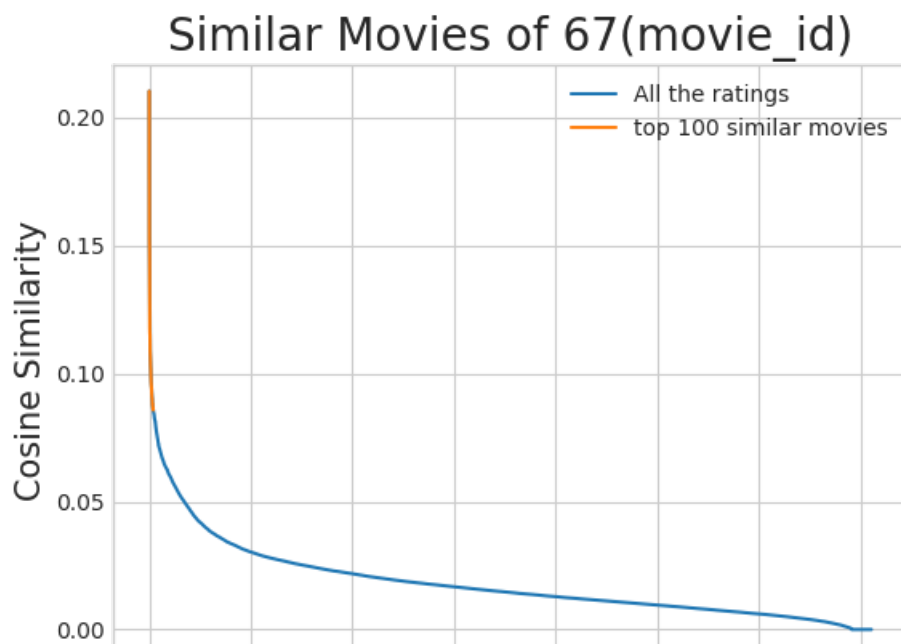

0 2500 5000 7500 10000 12500 15000 17500

Movies (Not Movie_Ids)

Top 10 similar movies

In [0]:

```
movie_titles.loc[sim_indices[:10]]
```

Out[0]:

	year_of_release	title
movie_id		
323	1999.0	Modern Vampires
4044	1998.0	Subspecies 4: Bloodstorm
1688	1993.0	To Sleep With a Vampire
13962	2001.0	Dracula: The Dark Prince
12053	1993.0	Dracula Rising
16279	2002.0	Vampires: Los Muertos
4667	1996.0	Vampirella
1900	1997.0	Club Vampire
13873	2001.0	The Breed
15867	2003.0	Dracula II: Ascension

Similarly, we can **find similar users** and compare how similar they are.

4. Machine Learning Models

In [0]:

```
def get_sample_sparse_matrix(sparse_matrix, no_users, no_movies, path, verbose = True):
    """
        It will get it from the 'path' if it is present or It will create
        and store the sampled sparse matrix in the path specified.
    """

    # get (row, col) and (rating) tuple from sparse_matrix...
    row_ind, col_ind, ratings = sparse.find(sparse_matrix)
    users = np.unique(row_ind)
    movies = np.unique(col_ind)

    print("Original Matrix : (users, movies) -- ({ } { })".format(len(users), len(movies)))
    print("Original Matrix : Ratings -- { }\n".format(len(ratings)))

    # It just to make sure to get same sample everytime we run this program..
    # and pick without replacement....
    np.random.seed(15)
    sample_users = np.random.choice(users, no_users, replace=False)
    sample_movies = np.random.choice(movies, no_movies, replace=False)
```

```

# get the boolean mask or these sampled_items in originl row/col_inde..
mask = np.logical_and( np.isin(row_ind, sample_users),
                        np.isin(col_ind, sample_movies) )

sample_sparse_matrix = sparse.csr_matrix((ratings[mask], (row_ind[mask], col_ind[mask])),
                                         shape=(max(sample_users)+1, max(sample_movies)+1))

if verbose:
    print("Sampled Matrix : (users, movies) -- ({} {})".format(len(sample_users), len(sample_movies)))
    print("Sampled Matrix : Ratings --", format(ratings[mask].shape[0]))

print('Saving it into disk for further usage..')
# save it into disk
sparse.save_npz(path, sample_sparse_matrix)
if verbose:
    print('Done..\n')

return sample_sparse_matrix

```

4.1 Sampling Data

4.1.1 Build sample train data from the train data

In [87]:

```

start = datetime.now()
path = "sample_train_sparse_matrix.npz"
if os.path.isfile(path):
    print("It is present in your pwd, getting it from disk....")
    # just get it from the disk instead of computing it
    sample_train_sparse_matrix = sparse.load_npz(path)
    print("DONE..")
else:
    # get 10k users and 1k movies from available data
    sample_train_sparse_matrix = get_sample_sparse_matrix(train_sparse_matrix, no_users=10000, no_movies=1000,
                                                         path = path)

print(datetime.now() - start)

```

It is present in your pwd, getting it from disk....
 DONE..
 0:00:00.170878

4.1.2 Build sample test data from the test data

In [88]:

```

start = datetime.now()

path = "sample_test_sparse_matrix.npz"
if os.path.isfile(path):
    print("It is present in your pwd, getting it from disk....")
    # just get it from the disk instead of computing it
    sample_test_sparse_matrix = sparse.load_npz(path)
    print("DONE..")
else:
    # get 5k users and 500 movies from available data
    sample_test_sparse_matrix = get_sample_sparse_matrix(test_sparse_matrix, no_users=5000, no_movies=500,
                                                         path = "sample_test_sparse_matrix.npz")

print(datetime.now() - start)

```

It is present in your pwd, getting it from disk....
 DONE..
 0:00:00.185494

4.2 Finding Global Average of all movie ratings, Average rating per User, and Average rating per Movie (from sampled train)

In [89]:

```
sample_train_averages = dict()
```

4.2.1 Finding Global Average of all movie ratings

In [90]:

```
# get the global average of ratings in our train set.
global_average = sample_train_sparse_matrix.sum()/sample_train_sparse_matrix.count_nonzero()
sample_train_averages['global'] = global_average
sample_train_averages
```

Out[90]:

```
{'global': 3.581679377504138}
```

4.2.2 Finding Average rating per User

In [91]:

```
sample_train_averages['user'] = get_average_ratings(sample_train_sparse_matrix, of_users=True)
print('\nAverage rating of user 1515220 :',sample_train_averages['user'][1515220])
```

Average rating of user 1515220 : 3.9655172413793105

4.2.3 Finding Average rating per Movie

In [92]:

```
sample_train_averages['movie'] = get_average_ratings(sample_train_sparse_matrix, of_users=False)
print('\n AVerage rating of movie 15153 :',sample_train_averages['movie'][15153])
```

AVerage rating of movie 15153 : 2.6458333333333335

4.3 Featurizing data

In [93]:

```
print('\n No of ratings in Our Sampled train matrix is : {}'.format(sample_train_sparse_matrix.count_nonzero()))
print('\n No of ratings in Our Sampled test  matrix is : {}'.format(sample_test_sparse_matrix.count_nonzero()))
```

No of ratings in Our Sampled train matrix is : 129286

No of ratings in Our Sampled test matrix is : 7333

4.3.1 Featurizing data for regression problem

4.3.1.1 Featurizing train data

In [94]:

In [94]:

```
# get users, movies and ratings from our samples train sparse matrix
sample_train_users, sample_train_movies, sample_train_ratings =
sparse.find(sample_train_sparse_matrix)
```

In [95]:

```
#####
# It took me almost 10 hours to prepare this train dataset.#
#####
start = datetime.now()
if os.path.isfile('reg_train.csv'):
    print("File already exists you don't have to prepare again..." )
else:
    print('preparing {} tuples for the dataset..\\n'.format(len(sample_train_ratings)))
    with open('reg_train.csv', mode='w') as reg_data_file:
        count = 0
        for (user, movie, rating) in zip(sample_train_users, sample_train_movies,
sample_train_ratings):
            st = datetime.now()
            # print(user, movie)
            #----- Ratings of "movie" by similar users of "user" -----
            --
            # compute the similar Users of the "user"
            user_sim = cosine_similarity(sample_train_sparse_matrix[user],
sample_train_sparse_matrix).ravel()
            top_sim_users = user_sim.argsort()[::-1][1:] # we are ignoring 'The User' from its simi
lar users.
            # get the ratings of most similar users for this movie
            top_ratings = sample_train_sparse_matrix[top_sim_users, movie].toarray().ravel()
            # we will make it's length "5" by adding movie averages to .
            top_sim_users_ratings = list(top_ratings[top_ratings != 0][:5])
            top_sim_users_ratings.extend([sample_train_averages['movie'][movie]]*(5 -
len(top_sim_users_ratings)))
            # print(top_sim_users_ratings, end=" ")

            #----- Ratings by "user" to similar movies of "movie" -----
            ----
            # compute the similar movies of the "movie"
            movie_sim = cosine_similarity(sample_train_sparse_matrix[:,movie].T,
sample_train_sparse_matrix.T).ravel()
            top_sim_movies = movie_sim.argsort()[::-1][1:] # we are ignoring 'The User' from its si
milar users.
            # get the ratings of most similar movie rated by this user..
            top_ratings = sample_train_sparse_matrix[user, top_sim_movies].toarray().ravel()
            # we will make it's length "5" by adding user averages to.
            top_sim_movies_ratings = list(top_ratings[top_ratings != 0][:5])
            top_sim_movies_ratings.extend([sample_train_averages['user']
[user]]*(5-len(top_sim_movies_ratings)))
            # print(top_sim_movies_ratings, end=" : -- ")

            #-----prepare the row to be stores in a file-----#
            row = list()
            row.append(user)
            row.append(movie)
            # Now add the other features to this data...
            row.append(sample_train_averages['global']) # first feature
            # next 5 features are similar_users "movie" ratings
            row.extend(top_sim_users_ratings)
            # next 5 features are "user" ratings for similar_movies
            row.extend(top_sim_movies_ratings)
            # Avg_user rating
            row.append(sample_train_averages['user'][user])
            # Avg_movie rating
            row.append(sample_train_averages['movie'][movie])

            # finalley, The actual Rating of this user-movie pair...
            row.append(rating)
            count = count + 1

            # add rows to the file opened..
            reg_data_file.write(','.join(map(str, row)))
            reg_data_file.write('\\n')
            if (count)%10000 == 0:
                # print('.'.join(map(str, row)))
```

```
print("Done for {} rows----- {}".format(count, datetime.now() - start))
```

```
print(datetime.now() - start)
```

File already exists you don't have to prepare again...
0:00:00.000997

Reading from the file to make a Train_dataframe

In [96]:

```
#reg_train = pd.read_csv('sample/small/reg_train.csv', names = ['user', 'movie', 'GAvg', 'sur1', 'sur2', 'sur3', 'sur4', 'sur5', 'smr1', 'smr2', 'smr3', 'smr4', 'smr5', 'UAvg', 'MAvg', 'rating'], header=None)
reg_train = pd.read_csv('reg_train.csv', names = ['user', 'movie', 'GAvg', 'sur1', 'sur2', 'sur3', 'sur4', 'sur5', 'smr1', 'smr2', 'smr3', 'smr4', 'smr5', 'UAvg', 'MAvg', 'rating'], header=None)
reg_train.head()
```

Out [96]:

	user	movie	GAvg	sur1	sur2	sur3	sur4	sur5	smr1	smr2	smr3	smr4	smr5	UAvg	MAvg	rating
0	53406	33	3.581679	4.0	5.0	5.0	4.0	1.0	5.0	2.0	5.0	3.0	1.0	3.370370	4.092437	4
1	99540	33	3.581679	5.0	5.0	5.0	4.0	5.0	3.0	4.0	4.0	3.0	5.0	3.555556	4.092437	3
2	99865	33	3.581679	5.0	5.0	4.0	5.0	3.0	5.0	4.0	4.0	5.0	4.0	3.714286	4.092437	5
3	101620	33	3.581679	2.0	3.0	5.0	5.0	4.0	4.0	3.0	3.0	4.0	5.0	3.584416	4.092437	5
4	112974	33	3.581679	5.0	5.0	5.0	5.0	5.0	3.0	5.0	5.0	5.0	3.0	3.750000	4.092437	5

- **GAvg** : Average rating of all the ratings
- **Similar users rating of this movie:**
 - sur1, sur2, sur3, sur4, sur5 (top 5 similar users who rated that movie..)
- **Similar movies rated by this user:**
 - smr1, smr2, smr3, smr4, smr5 (top 5 similar movies rated by this movie..)
- **UAvg** : User's Average rating
- **MAvg** : Average rating of this movie
- **rating** : Rating of this movie by this user.

4.3.1.2 Featurizing test data

In [97]:

```
# get users, movies and ratings from the Sampled Test
sample_test_users, sample_test_movies, sample_test_ratings = sparse.find(sample_test_sparse_matrix)
```

In [98]:

```
sample_train_averages['global']
```

Out [98]:

3.581679377504138

In [99]:

```
start = datetime.now()

# if os.path.isfile('sample/small/reg_test.csv'):
# if os.path.isfile('reg_test.csv'):
#     print("It is already created...")
# else:

#     print('preparing {} tuples for the dataset..\\n'.format(len(sample_test_ratings)))
#     with open('reg_test.csv', mode='w') as reg_data_file:
#         count = 0
#         for (user, movie, rating) in zip(sample_test_users, sample_test_movies,
# sample_test_ratings):
#             st = datetime.now()

# ----- Ratings of "movie" by similar users of "user" -----
# print(user, movie)
# try:
#     # compute the similar Users of the "user"
#     user_sim = cosine_similarity(sample_train_sparse_matrix[user],
# sample_train_sparse_matrix).ravel()
#     top_sim_users = user_sim.argsort()[::-1][1:] # we are ignoring 'The User' from its
# similar users.
#     # get the ratings of most similar users for this movie
#     top_ratings = sample_train_sparse_matrix[top_sim_users, movie].toarray().ravel()
#     # we will make it's length "5" by adding movie averages to .
#     top_sim_users_ratings = list(top_ratings[top_ratings != 0][:5])
#     top_sim_users_ratings.extend([sample_train_averages['movie'][movie]]*(5 -
# len(top_sim_users_ratings)))
#     # print(top_sim_users_ratings, end="--")

# except (IndexError, KeyError):
#     # It is a new User or new Movie or there are no ratings for given user for sim:
# lar movies...
#     ##### Cold Start Problem #####
#     top_sim_users_ratings.extend([sample_train_averages['global']]*(5 -
# len(top_sim_users_ratings)))
#     # print(top_sim_users_ratings)
# except:
#     print(user, movie)
#     # we just want KeyErrors to be resolved. Not every Exception...
#     raise

# ----- Ratings by "user" to similar movies of "movie" -----
# ----
# try:
#     # compute the similar movies of the "movie"
#     movie_sim = cosine_similarity(sample_train_sparse_matrix[:,movie].T,
# sample_train_sparse_matrix.T).ravel()
#     top_sim_movies = movie_sim.argsort()[::-1][1:] # we are ignoring 'The User' from it
# s similar users.
#     # get the ratings of most similar movie rated by this user..
#     top_ratings = sample_train_sparse_matrix[user, top_sim_movies].toarray().ravel()
#     # we will make it's length "5" by adding user averages to.
#     top_sim_movies_ratings = list(top_ratings[top_ratings != 0][:5])
#     top_sim_movies_ratings.extend([sample_train_averages['user']
# [user]]*(5-len(top_sim_movies_ratings)))
#     # print(top_sim_movies_ratings)
# except (IndexError, KeyError):
#     # print(top_sim_movies_ratings, end=" : -- ")

# top_sim_movies_ratings.extend([sample_train_averages['global']]*(5-len(top_sim_movies_ratings)))
#     # print(top_sim_movies_ratings)
# except :
#     raise

# -----prepare the row to be stores in a file-----#
# row = list()
# # add usser and movie name first
# row.append(user)
# row.append(movie)
# row.append(sample_train_averages['global']) # first feature
# print(row)
# # next 5 features are similar users "movie" ratings
```

```

row.extend(top_sim_users_ratings)
#print(row)
# next 5 features are "user" ratings for similar_movies
row.extend(top_sim_movies_ratings)
#print(row)
# Avg_user rating
try:
    row.append(sample_train_averages['user'][user])
except KeyError:
    row.append(sample_train_averages['global'])
except:
    raise
#print(row)
# Avg_movie rating
try:
    row.append(sample_train_averages['movie'][movie])
except KeyError:
    row.append(sample_train_averages['global'])
except:
    raise
#print(row)
# finalley, The actual Rating of this user-movie pair...
row.append(rating)
#print(row)
count = count + 1

# add rows to the file opened..
reg_data_file.write(','.join(map(str, row)))
#print(','.join(map(str, row)))
reg_data_file.write('\n')
if (count)%1000 == 0:
    #print(','.join(map(str, row)))
    print("Done for {} rows----- {}".format(count, datetime.now() - start))
print("",datetime.now() - start)

```

It is already created...

Reading from the file to make a test dataframe

In [100]:

```

reg_test_df = pd.read_csv('reg_test.csv', names = ['user', 'movie', 'GAvg', 'sur1', 'sur2', 'sur3',
'sur4', 'sur5',
'smr1', 'smr2', 'smr3', 'smr4', 'smr5',
'UAvg', 'MAvg', 'rating'], header=None)

reg_test_df.head(4)

```

Out[100]:

	user	movie	GAvg	sur1	sur2	sur3	sur4	sur5	smr1	smr2	smr3	smr4	smr5
0	808635	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679
1	941866	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679
2	1737912	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679
3	1849204	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679

- **GAvg** : Average rating of all the ratings
- **Similar users rating of this movie:**
 - sur1, sur2, sur3, sur4, sur5 (top 5 simiular users who rated that movie..)
- **Similar movies rated by this user:**
 - smr1, smr2, smr3, smr4, smr5 (top 5 simiular movies rated by this movie..)
- **UAvg** : User AVerage rating
- **MAvg** : Average rating of this movie

- **rating** : Rating of this movie by this user.

4.3.2 Transforming data for Surprise models

In [101]:

```
from surprise import Reader, Dataset
```

4.3.2.1 Transforming train data

- We can't give raw data (movie, user, rating) to train the model in Surprise library.
- They have a separate format for TRAIN and TEST data, which will be useful for training the models like SVD, KNNBaseLineOnly....etc., in Surprise.
- We can form the trainset from a file, or from a Pandas DataFrame.
http://surprise.readthedocs.io/en/stable/getting_started.html#load-dom-dataframe-py

In [102]:

```
# It is to specify how to read the dataframe.
# for our dataframe, we don't have to specify anything extra..
reader = Reader(rating_scale=(1,5))

# create the traindata from the dataframe...
train_data = Dataset.load_from_df(reg_train[['user', 'movie', 'rating']], reader)

# build the trainset from traindata.. It is of dataset format from surprise library..
trainset = train_data.build_full_trainset()
```

4.3.2.2 Transforming test data

- Testset is just a list of (user, movie, rating) tuples. (Order in the tuple is important)

In [103]:

```
testset = list(zip(reg_test_df.user.values, reg_test_df.movie.values, reg_test_df.rating.values))
testset[:3]
```

Out[103]:

```
[(808635, 71, 5), (941866, 71, 4), (1737912, 71, 3)]
```

4.4 Applying Machine Learning models

- Global dictionary that stores rmse and mape for all the models....
 - It stores the metrics in a dictionary of dictionaries

keys : model names(string)

value: dict(**key** : metric, **value** : value)

In [104]:

```
models_evaluation_train = dict()
models_evaluation_test = dict()

models_evaluation_train, models_evaluation_test
```

```
models_evaluation_train, models_evaluation_test
```

```
Out[104]:
```

```
({}, {})
```

Utility functions for running regression models

```
In [105]:
```

```
# to get rmse and mape given actual and predicted ratings..
def get_error_metrics(y_true, y_pred):
    rmse = np.sqrt(np.mean([ (y_true[i] - y_pred[i])**2 for i in range(len(y_pred)) ]))
    mape = np.mean(np.abs( (y_true - y_pred)/y_true )) * 100
    return rmse, mape

#####
#####

def run_xgboost(algo, x_train, y_train, x_test, y_test, verbose=True):
    """
    It will return train_results and test_results
    """

    # dictionaries for storing train and test results
    train_results = dict()
    test_results = dict()

    # fit the model
    print('Training the model..')
    start =datetime.now()
    algo.fit(x_train, y_train, eval_metric = 'rmse')
    print('Done. Time taken : {} \n'.format(datetime.now()-start))
    print('Done \n')

    # from the trained model, get the predictions....
    print('Evaluating the model with TRAIN data...')
    start =datetime.now()
    y_train_pred = algo.predict(x_train)
    # get the rmse and mape of train data...
    rmse_train, mape_train = get_error_metrics(y_train.values, y_train_pred)

    # store the results in train_results dictionary..
    train_results = {'rmse': rmse_train,
                    'mape' : mape_train,
                    'predictions' : y_train_pred}

    #####
    # get the test data predictions and compute rmse and mape
    print('Evaluating Test data')
    y_test_pred = algo.predict(x_test)
    rmse_test, mape_test = get_error_metrics(y_true=y_test.values, y_pred=y_test_pred)
    # store them in our test results dictionary.
    test_results = {'rmse': rmse_test,
                   'mape' : mape_test,
                   'predictions':y_test_pred}

    if verbose:
        print('\nTEST DATA')
        print('-'*30)
        print('RMSE : ', rmse_test)
        print('MAPE : ', mape_test)

    # return these train and test results...
    return train_results, test_results
```

Utility functions for Surprise modes

In [106]:

```
# it is just to make sure that all of our algorithms should produce same results
# everytime they run...

my_seed = 15
random.seed(my_seed)
np.random.seed(my_seed)

#####
# get (actual_list , predicted_list) ratings given list
# of predictions (prediction is a class in Surprise).
#####
def get_ratings(predictions):
    actual = np.array([pred.r_ui for pred in predictions])
    pred = np.array([pred.est for pred in predictions])

    return actual, pred

#####
# get 'rmse' and 'mape' , given list of prediction objects
#####
def get_errors(predictions, print_them=False):

    actual, pred = get_ratings(predictions)
    rmse = np.sqrt(np.mean((pred - actual)**2))
    mape = np.mean(np.abs(pred - actual)/actual)

    return rmse, mape*100

#####
# It will return predicted ratings, rmse and mape of both train and test data #
#####
def run_surprise(algo, trainset, testset, verbose=True):
    """
        return train_dict, test_dict

        It returns two dictionaries, one for train and the other is for test
        Each of them have 3 key-value pairs, which specify 'rmse', 'mape', and 'predicted ratings'.
    """
    start = datetime.now()
    # dictionaries that stores metrics for train and test..
    train = dict()
    test = dict()

    # train the algorithm with the trainset
    st = datetime.now()
    print('Training the model...')
    algo.fit(trainset)
    print('Done. time taken : {} \n'.format(datetime.now()-st))

    # ----- Evaluating train data-----#
    st = datetime.now()
    print('Evaluating the model with train data..')
    # get the train predictions (list of prediction class inside Surprise)
    train_preds = algo.test(trainset.build_testset())
    # get predicted ratings from the train predictions..
    train_actual_ratings, train_pred_ratings = get_ratings(train_preds)
    # get 'rmse' and 'mape' from the train predictions.
    train_rmse, train_mape = get_errors(train_preds)
    print('time taken : {}'.format(datetime.now()-st))

    if verbose:
        print('-'*15)
        print('Train Data')
        print('-'*15)
        print("RMSE : {}\n\nMAPE : {}\n".format(train_rmse, train_mape))

    #store them in the train dictionary
    if verbose:
        print('adding train results in the dictionary..')
    train['rmse'] = train_rmse
    train['mape'] = train_mape
    train['predictions'] = train_pred_ratings
```

```

#----- Evaluating Test data-----#
st = datetime.now()
print('\nEvaluating for test data...')
# get the predictions( list of prediction classes) of test data
test_preds = algo.test(testset)
# get the predicted ratings from the list of predictions
test_actual_ratings, test_pred_ratings = get_ratings(test_preds)
# get error metrics from the predicted and actual ratings
test_rmse, test_mape = get_errors(test_preds)
print('time taken : {}'.format(datetime.now()-st))

if verbose:
    print('-'*15)
    print('Test Data')
    print('-'*15)
    print("RMSE : {}\nMAPE : {}".format(test_rmse, test_mape))
# store them in test dictionary
if verbose:
    print('storing the test results in test dictionary...')
test['rmse'] = test_rmse
test['mape'] = test_mape
test['predictions'] = test_pred_ratings

print('\n'+ '-'*45)
print('Total time taken to run this algorithm :', datetime.now() - start)

# return two dictionaries train and test
return train, test

```

4.4.1 XGBoost with initial 13 features

In [107]:

```
import xgboost as xgb
```

In [108]:

```

# prepare Train data
x_train = reg_train.drop(['user', 'movie', 'rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user', 'movie', 'rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
first_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=100)
train_results, test_results = run_xgboost(first_xgb, x_train, y_train, x_test, y_test)

# store the results in models_evaluations dictionaries
models_evaluation_train['first_algo'] = train_results
models_evaluation_test['first_algo'] = test_results

xgb.plot_importance(first_xgb)
plt.show()

```

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version
if getattr(data, 'base', None) is not None and \

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version
data.base is not None and isinstance(data, np.ndarray) \

Training the model..

[12:24:56] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.

Done. Time taken : 0:00:02.453395

Done


Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.076373581778953

MAPE : 34.48223172520999

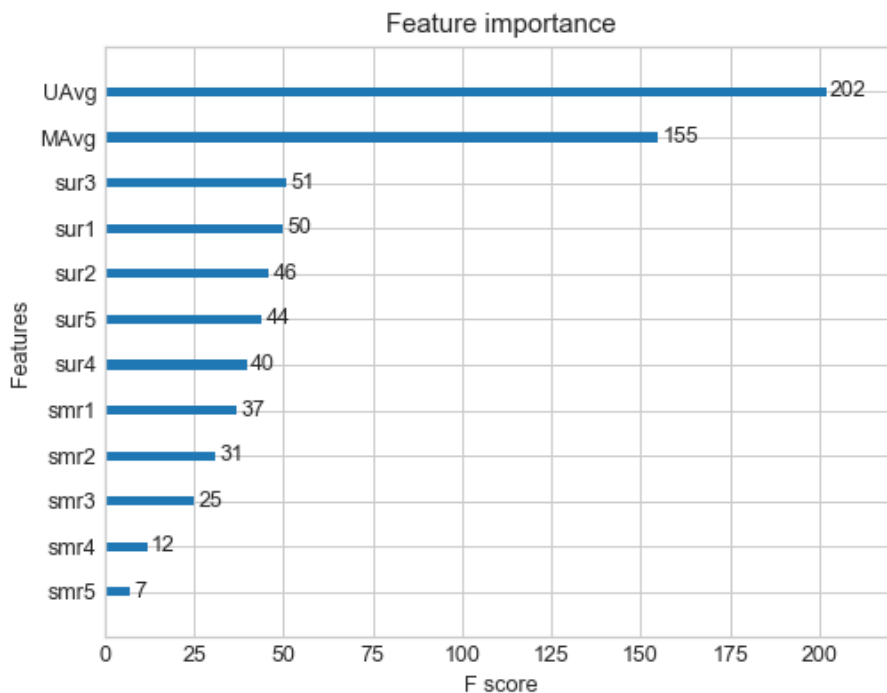

4.4.2 Surprise BaselineModel

In [109]:

```
from surprise import BaselineOnly
```

Predicted_rating : (baseline prediction)

-

http://surprise.readthedocs.io/en/stable/basic_algorithms.html#surprise.prediction_algorithm_baseline_only.BaselineOnly

$$\hat{r}_{ui} = b_{ui} = \mu + b_u + b_i$$

- μ : Average of all trainings in training data.
- b_u : User bias
- b_i : Item bias (movie biases)

Optimization function (Least Squares Problem)

-

http://surprise.readthedocs.io/en/stable/prediction_algorithms.html#baselines-estimates-configuration

$$\sum_{(u,i) \in R_{train}} \left(r_{ui} - (\mu + b_u + b_i) \right)^2 + \lambda (b_u^2 + b_i^2)$$

[mimimize] { b_u, b_i }

In [110]:

```
# options are to specify.., how to compute those user and item biases
bsl_options = {'method': 'sgd',
               'learning_rate': .001
              }
bsl_algo = BaselineOnly(bsl_options=bsl_options)
# run this algorithm.., It will return the train and test results..
bsl_train_results, bsl_test_results = run_surprise(bsl_algo, trainset, testset, verbose=True)

# Just store these error metrics in our models_evaluation datastructure
models_evaluation_train['bsl_algo'] = bsl_train_results
models_evaluation_test['bsl_algo'] = bsl_test_results
```

Training the model...

Estimating biases using sgd...

Done. time taken : 0:00:00.614292

Evaluating the model with train data..

time taken : 0:00:00.911763

Train Data

RMSE : 0.9347153928678286

MAPE : 29.389572652358183

adding train results in the dictionary..

Evaluating for test data...

time taken : 0:00:00.046863

Test Data

RMSE : 1.0730330260516174

MAPE : 35.04995544572911

storing the test results in test dictionary...

Total time taken to run this algorithm : 0:00:01.572918

4.4.3 XGBoost with initial 13 features + Surprise Baseline predictor

Updating Train Data

In [111]:

```
# add our baseline_predicted value as our feature..
reg_train['bslpr'] = models_evaluation_train['bsl_algo']['predictions']
reg_train.head(2)
```

Out[111]:

	user	movie	GAvg	sur1	sur2	sur3	sur4	sur5	smr1	smr2	smr3	smr4	smr5	UAvg	MAvg	rating	bslpr
0	53406	33	3.581679	4.0	5.0	5.0	4.0	1.0	5.0	2.0	5.0	3.0	1.0	3.370370	4.092437	4	3.898982
1	99540	33	3.581679	5.0	5.0	5.0	4.0	5.0	3.0	4.0	4.0	3.0	5.0	3.555556	4.092437	3	3.371403

Updating Test Data

In [112]:

```
# add that baseline predicted ratings with Surprise to the test data as well
reg_test_df['bslpr'] = models_evaluation_test['bsl_algo']['predictions']
```

```
reg_test_df.head(2)
```

Out[112]:

	user	movie	GAvg	sur1	sur2	sur3	sur4	sur5	smr1	smr2	smr3	smr4	smr5
0	808635	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679
1	941866	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679

In [113]:

```
# prepare train data
x_train = reg_train.drop(['user', 'movie', 'rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user', 'movie', 'rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
xgb_bsl = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=100)
train_results, test_results = run_xgboost(xgb_bsl, x_train, y_train, x_test, y_test)

# store the results in models_evaluations dictionaries
models_evaluation_train['xgb_bsl'] = train_results
models_evaluation_test['xgb_bsl'] = test_results

xgb.plot_importance(xgb_bsl)
plt.show()
```

Training the model..

```
[12:31:34] WARNING: C:/Jenkins/workspace/xgboost-
win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of
reg:squarederror.
```

```
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is
deprecated and will be removed in a future version
  if getattr(data, 'base', None) is not None and \
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is
deprecated and will be removed in a future version
  data.base is not None and isinstance(data, np.ndarray) \
```

Done. Time taken : 0:00:03.861306

Done


Evaluating the model with TRAIN data...


Evaluating Test data

TEST DATA

RMSE : 1.0765603714651855

MAPE : 34.4648051883444

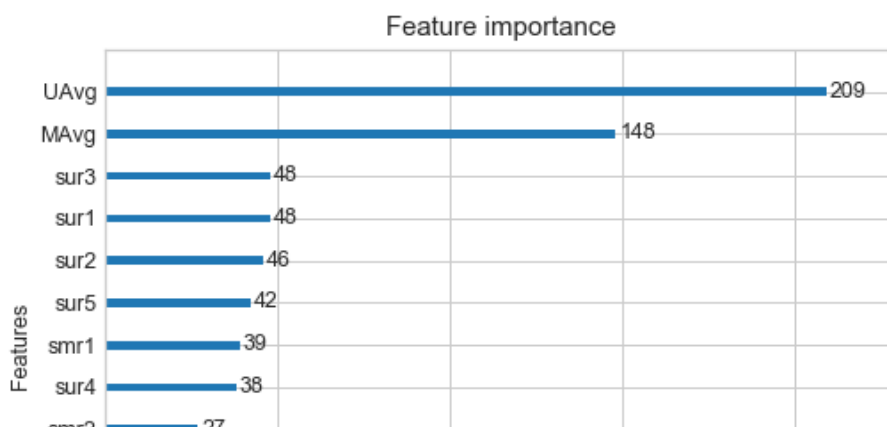

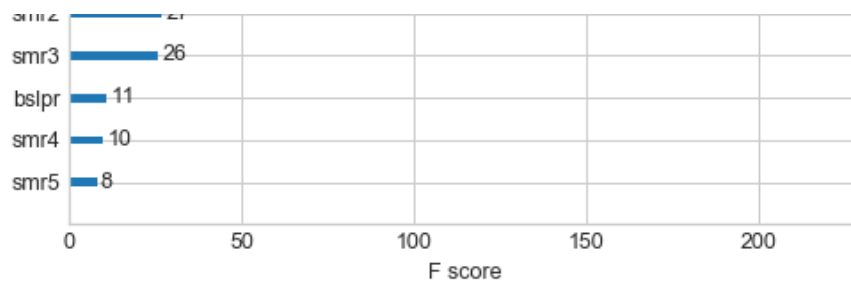

4.4.4 Surprise KNNBaseline predictor

In [114]:

```
from surprise import KNNBaseline
```

- KNN BASELINE
 - http://surprise.readthedocs.io/en/stable/knn_inspired.html#surprise.prediction_algorithms.knns.KNNBaseline
- PEARSON_BASELINE SIMILARITY
 - http://surprise.readthedocs.io/en/stable/similarities.html#surprise.similarities.pearson_baseline
- SHRINKAGE
 - 2.2 Neighborhood Models in <http://courses.ischool.berkeley.edu/i290-dm/s11/SECURE/a1-koren.pdf>
- **predicted Rating : (based on User-User similarity)**

$$\hat{r}_{ui} = b_{ui} + \frac{\sum_{v \in N^k_i(u)} \text{sim}(u, v) \cdot (r_{vi} - b_{vi})}{\sum_{v \in N^k_i(u)} \text{sim}(u, v)}$$

- b_{ui} - Baseline prediction of (user, movie) rating
- $N^k_i(u)$ - Set of **K** similar users (neighbours) of **user (u)** who rated **movie(i)**
- $\text{sim}(u, v)$ - **Similarity** between users **u** and **v**
 - Generally, it will be cosine similarity or Pearson correlation coefficient.
 - But we use **shrunk Pearson-baseline correlation coefficient**, which is based on the pearsonBaseline similarity (we take base line predictions instead of mean rating of user/item)

- **Predicted rating (based on Item Item similarity):**
$$\hat{r}_{ui} = b_{ui} + \frac{\sum_{j \in N^k_u(i)} \text{sim}(i, j) \cdot (r_{uj} - b_{uj})}{\sum_{j \in N^k_u(i)} \text{sim}(i, j)}$$
 - **Notations follows same as above (user user based predicted rating)**

4.4.4.1 Surprise KNNBaseline with user user similarities

In [115]:

```
# we specify , how to compute similarities and what to consider with sim_options to our algorithm
sim_options = {'user_based': True,
               'name': 'pearson_baseline',
               'shrinkage': 100,
               'min_support': 2
              }

# we keep other parameters like regularization parameter and learning_rate as default values.
bsl_options = {'method': 'sgd'}

knn_bsl_u = KNNBaseline(k=40, sim_options = sim_options, bsl_options = bsl_options)
knn_bsl_u_train_results, knn_bsl_u_test_results = run_surprise(knn_bsl_u, trainset, testset,
verbose=True)

# Just store these error metrics in our models_evaluation datastructure
models_evaluation_train['knn_bsl_u'] = knn_bsl_u_train_results
models_evaluation_test['knn_bsl_u'] = knn_bsl_u_test_results
```



```
models_evaluation_test['knn_bsl_u'] = knn_bsl_u_test_results
```

```
Training the model...
Estimating biases using sgd...
Computing the pearson_baseline similarity matrix...
Done computing similarity matrix.
Done. time taken : 0:00:34.208364
```

```
Evaluating the model with train data..
time taken : 0:01:27.484979
```

```
-----
Train Data
```

```
-----
RMSE : 0.33642097416508826
```

```
MAPE : 9.145093375416348
```

```
adding train results in the dictionary..
```

```
Evaluating for test data...
time taken : 0:00:00.078131
```

```
-----
Test Data
```

```
-----
RMSE : 1.0726493739667242
```

```
MAPE : 35.02094499698424
```

```
storing the test results in test dictionary...
```

```
-----
Total time taken to run this algorithm : 0:02:01.771474
```

4.4.4.2 Surprise KNNBaseline with movie movie similarities

```
In [116]:
```

```
# we specify , how to compute similarities and what to consider with sim_options to our algorithm
# 'user_based' : Fals => this considers the similarities of movies instead of users

sim_options = {'user_based' : False,
               'name': 'pearson_baseline',
               'shrinkage': 100,
               'min_support': 2
              }
# we keep other parameters like regularization parameter and learning_rate as default values.
bsl_options = {'method': 'sgd'}

knn_bsl_m = KNNBaseline(k=40, sim_options = sim_options, bsl_options = bsl_options)

knn_bsl_m_train_results, knn_bsl_m_test_results = run_surprise(knn_bsl_m, trainset, testset,
verbose=True)

# Just store these error metrics in our models_evaluation datastructure
models_evaluation_train['knn_bsl_m'] = knn_bsl_m_train_results
models_evaluation_test['knn_bsl_m'] = knn_bsl_m_test_results
```

```
Training the model...
Estimating biases using sgd...
Computing the pearson_baseline similarity matrix...
Done computing similarity matrix.
Done. time taken : 0:00:01.271404
```

```
Evaluating the model with train data..
time taken : 0:00:09.523003
```

```
-----
Train Data
```

```
-----
RMSE : 0.32584796251610554
```

```
MAPE : 8.447062581998374
```

```
adding train results in the dictionary..
```

```
Evaluating for test data...
```

```
time taken : 0:00:00.069807
```

```
-----
```

```
Test Data
```

```
-----
```

```
RMSE : 1.072758832653683
```

```
MAPE : 35.02269653015042
```

```
storing the test results in test dictionary...
```

```
-----
```

```
Total time taken to run this algorithm : 0:00:10.864214
```

4.4.5 XGBoost with initial 13 features + Surprise Baseline predictor + KNNBaseline predictor

- First we will run XGBoost with predictions from both KNN's (that uses User_User and Item_Item similarities along with our previous features.
- Then we will run XGBoost with just predictions from both knn models and predictions from our baseline model.

Preparing Train data

```
In [117]:
```

```
# add the predicted values from both knns to this dataframe
reg_train['knn_bsl_u'] = models_evaluation_train['knn_bsl_u']['predictions']
reg_train['knn_bsl_m'] = models_evaluation_train['knn_bsl_m']['predictions']

reg_train.head(2)
```

```
Out[117]:
```

	user	movie	GAvg	sur1	sur2	sur3	sur4	sur5	smr1	smr2	smr3	smr4	smr5	UAvg	MAvg	rating	bslpr
0	53406	33	3.581679	4.0	5.0	5.0	4.0	1.0	5.0	2.0	5.0	3.0	1.0	3.370370	4.092437	4	3.898982
1	99540	33	3.581679	5.0	5.0	5.0	4.0	5.0	3.0	4.0	4.0	3.0	5.0	3.555556	4.092437	3	3.371403

Preparing Test data

```
In [118]:
```

```
reg_test_df['knn_bsl_u'] = models_evaluation_test['knn_bsl_u']['predictions']
reg_test_df['knn_bsl_m'] = models_evaluation_test['knn_bsl_m']['predictions']

reg_test_df.head(2)
```

```
Out[118]:
```

	user	movie	GAvg	sur1	sur2	sur3	sur4	sur5	smr1	smr2	smr3	smr4	smr5
0	808635	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679
1	941866	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679

```
In [119]:
```

```
# prepare the train data....
x_train = reg_train.drop(['user', 'movie', 'rating'], axis=1)
y_train = reg_train['rating']

# prepare the train data....
x_test = reg_test_df.drop(['user', 'movie', 'rating'], axis=1)
```

```

# declare the model
xgb_knn_bsl = xgb.XGBRegressor(n_jobs=10, random_state=15)
train_results, test_results = run_xgboost(xgb_knn_bsl, x_train, y_train, x_test, y_test)

# store the results in models_evaluation dictionaries
models_evaluation_train['xgb_knn_bsl'] = train_results
models_evaluation_test['xgb_knn_bsl'] = test_results

xgb.plot_importance(xgb_knn_bsl)
plt.show()

```

Training the model..

[12:37:18] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version
 if getattr(data, 'base', None) is not None and \

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version
 data.base is not None and isinstance(data, np.ndarray) \

Done. Time taken : 0:00:04.437773


Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

 RMSE : 1.0767793575625662
 MAPE : 34.44745951378593

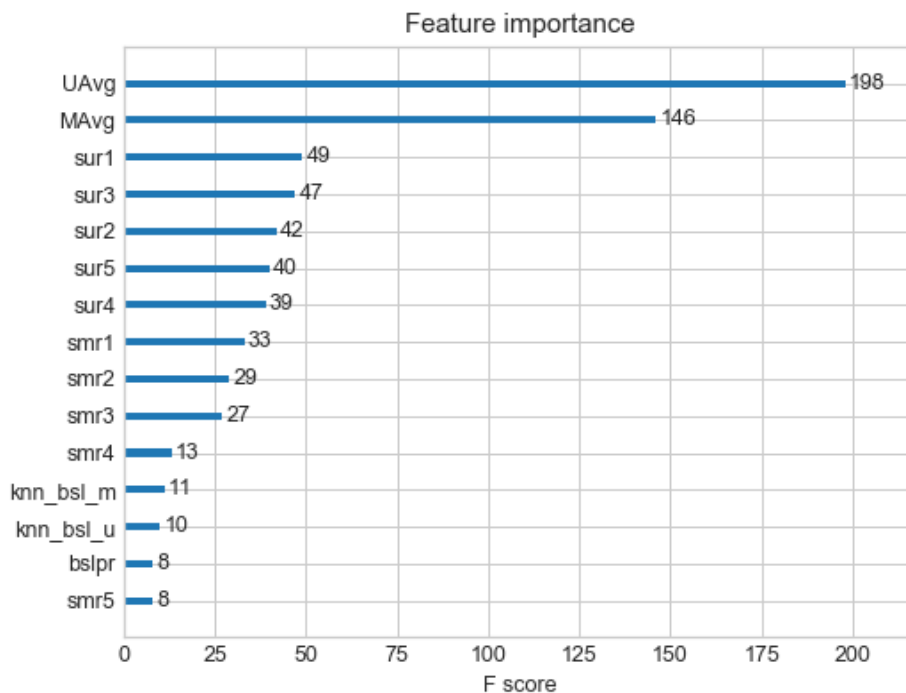

4.4.6 Matrix Factorization Techniques

4.4.6.1 SVD Matrix Factorization User Movie intractions

In [120]:

```
from surprise import SVD
```

http://surprise.readthedocs.io/en/stable/matrix_factorization.html#surprise.prediction_algorithms.matrix_factorization.SVD

- Predicted Rating :

- $\hat{r}_{ui} = \mu + b_u + b_i + q_i^T p_u$

- q_i - Representation of item(movie) in latent factor space

- p_u - Representation of user in new latent factor space

- A BASIC MATRIX FACTORIZATION MODEL in [https://datajobs.com/data-science-repo/Recommender-Systems-\[Netflix\].pdf](https://datajobs.com/data-science-repo/Recommender-Systems-[Netflix].pdf)

- Optimization problem with user item interactions and regularization (to avoid overfitting)

- $\sum_{\{ui\} \in R_{\{train\}}} \left(r_{ui} - \hat{r}_{ui} \right)^2 +$

$\lambda (b_i^2 + b_u^2 + \|q_i\|^2 + \|p_u\|^2)$

In [121]:

```
# initialize the model
svd = SVD(n_factors=100, biased=True, random_state=15, verbose=True)
svd_train_results, svd_test_results = run_surprise(svd, trainset, testset, verbose=True)

# Just store these error metrics in our models_evaluation datastructure
models_evaluation_train['svd'] = svd_train_results
models_evaluation_test['svd'] = svd_test_results
```

Training the model...

Processing epoch 0
Processing epoch 1
Processing epoch 2
Processing epoch 3
Processing epoch 4
Processing epoch 5
Processing epoch 6
Processing epoch 7
Processing epoch 8
Processing epoch 9
Processing epoch 10
Processing epoch 11
Processing epoch 12
Processing epoch 13
Processing epoch 14
Processing epoch 15
Processing epoch 16
Processing epoch 17
Processing epoch 18
Processing epoch 19
Done. time taken : 0:00:08.519727

Evaluating the model with train data..

time taken : 0:00:01.236383

Train Data

RMSE : 0.6574721240954099

MAPE : 19.704901088660478

adding train results in the dictionary..

```

Evaluating for test data...
time taken : 0:00:00.070095
-----
Test Data
-----
RMSE : 1.0726046873826458

MAPE : 35.01953535988152

storing the test results in test dictionary...

-----
Total time taken to run this algorithm : 0:00:09.828207

```

4.4.6.2 SVD Matrix Factorization with implicit feedback from user (user rated movies)

In [122]:

```
from surprise import SVDpp
```

- ----> 2.5 Implicit Feedback in <http://courses.ischool.berkeley.edu/i290-dm/s11/SECURE/a1-koren.pdf>

- Predicted Rating :

$$- \text{ } \hat{r}_{ui} = \mu + b_u + b_i + q_i^T \left(p_u + \frac{1}{|I_u|} \sum_{j \in I_u} y_j \right)$$

- I_u --- the set of all items rated by user u
- y_j --- Our new set of item factors that capture implicit ratings.

- Optimization problem with user item interactions and regularization (to avoid overfitting)

$$- \text{ } \sum_{r_{ui} \in R_{\text{train}}} \left(r_{ui} - \hat{r}_{ui} \right)^2 +$$

$$\lambda (b_i^2 + b_u^2 + \|q_i\|^2 + \|p_u\|^2 + \|y_j\|^2)$$

In [123]:

```

# initialize the model
svdpp = SVDpp(n_factors=50, random_state=15, verbose=True)
svdpp_train_results, svdpp_test_results = run_surprise(svdpp, trainset, testset, verbose=True)

# Just store these error metrics in our models_evaluation datastructure
models_evaluation_train['svdpp'] = svdpp_train_results
models_evaluation_test['svdpp'] = svdpp_test_results

```

```

Training the model...
processing epoch 0
processing epoch 1
processing epoch 2
processing epoch 3
processing epoch 4
processing epoch 5
processing epoch 6
processing epoch 7
processing epoch 8
processing epoch 9
processing epoch 10
processing epoch 11
processing epoch 12
processing epoch 13
processing epoch 14
processing epoch 15
processing epoch 16

```

```

processing epoch 17
processing epoch 18
processing epoch 19
Done. time taken : 0:02:15.227811

Evaluating the model with train data..
time taken : 0:00:06.137834
-----
Train Data
-----
RMSE : 0.6032438403305899

MAPE : 17.49285063490268

adding train results in the dictionary..

Evaluating for test data...
time taken : 0:00:00.069874
-----
Test Data
-----
RMSE : 1.0728491944183447

MAPE : 35.03817913919887

storing the test results in test dictionary...

-----
Total time taken to run this algorithm : 0:02:21.435519

```

4.4.7 XgBoost with 13 features + Surprise Baseline + Surprise KNNbaseline + MF Techniques

Preparing Train data

In [124]:

```

# add the predicted values from both knns to this dataframe
reg_train['svd'] = models_evaluation_train['svd']['predictions']
reg_train['svdpp'] = models_evaluation_train['svdpp']['predictions']

reg_train.head(2)

```

Out[124]:

	user	movie	GAvg	sur1	sur2	sur3	sur4	sur5	smr1	smr2	...	smr4	smr5	UAvg	MAvg	rating	bslpr	kn
0	53406	33	3.581679	4.0	5.0	5.0	4.0	1.0	5.0	2.0	...	3.0	1.0	3.370370	4.092437	4	3.898982	3.5
1	99540	33	3.581679	5.0	5.0	5.0	4.0	5.0	3.0	4.0	...	3.0	5.0	3.555556	4.092437	3	3.371403	3.5

2 rows × 21 columns



Preparing Test data

In [125]:

```


reg_test_df['svd'] = models_evaluation_test['svd']['predictions']
reg_test_df['svdpp'] = models_evaluation_test['svdpp']['predictions']

reg_test_df.head(2)

```

Out[125]:

	user	movie	GAvg	sur1	sur2	sur3	sur4	sur5	smr1	smr2	...	smr4	smr5	
0	808635	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	...	3.581679	3.581679	3.5

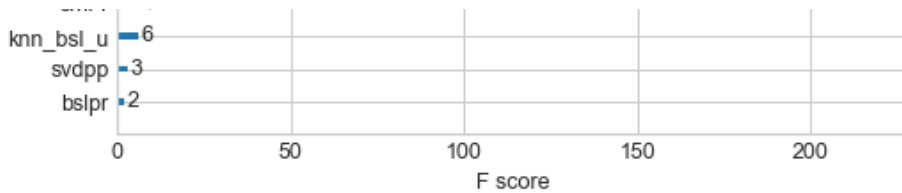

4.4.8 XgBoost with Surprise Baseline + Surprise KNNbaseline + MF Techniques

In [127]:

```
# prepare train data
x_train = reg_train[['knn_bsl_u', 'knn_bsl_m', 'svd', 'svdpp']]
y_train = reg_train['rating']

# test data
x_test = reg_test_df[['knn_bsl_u', 'knn_bsl_m', 'svd', 'svdpp']]
y_test = reg_test_df['rating']

xgb_all_models = xgb.XGBRegressor(n_jobs=10, random_state=15)
train_results, test_results = run_xgboost(xgb_all_models, x_train, y_train, x_test, y_test)

# store the results in models_evaluations dictionaries
models_evaluation_train['xgb_all_models'] = train_results
models_evaluation_test['xgb_all_models'] = test_results

xgb.plot_importance(xgb_all_models)
plt.show()
```

Training the model..

[12:43:42] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version
 if getattr(data, 'base', None) is not None and \n
 C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version
 data.base is not None and isinstance(data, np.ndarray) \n

Done. Time taken : 0:00:03.317137


Done


Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

 RMSE : 1.0753047860953797
 MAPE : 35.07058962951319

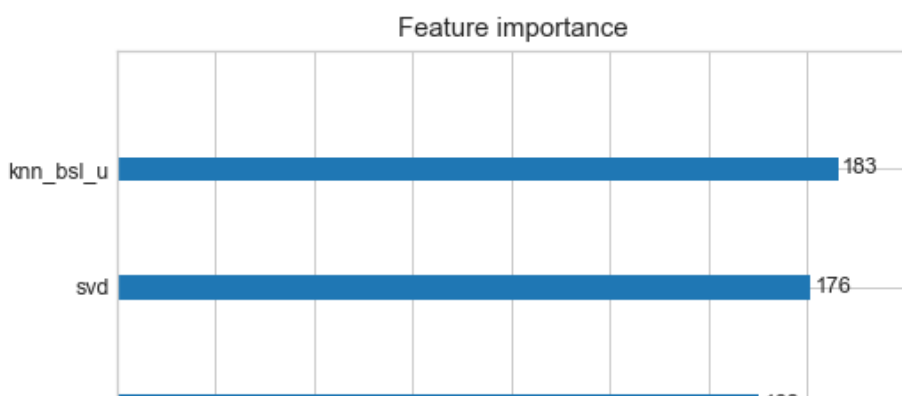

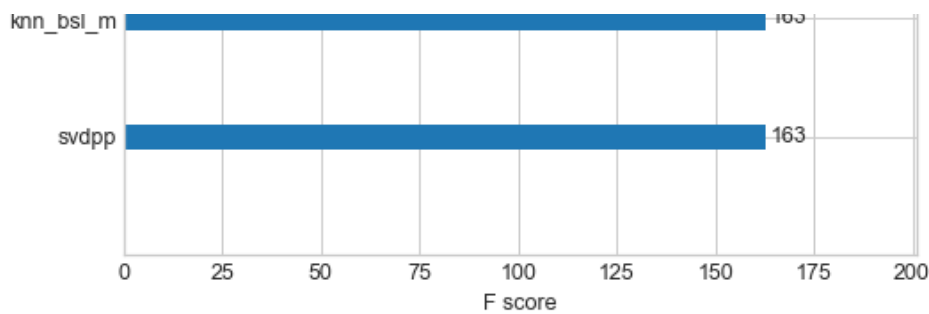

4.5 Comparison between all models

In [128]:

```
# Saving our TEST_RESULTS into a dataframe so that you don't have to run it again
pd.DataFrame(models_evaluation_test).to_csv('small_sample_results.csv')
models = pd.read_csv('small_sample_results.csv', index_col=0)
models.loc['rmse'].sort_values()
```

Out[128]:

```
svd                1.0726046873826458
knn_bsl_u          1.0726493739667242
knn_bsl_m          1.072758832653683
svdpp              1.0728491944183447
bsl_algo           1.0730330260516174
xgb_all_models     1.0753047860953797
first_algo         1.076373581778953
xgb_bsl            1.0765603714651855
xgb_knn_bsl        1.0767793575625662
xgb_final          1.0769599573828592
Name: rmse, dtype: object
```

In []:

```
print("-"*100)
print("Total time taken to run this entire notebook ( with saved files) is :",datetime.now()-globa
lstart)
```

5. Assignment

1.Instead of using 10K users and 1K movies to train the above models, use 25K users and 3K movies (or more) to train all of the above models. Report the RMSE and MAPE on the test data using larger amount of data and provide a comparison between various models as shown above.

NOTE: Please be patient as some of the code snippets make take many hours to complete execution.

2.Tune hyperparameters of all the Xgboost models above to improve the RMSE.

In []:

```
%%javascript
// Converts integer to roman numeral
// https://github.com/kmahelona/ipython_notebook_goodies
// https://kmahelona.github.io/ipython_notebook_goodies/ipython_notebook_toc.js
function romanize(num) {
    var lookup = {M:1000,CM:900,D:500,CD:400,C:100,XC:90,L:50,XL:40,X:10,IX:9,V:5,IV:4,I:1},
    roman = '',
    i;
    for ( i in lookup ) {
        while ( num >= lookup[i] ) {
            roman += i;
        }
    }
}
```

```

    num -= lookup[i];
  }
}
return roman;
}

// Builds a <ul> Table of Contents from all <headers> in DOM
function createTOC(){
  var toc = "";
  var level = 0;
  var levels = {}
  $('#toc').html('');

  $(".:header").each(function(i) {
    if (this.id=='tocheading') {return;}

    var titleText = this.innerHTML;
    var openLevel = this.tagName[1];

    if (levels[openLevel]){
      levels[openLevel] += 1;
    } else{
      levels[openLevel] = 1;
    }

    if (openLevel > level) {
      toc += (new Array(openLevel - level + 1)).join('<ul class="toc">');
    } else if (openLevel < level) {
      toc += (new Array(level - openLevel + 1)).join("</ul>");
      for (i=level;i>openLevel;i--){levels[i]=0;}
    }

    level = parseInt(openLevel);

    if (this.id==''){this.id = this.innerHTML.replace(/ /g,"-")}
    var anchor = this.id;

    toc += '<li><a style="text-decoration:none", href="#" + encodeURIComponent(anchor) + ">' + ti
    tleText + '</a></li>';

  });

  if (level) {
    toc += (new Array(level + 1)).join("</ul>");
  }

  $('#toc').append(toc);
};

// Executes the createToc function
setTimeout(function(){createTOC();},100);

// Rebuild to TOC every minute
setInterval(function(){createTOC();},60000);

```

5.1 Sampling Data

In [2]:

```
globalstart = datetime.now()
```

3.3.7 Finding Global average of all movie ratings, Average rating per user, and Average rating per movie

In [3]:

```
# get the user averages in dictionary (key: user_id/movie_id, value: avg rating)
```

```
def get_average_ratings(sparse_matrix, of_users):

    # average ratings of user/axes
    ax = 1 if of_users else 0 # 1 - User axes, 0 - Movie axes

    # ".A1" is for converting Column_Matrix to 1-D numpy array
    sum_of_ratings = sparse_matrix.sum(axis=ax).A1
    # Boolean matrix of ratings ( whether a user rated that movie or not)
    isRated = sparse_matrix!=0
    # no of ratings that each user OR movie..
    no_of_ratings = isRated.sum(axis=ax).A1

    # max_user and max_movie ids in sparse matrix
    u,m = sparse_matrix.shape
    # create a dictionary of users and their average ratings..
    average_ratings = { i : sum_of_ratings[i]/no_of_ratings[i]
                        for i in range(u if of_users else m)
                        if no_of_ratings[i] !=0}

    # return that dictionary of average ratings
    return average_ratings
```

5.1.1 Build sample train data from the train data

In [4]:

```
start = datetime.now()
path = "sample_train_sparse_matrix.npz"
if os.path.isfile(path):
    print("It is present in your pwd, getting it from disk....")
    # just get it from the disk instead of computing it
    sample_train_sparse_matrix = sparse.load_npz(path)
    print("DONE..")
else:
    # get 10k users and 1k movies from available data
    # For assignment I took need to use get 400k users and 10k movies from available data
    sample_train_sparse_matrix = get_sample_sparse_matrix(train_sparse_matrix, no_users=400000, no_
movies=10000,
                                                         path = path)

print(datetime.now() - start)
```

It is present in your pwd, getting it from disk....
DONE..
0:00:00.031918

In [66]:

```
sample_train_sparse_matrix.shape
```

Out[66]:

```
(2649405, 17724)
```

5.1.2 Build sample test data from the test data

In [5]:

```
start = datetime.now()

path = "sample_test_sparse_matrix.npz"
if os.path.isfile(path):
    print("It is present in your pwd, getting it from disk....")
    # just get it from the disk instead of computing it
    sample_test_sparse_matrix = sparse.load_npz(path)
    print("DONE..")
else:
    # get 5k users and 500 movies from available data
    sample_test_sparse_matrix = get_sample_sparse_matrix(test_sparse_matrix, no_users=5000, no_movi
es=500,
```

```
path = "sample/small/sample_test_sparse_matrix.npz"
)
print(datetime.now() - start)
It is present in your pwd, getting it from disk....
DONE..
0:00:00.025930
```

In [67]:

```
sample_test_sparse_matrix.shape
```

Out[67]:

```
(2648399, 17760)
```

5.2 Finding Global Average of all movie ratings, Average rating per User, and Average rating per Movie (from sampled train)

In [6]:

```
sample_train_averages = dict()
```

5.2.1 Finding Global Average of all movie ratings

In [7]:

```
# get the global average of ratings in our train set.
global_average = sample_train_sparse_matrix.sum()/sample_train_sparse_matrix.count_nonzero()
sample_train_averages['global'] = global_average
sample_train_averages
```

Out[7]:

```
{'global': 3.581679377504138}
```

5.2.2 Finding Average rating per User

In [8]:

```
sample_train_averages['user'] = get_average_ratings(sample_train_sparse_matrix, of_users=True)
print('\nAverage rating of user 1515220 : ',sample_train_averages['user'][1515220])
```

```
Average rating of user 1515220 : 3.9655172413793105
```

5.2.3 Finding Average rating per Movie

In [9]:

```
sample_train_averages['movie'] = get_average_ratings(sample_train_sparse_matrix, of_users=False)
print('\nAverage rating of movie 15153 : ',sample_train_averages['movie'][15153])
```

```
Average rating of movie 15153 : 2.6458333333333335
```

5.3 Featurizing data

In [10]:

```
print('\n No of ratings in Our Sampled train matrix is : {}'.format(sample_train_sparse_matrix.count_nonzero()))
print('\n No of ratings in Our Sampled test matrix is : {}'.format(sample_test_sparse_matrix.co
```

```
unt_nonzero()))
```

No of ratings in Our Sampled train matrix is : 129286

No of ratings in Our Sampled test matrix is : 7333

5.3.1 Featurizing data for regression problem

5.3.1.1 Featurizing train data

In [11]:

```
# get users, movies and ratings from our samples train sparse matrix
sample_train_users, sample_train_movies, sample_train_ratings =
sparse.find(sample_train_sparse_matrix)
```

In [12]:

```
#####
# It took me almost 10 hours to prepare this train dataset.#
#####
start = datetime.now()
if os.path.isfile('reg_train.csv'):
    print("File already exists you don't have to prepare again..." )
else:
    print('preparing {} tuples for the dataset..\\n'.format(len(sample_train_ratings)))
    with open('reg_train.csv', mode='w') as reg_data_file:
        count = 0
        for (user, movie, rating) in zip(sample_train_users, sample_train_movies,
sample_train_ratings):
            st = datetime.now()
            # print(user, movie)
            #----- Ratings of "movie" by similar users of "user" -----
            --
            # compute the similar Users of the "user"
            user_sim = cosine_similarity(sample_train_sparse_matrix[user],
sample_train_sparse_matrix).ravel()
            top_sim_users = user_sim.argsort()[::-1][1:] # we are ignoring 'The User' from its simi
lar users.
            # get the ratings of most similar users for this movie
            top_ratings = sample_train_sparse_matrix[top_sim_users, movie].toarray().ravel()
            # we will make it's length "5" by adding movie averages to .
            top_sim_users_ratings = list(top_ratings[top_ratings != 0][:5])
            top_sim_users_ratings.extend([sample_train_averages['movie'][movie]]*(5 -
len(top_sim_users_ratings)))
            # print(top_sim_users_ratings, end=" ")

            #----- Ratings by "user" to similar movies of "movie" -----
            ----
            # compute the similar movies of the "movie"
            movie_sim = cosine_similarity(sample_train_sparse_matrix[:,movie].T,
sample_train_sparse_matrix.T).ravel()
            top_sim_movies = movie_sim.argsort()[::-1][1:] # we are ignoring 'The User' from its si
milar users.
            # get the ratings of most similar movie rated by this user..
            top_ratings = sample_train_sparse_matrix[user, top_sim_movies].toarray().ravel()
            # we will make it's length "5" by adding user averages to.
            top_sim_movies_ratings = list(top_ratings[top_ratings != 0][:5])
            top_sim_movies_ratings.extend([sample_train_averages['user']
[user]]*(5-len(top_sim_movies_ratings)))
            # print(top_sim_movies_ratings, end=" : -- ")

            #-----prepare the row to be stores in a file-----#
            row = list()
            row.append(user)
            row.append(movie)
            # Now add the other features to this data...
            row.append(sample_train_averages['global']) # first feature
            # next 5 features are similar_users "movie" ratings
```

```

row.extend(top_sim_users_ratings)
# next 5 features are "user" ratings for similar_movies
row.extend(top_sim_movies_ratings)
# Avg_user rating
row.append(sample_train_averages['user'][user])
# Avg_movie rating
row.append(sample_train_averages['movie'][movie])

# finalley, The actual Rating of this user-movie pair...
row.append(rating)
count = count + 1

# add rows to the file opened..
reg_data_file.write(','.join(map(str, row)))
reg_data_file.write('\n')
if (count)%10000 == 0:
    # print(','.join(map(str, row)))
    print("Done for {} rows----- {}".format(count, datetime.now() - start))

print(datetime.now() - start)

```

File already exists you don't have to prepare again...
0:00:00.000999

Reading from the file to make a Train_dataframe

In [13]:

```

reg_train = pd.read_csv('reg_train.csv', names = ['user', 'movie', 'GAvg', 'sur1', 'sur2', 'sur3', 'sur4', 'sur5', 'smr1', 'smr2', 'smr3', 'smr4', 'smr5', 'UAvg', 'MAvg', 'rating'], header=None)
reg_train.head()

```

Out[13]:

	user	movie	GAvg	sur1	sur2	sur3	sur4	sur5	smr1	smr2	smr3	smr4	smr5	UAvg	MAvg	rating
0	53406	33	3.581679	4.0	5.0	5.0	4.0	1.0	5.0	2.0	5.0	3.0	1.0	3.370370	4.092437	4
1	99540	33	3.581679	5.0	5.0	5.0	4.0	5.0	3.0	4.0	4.0	3.0	5.0	3.555556	4.092437	3
2	99865	33	3.581679	5.0	5.0	4.0	5.0	3.0	5.0	4.0	4.0	5.0	4.0	3.714286	4.092437	5
3	101620	33	3.581679	2.0	3.0	5.0	5.0	4.0	4.0	3.0	3.0	4.0	5.0	3.584416	4.092437	5
4	112974	33	3.581679	5.0	5.0	5.0	5.0	5.0	3.0	5.0	5.0	5.0	3.0	3.750000	4.092437	5

5.3.1.2 Featurizing test data

In [14]:

```

# get users, movies and ratings from the Sampled Test
sample_test_users, sample_test_movies, sample_test_ratings = sparse.find(sample_test_sparse_matrix)

```

In [15]:

```
sample_train_averages['global']
```

Out[15]:

3.581679377504138

In [16]:

```

start = datetime.now()

if os.path.isfile('reg_test.csv'):
    print("It is already created...")
else:

```

```

else:

    print('preparing {} tuples for the dataset..\\n'.format(len(sample_test_ratings)))
    with open('reg_test.csv', mode='w') as reg_data_file:
        count = 0
        for (user, movie, rating) in zip(sample_test_users, sample_test_movies,
sample_test_ratings):
            st = datetime.now()

            #----- Ratings of "movie" by similar users of "user" -----
            #print(user, movie)
            try:
                # compute the similar Users of the "user"
                user_sim = cosine_similarity(sample_train_sparse_matrix[user],
sample_train_sparse_matrix).ravel()
                top_sim_users = user_sim.argsort()[::-1][1:] # we are ignoring 'The User' from its
similar users.
                # get the ratings of most similar users for this movie
                top_ratings = sample_train_sparse_matrix[top_sim_users, movie].toarray().ravel()
                # we will make it's length "5" by adding movie averages to .
                top_sim_users_ratings = list(top_ratings[top_ratings != 0][:5])
                top_sim_users_ratings.extend([sample_train_averages['movie'][movie]]*(5 -
len(top_sim_users_ratings)))
                # print(top_sim_users_ratings, end="--")

            except (IndexError, KeyError):
                # It is a new User or new Movie or there are no ratings for given user for top simi
lar movies...
                ##### Cold SStart Problem #####
                top_sim_users_ratings.extend([sample_train_averages['global']]*(5 -
len(top_sim_users_ratings)))
                #print(top_sim_users_ratings)
            except:
                print(user, movie)
                # we just want KeyErrors to be resolved. Not every Exception...
                raise

            #----- Ratings by "user" to similar movies of "movie" -----
            ----
            try:
                # compute the similar movies of the "movie"
                movie_sim = cosine_similarity(sample_train_sparse_matrix[:,movie].T,
sample_train_sparse_matrix.T).ravel()
                top_sim_movies = movie_sim.argsort()[::-1][1:] # we are ignoring 'The User' from it
s similar users.
                # get the ratings of most similar movie rated by this user..
                top_ratings = sample_train_sparse_matrix[user, top_sim_movies].toarray().ravel()
                # we will make it's length "5" by adding user averages to.
                top_sim_movies_ratings = list(top_ratings[top_ratings != 0][:5])
                top_sim_movies_ratings.extend([sample_train_averages['user']
[user]]*(5-len(top_sim_movies_ratings)))
                #print(top_sim_movies_ratings)
            except (IndexError, KeyError):
                #print(top_sim_movies_ratings, end=" : -- ")

            top_sim_movies_ratings.extend([sample_train_averages['global']]*(5-len(top_sim_movies_ratings)))
            #print(top_sim_movies_ratings)
            except :
                raise

            #-----prepare the row to be stores in a file-----#
            row = list()
            # add usser and movie name first
            row.append(user)
            row.append(movie)
            row.append(sample_train_averages['global']) # first feature
            #print(row)
            # next 5 features are similar_users "movie" ratings
            row.extend(top_sim_users_ratings)
            #print(row)
            # next 5 features are "user" ratings for similar_movies
            row.extend(top_sim_movies_ratings)
            #print(row)
            # Avg_user rating
            try:
                row.append(sample_train_averages['user'][user])

```

```

row.append(sample_train_averages[ user ][user])
except KeyError:
    row.append(sample_train_averages['global'])
except:
    raise
#print(row)
# Avg_movie rating
try:
    row.append(sample_train_averages['movie'][movie])
except KeyError:
    row.append(sample_train_averages['global'])
except:
    raise
#print(row)
# finalley, The actual Rating of this user-movie pair...
row.append(rating)
#print(row)
count = count + 1

# add rows to the file opened..
reg_data_file.write(','.join(map(str, row)))
#print(','.join(map(str, row)))
reg_data_file.write('\n')
if (count)%1000 == 0:
    #print(','.join(map(str, row)))
    print("Done for {} rows----- {}".format(count, datetime.now() - start))
print("",datetime.now() - start)

```

It is already created...

Reading from the file to make a test dataframe

In [17]:

```

reg_test_df = pd.read_csv('reg_test.csv', names = ['user', 'movie', 'GAvg', 'sur1', 'sur2', 'sur3',
'sur4', 'sur5',
'smr1', 'smr2', 'smr3', 'smr4', 'smr5',
'UAvg', 'MAvg', 'rating'], header=None)

reg_test_df.head(4)

```

Out[17]:

	user	movie	GAvg	sur1	sur2	sur3	sur4	sur5	smr1	smr2	smr3	smr4	smr5
0	808635	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679
1	941866	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679
2	1737912	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679
3	1849204	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679

5.3.2 Transforming data for Surprise models

In [18]:

```

from surprise import Reader, Dataset

```

In [19]:

```

# It is to specify how to read the dataframe.
# for our dataframe, we don't have to specify anything extra..
reader = Reader(rating_scale=(1,5))

# create the traindata from the dataframe...
train_data = Dataset.load_from_df(reg_train[['user', 'movie', 'rating']], reader)

# build the trainset from traindata.. It is of dataset format from surprise library..
trainset = train_data.build_full_trainset()

```


5.3.2.2 Transforming test data

In [20]:

```
testset = list(zip(reg_test_df.user.values, reg_test_df.movie.values, reg_test_df.rating.values))
testset[:3]
```

Out[20]:

```
[(808635, 71, 5), (941866, 71, 4), (1737912, 71, 3)]
```

5.4 Applying Machine Learning models

In [21]:

```
models_evaluation_train = dict()
models_evaluation_test = dict()

models_evaluation_train, models_evaluation_test
```

Out[21]:

```
({}, {})
```

Utility functions for running regression models

In [22]:

```
# to get rmse and mape given actual and predicted ratings..
def get_error_metrics(y_true, y_pred):
    rmse = np.sqrt(np.mean([ (y_true[i] - y_pred[i])**2 for i in range(len(y_pred)) ]))
    mape = np.mean(np.abs( (y_true - y_pred)/y_true )) * 100
    return rmse, mape

#####
#####
def run_xgboost(algo, x_train, y_train, x_test, y_test, verbose=True):
    """
    It will return train_results and test_results
    """

    # dictionaries for storing train and test results
    train_results = dict()
    test_results = dict()

    # fit the model
    print('Training the model..')
    start =datetime.now()
    algo.fit(x_train, y_train, eval_metric = 'rmse')
    print('Done. Time taken : {} \n'.format(datetime.now()-start))
    print('Done \n')

    # from the trained model, get the predictions....
    print('Evaluating the model with TRAIN data...')
    start =datetime.now()
    y_train_pred = algo.predict(x_train)
    # get the rmse and mape of train data...
    rmse_train, mape_train = get_error_metrics(y_train.values, y_train_pred)

    # store the results in train_results dictionary..
    train_results = {'rmse': rmse_train,
                    'mape' : mape_train,
                    'predictions' : y_train_pred}

    #####
    # get the test data predictions and compute rmse and mape
    print('Evaluating Test data')
    y_test_pred = algo.predict(x_test)
    rmse_test, mape_test = get_error_metrics(y_true=y_test.values, y_pred=y_test_pred)
```

```

# store them in our test results dictionary.
test_results = {'rmse': rmse_test,
                'mape' : mape_test,
                'predictions':y_test_pred}

if verbose:
    print('\nTEST DATA')
    print('-'*30)
    print('RMSE : ', rmse_test)
    print('MAPE : ', mape_test)

# return these train and test results...
return train_results, test_results

```

Utility functions for Surprise modes

In [23]:

```

# it is just to make sure that all of our algorithms should produce same results
# everytime they run...

my_seed = 15
random.seed(my_seed)
np.random.seed(my_seed)

#####
# get (actual_list , predicted_list) ratings given list
# of predictions (prediction is a class in Surprise).
#####
def get_ratings(predictions):
    actual = np.array([pred.r_ui for pred in predictions])
    pred = np.array([pred.est for pred in predictions])

    return actual, pred

#####
# get 'rmse' and 'mape' , given list of prediction objects
#####
def get_errors(predictions, print_them=False):

    actual, pred = get_ratings(predictions)
    rmse = np.sqrt(np.mean((pred - actual)**2))
    mape = np.mean(np.abs(pred - actual)/actual)

    return rmse, mape*100

#####
# It will return predicted ratings, rmse and mape of both train and test data #
#####
def run_surprise(algo, trainset, testset, verbose=True):
    """
        return train_dict, test_dict

        It returns two dictionaries, one for train and the other is for test
        Each of them have 3 key-value pairs, which specify 'rmse', 'mape', and 'predicted ratings'.
    """
    start = datetime.now()
    # dictionaries that stores metrics for train and test..
    train = dict()
    test = dict()

    # train the algorithm with the trainset
    st = datetime.now()
    print('Training the model...')
    algo.fit(trainset)
    print('Done. time taken : {} \n'.format(datetime.now()-st))

    # ----- Evaluating train data-----#
    st = datetime.now()
    print('Evaluating the model with train data..')
    # get the train predictions (list of prediction class inside Surprise)
    train_preds = algo.test(trainset.build_testset())
    # get predicted ratings from the train predictions..
    train_actual_ratings, train_pred_ratings = get_ratings(train_preds)
    # get 'rmse' and 'mape' from the train predictions.

```

```

# get rmse and mape from the train predictions
train_rmse, train_mape = get_errors(train_preds)
print('time taken : {}'.format(datetime.now()-st))

if verbose:
    print('-'*15)
    print('Train Data')
    print('-'*15)
    print("RMSE : {}\nMAPE : {}".format(train_rmse, train_mape))

#store them in the train dictionary
if verbose:
    print('adding train results in the dictionary..')
train['rmse'] = train_rmse
train['mape'] = train_mape
train['predictions'] = train_pred_ratings

#----- Evaluating Test data-----#
st = datetime.now()
print('\nEvaluating for test data...')
# get the predictions( list of prediction classes) of test data
test_preds = algo.test(testset)
# get the predicted ratings from the list of predictions
test_actual_ratings, test_pred_ratings = get_ratings(test_preds)
# get error metrics from the predicted and actual ratings
test_rmse, test_mape = get_errors(test_preds)
print('time taken : {}'.format(datetime.now()-st))

if verbose:
    print('-'*15)
    print('Test Data')
    print('-'*15)
    print("RMSE : {}\nMAPE : {}".format(test_rmse, test_mape))
# store them in test dictionary
if verbose:
    print('storing the test results in test dictionary..')
test['rmse'] = test_rmse
test['mape'] = test_mape
test['predictions'] = test_pred_ratings

print('\n'+ '-'*45)
print('Total time taken to run this algorithm :', datetime.now() - start)

# return two dictionaries train and test
return train, test

```

5.4.1 XGBoost with initial 13 features

In [24]:

```
import xgboost as xgb
```

In [25]:

```

# prepare Train data
x_train = reg_train.drop(['user', 'movie', 'rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user', 'movie', 'rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
first_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=100)
train_results, test_results = run_xgboost(first_xgb, x_train, y_train, x_test, y_test)

## store the results in models_evaluations dictionaries
#models_evaluation_train['first_algo'] = train_results
#models_evaluation_test['first_algo'] = test_results

#xgb.plot_importance(first_xgb)
plt.show()

```

Training the model..

Training the model..

```
[00:10:37] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.
```

```
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version
  if getattr(data, 'base', None) is not None and \
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version
  data.base is not None and isinstance(data, np.ndarray) \
```

Done. Time taken : 0:00:02.784279

Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.076373581778953

MAPE : 34.48223172520999

In [26]:

```
# prepare Train data
x_train = reg_train.drop(['user','movie','rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user','movie','rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
second_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=100,max_depth=
5)
train_results, test_results = run_xgboost(second_xgb, x_train, y_train, x_test, y_test)

#xgb.plot_importance(second_xgb)
#plt.show()
```

Training the model..

```
[00:10:41] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.
```

```
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version
  if getattr(data, 'base', None) is not None and \
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version
  data.base is not None and isinstance(data, np.ndarray) \
```

Done. Time taken : 0:00:03.561683

Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.0755881866540673

MAPE : 34.55557960993355

In [27]:

```
# prepare Train data
x_train = reg_train.drop(['user','movie','rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
```

```

x_test = reg_test_df.drop(['user','movie','rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
third_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=100,max_depth=15,)
train_results, test_results = run_xgboost(third_xgb, x_train, y_train, x_test, y_test)

#xgb.plot_importance(third_xgb)
#plt.show()

```

Training the model..

[00:10:45] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version
if getattr(data, 'base', None) is not None and \

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version
data.base is not None and isinstance(data, np.ndarray) \

Done. Time taken : 0:00:13.831008

Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.1068479351352207

MAPE : 33.2577180163395

n_estimators=100,max_depth=15 to 7

In [28]:

```

# prepare Train data
x_train = reg_train.drop(['user','movie','rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user','movie','rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
fourth_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=100,max_depth=7,)
train_results, test_results = run_xgboost(fourth_xgb, x_train, y_train, x_test, y_test)

#xgb.plot_importance(fourth_xgb)
#plt.show()

```

Training the model..

[00:11:00] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version
if getattr(data, 'base', None) is not None and \

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version
data.base is not None and isinstance(data, np.ndarray) \

Done. Time taken : 0:00:04.952049

Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.0993102143211242
MAPE : 33.41973322755375

In [29]:

```
# prepare Train data
x_train = reg_train.drop(['user','movie','rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user','movie','rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
fifth_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=100,max_depth=3
,)
train_results, test_results = run_xgboost(fifth_xgb, x_train, y_train, x_test, y_test)

#xgb.plot_importance(fifth_xgb)
#plt.show()
```

Training the model..

[00:11:05] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version
if getattr(data, 'base', None) is not None and \
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version
data.base is not None and isinstance(data, np.ndarray) \

Done. Time taken : 0:00:02.431075

Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.076373581778953
MAPE : 34.48223172520999

In [30]:

```
# prepare Train data
x_train = reg_train.drop(['user','movie','rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user','movie','rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
sixth_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=100,max_depth=1
,)
train_results, test_results = run_xgboost(sixth_xgb, x_train, y_train, x_test, y_test)

#xgb.plot_importance(sixth_xgb)
#plt.show()
```

Training the model..

[00:11:09] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.

```
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version
  if getattr(data, 'base', None) is not None and \
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version
  data.base is not None and isinstance(data, np.ndarray) \
```

Done. Time taken : 0:00:01.510809

Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

```
-----
RMSE : 1.0730108066777155
MAPE : 35.11891181460618
```

In [31]:

```
# prepare Train data
x_train = reg_train.drop(['user', 'movie', 'rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user', 'movie', 'rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
s7th_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=75, max_depth=1)
train_results, test_results = run_xgboost(s7th_xgb, x_train, y_train, x_test, y_test)

#xgb.plot_importance(s7th_xgb)
#plt.show()
```

Training the model..

```
[00:11:11] WARNING: C:/Jenkins/workspace/xgboost-
win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of
reg:squarederror.
```

```
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version
  if getattr(data, 'base', None) is not None and \
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version
  data.base is not None and isinstance(data, np.ndarray) \
```

Done. Time taken : 0:00:01.179355

Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

```
-----
RMSE : 1.07308676906224
MAPE : 35.175607443679496
```

In [32]:

```
# prepare Train data
x_train = reg_train.drop(['user', 'movie', 'rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user', 'movie', 'rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
e8th_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=51, max_depth=1)
train_results, test_results = run_xgboost(e8th_xgb, x_train, y_train, x_test, y_test)
```

```
#xgb.plot_importance(e8th_xgb)
#plt.show()
```

Training the model..

```
[00:11:12] WARNING: C:/Jenkins/workspace/xgboost-
win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of
reg:squarederror.
```

```
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is
deprecated and will be removed in a future version
  if getattr(data, 'base', None) is not None and \
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is
deprecated and will be removed in a future version
  data.base is not None and isinstance(data, np.ndarray) \
```

Done. Time taken : 0:00:00.867481

Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.073314218595979

MAPE : 34.9013490908048

In [33]:

```
# prepare Train data
x_train = reg_train.drop(['user','movie','rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user','movie','rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
n9th_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=91,max_depth=1)
train_results, test_results = run_xgboost(n9th_xgb, x_train, y_train, x_test, y_test)

#xgb.plot_importance(n9th_xgb)
#plt.show()
```

Training the model..

```
[00:11:14] WARNING: C:/Jenkins/workspace/xgboost-
win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of
reg:squarederror.
```

```
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is
deprecated and will be removed in a future version
  if getattr(data, 'base', None) is not None and \
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is
deprecated and will be removed in a future version
  data.base is not None and isinstance(data, np.ndarray) \
```

Done. Time taken : 0:00:01.394802

Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.073076157478468

MAPE : 35.156766311532444

In [34]:

```
# prepare Train data
```



```

x_train = reg_train.drop(['user','movie','rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user','movie','rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
t10th_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=125,max_depth=1
)
train_results, test_results = run_xgboost(t10th_xgb, x_train, y_train, x_test, y_test)

#xgb.plot_importance(t10th_xgb)
#plt.show()

```

Training the model..

```

[00:11:16] WARNING: C:/Jenkins/workspace/xgboost-
win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of
reg:squarederror.

```

```

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is
deprecated and will be removed in a future version
  if getattr(data, 'base', None) is not None and \
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is
deprecated and will be removed in a future version
  data.base is not None and isinstance(data, np.ndarray) \

```

Done. Time taken : 0:00:01.845644

Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.0730568328704853

MAPE : 35.144507547764185

In [35]:

```

# prepare Train data
x_train = reg_train.drop(['user','movie','rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user','movie','rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
e11th_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=111,max_depth=1
)
train_results, test_results = run_xgboost(e11th_xgb, x_train, y_train, x_test, y_test)

#xgb.plot_importance(e11th_xgb)
#plt.show()

```

Training the model..

```

[00:11:18] WARNING: C:/Jenkins/workspace/xgboost-
win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of
reg:squarederror.

```

```

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is
deprecated and will be removed in a future version
  if getattr(data, 'base', None) is not None and \
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is
deprecated and will be removed in a future version
  data.base is not None and isinstance(data, np.ndarray) \

```

Done. Time taken : 0:00:01.686367

Done

Evaluating the model with TRAIN data...
Evaluating Test data

TEST DATA

RMSE : 1.0730531870731104
MAPE : 35.1453360003598

In [36]:

```
# prepare Train data
x_train = reg_train.drop(['user', 'movie', 'rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user', 'movie', 'rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
t12th_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=103, max_depth=1)
train_results, test_results = run_xgboost(t12th_xgb, x_train, y_train, x_test, y_test)

#xgb.plot_importance(t12th_xgb)
#plt.show()
```

Training the model..

[00:11:21] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version
if getattr(data, 'base', None) is not None and \

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version
data.base is not None and isinstance(data, np.ndarray) \

Done. Time taken : 0:00:01.543319

Done

Evaluating the model with TRAIN data...
Evaluating Test data

TEST DATA

RMSE : 1.0730092111775529
MAPE : 35.114587054934745

In [37]:

```
# prepare Train data
x_train = reg_train.drop(['user', 'movie', 'rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user', 'movie', 'rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
t13th_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=105, max_depth=1)
train_results, test_results = run_xgboost(t13th_xgb, x_train, y_train, x_test, y_test)

#xgb.plot_importance(t13th_xgb)
#plt.show()
```

Training the model..

[00:11:23] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.

```
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version
  if getattr(data, 'base', None) is not None and \
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version
  data.base is not None and isinstance(data, np.ndarray) \
```

Done. Time taken : 0:00:01.559859

Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.0730021080125454

MAPE : 35.10788939628738

In [38]:

```
# prepare Train data
x_train = reg_train.drop(['user','movie','rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user','movie','rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
f14th_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=109, max_depth=1)
train_results, test_results = run_xgboost(f14th_xgb, x_train, y_train, x_test, y_test)

#xgb.plot_importance(f14th_xgb)
#plt.show()
```

Training the model..

[00:11:25] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.

```
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version
  if getattr(data, 'base', None) is not None and \
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version
  data.base is not None and isinstance(data, np.ndarray) \
```

Done. Time taken : 0:00:01.611068

Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.0729989562963496

MAPE : 35.10758364453652

In [39]:

```
# prepare Train data
x_train = reg_train.drop(['user','movie','rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user','movie','rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
```

```
f15th_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=110,max_depth=1
)
train_results, test_results = run_xgboost(f15th_xgb, x_train, y_train, x_test, y_test)

#xgb.plot_importance(f15th_xgb)
#plt.show()
```

Training the model..

```
[00:11:27] WARNING: C:/Jenkins/workspace/xgboost-
win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of
reg:squarederror.
```

```
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is
deprecated and will be removed in a future version
  if getattr(data, 'base', None) is not None and \
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is
deprecated and will be removed in a future version
  data.base is not None and isinstance(data, np.ndarray) \
```

Done. Time taken : 0:00:01.624710

Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.0730169090629065

MAPE : 35.118188392823924

In [40]:

```
# prepare Train data
x_train = reg_train.drop(['user','movie','rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user','movie','rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
s16th_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=109,max_depth=3
)
train_results, test_results = run_xgboost(s16th_xgb, x_train, y_train, x_test, y_test)

#xgb.plot_importance(s16th_xgb)
#plt.show()
```

Training the model..

```
[00:11:29] WARNING: C:/Jenkins/workspace/xgboost-
win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of
reg:squarederror.
```

```
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is
deprecated and will be removed in a future version
  if getattr(data, 'base', None) is not None and \
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is
deprecated and will be removed in a future version
  data.base is not None and isinstance(data, np.ndarray) \
```

Done. Time taken : 0:00:02.619620

Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.0763864067818336

MAPE : 34.48209115697978

In [41]:

```
# prepare Train data
x_train = reg_train.drop(['user','movie','rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user','movie','rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
s17th_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=109,max_depth=15)
train_results, test_results = run_xgboost(s17th_xgb, x_train, y_train, x_test, y_test)

#xgb.plot_importance(s17th_xgb)
#plt.show()
```

Training the model..

[00:11:33] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version

if getattr(data, 'base', None) is not None and \

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version

data.base is not None and isinstance(data, np.ndarray) \

Done. Time taken : 0:00:14.537784

Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.1038707638491814

MAPE : 33.34390588292014

In [65]:

```
# Please compare all your models using Prettytable library
from prettytable import PrettyTable

x = PrettyTable()

x.field_names = ["Attempt", "n_estimators", "max_depth", "RMSE "]
x.add_row(["first_xgb ", 100, " ", 1.076373581778953])
x.add_row(["second_xgb ", 100, 5, 1.0755881866540673])
x.add_row(["third_xgb ", 100, 15, 1.1068479351352207])
x.add_row(["fourth_xgb ", 100, 7, 1.0993102143211242])
x.add_row(["fifth_xgb ", 100, 3, 1.076373581778953])
x.add_row(["sixth_xgb ", 100, 1, 1.0730108066777155])
x.add_row(["s7th_xgb ", 75, 1, 1.07308676906224])
x.add_row(["e8th_xgb ", 51, 1, 1.073314218595979])
x.add_row(["n9th_xgb ", 91, 1, 1.073076157478468])
x.add_row(["t10th_xgb ", 125, 1, 1.0730568328704853])
x.add_row(["e11th_xgb ", 111, 1, 1.0730531870731104])
x.add_row(["t12th_xgb ", 103, 1, 1.0730092111775529])
x.add_row(["t13th_xgb ", 105, 1, 1.0730021080125454])
x.add_row(["f14th_xgb (BEST) ", 109, 1, 1.0729989562963496])
x.add_row(["f15th_xgb ", 110, 1, 1.0730169090629065])
x.add_row(["s16th_xgb ", 109, 3, 1.0763864067818336])
x.add_row(["s17th_xgb ", 109, 15, 1.1038707638491814])

print(x)
```

```
+-----+-----+-----+-----+
| Attempt | n_estimators | max_depth | RMSE |
+-----+-----+-----+-----+
```

first_xgb	100		1.076373581778953
second_xgb	100	5	1.0755881866540673
third_xgb	100	15	1.1068479351352207
fourth_xgb	100	7	1.0993102143211242
fifth_xgb	100	3	1.076373581778953
sixth_xgb	100	1	1.0730108066777155
s7th_xgb	75	1	1.07308676906224
e8th_xgb	51	1	1.073314218595979
n9th_xgb	91	1	1.073076157478468
t10th_xgb	125	1	1.0730568328704853
e11th_xgb	111	1	1.0730531870731104
t12th_xgb	103	1	1.0730092111775529
t13th_xgb	105	1	1.0730021080125454
f14th_xgb(BEST)	109	1	1.0729989562963496
f15th_xgb	110	1	1.0730169090629065
s16th_xgb	109	3	1.0763864067818336
s17th_xgb	109	15	1.1038707638491814

Storing the Best featureof XGBOOST in model_evalutions

In [70]:

```
# prepare Train data
x_train = reg_train.drop(['user','movie','rating'], axis=1)
y_train = reg_train['rating']

# Prepare Test data
x_test = reg_test_df.drop(['user','movie','rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
f14th_xgb = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=109,max_depth=1
)
train_results, test_results = run_xgboost(f14th_xgb, x_train, y_train, x_test, y_test)

# store the BEST results in models_evalutions dictionaries
models_evaluation_train['14th_algo'] = train_results
models_evaluation_test['14th_algo'] = test_results

xgb.plot_importance(f14th_xgb)
plt.show()
```

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version
if getattr(data, 'base', None) is not None and \

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version
data.base is not None and isinstance(data, np.ndarray) \

Training the model..

[12:15:43] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.
Done. Time taken : 0:00:03.435182

Done


Evaluating the model with TRAIN data...
Evaluating Test data

TEST DATA

RMSE : 1.0729989562963496
MAPE : 35.10758364453652

Feature importance

--	--	--	--	--

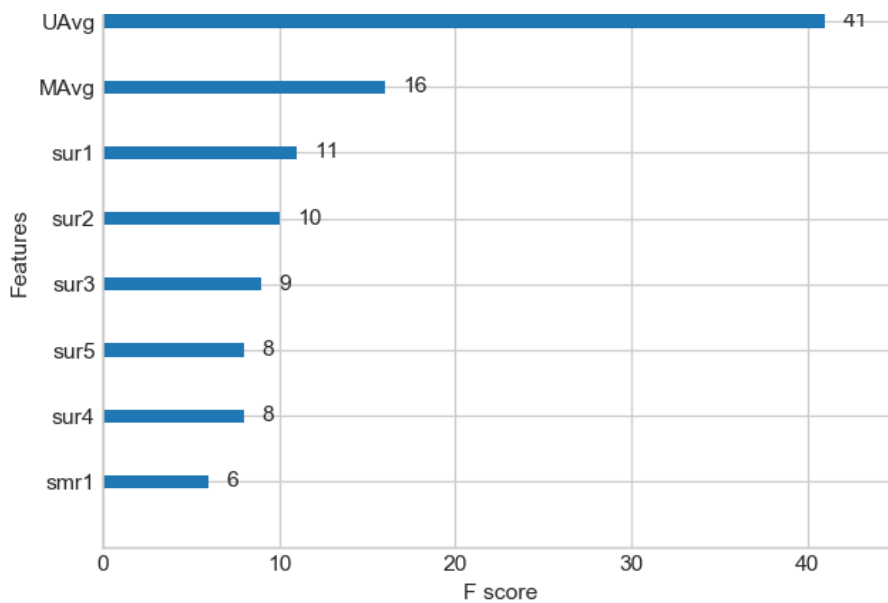

5.4.2 Surprise BaselineModel

In [44]:

```
from surprise import BaselineOnly
```

In [45]:

```
# options are to specify..., how to compute those user and item biases
bsl_options = {'method': 'sgd',
               'learning_rate': .001
              }
bsl_algo = BaselineOnly(bsl_options=bsl_options)
# run this algorithm..., It will return the train and test results..
bsl_train_results, bsl_test_results = run_surprise(bsl_algo, trainset, testset, verbose=True)

# Just store these error metrics in our models_evaluation datastructure
models_evaluation_train['bsl_algo'] = bsl_train_results
models_evaluation_test['bsl_algo'] = bsl_test_results
```

Training the model...

Estimating biases using sgd...

Done. time taken : 0:00:00.574840

Evaluating the model with train data..

time taken : 0:00:00.776988

Train Data

RMSE : 0.9347153928678286

MAPE : 29.389572652358183

adding train results in the dictionary..

Evaluating for test data...

time taken : 0:00:00.062474

Test Data

RMSE : 1.0730330260516174

MAPE : 35.04995544572911

storing the test results in test dictionary...

Total time taken to run this algorithm : 0:00:01.414302

5.4.3 XGBoost with initial 13 features + Surprise Baseline predictor

Updating Train Data

In [46]:

```
# add our baseline_predicted value as our feature..
reg_train['bslpr'] = models_evaluation_train['bsl_algo']['predictions']
reg_train.head(2)
```

Out[46]:

	user	movie	GAvg	sur1	sur2	sur3	sur4	sur5	smr1	smr2	smr3	smr4	smr5	UAvg	MAvg	rating	bslpr
0	53406	33	3.581679	4.0	5.0	5.0	4.0	1.0	5.0	2.0	5.0	3.0	1.0	3.370370	4.092437	4	3.898982
1	99540	33	3.581679	5.0	5.0	5.0	4.0	5.0	3.0	4.0	4.0	3.0	5.0	3.555556	4.092437	3	3.371403

Updating Test Data

In [47]:

```
# add that baseline predicted ratings with Surprise to the test data as well
reg_test_df['bslpr'] = models_evaluation_test['bsl_algo']['predictions']

reg_test_df.head(2)
```

Out[47]:

	user	movie	GAvg	sur1	sur2	sur3	sur4	sur5	smr1	smr2	smr3	smr4	smr5
0	808635	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679
1	941866	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679

since X_train data is same, so taking best estimator as n_estimators=109,max_depth=1

In [48]:

```
# prepare train data
x_train = reg_train.drop(['user', 'movie', 'rating'], axis=1)
y_train = reg_train['rating']
#
# Prepare Test data
x_test = reg_test_df.drop(['user', 'movie', 'rating'], axis=1)
y_test = reg_test_df['rating']

# initialize Our first XGBoost model...
xgb_bsl = xgb.XGBRegressor(silent=False, n_jobs=13, random_state=15, n_estimators=109,max_depth=1)
train_results, test_results = run_xgboost(xgb_bsl, x_train, y_train, x_test, y_test)

# store the results in models evaluations dictionaries
models_evaluation_train['xgb_bsl'] = train_results
models_evaluation_test['xgb_bsl'] = test_results

xgb.plot_importance(xgb_bsl)
plt.show()
```

Training the model..

```
[00:11:52] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.
```

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is


```
deprecated and will be removed in a future version
if getattr(data, 'base', None) is not None and \
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is
deprecated and will be removed in a future version
data.base is not None and isinstance(data, np.ndarray) \
```

Done. Time taken : 0:00:02.088440

Done


Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.0729989562963496

MAPE : 35.10758364453652

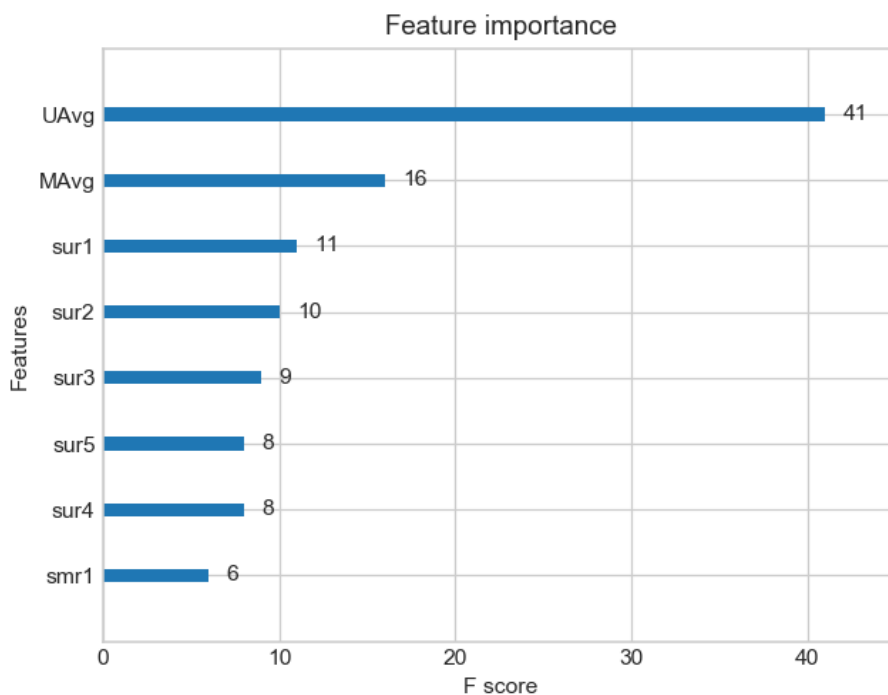

5.4.4 Surprise KNNBaseline predictor

In [49]:

```
from surprise import KNNBaseline
```

5.4.4.1 Surprise KNNBaseline with user user similarities

In [50]:

```
# we specify , how to compute similarities and what to consider with sim_options to our algorithm
sim_options = {'user_based' : True,
               'name': 'pearson_baseline',
               'shrinkage': 100,
               'min_support': 2
              }
# we keep other parameters like regularization parameter and learning_rate as default values.
bsl_options = {'method': 'sgd'}

knn_bsl_u = KNNBaseline(k=40, sim_options = sim_options, bsl_options = bsl_options)
knn_bsl_u_train_results, knn_bsl_u_test_results = run_surprise(knn_bsl_u, trainset, testset,
verbose=True)
```

```
# Just store these error metrics in our models_evaluation datastructure
models_evaluation_train['knn_bsl_u'] = knn_bsl_u_train_results
models_evaluation_test['knn_bsl_u'] = knn_bsl_u_test_results
```

```
Training the model...
Estimating biases using sgd...
Computing the pearson_baseline similarity matrix...
Done computing similarity matrix.
Done. time taken : 0:00:33.191524
```

```
Evaluating the model with train data..
time taken : 0:01:18.470481
```

```
-----
Train Data
```

```
-----
RMSE : 0.33642097416508826
```

```
MAPE : 9.145093375416348
```

```
adding train results in the dictionary..
```

```
Evaluating for test data...
time taken : 0:00:00.062483
```

```
-----
Test Data
```

```
-----
RMSE : 1.0726493739667242
```

```
MAPE : 35.02094499698424
```

```
storing the test results in test dictionary...
```

```
-----
Total time taken to run this algorithm : 0:01:51.724488
```

5.4.4.2 Surprise KNNBaseline with movie movie similarities

In [51]:

```
# we specify , how to compute similarities and what to consider with sim_options to our algorithm

# 'user_based' : Fals => this considers the similarities of movies instead of users

sim_options = {'user_based' : False,
               'name': 'pearson_baseline',
               'shrinkage': 100,
               'min_support': 2
              }

# we keep other parameters like regularization parameter and learning_rate as default values.
bsl_options = {'method': 'sgd'}

knn_bsl_m = KNNBaseline(k=40, sim_options = sim_options, bsl_options = bsl_options)

knn_bsl_m_train_results, knn_bsl_m_test_results = run_surprise(knn_bsl_m, trainset, testset,
verbose=True)

# Just store these error metrics in our models_evaluation datastructure
models_evaluation_train['knn_bsl_m'] = knn_bsl_m_train_results
models_evaluation_test['knn_bsl_m'] = knn_bsl_m_test_results
```

```
Training the model...
Estimating biases using sgd...
Computing the pearson_baseline similarity matrix...
Done computing similarity matrix.
Done. time taken : 0:00:01.113305
```

```
Evaluating the model with train data..
time taken : 0:00:07.659487
```

```
-----
Train Data
```

```
-----
RMSE : 0.32584796251610554
```

MAPE : 8.447062581998374

adding train results in the dictionary..

Evaluating for test data...
time taken : 0:00:00.046866

Test Data

RMSE : 1.072758832653683

MAPE : 35.02269653015042

storing the test results in test dictionary...

Total time taken to run this algorithm : 0:00:08.819658

5.4.5 XGBoost with initial 13 features + Surprise Baseline predictor + KNNBaseline predictor

- First we will run XGBoost with predictions from both KNN's (that uses User_User and Item_Item similarities along with our previous features.
- Then we will run XGBoost with just predictions from both knn models and predictions from our baseline model.

Preparing Train data

In [52]:

```
# add the predicted values from both knns to this dataframe
reg_train['knn_bsl_u'] = models_evaluation_train['knn_bsl_u']['predictions']
reg_train['knn_bsl_m'] = models_evaluation_train['knn_bsl_m']['predictions']

reg_train.head(2)
```

Out[52]:

	user	movie	GAvg	sur1	sur2	sur3	sur4	sur5	smr1	smr2	smr3	smr4	smr5	UAvg	MAvg	rating	bslpr
0	53406	33	3.581679	4.0	5.0	5.0	4.0	1.0	5.0	2.0	5.0	3.0	1.0	3.370370	4.092437	4	3.898982
1	99540	33	3.581679	5.0	5.0	5.0	4.0	5.0	3.0	4.0	4.0	3.0	5.0	3.555556	4.092437	3	3.371403

Preparing Test data

In [53]:

```
reg_test_df['knn_bsl_u'] = models_evaluation_test['knn_bsl_u']['predictions']
reg_test_df['knn_bsl_m'] = models_evaluation_test['knn_bsl_m']['predictions']

reg_test_df.head(2)
```

Out[53]:

	user	movie	GAvg	sur1	sur2	sur3	sur4	sur5	smr1	smr2	smr3	smr4	smr5
0	808635	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679
1	941866	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679

since X_train data is same, so taking best estimator as n_estimators=109,max_depth=1

In [54]:

```
# prepare the train data....
x_train = reg_train.drop(['user', 'movie', 'rating'], axis=1)
y_train = reg_train['rating']

# prepare the train data....
x_test = reg_test_df.drop(['user', 'movie', 'rating'], axis=1)
y_test = reg_test_df['rating']

# declare the model
xgb_knn_bsl = xgb.XGBRegressor(n_jobs=10, random_state=15, n_estimators=109, max_depth=1)
train_results, test_results = run_xgboost(xgb_knn_bsl, x_train, y_train, x_test, y_test)

# store the results in models_evaluations dictionaries
models_evaluation_train['xgb_knn_bsl'] = train_results
models_evaluation_test['xgb_knn_bsl'] = test_results

xgb.plot_importance(xgb_knn_bsl)
plt.show()
```

Training the model..

[00:13:56] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version
if getattr(data, 'base', None) is not None and \n
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version
data.base is not None and isinstance(data, np.ndarray) \n

Done. Time taken : 0:00:02.455969


Done

Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.0729989562963496
MAPE : 35.10758364453652

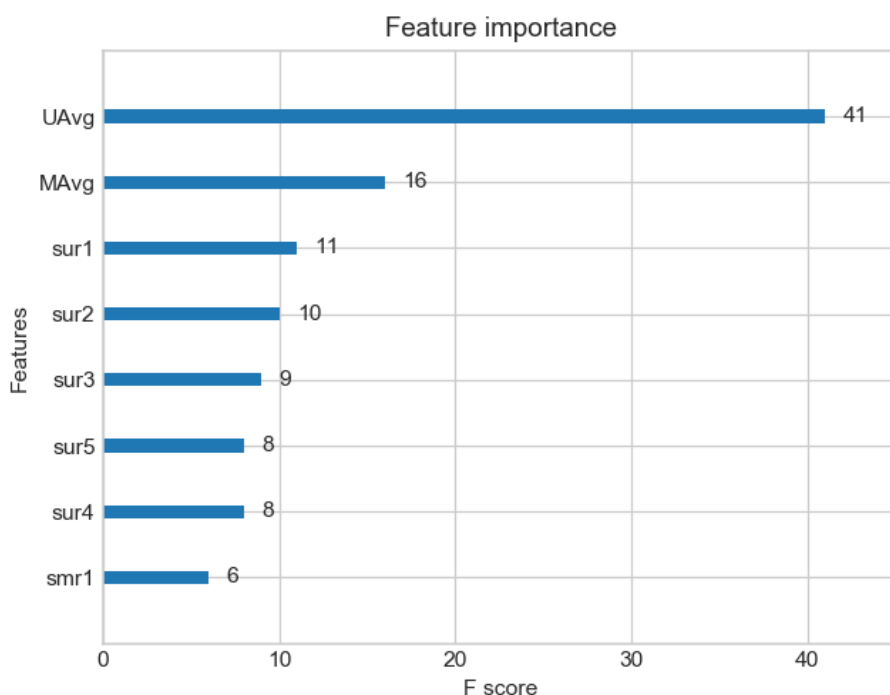

5.4.6 Matrix Factorization Techniques

5.4.6.1 SVD Matrix Factorization User Movie intractions

In [55]:

```
from surprise import SVD
```

In [56]:

```
# initiallize the model
svd = SVD(n_factors=100, biased=True, random_state=15, verbose=True)
svd_train_results, svd_test_results = run_surprise(svd, trainset, testset, verbose=True)

# Just store these error metrics in our models_evaluation datastructure
models_evaluation_train['svd'] = svd_train_results
models_evaluation_test['svd'] = svd_test_results
```

Training the model...

```
Processing epoch 0
Processing epoch 1
Processing epoch 2
Processing epoch 3
Processing epoch 4
Processing epoch 5
Processing epoch 6
Processing epoch 7
Processing epoch 8
Processing epoch 9
Processing epoch 10
Processing epoch 11
Processing epoch 12
Processing epoch 13
Processing epoch 14
Processing epoch 15
Processing epoch 16
Processing epoch 17
Processing epoch 18
Processing epoch 19
Done. time taken : 0:00:06.989769
```

Evaluating the model with train data..
time taken : 0:00:00.958035

Train Data

RMSE : 0.6574721240954099

MAPE : 19.704901088660478

adding train results in the dictionary..

Evaluating for test data..
time taken : 0:00:00.046862

Test Data

RMSE : 1.0726046873826458

MAPE : 35.01953535988152

storing the test results in test dictionary...

Total time taken to run this algorithm : 0:00:07.994666

5.4.6.2 SVD Matrix Factorization with implicit feedback from user (user rated movies)

In [57]:

```
from surprise import SVDpp
```

In [58]:

```
# initialize the model
svdpp = SVDpp(n_factors=50, random_state=15, verbose=True)
svdpp_train_results, svdpp_test_results = run_surprise(svdpp, trainset, testset, verbose=True)

# Just store these error metrics in our models_evaluation datastructure
models_evaluation_train['svdpp'] = svdpp_train_results
models_evaluation_test['svdpp'] = svdpp_test_results
```

Training the model...

```
processing epoch 0
processing epoch 1
processing epoch 2
processing epoch 3
processing epoch 4
processing epoch 5
processing epoch 6
processing epoch 7
processing epoch 8
processing epoch 9
processing epoch 10
processing epoch 11
processing epoch 12
processing epoch 13
processing epoch 14
processing epoch 15
processing epoch 16
processing epoch 17
processing epoch 18
processing epoch 19
```

Done. time taken : 0:01:44.587937

Evaluating the model with train data..

time taken : 0:00:04.772048

Train Data

RMSE : 0.6032438403305899

MAPE : 17.49285063490268

adding train results in the dictionary..

Evaluating for test data...

time taken : 0:00:00.140588

Test Data

RMSE : 1.0728491944183447

MAPE : 35.03817913919887

storing the test results in test dictionary...

Total time taken to run this algorithm : 0:01:49.500573

5.4.7 XgBoost with 13 features + Surprise Baseline + Surprise KNNbaseline + MF Techniques

Preparing Train data

In [59]:

```
# add the predicted values from both knns to this dataframe
reg_train['svd'] = models_evaluation_train['svd']['predictions']
reg_train['svdpp'] = models_evaluation_train['svdpp']['predictions']
```

```
reg_train.head(2)
```

Out[59]:

	user	movie	GAvg	sur1	sur2	sur3	sur4	sur5	smr1	smr2	...	smr4	smr5	UAvg	MAvg	rating	bslpr	kn
0	53406	33	3.581679	4.0	5.0	5.0	4.0	1.0	5.0	2.0	...	3.0	1.0	3.370370	4.092437	4	3.898982	3.5
1	99540	33	3.581679	5.0	5.0	5.0	4.0	5.0	3.0	4.0	...	3.0	5.0	3.555556	4.092437	3	3.371403	3.5

2 rows × 21 columns



Preparing Test data

In [60]:

```
reg_test_df['svd'] = models_evaluation_test['svd']['predictions']
reg_test_df['svdpp'] = models_evaluation_test['svdpp']['predictions']

reg_test_df.head(2)
```

Out[60]:

	user	movie	GAvg	sur1	sur2	sur3	sur4	sur5	smr1	smr2	...	smr4	smr5	
0	808635	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	...	3.581679	3.581679	3.5
1	941866	71	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	3.581679	...	3.581679	3.581679	3.5

2 rows × 21 columns



since X_train data is same, so taking best estimator as n_estimators=109,max_depth=1

In [61]:

```
# prepare x_train and y_train
x_train = reg_train.drop(['user', 'movie', 'rating'], axis=1)
y_train = reg_train['rating']

# prepare test data
x_test = reg_test_df.drop(['user', 'movie', 'rating'], axis=1)
y_test = reg_test_df['rating']

xgb_final = xgb.XGBRegressor(n_jobs=10, random_state=15, n_estimators=109, max_depth=1)
train_results, test_results = run_xgboost(xgb_final, x_train, y_train, x_test, y_test)

# store the results in models_evaluations dictionaries
models_evaluation_train['xgb_final'] = train_results
models_evaluation_test['xgb_final'] = test_results

xgb.plot_importance(xgb_final)
plt.show()
```

Training the model..

```
[00:15:57] WARNING: C:/Jenkins/workspace/xgboost-
win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of
reg:squarederror.
```

```
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is
deprecated and will be removed in a future version
  if getattr(data, 'base', None) is not None and \
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is
deprecated and will be removed in a future version
  data.base is not None and isinstance(data, np.ndarray) \
```


Done. Time taken : 0:00:02.683979

Done

Evaluating the model with TRAIN data...
Evaluating Test data

TEST DATA

RMSE : 1.0729989562963496
MAPE : 35.10758364453652

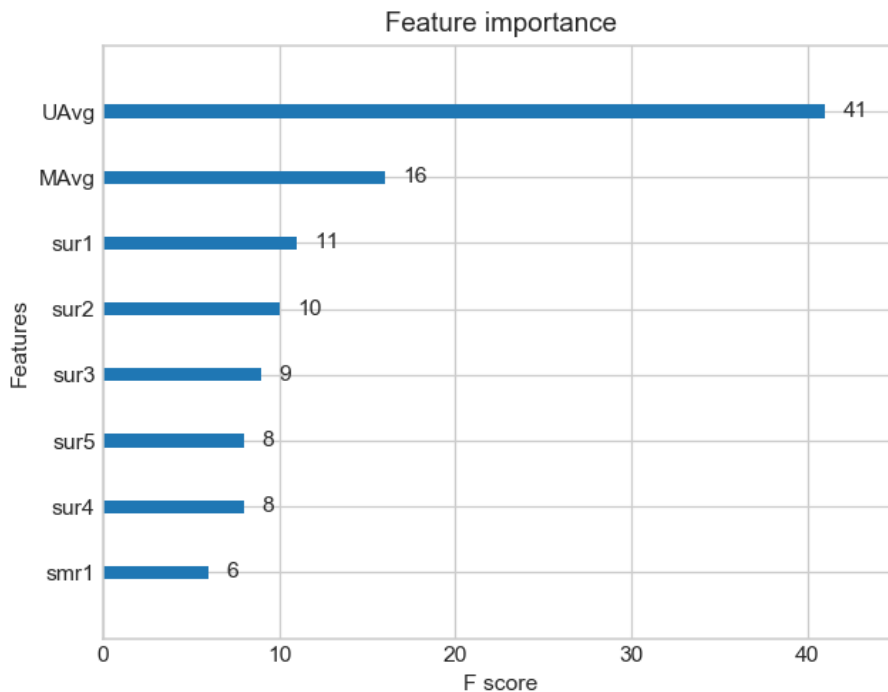

5.4.8 XgBoost with Surprise Baseline + Surprise KNNbaseline + MF Techniques

In [62]:

```
# prepare train data
x_train = reg_train[['knn_bsl_u', 'knn_bsl_m', 'svd', 'svdpp']]
y_train = reg_train['rating']

# test data
x_test = reg_test_df[['knn_bsl_u', 'knn_bsl_m', 'svd', 'svdpp']]
y_test = reg_test_df['rating']

xgb_all_models = xgb.XGBRegressor(n_jobs=10, random_state=15, n_estimators=109, max_depth=1)
train_results, test_results = run_xgboost(xgb_all_models, x_train, y_train, x_test, y_test)

# store the results in models evaluations dictionaries
models_evaluation_train['xgb_all_models'] = train_results
models_evaluation_test['xgb_all_models'] = test_results

xgb.plot_importance(xgb_all_models)
plt.show()
```

Training the model..

[00:16:00] WARNING: C:/Jenkins/workspace/xgboost-win64_release_0.90/src/objective/regression_obj.cu:152: reg:linear is now deprecated in favor of reg:squarederror.

C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:587: FutureWarning: Series.base is deprecated and will be removed in a future version
if getattr(data, 'base', None) is not None and \n
C:\Users\samar\Anaconda3\lib\site-packages\xgboost\core.py:588: FutureWarning: Series.base is deprecated and will be removed in a future version
data.base is not None and isinstance(data, np.ndarray) \n

Done. Time taken : 0:00:01.706372

Done


Evaluating the model with TRAIN data...

Evaluating Test data

TEST DATA

RMSE : 1.0751757372744302

MAPE : 35.125432631834954

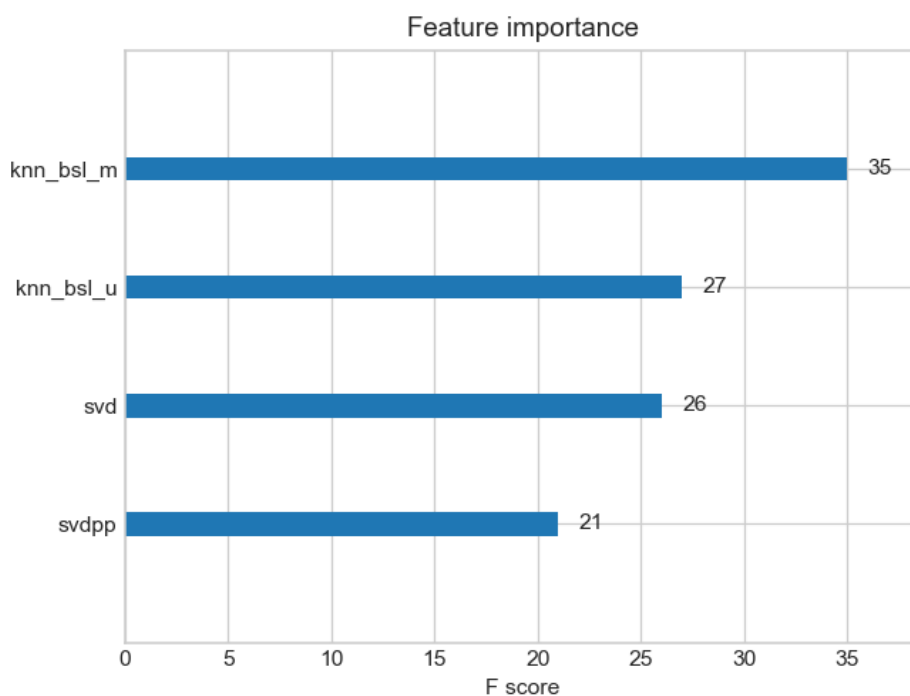

5.5 Comparision between all models

In [63]:

```
# Saving our TEST_RESULTS into a dataframe so that you don't have to run it again
pd.DataFrame(models_evaluation_test).to_csv('small_sample_results_4July.csv')
models = pd.read_csv('small_sample_results_4July.csv', index_col=0)
models.loc['rmse'].sort_values()
```

Out[63]:

```
svd                1.0726046873826458
knn_bsl_u          1.0726493739667242
knn_bsl_m          1.072758832653683
svdpp              1.0728491944183447
14th_algo          1.0729989562963496
xgb_bsl            1.0729989562963496
xgb_knn_bsl        1.0729989562963496
xgb_final          1.0729989562963496
bsl_algo           1.0730330260516174
xgb_all_models     1.0751757372744302
Name: rmse, dtype: object
```

In [64]:

```
print("-"*100)
print("Total time taken to run this entire notebook ( with saved files) is :",datetime.now()-globa
lstart)
```

Summary

Step followed

- def get_average_ratings function ()

INPUT: sparse Matrix

: flag to state the matrix is for User or for Movies

RETURNS : dictionary of average rating

5.1 Sampling Data

- Load Sample train data (2649405, 17724)
- Load Sample Test data (2648399, 17760)

5.2 Finding Global Average

- store Global average of all movie rating in sample_train_averages['global']
- store Global average of all movie rating in sample_train_averages['user']

5.3 Featurizing data

- Load reg_train.csv
- Load reg_test.csv

5.3.2 Transforming data for Surprise models

- Suiprise not able to read normal data, thru 'reader' we can read the data for surprise library.

5.4 Applying Machine Learning models

- create empty dictionary
models_evaluation_train,
models_evaluation_test

Utility functions for running regression models def get_error_metrics () INPUT : two numpy array RETURNS: RMSE,MAPE error metric between the two input numpy array

```
def run_xgboost()  
    INPUT: Algorithm classifier  
           four numpy array  
    RETURNS: returns Train and TEST result, after running the algorithm on the passed  
    numpy array.
```

Utility functions for Suprise Models def get_ratings() INPUT: numpy array RETURNS: return back, actual and predicted rating

```
def get_errors()  
    INPUT:numpy array  
    RETURN: get 'rmse' and 'mape' , given list of prediction objects  
  
def run_surprise()  
    INPUT:algorithm classifier, two numpy array  
    RETURNS: It will return predicted ratings, rmse and mape of both train and test data
```

5.4.1 XGBoost with initial 13 features

- run XGBRegressor on 13th features
- with hvoptuning n estimator=109 and max depth=1, is the best parameter.

- store the same in below dictionary, which we created earlier.
models_evaluation_train,
models_evaluation_test

5.4.2 Surprise BaselineModel

- call run_surprise() with train and test data, and get bsl_result value for both train and test.
- store the bsl_result in below dictionary, which we created earlier.
models_evaluation_train,
models_evaluation_test

5.4.3 XGBoost with initial 13 features + Surprise Baseline predictor

- Club models_evaluation_* to reg_train and reg_test.
- run XGBRegressor, on the above cumulative data(13 feature + Baseline Model)
- store the xgb_bsl in below dictionary, which we created earlier.
models_evaluation_train,
models_evaluation_test

5.4.4.1 Surprise KNNBaseline with user user similarities

- run KNNBaseline algorithm wiht 'user_based' : True, etc
- call run_surprise() with train and test data, and get knn_bsl_u value for both train and test.
- store the knn_bsl_u in below dictionary, which we created earlier.
models_evaluation_train,
models_evaluation_test

5.4.4.2 Surprise KNNBaseline with movie movie similarities

- run KNNBaseline algorithm wiht 'user_based' : False , etc
- call run_surprise() with train and test data, and get knn_bsl_m value for both train and test.
- store the knn_bsl_m in below dictionary, which we created earlier.
models_evaluation_train,
models_evaluation_test

5.4.5 XGBoost with initial 13 features + Surprise Baseline predictor + KNNBaseline predictor

- Club models_evaluation_* to reg_train and reg_test.
- run XGBRegressor, on the above cumulative data(13 feature + Baseline Model+ KNN Baseline)
- store the xgb_knn_bsl in below dictionary, which we created earlier.
models_evaluation_train,
models_evaluation_test

5.4.6.1 SVD Matrix Factorization User Movie intractions

- run SVD algorithm
- call run_surprise() with train and test data, and get svd_results value for both train and test.
- store the svd_results in below dictionary, which we created earlier.
models_evaluation_train,
models_evaluation_test

5.4.6.2 SVD Matrix Factorization with implicit feedback from user (user rated movies)

- run SVDpp algorithm
- call `run_surprise()` with train and test data, and get `svdpp_results` value for both train and test.
- store the `svdpp_results` in below dictionary, which we created earlier.
 - `models_evaluation_train,`
 - `models_evaluation_test`

5.4.7 XgBoost with 13 features + Surprise Baseline + Surprise KNNbaseline + MF Techniques

- Club `models_evaluation_*` to `reg_train` and `reg_test`.
- run `XGBRegressor`, on the above cumulative data{13 feature + Baseline Model+ KNN Baseline + MF Technique (SVD+SVDpp)}
- store the `xgb_final` in below dictionary, which we created earlier.
 - `models_evaluation_train,`
 - `models_evaluation_test`

5.4.8 XgBoost with Surprise Baseline + Surprise KNNbaseline + MF Techniques

- Take only `Surprise(User and Movie KNNBaseline)` and `MF Techneque(SVD,SVDpp)`.
- run `XGBRegressor`, on the above cumulative data{Baseline Model+ KNN Baseline + MF Technique (SVD+SVDpp)}
- store the `xgb_all_models` in below dictionary, which we created earlier.
 - `models_evaluation_train,`
 - `models_evaluation_test`

5.5 Comparision between all models

- Compare all the models which we get in below dictionary in sorted order.
 - `models_evaluation_test`