
The Rank the Task Demands: A Causal Rank Law for Matrix Memories Trained on Group Composition

Samuel Larson
Pebble ML
samlarson@pebbleml.com

Abstract

Matrix-valued memories make rank the natural budget of a learned representation: the number of independent directions a state spans bounds what it can bind, compose, and track. We report causal evidence, on a group-composition testbed trained under a hard single-state bottleneck with a fixed decoder that cannot launder rank, that gradient descent recruits precisely the rank the task’s algebra demands. A companion paper [Larson, 2026a] establishes the analogous recruitment and causal necessity pattern on a K -pair associative-binding testbed, where exact recovery provably requires state rank at least K ; this paper inherits that instrument and extends the rank law from a scalar capacity bound to a representation-theoretic one. We train toward chosen minimal faithful reference representations embedded in larger matrices. On group-composition state tracking over five finite groups spanning the solvable/non-solvable divide, the recruited rank equals the group’s minimal faithful real representation dimension $d_{\min}$ (Spearman $\rho = 0.9747$, the design’s tie-capped maximum), the dimension-matched solvable/non-solvable pair S_4/A_5 is statistically equivalent under a pre-registered test, and a pre-registered force-rank test separates a guaranteed similarity ceiling from empirical recovery at the target dimension: one rank below $d_{\min}$, cosine similarity is capped by the target’s tied unit spectrum at $\sqrt{(d_{\min}-1)/d_{\min}} \leq 0.894$, below the 0.9 threshold in every group by construction, with observed cells at 86–95% (mean 91%) of that ceiling; at $d_{\min}$, not guaranteed a priori, recovery clears the pre-registered anchor-relative bar at four seeds per group in all five groups, both marquee members included. Within this testbed, measured effective rank tracks representation dimension; the matched-dimension S_4/A_5 comparison establishes equivalence within the pre-registered tolerance.

Keywords: effective rank, fast weights, group representations, state tracking

1 Introduction

A matrix-valued memory represents by spanning: whatever a $d \times d$ state binds or tracks, it holds in the geometry of its column space, and rank is the budget it spends. Prior work treats this budget descriptively [Nazari and Rusch, 2026, Sun et al., 2026] or through hand-built constructions [Nichani et al., 2025]; neither answers what a geometric account of learned representations needs answered: when a task’s algebra fixes a minimal representational dimension, does gradient descent recruit exactly that dimension, and is it causally load-bearing?

We answer both halves affirmatively under one discipline: a hard single-state bottleneck (the decoder reads only one matrix Z , verified by a gradient blank-out test) and recovery at a cosine-similarity threshold of 0.9 (scoring against the true continuous target, never argmax over a codebook, which would let a rank-1 state recover on the order of d associations [Nichani et al., 2025]). Section 2 includes the provable K -pair-binding foundation. The headline is group-composition state track-

ing, where representation theory supplies the ground truth: across five finite groups spanning the solvable/non-solvable divide, the minimal faithful real representation dimension $d_{\min}$ predicts the recruited rank almost perfectly (Section 3), a matched-dimension solvable/non-solvable pair lands statistically equivalent (Section 4), and a pre-registered force-rank razor (Section 5) checks a geometrically guaranteed similarity ceiling and confirms sufficiency in all five groups: at rank $d_{\min}-1$, the maximum cosine similarity is below the 0.9 threshold ($\sqrt{(d_{\min}-1)/d_{\min}} \leq 0.894$), and $d_{\min}$ suffices at four seeds per group in every group, which is not guaranteed a priori. Correcting the target’s padding (Appendix D) recovers the razor’s sufficiency result.

2 Tasks, Models, Instrument, and the Binding Foundation

Tasks. In the binding task, each episode presents K key–value pairs. The encoder writes one state $Z \in \mathbb{R}^{d \times d}$. Prediction is the literal unbind Zk_j . $\text{rec}@0.9$ is the fraction of queries with cosine to the true value above 0.9. The group task is the word problem of a finite group G . A word $w = g_{i_1} \cdots g_{i_L}$ is drawn as a random walk on G ’s Cayley graph ($L \sim \text{U}\{1, \dots, 8\}$). It must map to $\rho_G(g_{i_1} \cdots g_{i_L})$ under a pinned orthogonal reference representation of dimension $d_{\min}(G)$, the minimal faithful real representation dimension. The groups are S_3, S_4, A_5, S_5, A_6 with $d_{\min} = 2, 3, 3, 4, 5$ (Appendix A). The first two are solvable, and the rest are not. Non-solvable word problems are NC^1 -complete [Barrington, 1989, Barrington and Thérien, 1988]. $d_{\min}$ is a different, representation-theoretic axis. The design uses S_4/A_5 , matched at $d_{\min} = 3$ with opposite solvability, as the dissociation pair.

We study learning under direct supervision toward a chosen minimal faithful representation, embedded in a larger matrix. The target specifies this representation; the rank requirements studied here apply to this target and scoring setup, rather than to storage across all possible encodings or decoders.

Model. A Transformer encoder with d_{state} learned row-reader queries maps each word to a single state $Z(w) \in \mathbb{R}^{d_{\text{state}} \times d_{\text{state}}}$, $d_{\text{state}} = d_{\min} + 2$, leaving spare dimensions so over-recruitment is expressible. The target embeds the reference block-diagonally ($\rho_G(\cdot) \oplus I_2$ in the observational arm, $\rho_G(\cdot) \oplus 0$ in the causal-razor arm; Appendix D). The loss is cosine distance. The fixed readout has no learned weights that could launder rank, and the decoder reads only Z (blank-out verified). Convergence bars pinned the per-group step budgets (8k–40k) before any decisional cell ran, as recorded in the design document’s pre-registration.

Instrument. The learned state is defined only up to scale and an orthogonal change of basis (a Schur intertwiner): $Z(w) \approx cQ[\rho_G(w) \oplus \cdot]Q^\top$. We estimate the model’s own dominant $d_{\min}$ -subspace U from the SVD of the *centered* covariance of $Z(w)$ over held-out words. We measure **restricted effective rank** as the entropy effective rank of $U^\top Z(w)U$. We score **degauged recovery** as cosine after fitting (c, Q) on a fitting split and evaluating on a disjoint split (50 fresh words per cell, 30 to fit and 20 scored, so $\text{rec}@0.9$ moves in steps of 0.05), reported as $\text{rec}@0.9$. Centering is load-bearing (Appendix D). Rank is invariant under the fitted gauge, so a rank-deficient state cannot be degauged into a full-rank one. For force-rank cells, the pre-registration pinned the conservative full- Q Procrustes variant (*crosscheck* $\text{rec}@0.9$) as the decisional readout. **The provable foundation (binding).**

Fact 1. *If $Zk_j = v_j$ exactly for K bindings with linearly independent keys and values, then $ZK_{\text{mat}} = V_{\text{mat}}$, so $K = \text{rank}(V_{\text{mat}}) \leq \text{rank}(Z)$.*

The bound is classical [Kohonen, 1972, Anderson, 1972], holding only under exact continuous recovery. On this binding testbed, a companion paper [Larson, 2026a] establishes that gradient descent recruits effective rank tracking K . The same paper shows that the recruited rank is causally necessary through a train-time force-rank step at the provable bound. It also shows that the trained operator composes exactly under repeated self-application. The composition-stability probe is periodicity-equivalent to depth 5 under the single 8-cycle target [Liu et al., 2023] (Appendix H). This paper inherits that instrument and carries only the group-composition program.

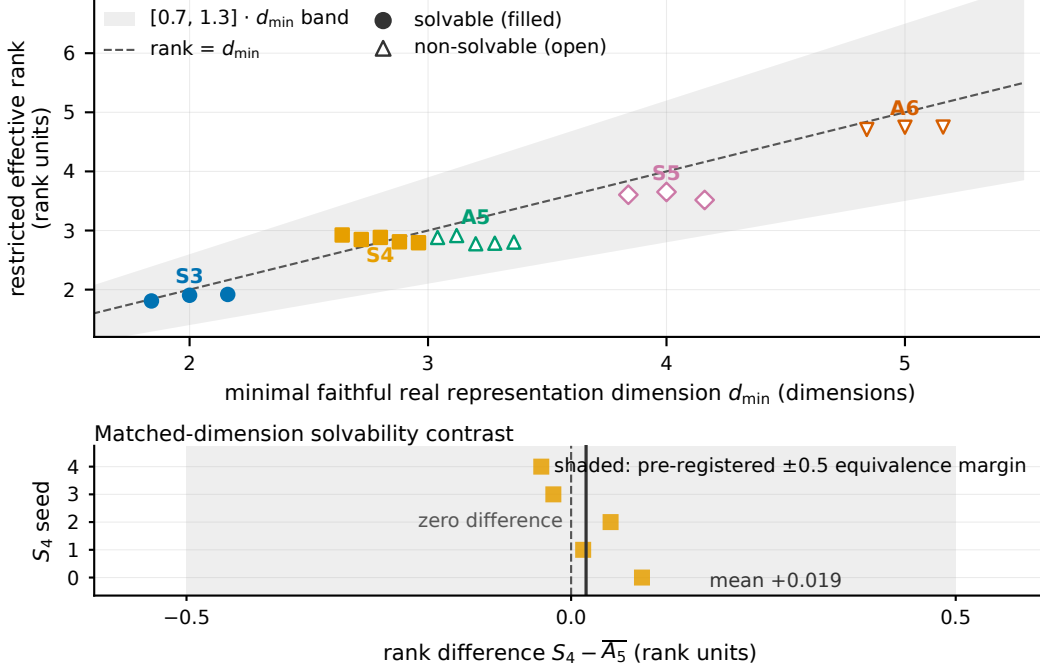


Figure 1: Recruited rank follows representation dimension across the five tested groups. Each point is one seed’s restricted effective rank on the group word problem vs. its group’s $d_{\min}$. Filled markers denote solvable groups; open markers denote non-solvable groups. Small horizontal offsets separate seeds at the same categorical value. Shading marks the pre-registered $[0.7, 1.3] \cdot d_{\min}$ band, and the dashed line marks the identity. All 19 seeds are in band, and S_4/A_5 coincide at $d_{\min} = 3$. The lower panel plots per-seed $S_4 - A_5$ rank differences at matched $d_{\min} = 3$ against the pre-registered ± 0.5 rank-unit equivalence margin. Shading marks the margin. The vertical lines mark zero difference and the observed mean difference, $+0.019$ (Section 4).

3 The Rank Law on Group Composition, Observed

Per-group mean restricted effective rank lands within 4.9–10.2% of $d_{\min}$ at every group, and all 19 seeds sit inside the pre-registered $[0.7, 1.3] \cdot d_{\min}$ band (Figure 1; means and per-seed values in Appendix B).

Spearman correlation between recruited rank and $d_{\min}$ is $\rho = 0.9747$, the maximum this design can express, since the S_4/A_5 tie caps ρ below 1; under the exact permutation null, $P(\rho \geq 0.8) = 8/120 \approx 6.7\%$ (0.8 is pre-registered, below the next achievable level 0.87), so by pre-registration this leg is corroborating rather than independently decisive: the band’s upper half is non-binding by construction, and a disclosed length-robustness split is reported alongside it (Appendix D). The dimension-matched pair S_4/A_5 is tested directly in Section 4.

4 Equivalence at Matched Dimension

The design uses S_4/A_5 as its contrast. The groups share $d_{\min} = 3$ but lie on opposite sides of the solvability divide, the axis on which expressivity theory separates state-tracking architectures [Merrill et al., 2024, Grazzi et al., 2025, Siems et al., 2025]. This matched-dimension comparison tests whether measured effective rank is equivalent across the selected pair despite their opposite solvability. Siems et al. [2025] provide the precursor observation (§5.2): S_4 and A_5 both extrapolate with two Householder reflections and keys of size 3. They attribute this to the groups’ embedding in $SO(3)$, and their PCA of the trained keys is three-dimensional. The present test turns that single-architecture reading into a pre-registered equivalence claim on state rank across the five-group family. Section 5 makes the dimension causal. Because the interesting outcome is a null, the pre-registration specifies an equivalence test rather than a difference test. The comparison uses Welch

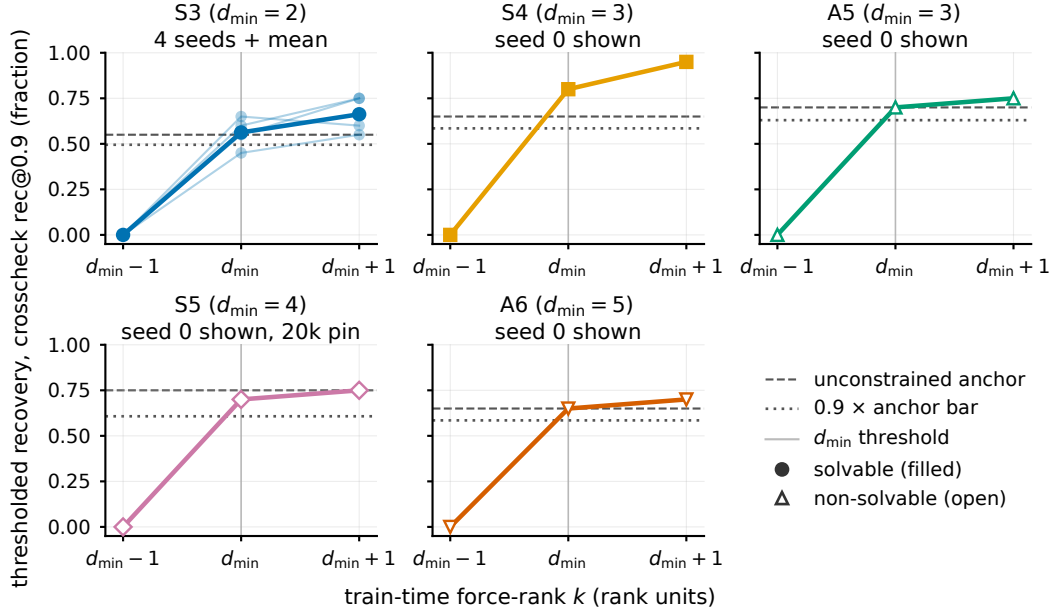


Figure 2: Recovery at a cosine-similarity threshold of 0.9 is a step function at $d_{\min}$: per group, crosscheck rec@0.9 on held-out words at force-rank $k \in \{d_{\min}-1, d_{\min}, d_{\min}+1\}$, vs. the unconstrained anchor (dashed) and the $0.9 \times$ anchor bar (dotted). S_3 overlays its four seeds (thin lines; bold mean); its below- $d_{\min}$ zero is unanimous. The other four groups are drawn at seed 0; their four-seed sufficiency verdicts are in Table 1. S_5 's dotted bar is its decisional bar, $0.9 \times$ its four-seed anchor mean at its 20k pin (Appendix F).

two-one-sided tests on restricted effective rank at margin ± 0.5 rank-units (half the spacing of the $d_{\min}$ ladder), with $n = 5$ seeds per group. The design record fixed a pre-run power simulation before the sweep ran. It confirms that the test reliably *rejects* equivalence at a true gap of 1.0 rank-units, so a real class effect of one ladder step could not have hidden inside the margin.

The observed difference is $+0.019$ rank-units (se 0.037, df 7.8), and both one-sided tests pass at roughly seven times the critical value ($t = 13.06$ and 14.12 against $t_{\text{crit}} = 1.865$): the two one-sided tests declare equivalence. The two groups' seed clusters are visually coincident in Figure 1 (lower panel). These results establish equivalence of effective rank for this matched-dimension pair within the pre-registered ± 0.5 rank-unit tolerance.

5 The Causal Razor

The decisive test intervenes on rank: the encoder's output is spectrally truncated to rank $k \in \{d_{\min}-1, d_{\min}, d_{\min}+1\}$ throughout training, against the zero-padded target $\rho_G(\cdot) \oplus 0$ of rank exactly $d_{\min}$, alongside an unconstrained anchor from the same family. Pre-registered reading: below $d_{\min}$, a sound readout pins recovery to zero by geometry, making that arm an integrity control whose registered trigger (any recovery there) would indicate an instrument leak; the live prediction is that $k \geq d_{\min}$ recovers past $0.9 \times$ the anchor's crosscheck rec@0.9.

Table 1 and Figure 2 show the result on the pre-pinned crosscheck readout. Necessity below $d_{\min}$ is an analytically forced floor: against a $d_{\min}$ -tied-unit-singular-value target, the maximum cosine any rank- $(d_{\min}-1)$ operator can reach is $\sqrt{(d_{\min}-1)/d_{\min}} \leq 0.894$, below the 0.9 threshold in every group by construction, so $\text{rec@0.9} = 0.000$ at $k = d_{\min}-1$ follows regardless of training quality; observed cells still reach 86–95% of that ceiling (mean 91%; Appendix D), evidence of near-optimal training under the cap. The zero is noiseless in all four seeds of every group. Sufficiency at $d_{\min}$ carries the causal claim, since no such bound guarantees a rank-exactly- $d_{\min}$ solution is reachable. Every group was run at four seeds, and the pre-registered rule compares the seed-mean of $k=d_{\min}$ against the bar fixed from seed 0 before the further seeds ran, never against

G	anchor	$k=d_{\min}-1$	$k=d_{\min}$	$k=d_{\min}+1$	bar	$k=d_{\min}$, seed-mean ($n=4$)
S_3	0.550	0.000	0.450*	0.550	0.495	0.5625
S_4	0.650	0.000	0.800	0.950	0.585	0.6875
A_5	0.700	0.000	0.700	0.750	0.630	0.6500
S_5	0.750	0.000	0.700	0.750	0.6075 [†]	0.7000
A_6	0.650	0.000	0.650	0.700	0.585	0.6750

Table 1: The causal razor on the zero-padded rank- $d_{\min}$ target (crosscheck rec@0.9 by force-rank k). The anchor and k columns are seed 0, one seed per cell; the bar is $0.9\times$ the seed-0 anchor, fixed before any further seed ran (S_5 : see [†]), and bold there marks a seed-0 cell that clears it. The last column is the seed-mean of $k=d_{\min}$ over seeds 0–3, judged against that bar by the pre-registered rule: all five groups confirm (bold). Exactly 0.000 one rank below $d_{\min}$ in all four seeds of every group (the forced ceiling is ≤ 0.894). Per-seed own-bar clears ($0.9\times$ each seed’s own anchor; disclosed, not decisional): S_3 2/4, S_4 4/4, A_5 4/4, S_5 4/4, A_6 4/4. * S_3 ’s seed-0 cell sat inside the pre-stated ± 0.05 marginality trigger and was extended first (seed-mean 0.5625 against the fixed 0.495 bar); the other four groups were extended under a separate pre-registration (Appendices E, F). [†] S_5 ’s step pin is 20k, set by a separately pre-registered re-test (Appendix F); by that pre-registration its bar is $0.9\times$ its four-seed anchor mean (0.6750), since no seed-0 literal existed at that pin.

a bar recomputed from the seeds being judged. S_3 , whose seed-0 cell sat inside the pre-stated ± 0.05 marginality trigger, confirms at seed-mean 0.5625 against the fixed 0.495 bar; S_4 , A_5 , and A_6 confirm at seed-means 0.6875, 0.6500, and 0.6750 against fixed bars 0.585, 0.630, and 0.585, each clearing its own-seed bar in 4 of 4 seeds; S_5 confirms at seed-mean 0.7000 against its bar 0.6075, per-seed $k=d_{\min}$ 0.700/0.600/0.750/0.750 against anchors 0.750/0.600/0.700/0.650, own-bar clears 4 of 4, and $k=d_{\min}-1$ at 0.000 in all four seeds; its bar is $0.9\times$ its four-seed anchor mean rather than a seed-0 literal because its 20k step pin was set by a separately pre-registered re-test (Appendix F). Sufficiency therefore holds at four seeds in all five groups (per-seed detail in Appendices E and F). Both marquee groups confirm at $d_{\min}$, meeting the causal criterion. Table 4 adds an instrument-independent reading: on the zero-padded target the unconstrained anchor’s whole-matrix effective rank, taken over the full $d_{\text{state}} \times d_{\text{state}}$ state with no subspace lens, lands at 1.82/2.82/2.83/3.77/4.67 (four-seed means) against $d_{\min} = 2/3/3/4/5$ with two ambient dimensions available, so the recruited rank equals $d_{\min}$ without any restriction to the model’s dominant subspace.

Identity-padding the target confounds the razor by handing every capped arm a free rank-2 loss reduction (Appendix D); the zero-padded target above removes the confound.

6 Related Work and Limitations

Chughtai et al. [2023] reverse-engineers group multiplication via representation theory. Stander et al. [2024] and Wu et al. [2025] dispute and refine that account (coset circuits; verified per-argument equivariance). He et al. [2026] prove that two-layer networks on $g_1 \star g_2$ learn spectral representations with a rank-one alignment of Fourier coefficients. Shutman et al. [2025] frame word learning as a low-rank 3-tensor. All four study the binary operation, not a sequential state, and none relates a learned dimension to $d_{\min}$. On sequential composition, Marchetti et al. [2026] show recurrent networks acquire irreps one at a time with width scaling in the irrep dimensions on cyclic and dihedral groups. Zhang et al. [2026] find on looped transformers that NC¹-completeness costs nothing while group order does. Neither measures state rank. Kazanskii [2026] regularizes representation dimensionality on permutation composition to speed grokking, without a necessity threshold. Here, rank itself, not an irrep decomposition, is the measured and manipulated quantity, and the required dimension is fixed in closed form by $d_{\min}$. Nazari and Rusch [2026] and Sun et al. [2026] measure state-rank dynamics in pretrained linear-attention models observationally, with no task algebra fixing a required dimension. They read low rank as under-used capacity, whereas this paper reads it as the rank the task demands. Parnichkun et al. [2025] apply an entropy effective rank to sequence-model memory as a utilization measure. Truong et al. [2026] track spectral-entropy collapse of representation covariances on group tasks. The estimator here is therefore standard, not new. Mishra et al. [2026] train matrix-state RNNs on S_3 composition without a rank intervention. Grazzi et al.

[2025], Siems et al. [2025], Merrill et al. [2024], Shakerinava et al. [2026], and Nowak et al. [2026] characterize which word problems recurrent architectures can express. They sort the problems by solvability and by the depth a subnormal series demands, an axis orthogonal to the one measured here (dimension governs state rank; series length governs depth). Delétang et al. [2023] benchmark sequence architectures across the formal-language hierarchy. The equivalence test instead sorts by representation dimension. A bolt-on-latent negative result [Larson, 2026b] is this result’s counterpart. Nichani et al. [2025] and Barnfield et al. [2026] prove associative-memory capacity under argmax (winner-take-all) decoding, whereas we score cosine similarity against continuous targets and report recovery at a threshold of 0.9. Huh et al. [2024] propose that models trained on different tasks converge to a shared representation; the present law is a narrower, algebra-driven instance of that convergence.

Limitations. All results are on sub-1M-parameter synthetic testbeds, not claims about pretrained language models. Razor cells are four seeds per group; S_5 ’s step pin is 20k rather than 8k, set by a pre-registered re-test after the 8k pin failed convergence (Appendix F). S_3 carries a soft-convergence flag at its own shortest pinned budget (Appendix G), so its confirmation reads directionally. A companion paper [Larson, 2026a] carries the binding-task program (the recruitment grid, force-rank staircase, and composition mechanism) in full; this paper shares no figures or tables with it.

References

- James A. Anderson. A simple neural network generating an interactive memory. *Mathematical Biosciences*, 14(3–4):197–220, 1972.
- Nicholas Barnfield, Juno Kim, Eshaan Nichani, Jason D. Lee, and Yue M. Lu. Sharp capacity thresholds in linear associative memory. *arXiv preprint arXiv:2605.05189*, 2026.
- David A. Mix Barrington. Bounded-width polynomial-size branching programs recognize exactly those languages in NC^1 . *Journal of Computer and System Sciences*, 38(1):150–164, 1989.
- David A. Mix Barrington and Denis Thérien. Finite monoids and the fine structure of NC^1 . *Journal of the ACM*, 35(4):941–952, 1988.
- Bilal Chughtai, Lawrence Chan, and Neel Nanda. A toy model of universality: Reverse engineering how networks learn group operations. In *International Conference on Machine Learning (ICML)*, 2023. arXiv:2302.03025.
- Grégoire Delétang, Anian Ruoss, Jordi Grau-Moya, Tim Genewein, Li Kevin Wenliang, Elliot Catt, Chris Cundy, Marcus Hutter, Shane Legg, Joel Veness, and Pedro A. Ortega. Neural networks and the chomsky hierarchy. In *International Conference on Learning Representations (ICLR)*, 2023. arXiv:2207.02098.
- Riccardo Grazi, Julien Siems, Arber Zela, Jörg K. H. Franke, Frank Hutter, and Massimiliano Pontil. Unlocking state-tracking in linear RNNs through negative eigenvalues. In *International Conference on Learning Representations (ICLR)*, 2025. arXiv:2411.12537.
- Jianliang He, Leda Wang, Fengzhuo Zhang, Siyu Chen, and Zhuoran Yang. Neural networks provably learn spectral representations for group composition. *arXiv preprint arXiv:2606.02993*, 2026.
- Minyoung Huh, Brian Cheung, Tongzhou Wang, and Phillip Isola. Position: The platonic representation hypothesis. In *International Conference on Machine Learning (ICML)*, 2024. arXiv:2405.07987.
- Maksim A. Kazanskii. How to tame grokking: Representation geometry as a control signal. *arXiv preprint arXiv:2607.11666*, 2026.
- Teuvo Kohonen. Correlation matrix memories. *IEEE Transactions on Computers*, C-21(4):353–359, 1972.
- Samuel Larson. When the gradient sees rank: Provable necessity, causal recruitment, and exact composition in trained matrix memories, 2026a. Companion paper, in preparation for arXiv.

- Samuel Larson. The gradient does not see rank: Rank-indifference in matrix-CODI on ProsQA. In *ICML 2026 Workshop on Mechanistic Interpretability*, 2026b. ICML 2026 Mechanistic Interpretability Workshop; arXiv:2609.03090.
- Bingbin Liu, Jordan T. Ash, Surbhi Goel, Akshay Krishnamurthy, and Cyril Zhang. Transformers learn shortcuts to automata. In *International Conference on Learning Representations (ICLR)*, 2023. arXiv:2210.10749.
- Giovanni Luca Marchetti, Daniel Kunin, Adele Myers, Francisco Acosta, and Nina Miolane. Sequential group composition: A window into the mechanics of deep learning. In *International Conference on Machine Learning (ICML)*, 2026. arXiv:2602.03655.
- William Merrill, Jackson Petty, and Ashish Sabharwal. The illusion of state in state-space models. In *International Conference on Machine Learning (ICML)*, 2024. arXiv:2404.08819.
- Mayank Mishra, Shawn Tan, Ion Stoica, Joseph Gonzalez, and Tri Dao. M²RNN: Non-linear RNNs with matrix-valued states for scalable language modeling. *arXiv preprint arXiv:2603.14360*, 2026.
- Philipp Nazari and T. Konstantin Rusch. The key to state reduction in linear attention: A rank-based perspective. *arXiv preprint arXiv:2602.04852*, 2026.
- Eshaan Nichani, Jason D. Lee, and Alberto Bietti. Understanding factual recall in transformers via associative memories. In *International Conference on Learning Representations (ICLR)*, 2025. arXiv:2412.06538, Spotlight.
- Franz Nowak, Ryan Cotterell, and Reda Boumasmoud. An algebraic view of the expressivity of recurrent language models. In *International Conference on Machine Learning (ICML)*, 2026. arXiv:2606.01765.
- Rom N. Parnichkun, Neehal Tumma, Armin W. Thomas, Alessandro Moro, Qi An, Taiji Suzuki, Atsushi Yamashita, Michael Poli, and Stefano Massaroli. Quantifying memory utilization with effective state-size. *arXiv preprint arXiv:2504.19561*, 2025.
- Mehran Shakerinava, Behnoush Khavari, Siamak Ravanbakhsh, and Sarath Chandar. The expressive limits of diagonal SSMs for state-tracking. In *International Conference on Learning Representations (ICLR)*, 2026. arXiv:2603.01959.
- Maor Shutman, Oren Loidor, and Ran Tessler. Learning words in groups: Fusion algebras, tensor ranks and grokking. *arXiv preprint arXiv:2509.06931*, 2025.
- Julien Siems, Timur Carstensen, Arber Zela, Frank Hutter, Massimiliano Pontil, and Riccardo Grazi. DeltaProduct: Improving state-tracking in linear RNNs via householder products. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2025. arXiv:2502.10297.
- Dashiell Stander, Qinan Yu, Honglu Fan, and Stella Biderman. Grokking group multiplication with cosets. *arXiv preprint arXiv:2312.06581*, 2024.
- Ao Sun, Hongtao Zhang, Heng Zhou, Yixuan Ma, Yiran Qin, Tongrui Su, Yan Liu, Zhanyu Ma, Jun Xu, Jiuchong Gao, Jinghua Hao, and Renqing He. State rank dynamics in linear attention LLMs. *arXiv preprint arXiv:2602.02195*, 2026.
- Xuan Khanh Truong, Quynh Hoa Truong, Duc Trung Luu, and Thanh Duc Phan. Spectral entropy collapse as a phase transition in delayed generalisation: An interventional and predictive framework for grokking. *arXiv preprint arXiv:2604.13123*, 2026.
- Wilson Wu, Louis Jaburi, Jacob Drori, and Jason Gross. Towards a unified and verified understanding of group-operation networks. In *International Conference on Learning Representations (ICLR)*, 2025. arXiv:2410.07476.
- Tong Zhang, Junhao Hu, Yun Peng, and Tao Xie. When does recurrence become an algorithm? convergence selection in weight-tied looped transformers. *arXiv preprint arXiv:2607.20594*, 2026.

A The Five Groups and Reference Representations

G	$ G $	$d_{\min}$	solvable	realization of ρ_G
S_3	6	2	yes	standard (dihedral)
S_4	24	3	yes	cube rotations
A_5	60	3	no	icosahedral rotations
S_5	120	4	no	standard (zero-sum)
A_6	360	5	no	standard (zero-sum)

Table 2: The five task groups. $d_{\min}$ is the minimal faithful real representation dimension; each reference representation is orthogonal by construction and verified faithful (injective on G) at build time. S_4/A_5 form the marquee pair: matched $d_{\min}$, opposite solvability.

B Per-Seed Observational Rank

G	$d_{\min}$	n	restricted eff. rank	band	in band
S_3	2	3	1.877 ± 0.060	$[1.4, 2.6]$	3/3
S_4	3	5	2.852 ± 0.054	$[2.1, 3.9]$	5/5
A_5	3	5	2.832 ± 0.062	$[2.1, 3.9]$	5/5
S_5	4	3	3.591 ± 0.069	$[2.8, 5.2]$	3/3
A_6	5	3	4.736 ± 0.023	$[3.5, 6.5]$	3/3

Table 3: Restricted effective rank of the unconstrained trained state (mean $\pm$ sd over seeds) against each group’s $d_{\min}$, with the pre-registered $[0.7, 1.3] \cdot d_{\min}$ band. Every seed of every group is in band; Spearman $\rho = 0.9747$ is the tie-capped maximum; the dimension-matched pair S_4/A_5 differs by 0.019 rank-units.

Per-group deviation of the mean from $d_{\min}$ (Table 3): S_3 6.1%, S_4 4.9%, A_5 5.6%, S_5 10.2%, A_6 5.3%.

S_4 ’s seed-0 razor $k=d_{\min}$ cell (Table 1) numerically exceeds its own unconstrained anchor by 0.15; plausibly the capped arm skips the ambient dimensions the zero-padded anchor must still learn to null under the same fixed step budget, an unconfirmed hypothesis. At four seeds the inversion holds strictly in 2 of 4 S_4 seeds and ties in the other 2 (Appendix F), so it stays unconfirmed.

C Whole-Matrix Effective Rank

G	$d_{\min}$	d_{state}	observational arm ($\rho_G \oplus I_2$)	zero-padded anchor ($\rho_G \oplus 0$)
S_3	2	4	3.769 ± 0.071 ($n=3$)	1.824 ± 0.064 ($n=4$)
S_4	3	5	4.835 ± 0.066 ($n=5$)	2.817 ± 0.101 ($n=4$)
A_5	3	5	4.781 ± 0.066 ($n=5$)	2.833 ± 0.077 ($n=4$)
S_5	4	6	5.510 ± 0.084 ($n=3$)	3.767 (3.705–3.860, $n=4$)
A_6	5	7	6.717 ± 0.022 ($n=3$)	4.669 ± 0.097 ($n=4$)

Table 4: Whole-matrix effective rank of the unconstrained trained state: the entropy effective rank of the full $d_{\text{state}} \times d_{\text{state}}$ state with no subspace lens, so unlike the restricted quantity of Table 3 it can range up to $d_{\text{state}} = d_{\min} + 2$. Observational arm: mean $\pm$ sd over seeds against the eye-padded target of rank $d_{\min} + 2$, which the state recruits (3.77/4.84/4.78/5.51/6.72 against $d_{\text{state}} = 4/5/5/6/7$). Zero-padded anchor: the causal wave’s unconstrained arm against the rank- $d_{\min}$ target, mean $\pm$ sd over four seeds in every group (S_5 at its 20k pin, Appendix F, reported as mean and range). On the zero-padded target the unconstrained state recruits $d_{\min}$ (1.82/2.82/2.83/3.77/4.67 against $d_{\min} = 2/3/3/4/5$) and leaves the two spare dimensions unused.

G	$k=d_{\min}-1$	$k=d_{\min}$	$k=d_{\min}+1$	unconstrained
S_3	1.000 ± 0.000	1.816 ± 0.081	1.841 ± 0.053	1.824 ± 0.064
S_4	1.953	2.937	2.964	2.952
A_5	1.991	2.824	2.869	2.882
S_5	2.931	3.766	3.801	3.860
A_6	3.887	4.631	4.708	4.730

Table 5: Whole-matrix effective rank of every zero-padded razor cell (seed 0; S_3 mean $\pm$ sd over its four seeds; S_5 at its 20k pin), for completeness alongside Table 4. The capped cells sit at or below their cap k ; at $k \geq d_{\min}$ they land where the unconstrained anchor does.

D Instrument Details and the Two Defects

Centering. For an orthogonal target the uncentered covariance of $Z(w)$ is isotropic and carries no subspace information; the production lens centers it (a nontrivial irreducible representation has zero group mean, cancelling the constant block). The step is load-bearing: an uncentered lens scores a flawless synthetic model 0.705 where the centered lens scores 0.9996 on identical data.

Length-robustness split. The disclosed split referenced in Section 3 scores only words of length $L \geq 2$ (the $L = 1$ read is attention-degenerate and was demoted with a mechanism note in the run records): it moves per-group mean recovery cosine by at most 0.013 (per-seed at most 0.041), with no group-selective divergence.

The ambient-identity tax. The first 58-cell sweep’s force-rank target was the eye-padded $\rho_G(\cdot) \oplus I_2$, whose rank is $d_{\text{state}} = d_{\min} + 2$ for every group. Because the identity block is constant across words, it is the cheapest reliable loss reduction available, and a rank-capped arm buys it before the group representation; the residual budget for ρ_G is $k - 2$, below $d_{\min}$ at every grid point, so no capped cell under identity-padding ever tested the law’s confirm direction. Three raw-artifact signatures established this: (i) force-rank cells’ direct cosine matched the rank- k optimum $\sqrt{k/d_{\text{state}}}$ with mean absolute deviation 0.028 across all 39 cells (maximum 0.166; the two S_5 below- $d_{\min}$ cells are the only outliers, an additional disclosed optimization shortfall), so the arms trained to their rank-constrained ceiling rather than under-training; (ii) centered restricted rank of capped arms landed near $k - 2$, the residual budget; (iii) in the zero-padded grid, a deliberately eye-padded corroboration arm reproduces the failure on demand at raw $k = d_{\min} + 1$ (effective budget $d_{\min} - 1$) while the tax-paid point recovers. The sweep verdict was registered as inconclusive with the tax as mechanism; the zero-padded causal wave of Section 5 is the registered fix. The zero-padded grid’s 30 cells were configuration-verified one-by-one against a manifest re-derived independently from the design record (steps, padding mode, and force-rank value per cell; zero skipped steps).

The observational band’s non-binding upper half. `entity_subspace_from_words` returns the top- $d_{\min}$ left singular vectors of the centered covariance by construction, so the restricted state $U^\top ZU$ is always $d_{\min} \times d_{\min}$, and the entropy effective rank of a $d_{\min} \times d_{\min}$ input has range $[1, d_{\min}]$. Restricted effective rank therefore cannot exceed $d_{\min}$, and so cannot exceed $1.3 \cdot d_{\min}$, for any seed of any group; only the band’s lower half, $\geq 0.7 \cdot d_{\min}$, is a test the data could fail. Every group mean lands in $[0.898, 0.951] \cdot d_{\min}$.

The rank-constrained cosine ceiling. The causal wave’s target is $\rho_G(\cdot) \oplus 0$, of rank exactly $d_{\min}$ with all $d_{\min}$ informative singular values equal to 1 (the reference representation is orthogonal by construction, Appendix A). For any matrix M of rank $\leq k \leq d_{\min}$, von Neumann’s trace inequality gives $\langle M, T \rangle_F \leq \sum_{i=1}^k \sigma_i(M) \sigma_i(T) = \sum_{i=1}^k \sigma_i(M)$, and Cauchy–Schwarz bounds $\sum_{i=1}^k \sigma_i(M) \leq \sqrt{k} \|M\|_F$, so $\cos(M, T) \leq \sqrt{k/d_{\min}}$. At $k = d_{\min} - 1$ this ceiling is 0.707/0.816/0.816/0.866/0.894 for $S_3/S_4/A_5/S_5/A_6$, below the `rec@0.9` threshold of 0.9 in every case: no rank- $(d_{\min} - 1)$ state, however trained, can register a single word above cosine 0.9 against this target. The necessity result (`rec@0.9` = 0.000 at $d_{\min} - 1$, all groups, all seeds) is this bound realized, not an independent discovery about what SGD finds; the corresponding empirical content is that the observed cosines at $d_{\min} - 1$ (0.61–0.84, seed 0) sit under their respective rank-constrained optima, evidence optimization reaches the geometry’s own ceiling. At $k \geq d_{\min}$ the ceiling is 1.0 (exact recovery is representable), so recovery above 0 at $d_{\min}$ is not guaranteed by the metric and carries the causal weight (sufficiency). As a fraction of the geometrically forced ceiling

$\sqrt{(d_{\min}-1)/d_{\min}}$, the below- $d_{\min}$ crosscheck cosines read S_3 86.3%, S_4 91.2%, A_5 94.9%, S_5 87.9%, and A_6 93.5% (mean 90.8%; seed-0 cells, S_5 at its 20k pin).

Estimator dependence. The pre-registered instrument is the entropy effective rank; under the stable-rank estimator (squared Frobenius norm over squared spectral norm, the estimator of Nazari and Rusch [2026]) the same unconstrained states read 1.451/2.156/2.078/2.362/3.340 against $d_{\min} = 2/3/3/4/5$, that is $0.59\text{--}0.73 \cdot d_{\min}$, outside the pre-registered band, which was written for the entropy estimator, while the group ordering is unchanged (Spearman 0.975 on group means). The ordinal law is therefore estimator-robust; the point estimate “equals $d_{\min}$ ” is a property of the entropy estimator on a near-flat spectrum with one weak direction, which stable rank penalizes; and the causal razor caps algebraic rank and is estimator-free.

Primary and crosscheck degauging. The design record’s default pipeline treats scale-only degauging ($\hat{Q} = I$) as the primary metric, with the fitted- (c, Q) Procrustes score retained as a robustness cross-check, after calibration on unconstrained checkpoints found $\hat{Q} \approx I$ empirically. Under the force-rank grid’s zero-padded target this equivalence breaks: the informative block’s degenerate singular spectrum makes the scale-only fit’s basis arbitrary, so the pre-registration for the causal wave specifically pins the fitted- (c, Q) score, denoted crosscheck rec@0.9 throughout Section 5 and Table 1 and Figure 2, as decisional; the scale-only score informs no reported conclusion. The two diverge sharply on this grid, which is why the distinction is disclosed here.

E S_3 Per-Seed Causal Detail

seed	anchor	$k=d_{\min}-1$	$k=d_{\min}$	$k=d_{\min}+1$	own bar	clears
0	0.550	0.000	0.450	0.550	0.495	no (−0.045)
1	0.600	0.000	0.550	0.750	0.540	yes (+0.010)
2	0.800	0.000	0.600	0.750	0.720	no (−0.120)
3	0.600	0.000	0.650	0.600	0.540	yes (+0.110)

Table 6: S_3 four-seed causal detail (crosscheck rec@0.9) behind the seed-mean confirmation in Section 5; the own bar is $0.9 \times$ each seed’s anchor. $k = d_{\min}-1$ reads exactly 0.000 in all four seeds; $k = d_{\min}$ clears each seed’s own bar in 2 of 4 (seeds 1, 3), missing in the other 2 because the anchor itself ranges 0.550–0.800 across seeds. The pre-registered criterion compares the seed-mean $k = d_{\min}$ value (0.5625) against the bar fixed before the extension ran (0.495, from seed 0’s anchor), specifically to avoid computing the bar from the same noisy seeds it is judged against; recomputing the bar as $0.9 \times$ the four-seed anchor mean (raw mean 0.6375, bar 0.574) would put the seed-mean value 0.011 below it.

F Per-Seed Razor Detail for S_4, A_5, S_5, A_6

seed	anchor	$k=d_{\min}-1$	$k=d_{\min}$	$k=d_{\min}+1$	own bar	clears	gate1a (anchor / $k=d_{\min}$)
S_4 ($d_{\min} = 3$, 20k steps): seed-mean 0.6875 vs. fixed bar 0.585, confirmed; self-referential bar 0.5625							
0	0.650	0.000	0.800	0.950	0.585	yes (+0.215)	—
1	0.500	0.000	0.600	0.600	0.450	yes (+0.150)	—
2	0.700	0.000	0.700	0.650	0.630	yes (+0.070)	—
3	0.650	0.000	0.650	0.650	0.585	yes (+0.065)	—
A_5 ($d_{\min} = 3$, 20k steps): seed-mean 0.6500 vs. fixed bar 0.630, confirmed; self-referential bar 0.5625							
0	0.700	0.000	0.700	0.750	0.630	yes (+0.070)	—
1	0.700	0.000	0.750	0.750	0.630	yes (+0.120)	—
2	0.550	0.000	0.600	0.550	0.495	yes (+0.105)	—
3	0.550	0.000	0.550	0.450	0.495	yes (+0.055)	—
S_5 ($d_{\min} = 4$, 20k steps, pre-registered re-test): seed-mean 0.7000 vs. bar 0.6075, confirmed							
0	0.750	0.000	0.700	0.750	0.675	yes (+0.025)	0.981 / 0.981
1	0.600	0.000	0.600	0.650	0.540	yes (+0.060)	0.974 / 0.960
2	0.700	0.000	0.750	0.650	0.630	yes (+0.120)	0.974 / 0.970
3	0.650	0.000	0.750	0.700	0.585	yes (+0.165)	0.959 / 0.967
A_6 ($d_{\min} = 5$, 40k steps): seed-mean 0.6750 vs. fixed bar 0.585, confirmed; self-referential bar 0.5850							
0	0.650	0.000	0.650	0.700	0.585	yes (+0.065)	—
1	0.600	0.000	0.650	0.700	0.540	yes (+0.110)	—
2	0.850	0.000	0.850	0.800	0.765	yes (+0.085)	—
3	0.500	0.000	0.550	0.550	0.450	yes (+0.100)	—

Table 7: Four-seed causal detail (crosscheck rec@0.9) for the four groups extended under a pre-registration recorded before launch, on the same build, manifest, and decisional readout as seed 0; S_4 , A_5 , and A_6 at their seed-0 step pins, S_5 at a 20k pin. The own bar is $0.9\times$ each seed’s anchor and is disclosed, not decisional. $k = d_{\min}-1$ reads exactly 0.000 in all 16 cells. The decisional comparison is the seed-mean of $k = d_{\min}$ over seeds 0–3 against the bar fixed before the seeds ran: from seed 0 for S_4 , A_5 , A_6 (0.585/0.630/0.585), and, for S_5 , $0.9\times$ the seed-mean of its four 20k anchors (0.6075), since no seed-0 literal existed at that pin and the rule was fixed before launch. S_4 0.6875, A_5 0.6500, S_5 0.7000, and A_6 0.6750 confirm. The self-referential bar ($0.9\times$ the four-seed anchor mean: 0.5625/0.5625/0.5850 for $S_4/A_5/A_6$) is reported for symmetry with Table 6. Own-bar clears: 4/4 in every group. gate1a (min validation cosine over $L \in [2, 5]$, bar 0.92) is tabulated for S_5 , whose pin was set on that criterion. S_5 ’s original 8,000-step pin under-trained it (every 8k razor cell failed the 0.92 convergence bar, Appendix G, and the four-seed $k=d_{\min}$ mean at that pin, 0.4125, fell short of the fixed 0.450 bar); the pin was raised to 20,000 steps under a pre-registration recorded before the re-run, and the 8k cells remain archived with the design record.

G Soft Convergence at the Shortest Pinned Budgets

G	anchor	$k=d_{\min}-1$	$k=d_{\min}$	$k=d_{\min}+1$	bar (0.92)
S_3	0.914	0.665	0.900	0.903	fail (all 4)
S_5	0.876	0.801	0.879	0.877	fail (all 4)

Table 8: Convergence health (gate1a, min validation cosine over $L \in [2, 5]$) for every seed-0 S_3 razor cell at its shortest pinned step budget and every seed-0 S_5 razor cell at its original 8k budget. All eight cells fall short of the 0.92 margin; S_5 ’s 0.876–0.879 range is a larger shortfall than S_3 ’s 0.900–0.914. The necessity leg (Section 5) is unaffected by construction; S_3 ’s sufficiency leg should be read as directionally consistent under disclosed soft convergence. At S_5 ’s 20k pin (Appendix F), every S_5 anchor and $k=d_{\min}$ cell passes gate1a (0.959–0.981), which is why that pin moved.

H Depth-21 Periodicity Under the Single K -Cycle

The binding task’s held-out composition probe uses a single Hamiltonian K -cycle, under which nominal depth 21 shares its target with the already-tested depth 5 ($\pi^{21} = \pi^{21 \bmod 8} = \pi^5$ exactly). Appendix A of a companion paper [Larson, 2026a] performs this periodicity analysis and the associated depth-decay measurement in full on the binding testbed; see that appendix for the derivation and the per-hop predicted-vs-measured table.