

---

# The Rank the Task Demands: A Causal Rank Law for Matrix Memories Trained on Group Composition

---

Samuel Larson  
Pebble ML  
samlarson@pebbleml.com

## Abstract

Matrix-valued memories make rank the natural budget of a learned representation: the number of independent directions a state spans bounds what it can bind, compose, and track. We report causal evidence, on a group-composition testbed trained under a hard single-state bottleneck with a fixed decoder that cannot launder rank, that gradient descent recruits precisely the rank the task’s algebra demands. A companion paper [Larson, 2026a] establishes the analogous recruitment and causal necessity pattern on a  $K$ -pair associative-binding testbed, where exact recovery provably requires state rank at least  $K$ ; this paper inherits that instrument and extends the rank law from a scalar capacity bound to a representation-theoretic one. On group-composition state tracking over five finite groups spanning the solvable/non-solvable divide, the recruited rank equals the group’s minimal faithful real representation dimension  $d_{\min}$  (Spearman  $\rho = 0.9747$ , the design’s tie-capped maximum), the dimension-matched solvable/non-solvable pair  $S_4/A_5$  is statistically equivalent under a pre-registered test, and a pre-registered force-rank razor is exact in both directions: one rank below  $d_{\min}$ , recovery is capped by the target’s tied unit spectrum at  $\sqrt{(d_{\min}-1)/d_{\min}} \leq 0.894$ , below the 0.9 threshold in every group by construction, with observed cells at 76–95% (mean 88%) of that ceiling; at  $d_{\min}$ , not guaranteed a priori, recovery clears the pre-registered anchor-relative bar at four seeds per group in all five groups, both marquee members included. Representation theory, not computational complexity class, sets what gradient descent buys.

**Keywords:** effective rank, fast weights, group representations, state tracking

## 1 Introduction

A matrix-valued memory represents by spanning: whatever a  $d \times d$  state binds or tracks, it holds in the geometry of its column space, and rank is the budget it spends. Prior work treats this budget descriptively [Nazari and Rusch, 2026, Sun et al., 2026] or through hand-built constructions [Nichani et al., 2025]; neither answers what a geometric account of learned representations needs answered: when a task’s algebra fixes a minimal representational dimension, does gradient descent recruit exactly that dimension, and is it causally load-bearing?

We answer both halves affirmatively under one discipline: a hard single-state bottleneck (the decoder reads only one matrix  $Z$ , verified by a gradient blank-out test) and exact-continuous-recovery scoring (cosine against the true continuous target, never argmax over a codebook, which would let a rank-1 state recover on the order of  $d$  associations [Nichani et al., 2025]). Section 2 includes the provable  $K$ -pair-binding foundation. The headline is group-composition state tracking, where representation theory supplies the ground truth: across five finite groups spanning the solvable/non-solvable divide, the minimal faithful real representation dimension  $d_{\min}$  predicts the recruited rank almost perfectly (Section 3), a matched-dimension solvable/non-solvable pair lands statistically equivalent

(Section 4), and a pre-registered force-rank razor (Section 5) is exact in the necessity direction and confirms sufficiency in all five groups:  $d_{\min}-1$  is analytically incapable of exact recovery under the 0.9 threshold ( $\sqrt{(d_{\min}-1)/d_{\min}} \leq 0.894$ ), and  $d_{\min}$  suffices at four seeds per group in every group, which is not guaranteed a priori. Correcting the target’s padding (Appendix D) recovers the razor’s sufficiency result.

## 2 Tasks, Models, Instrument, and the Binding Foundation

**Tasks.** In the binding task, each episode presents  $K$  key-value pairs, the encoder writes one state  $Z \in \mathbb{R}^{d \times d}$ , prediction is the literal unbind  $Zk_j$ , and  $\text{rec@0.9}$  is the fraction of queries with cosine to the true value above 0.9. The group task is the word problem of a finite group  $G$ : a word  $w = g_{i_1} \cdots g_{i_L}$ , drawn as a random walk on  $G$ ’s Cayley graph ( $L \sim \text{U}\{1, \dots, 8\}$ ), must map to  $\rho_G(g_{i_1} \cdots g_{i_L})$  under a pinned orthogonal reference representation of dimension  $d_{\min}(G)$ , the minimal faithful real representation dimension. The groups are  $S_3, S_4, A_5, S_5, A_6$  with  $d_{\min} = 2, 3, 3, 4, 5$  (Appendix A); the first two are solvable, the rest are not, and non-solvable word problems are  $\text{NC}^1$ -complete [Barrington, 1989, Barrington and Thérien, 1988].  $d_{\min}$  is a different, representation-theoretic axis;  $S_4/A_5$ , matched at  $d_{\min} = 3$  with opposite solvability, are the designed dissociation pair.

**Model.** A Transformer encoder with  $d_{\text{state}}$  learned row-reader queries maps each word to a single state  $Z(w) \in \mathbb{R}^{d_{\text{state}} \times d_{\text{state}}}$ ,  $d_{\text{state}} = d_{\min} + 2$ , leaving spare dimensions so over-recruitment is expressible. The target embeds the reference block-diagonally ( $\rho_G(\cdot) \oplus I_2$  in the observational arm,  $\rho_G(\cdot) \oplus 0$  in the causal-razor arm; Appendix D); the loss is cosine distance, the readout is fixed with no learned weights that could launder rank, and the decoder reads only  $Z$  (blank-out verified). Per-group step budgets (8k–40k, recorded in the design document’s pre-registration) were pinned by convergence bars before any decisional cell ran.

**Instrument.** The learned state is defined only up to scale and an orthogonal change of basis (a Schur intertwiner):  $Z(w) \approx cQ[\rho_G(w) \oplus \cdot]Q^T$ . We estimate the model’s own dominant  $d_{\min}$ -subspace  $U$  from the SVD of the centered covariance of  $Z(w)$  over held-out words, measure **restricted effective rank** (entropy effective rank of  $U^T Z(w)U$ ), and score **degauged recovery**: cosine after fitting ( $c, Q$ ) on a fitting split, evaluated on a disjoint split, reported as  $\text{rec@0.9}$ . Centering is load-bearing (Appendix D); rank is invariant under the fitted gauge, so a rank-deficient state cannot be degauged into a full-rank one. For force-rank cells the decisional readout was pinned in advance to the conservative full- $Q$  Procrustes variant (*crosscheck*  $\text{rec@0.9}$ ).

**The provable foundation (binding).**

**Fact 1.** *If  $Zk_j = v_j$  exactly for  $K$  bindings with linearly independent keys and values, then  $ZK_{\text{mat}} = V_{\text{mat}}$ , so  $K = \text{rank}(V_{\text{mat}}) \leq \text{rank}(Z)$ .*

The bound is classical [Kohonen, 1972, Anderson, 1972], holding only under exact continuous recovery. A companion paper [Larson, 2026a] establishes on this binding testbed that gradient descent recruits effective rank tracking  $K$ , that the recruited rank is causally necessary (a train-time force-rank step at the provable bound), and that the trained operator composes exactly under repeated self-application, a composition-stability probe periodicity-equivalent to depth 5 under the single 8-cycle target [Liu et al., 2023] (Appendix H); this paper inherits that instrument and carries only the group-composition program.

## 3 The Rank Law on Group Composition, Observed

Figure 1 gives the observational leg: per-group mean restricted effective rank lands within 4.9–10.2% of  $d_{\min}$  at every group, and all 19 seeds sit inside the pre-registered  $[0.7, 1.3] \cdot d_{\min}$  band (means and per-seed values in Appendix B).

Spearman correlation between recruited rank and  $d_{\min}$  is  $\rho = 0.9747$ , the maximum this design can express, since the  $S_4/A_5$  tie caps  $\rho$  below 1; under the exact permutation null,  $P(\rho \geq 0.8) = 8/120 \approx 6.7\%$  (0.8 is pre-registered, below the next achievable level 0.87), so by pre-registration this leg is corroborating rather than independently decisive: the band’s upper half is non-binding by construction, and a disclosed length-robustness split is reported alongside it (Appendix D). The dimension-matched pair  $S_4/A_5$  is tested directly in Section 4.

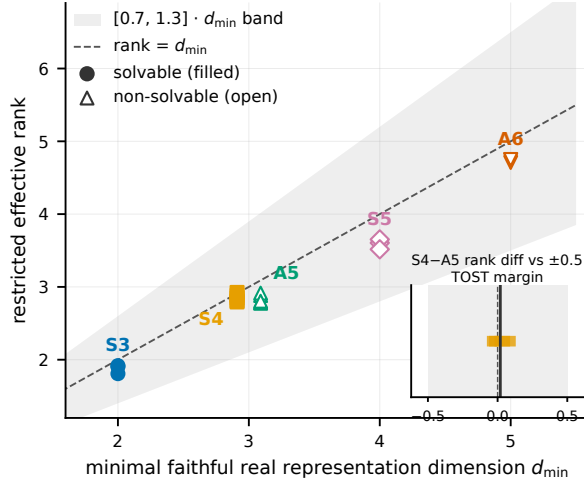


Figure 1: Recruited rank follows representation dimension, not solvability. Each point is one seed’s restricted effective rank on the group word problem vs. its group’s  $d_{\min}$  (filled: solvable; open: non-solvable), with the pre-registered  $[0.7, 1.3] \cdot d_{\min}$  band and the identity line; all 19 seeds are in band, and  $S_4/A_5$  coincide at  $d_{\min} = 3$ . Inset: per-seed  $S_4 - A_5$  rank differences at matched  $d_{\min} = 3$  against the pre-registered  $\pm 0.5$  rank-unit equivalence margin (shaded); the vertical line is the observed mean difference,  $+0.019$  (Section 4).

#### 4 Equivalence at Matched Dimension

The pair  $S_4/A_5$  was designed into the family as the decisive contrast: the same  $d_{\min} = 3$ , opposite sides of the solvability divide, the axis on which expressivity theory separates state-tracking architectures [Merrill et al., 2024, Grazzi et al., 2025, Siems et al., 2025]. If learned representational dimension were set by complexity class, the pair should separate; if by representation dimension, it should coincide. The precursor observation is in Siems et al. [2025] (§5.2):  $S_4$  and  $A_5$  both extrapolate with two Householder reflections and keys of size 3, which they attribute to the groups’ embedding in  $SO(3)$ , and a PCA of the trained keys is three-dimensional; the present test turns that single-architecture reading into a pre-registered equivalence claim on state rank across the five-group family, and Section 5 makes the dimension causal. Because the interesting outcome is a null, the comparison was pre-registered as an equivalence test rather than a difference test: Welch two-one-sided tests on restricted effective rank at margin  $\pm 0.5$  rank-units (half the spacing of the  $d_{\min}$  ladder),  $n = 5$  seeds per group, with a pre-run power simulation, fixed in the design record before the sweep ran, confirming the test reliably *rejects* equivalence at a true gap of 1.0 rank-units, so a real class effect of one ladder step could not have hidden inside the margin.

The observed difference is  $+0.019$  rank-units (se 0.037, df 7.8), and both one-sided tests pass at roughly seven times the critical value ( $t = 13.06$  and  $14.12$  against  $t_{\text{crit}} = 1.865$ ): equivalence is declared decisively. The two groups’ seed clusters are visually coincident in Figure 1 (inset). Convergence here is governed by what the algebra demands, not by how hard the class is to compute.

#### 5 The Causal Razor

The decisive test intervenes on rank: the encoder’s output is spectrally truncated to rank  $k \in \{d_{\min} - 1, d_{\min}, d_{\min} + 1\}$  throughout training, against the zero-padded target  $\rho_G(\cdot) \oplus 0$  of rank exactly  $d_{\min}$ , alongside an unconstrained anchor from the same family. Pre-registered reading: below  $d_{\min}$ , a sound readout pins recovery to zero by geometry, making that arm an integrity control whose registered trigger (any recovery there) would indicate an instrument leak; the live prediction is that  $k \geq d_{\min}$  recovers past  $0.9 \times$  the anchor’s crosscheck  $\text{rec}@0.9$ .

Table 1 and Figure 2 show the result on the pre-pinned crosscheck readout. Necessity below  $d_{\min}$  is an analytically forced floor: against a  $d_{\min}$ -tied-unit-singular-value target, the maximum cosine

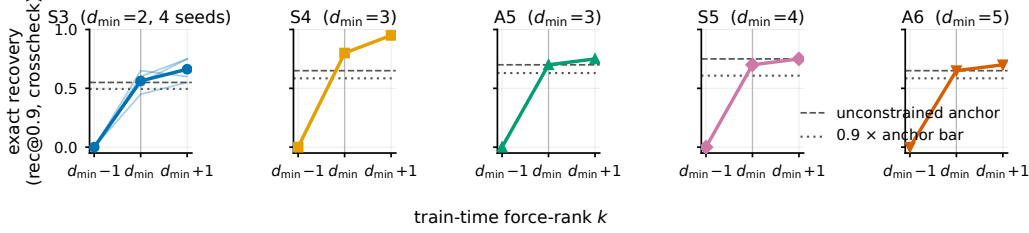


Figure 2: Exact recovery is a step function at  $d_{\min}$ : per group, crosscheck  $\text{rec}@0.9$  on held-out words at force-rank  $k \in \{d_{\min}-1, d_{\min}, d_{\min}+1\}$ , vs. the unconstrained anchor (dashed) and the  $0.9 \times$  anchor bar (dotted).  $S_3$  overlays its four seeds (thin lines; bold mean); its below- $d_{\min}$  zero is unanimous. The other four groups are drawn at seed 0; their four-seed sufficiency verdicts are in Table 1.  $S_5$ 's dotted bar is its decisional bar,  $0.9 \times$  its four-seed anchor mean at its 20k pin (Appendix F).

| $G$   | anchor | $k=d_{\min}-1$ | $k=d_{\min}$ | $k=d_{\min}+1$ | bar                 | $k=d_{\min}$ , seed-mean ( $n=4$ ) |
|-------|--------|----------------|--------------|----------------|---------------------|------------------------------------|
| $S_3$ | 0.550  | 0.000          | 0.450*       | 0.550          | 0.495               | <b>0.5625</b>                      |
| $S_4$ | 0.650  | 0.000          | <b>0.800</b> | 0.950          | 0.585               | <b>0.6875</b>                      |
| $A_5$ | 0.700  | 0.000          | <b>0.700</b> | 0.750          | 0.630               | <b>0.6500</b>                      |
| $S_5$ | 0.750  | 0.000          | <b>0.700</b> | 0.750          | 0.6075 <sup>†</sup> | <b>0.7000</b>                      |
| $A_6$ | 0.650  | 0.000          | <b>0.650</b> | 0.700          | 0.585               | <b>0.6750</b>                      |

Table 1: The causal razor on the zero-padded rank- $d_{\min}$  target (crosscheck  $\text{rec}@0.9$  by force-rank  $k$ ). The anchor and  $k$  columns are seed 0, one seed per cell; the bar is  $0.9 \times$  the seed-0 anchor, fixed before any further seed ran ( $S_5$ : see <sup>†</sup>), and bold there marks a seed-0 cell that clears it. The last column is the seed-mean of  $k=d_{\min}$  over seeds 0–3, judged against that bar by the pre-registered rule: all five groups confirm (bold). Exactly 0.000 one rank below  $d_{\min}$  in all four seeds of every group (the forced ceiling is  $\leq 0.894$ ). Per-seed own-bar clears ( $0.9 \times$  each seed's own anchor; disclosed, not decisional):  $S_3$  2/4,  $S_4$  4/4,  $A_5$  4/4,  $S_5$  4/4,  $A_6$  4/4. \* $S_3$ 's seed-0 cell sat inside the pre-stated  $\pm 0.05$  marginality trigger and was extended first (seed-mean 0.5625 against the fixed 0.495 bar); the other four groups were extended under a separate pre-registration (Appendices E, F). <sup>†</sup> $S_5$ 's step pin is 20k, set by a separately pre-registered re-test (Appendix F); by that pre-registration its bar is  $0.9 \times$  its four-seed anchor mean (0.6750), since no seed-0 literal existed at that pin.

any rank- $(d_{\min}-1)$  operator can reach is  $\sqrt{(d_{\min}-1)/d_{\min}} \leq 0.894$ , below the 0.9 threshold in every group by construction, so  $\text{rec}@0.9 = 0.000$  at  $k = d_{\min}-1$  follows regardless of training quality; observed cells still reach 76–95% of that ceiling (mean 88%; Appendix D), evidence of near-optimal training under the cap. The zero is noiseless in all four seeds of every group. Sufficiency at  $d_{\min}$  carries the causal claim, since no such bound guarantees a rank-exactly- $d_{\min}$  solution is reachable. Every group was run at four seeds, and the pre-registered rule compares the seed-mean of  $k=d_{\min}$  against the bar fixed from seed 0 before the further seeds ran, never against a bar recomputed from the seeds being judged.  $S_3$ , whose seed-0 cell sat inside the pre-stated  $\pm 0.05$  marginality trigger, confirms at seed-mean 0.5625 against the fixed 0.495 bar;  $S_4$ ,  $A_5$ , and  $A_6$  confirm at seed-means 0.6875, 0.6500, and 0.6750 against fixed bars 0.585, 0.630, and 0.585, each clearing its own-seed bar in 4 of 4 seeds;  $S_5$  confirms at seed-mean 0.7000 against its bar 0.6075, per-seed  $k=d_{\min}$  0.700/0.600/0.750/0.750 against anchors 0.750/0.600/0.700/0.650, own-bar clears 4 of 4, and  $k=d_{\min}-1$  at 0.000 in all four seeds; its bar is  $0.9 \times$  its four-seed anchor mean rather than a seed-0 literal because its 20k step pin was set by a separately pre-registered re-test (Appendix F). Sufficiency therefore holds at four seeds in all five groups (per-seed detail in Appendices E and F). Both marquee groups confirm at  $d_{\min}$ , meeting the causal criterion. Table 4 adds an instrument-independent reading: on the zero-padded target the unconstrained anchor's whole-matrix effective rank, taken over the full  $d_{\text{state}} \times d_{\text{state}}$  state with no subspace lens, lands at 1.82/2.82/2.83/3.77/4.67 (four-seed means) against  $d_{\min} = 2/3/3/4/5$  with two ambient dimensions available, so the recruited rank equals  $d_{\min}$  without any restriction to the model's dominant subspace.

Identity-padding the target confounds the razor by handing every capped arm a free rank-2 loss reduction (Appendix D); the zero-padded target above removes the confound.

## 6 Related Work and Limitations

Chughtai et al. [2023] reverse-engineers group multiplication via representation theory, Stander et al. [2024] and Wu et al. [2025] dispute and refine that account (coset circuits; verified per-argument equivariance), He et al. [2026] prove that two-layer networks on  $g_1 \star g_2$  learn spectral representations with a rank-one alignment of Fourier coefficients, and Shutman et al. [2025] frame word learning as a low-rank 3-tensor; all four study the binary operation, not a sequential state, and none relates a learned dimension to  $d_{\min}$ . On sequential composition, Marchetti et al. [2026] show recurrent networks acquire irreps one at a time with width scaling in the irrep dimensions on cyclic and dihedral groups, and Zhang et al. [2026] find on looped transformers that  $\text{NC}^1$ -completeness costs nothing while group order does; neither measures state rank. Kazanskii [2026] regularizes representation dimensionality on permutation composition to speed grokking, without a necessity threshold. Here, rank itself, not an irrep decomposition, is the measured and manipulated quantity, and the required dimension is fixed in closed form by  $d_{\min}$ . Nazari and Rusch [2026] and Sun et al. [2026] measure state-rank dynamics in pretrained linear-attention models, observationally, with no task algebra fixing a required dimension, and read low rank as under-used capacity where this paper reads it as the rank the task demands; Parnichkun et al. [2025] apply an entropy effective rank to sequence-model memory as a utilization measure, and Truong et al. [2026] track spectral-entropy collapse of representation covariances on group tasks, so the estimator here is standard, not new; Mishra et al. [2026] train matrix-state RNNs on  $S_3$  composition without a rank intervention. Grazi et al. [2025], Siems et al. [2025], Merrill et al. [2024], Shakerinava et al. [2026], and Nowak et al. [2026] characterize which word problems recurrent architectures can express, sorting them by solvability and by the depth a subnormal series demands, an axis orthogonal to the one measured here (dimension governs state rank; series length governs depth), and Delétang et al. [2023] benchmark sequence architectures across the formal-language hierarchy; the marquee equivalence instead sorts by representation dimension. A bolt-on-latent negative result [Larson, 2026b] is this result’s counterpart. Nichani et al. [2025] and Barnfield et al. [2026] prove associative-memory capacity under argmax (winner-take-all) decoding, the loophole our exact-continuous-recovery scoring closes. Huh et al. [2024] propose that models trained on different tasks converge to a shared representation; the present law is a narrower, algebra-driven instance of that convergence.

**Limitations.** All results are on sub-1M-parameter synthetic testbeds, not claims about pretrained language models. Razor cells are four seeds per group;  $S_5$ ’s step pin is 20k rather than 8k, set by a pre-registered re-test after the 8k pin failed convergence (Appendix F).  $S_3$  carries a soft-convergence flag at its own shortest pinned budget (Appendix G), so its confirmation reads directionally. A companion paper [Larson, 2026a] carries the binding-task program (the recruitment grid, force-rank staircase, and composition mechanism) in full; this paper shares no figures or tables with it.

## References

- James A. Anderson. A simple neural network generating an interactive memory. *Mathematical Biosciences*, 14(3–4):197–220, 1972.
- Nicholas Barnfield, Juno Kim, Eshaan Nichani, Jason D. Lee, and Yue M. Lu. Sharp capacity thresholds in linear associative memory. *arXiv preprint arXiv:2605.05189*, 2026.
- David A. Mix Barrington. Bounded-width polynomial-size branching programs recognize exactly those languages in  $\text{NC}^1$ . *Journal of Computer and System Sciences*, 38(1):150–164, 1989.
- David A. Mix Barrington and Denis Thérien. Finite monoids and the fine structure of  $\text{NC}^1$ . *Journal of the ACM*, 35(4):941–952, 1988.
- Bilal Chughtai, Lawrence Chan, and Neel Nanda. A toy model of universality: Reverse engineering how networks learn group operations. In *International Conference on Machine Learning (ICML)*, 2023. arXiv:2302.03025.
- Grégoire Delétang, Anian Ruoss, Jordi Grau-Moya, Tim Genewein, Li Kevin Wenliang, Elliot Catt, Chris Cundy, Marcus Hutter, Shane Legg, Joel Veness, and Pedro A. Ortega. Neural networks and

- the chomsky hierarchy. In *International Conference on Learning Representations (ICLR)*, 2023. arXiv:2207.02098.
- Riccardo Grazi, Julien Siems, Arber Zela, Jörg K. H. Franke, Frank Hutter, and Massimiliano Pontil. Unlocking state-tracking in linear RNNs through negative eigenvalues. In *International Conference on Learning Representations (ICLR)*, 2025. arXiv:2411.12537.
- Jianliang He, Leda Wang, Fengzhuo Zhang, Siyu Chen, and Zhuoran Yang. Neural networks provably learn spectral representations for group composition. *arXiv preprint arXiv:2606.02993*, 2026.
- Minyoung Huh, Brian Cheung, Tongzhou Wang, and Phillip Isola. Position: The platonic representation hypothesis. In *International Conference on Machine Learning (ICML)*, 2024. arXiv:2405.07987.
- Maksim A. Kazanskii. How to tame grokking: Representation geometry as a control signal. *arXiv preprint arXiv:2607.11666*, 2026.
- Teuvo Kohonen. Correlation matrix memories. *IEEE Transactions on Computers*, C-21(4):353–359, 1972.
- Samuel Larson. When the gradient sees rank: Provable necessity, causal recruitment, and exact composition in trained matrix memories, 2026a. Companion paper, in preparation for arXiv.
- Samuel Larson. The gradient does not see rank: Rank-indifference in matrix-CODI on ProsQA. In *ICML 2026 Workshop on Mechanistic Interpretability*, 2026b. ICML 2026 Mechanistic Interpretability Workshop; arXiv preprint submitted Sept 2026.
- Bingbin Liu, Jordan T. Ash, Surbhi Goel, Akshay Krishnamurthy, and Cyril Zhang. Transformers learn shortcuts to automata. In *International Conference on Learning Representations (ICLR)*, 2023. arXiv:2210.10749.
- Giovanni Luca Marchetti, Daniel Kunin, Adele Myers, Francisco Acosta, and Nina Miolane. Sequential group composition: A window into the mechanics of deep learning. In *International Conference on Machine Learning (ICML)*, 2026. arXiv:2602.03655.
- William Merrill, Jackson Petty, and Ashish Sabharwal. The illusion of state in state-space models. In *International Conference on Machine Learning (ICML)*, 2024. arXiv:2404.08819.
- Mayank Mishra, Shawn Tan, Ion Stoica, Joseph Gonzalez, and Tri Dao. M<sup>2</sup>RNN: Non-linear RNNs with matrix-valued states for scalable language modeling. *arXiv preprint arXiv:2603.14360*, 2026.
- Philipp Nazari and T. Konstantin Rusch. The key to state reduction in linear attention: A rank-based perspective. *arXiv preprint arXiv:2602.04852*, 2026.
- Eshaan Nichani, Jason D. Lee, and Alberto Bietti. Understanding factual recall in transformers via associative memories. In *International Conference on Learning Representations (ICLR)*, 2025. arXiv:2412.06538, Spotlight.
- Franz Nowak, Ryan Cotterell, and Reda Boumaismoud. An algebraic view of the expressivity of recurrent language models. In *International Conference on Machine Learning (ICML)*, 2026. arXiv:2606.01765.
- Rom N. Parnichkun, Neehal Tumma, Armin W. Thomas, Alessandro Moro, Qi An, Taiji Suzuki, Atsushi Yamashita, Michael Poli, and Stefano Massaroli. Quantifying memory utilization with effective state-size. *arXiv preprint arXiv:2504.19561*, 2025.
- Mehran Shakerinava, Behnoush Khavari, Siamak Ravanbakhsh, and Sarath Chandar. The expressive limits of diagonal SSMs for state-tracking. In *International Conference on Learning Representations (ICLR)*, 2026. arXiv:2603.01959.
- Maor Shutman, Oren Loidor, and Ran Tessler. Learning words in groups: Fusion algebras, tensor ranks and grokking. *arXiv preprint arXiv:2509.06931*, 2025.

Julien Siems, Timur Carstensen, Arber Zela, Frank Hutter, Massimiliano Pontil, and Riccardo Grazzi. DeltaProduct: Improving state-tracking in linear RNNs via householder products. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2025. arXiv:2502.10297.

Dashiell Stander, Qinan Yu, Honglu Fan, and Stella Biderman. Grokking group multiplication with cosets. *arXiv preprint arXiv:2312.06581*, 2024.

Ao Sun, Hongtao Zhang, Heng Zhou, Yixuan Ma, Yiran Qin, Tongrui Su, Yan Liu, Zhanyu Ma, Jun Xu, Jiuchong Gao, Jinghua Hao, and Renqing He. State rank dynamics in linear attention LLMs. *arXiv preprint arXiv:2602.02195*, 2026.

Xuan Khanh Truong, Quynh Hoa Truong, Duc Trung Luu, and Thanh Duc Phan. Spectral entropy collapse as a phase transition in delayed generalisation: An interventional and predictive framework for grokking. *arXiv preprint arXiv:2604.13123*, 2026.

Wilson Wu, Louis Jaburi, Jacob Drori, and Jason Gross. Towards a unified and verified understanding of group-operation networks. In *International Conference on Learning Representations (ICLR)*, 2025. arXiv:2410.07476.

Tong Zhang, Junhao Hu, Yun Peng, and Tao Xie. When does recurrence become an algorithm? convergence selection in weight-tied looped transformers. *arXiv preprint arXiv:2607.20594*, 2026.

## A The Five Groups and Reference Representations

| $G$   | $ G $ | $d_{\min}$ | solvable | realization of $\rho_G$ |
|-------|-------|------------|----------|-------------------------|
| $S_3$ | 6     | 2          | yes      | standard (dihedral)     |
| $S_4$ | 24    | 3          | yes      | cube rotations          |
| $A_5$ | 60    | 3          | no       | icosahedral rotations   |
| $S_5$ | 120   | 4          | no       | standard (zero-sum)     |
| $A_6$ | 360   | 5          | no       | standard (zero-sum)     |

Table 2: The five task groups.  $d_{\min}$  is the minimal faithful real representation dimension; each reference representation is orthogonal by construction and verified faithful (injective on  $G$ ) at build time.  $S_4/A_5$  form the marquee pair: matched  $d_{\min}$ , opposite solvability.

## B Per-Seed Observational Rank

| $G$   | $d_{\min}$ | $n$ | restricted eff. rank | band         | in band |
|-------|------------|-----|----------------------|--------------|---------|
| $S_3$ | 2          | 3   | $1.877 \pm 0.060$    | $[1.4, 2.6]$ | 3/3     |
| $S_4$ | 3          | 5   | $2.852 \pm 0.054$    | $[2.1, 3.9]$ | 5/5     |
| $A_5$ | 3          | 5   | $2.832 \pm 0.062$    | $[2.1, 3.9]$ | 5/5     |
| $S_5$ | 4          | 3   | $3.591 \pm 0.069$    | $[2.8, 5.2]$ | 3/3     |
| $A_6$ | 5          | 3   | $4.736 \pm 0.023$    | $[3.5, 6.5]$ | 3/3     |

Table 3: Restricted effective rank of the unconstrained trained state (mean  $\pm$  sd over seeds) against each group’s  $d_{\min}$ , with the pre-registered  $[0.7, 1.3] \cdot d_{\min}$  band. Every seed of every group is in band; Spearman  $\rho = 0.9747$  is the tie-capped maximum; the dimension-matched pair  $S_4/A_5$  differs by 0.019 rank-units.

Per-group deviation of the mean from  $d_{\min}$  (Table 3):  $S_3$  6.1%,  $S_4$  4.9%,  $A_5$  5.6%,  $S_5$  10.2%,  $A_6$  5.3%.

$S_4$ ’s seed-0 razor  $k=d_{\min}$  cell (Table 1) numerically exceeds its own unconstrained anchor by 0.15; plausibly the capped arm skips the ambient dimensions the zero-padded anchor must still learn to null under the same fixed step budget, an unconfirmed hypothesis. At four seeds the inversion holds in 3 of 4  $S_4$  seeds (Appendix F), so it stays unconfirmed.

## C Whole-Matrix Effective Rank

| $G$   | $d_{\min}$ | $d_{\text{state}}$ | observational arm ( $\rho_G \oplus I_2$ ) | zero-padded anchor ( $\rho_G \oplus 0$ ) |
|-------|------------|--------------------|-------------------------------------------|------------------------------------------|
| $S_3$ | 2          | 4                  | $3.769 \pm 0.071$ ( $n=3$ )               | $1.824 \pm 0.064$ ( $n=4$ )              |
| $S_4$ | 3          | 5                  | $4.835 \pm 0.066$ ( $n=5$ )               | $2.817 \pm 0.101$ ( $n=4$ )              |
| $A_5$ | 3          | 5                  | $4.781 \pm 0.066$ ( $n=5$ )               | $2.833 \pm 0.077$ ( $n=4$ )              |
| $S_5$ | 4          | 6                  | $5.510 \pm 0.084$ ( $n=3$ )               | $3.767$ (3.705–3.860, $n=4$ )            |
| $A_6$ | 5          | 7                  | $6.717 \pm 0.022$ ( $n=3$ )               | $4.669 \pm 0.097$ ( $n=4$ )              |

Table 4: Whole-matrix effective rank of the unconstrained trained state: the entropy effective rank of the full  $d_{\text{state}} \times d_{\text{state}}$  state with no subspace lens, so unlike the restricted quantity of Table 3 it can range up to  $d_{\text{state}} = d_{\min} + 2$ . Observational arm: mean  $\pm$  sd over seeds against the eye-padded target of rank  $d_{\min} + 2$ , which the state recruits (3.77/4.84/4.78/5.51/6.72 against  $d_{\text{state}} = 4/5/5/6/7$ ). Zero-padded anchor: the causal wave’s unconstrained arm against the rank- $d_{\min}$  target, mean  $\pm$  sd over four seeds in every group ( $S_5$  at its 20k pin, Appendix F, reported as mean and range). On the zero-padded target the unconstrained state recruits  $d_{\min}$  (1.82/2.82/2.83/3.77/4.67 against  $d_{\min} = 2/3/3/4/5$ ) and leaves the two spare dimensions unused.

| $G$   | $k=d_{\min}-1$    | $k=d_{\min}$      | $k=d_{\min}+1$    | unconstrained     |
|-------|-------------------|-------------------|-------------------|-------------------|
| $S_3$ | $1.000 \pm 0.000$ | $1.816 \pm 0.081$ | $1.841 \pm 0.053$ | $1.824 \pm 0.064$ |
| $S_4$ | 1.953             | 2.937             | 2.964             | 2.952             |
| $A_5$ | 1.991             | 2.824             | 2.869             | 2.882             |
| $S_5$ | 2.931             | 3.766             | 3.801             | 3.860             |
| $A_6$ | 3.887             | 4.631             | 4.708             | 4.730             |

Table 5: Whole-matrix effective rank of every zero-padded razor cell (seed 0;  $S_3$  mean  $\pm$  sd over its four seeds;  $S_5$  at its 20k pin), for completeness alongside Table 4. The capped cells sit at or below their cap  $k$ ; at  $k \geq d_{\min}$  they land where the unconstrained anchor does.

## D Instrument Details and the Two Defects

**Centering.** For an orthogonal target the uncentered covariance of  $Z(w)$  is isotropic and carries no subspace information; the production lens centers it (a nontrivial irreducible representation has zero group mean, cancelling the constant block). The step is load-bearing: an uncentered lens scores a flawless synthetic model 0.705 where the centered lens scores 0.9996 on identical data.

**Length-robustness split.** The disclosed split referenced in Section 3 scores only words of length  $L \geq 2$  (the  $L = 1$  read is attention-degenerate and was demoted with a mechanism note in the run records): it moves per-group mean recovery cosine by at most 0.013 (per-seed at most 0.041), with no group-selective divergence.

**The ambient-identity tax.** The first 58-cell sweep’s force-rank target was the eye-padded  $\rho_G(\cdot) \oplus I_2$ , whose rank is  $d_{\text{state}} = d_{\min} + 2$  for every group. Because the identity block is constant across words, it is the cheapest reliable loss reduction available, and a rank-capped arm buys it before the group representation; the residual budget for  $\rho_G$  is  $k - 2$ , below  $d_{\min}$  at every grid point, so no capped cell under identity-padding ever tested the law’s confirm direction. Three raw-artifact signatures established this: (i) force-rank cells’ direct cosine matched the rank- $k$  optimum  $\sqrt{k/d_{\text{state}}}$  with mean absolute deviation 0.028 across all 39 cells (maximum 0.166; the two  $S_5$  below- $d_{\min}$  cells are the only outliers, an additional disclosed optimization shortfall), so the arms trained to their rank-constrained ceiling rather than under-training; (ii) centered restricted rank of capped arms landed near  $k - 2$ , the residual budget; (iii) in the zero-padded grid, a deliberately eye-padded corroboration arm reproduces the failure on demand at raw  $k = d_{\min} + 1$  (effective budget  $d_{\min} - 1$ ) while the tax-paid point recovers. The sweep verdict was registered as inconclusive with the tax as mechanism; the zero-padded causal wave of Section 5 is the registered fix. The zero-padded grid’s 30 cells were configuration-verified one-by-one against a manifest re-derived independently from the design record (steps, padding mode, and force-rank value per cell; zero skipped steps).



**The observational band’s non-binding upper half.** `entity_subspace_from_words` returns the top- $d_{\min}$  left singular vectors of the centered covariance by construction, so the restricted state  $U^\top ZU$  is always  $d_{\min} \times d_{\min}$ , and the entropy effective rank of a  $d_{\min} \times d_{\min}$  input has range  $[1, d_{\min}]$ . Restricted effective rank therefore cannot exceed  $d_{\min}$ , and so cannot exceed  $1.3 \cdot d_{\min}$ , for any seed of any group; only the band’s lower half,  $\geq 0.7 \cdot d_{\min}$ , is a test the data could fail. Every group mean lands in  $[0.895, 0.951] \cdot d_{\min}$ .

**The rank-constrained cosine ceiling.** The causal wave’s target is  $\rho_G(\cdot) \oplus 0$ , of rank exactly  $d_{\min}$  with all  $d_{\min}$  informative singular values equal to 1 (the reference representation is orthogonal by construction, Appendix A). For any matrix  $M$  of rank  $\leq k \leq d_{\min}$ , von Neumann’s trace inequality gives  $\langle M, T \rangle_F \leq \sum_{i=1}^k \sigma_i(M) \sigma_i(T) = \sum_{i=1}^k \sigma_i(M)$ , and Cauchy–Schwarz bounds  $\sum_{i=1}^k \sigma_i(M) \leq \sqrt{k} \|M\|_F$ , so  $\cos(M, T) \leq \sqrt{k/d_{\min}}$ . At  $k = d_{\min} - 1$  this ceiling is  $0.707/0.816/0.816/0.866/0.894$  for  $S_3/S_4/A_5/S_5/A_6$ , below the `rec@0.9` threshold of 0.9 in every case: no rank- $(d_{\min} - 1)$  state, however trained, can register a single word above cosine 0.9 against this target. The necessity result (`rec@0.9` = 0.000 at  $d_{\min} - 1$ , all groups, all seeds) is this bound realized, not an independent discovery about what SGD finds; the corresponding empirical content is that the observed cosines at  $d_{\min} - 1$  (0.61–0.84) sit under their respective rank-constrained optima, evidence optimization reaches the geometry’s own ceiling. At  $k \geq d_{\min}$  the ceiling is 1.0 (exact recovery is representable), so recovery above 0 at  $d_{\min}$  is not guaranteed by the metric and carries the causal weight (sufficiency). As a fraction of the geometrically forced ceiling  $\sqrt{(d_{\min} - 1)/d_{\min}}$ , the below- $d_{\min}$  crosscheck cosines read  $S_3$  86.3%,  $S_4$  91.2%,  $A_5$  94.9%,  $S_5$  75.7%, and  $A_6$  93.5% (mean 88.3%).  $S_5$  is the outlier, consistent with the soft-convergence flag at its original 8k pin (Appendix G), where that cell ran.

**Estimator dependence.** The pre-registered instrument is the entropy effective rank; under the stable-rank estimator (squared Frobenius norm over squared spectral norm, the estimator of Nazari and Rusch [2026]) the same unconstrained states read 1.451/2.156/2.078/2.362/3.340 against  $d_{\min} = 2/3/3/4/5$ , that is  $0.59\text{--}0.73 \cdot d_{\min}$ , outside the pre-registered band, which was written for the entropy estimator, while the group ordering is unchanged (Spearman 0.975 on group means). The ordinal law is therefore estimator-robust; the point estimate “equals  $d_{\min}$ ” is a property of the entropy estimator on a near-flat spectrum with one weak direction, which stable rank penalizes; and the causal razor caps algebraic rank and is estimator-free.

**Primary and crosscheck degauging.** The design record’s default pipeline treats scale-only degauging ( $\hat{Q} = I$ ) as the primary metric, with the fitted- $(c, Q)$  Procrustes score retained as a robustness cross-check, after calibration on unconstrained checkpoints found  $\hat{Q} \approx I$  empirically. Under the force-rank grid’s zero-padded target this equivalence breaks: the informative block’s degenerate singular spectrum makes the scale-only fit’s basis arbitrary, so the pre-registration for the causal wave specifically pins the fitted- $(c, Q)$  score, denoted crosscheck `rec@0.9` throughout Section 5 and Table 1 and Figure 2, as decisional; the scale-only score informs no reported conclusion. The two diverge sharply on this grid, which is why the distinction is disclosed here.

## E $S_3$ Per-Seed Causal Detail

| seed | anchor | $k=d_{\min}-1$ | $k=d_{\min}$ | $k=d_{\min}+1$ | own bar | clears       |
|------|--------|----------------|--------------|----------------|---------|--------------|
| 0    | 0.550  | 0.000          | 0.450        | 0.550          | 0.495   | no (−0.045)  |
| 1    | 0.600  | 0.000          | 0.550        | 0.750          | 0.540   | yes (+0.010) |
| 2    | 0.800  | 0.000          | 0.600        | 0.750          | 0.720   | no (−0.120)  |
| 3    | 0.600  | 0.000          | 0.650        | 0.600          | 0.540   | yes (+0.110) |

Table 6:  $S_3$  four-seed causal detail (crosscheck `rec@0.9`) behind the seed-mean confirmation in Section 5; the own bar is  $0.9 \times$  each seed’s anchor.  $k = d_{\min} - 1$  reads exactly 0.000 in all four seeds;  $k = d_{\min}$  clears each seed’s own bar in 2 of 4 (seeds 1, 3), missing in the other 2 because the anchor itself ranges 0.550–0.800 across seeds. The pre-registered criterion compares the seed-mean  $k = d_{\min}$  value (0.5625) against the bar fixed before the extension ran (0.495, from seed 0’s anchor), specifically to avoid computing the bar from the same noisy seeds it is judged against; recomputing the bar as  $0.9 \times$  the four-seed anchor mean (raw mean 0.6375, bar 0.574) would put the seed-mean value 0.011 below it.

## F Per-Seed Razor Detail for $S_4, A_5, S_5, A_6$

| seed                                                                                                              | anchor | $k=d_{\min}-1$ | $k=d_{\min}$ | $k=d_{\min}+1$ | own bar | clears       | gate1a (anchor / $k=d_{\min}$ ) |
|-------------------------------------------------------------------------------------------------------------------|--------|----------------|--------------|----------------|---------|--------------|---------------------------------|
| $S_4$ ( $d_{\min} = 3$ , 20k steps): seed-mean 0.6875 vs. fixed bar 0.585, confirmed; self-referential bar 0.5625 |        |                |              |                |         |              |                                 |
| 0                                                                                                                 | 0.650  | 0.000          | 0.800        | 0.950          | 0.585   | yes (+0.215) | —                               |
| 1                                                                                                                 | 0.500  | 0.000          | 0.600        | 0.600          | 0.450   | yes (+0.150) | —                               |
| 2                                                                                                                 | 0.700  | 0.000          | 0.700        | 0.650          | 0.630   | yes (+0.070) | —                               |
| 3                                                                                                                 | 0.650  | 0.000          | 0.650        | 0.650          | 0.585   | yes (+0.065) | —                               |
| $A_5$ ( $d_{\min} = 3$ , 20k steps): seed-mean 0.6500 vs. fixed bar 0.630, confirmed; self-referential bar 0.5625 |        |                |              |                |         |              |                                 |
| 0                                                                                                                 | 0.700  | 0.000          | 0.700        | 0.750          | 0.630   | yes (+0.070) | —                               |
| 1                                                                                                                 | 0.700  | 0.000          | 0.700        | 0.750          | 0.630   | yes (+0.120) | —                               |
| 2                                                                                                                 | 0.550  | 0.000          | 0.600        | 0.550          | 0.495   | yes (+0.105) | —                               |
| 3                                                                                                                 | 0.550  | 0.000          | 0.550        | 0.450          | 0.495   | yes (+0.055) | —                               |
| $S_5$ ( $d_{\min} = 4$ , 20k steps, pre-registered re-test): seed-mean 0.7000 vs. bar 0.6075, confirmed           |        |                |              |                |         |              |                                 |
| 0                                                                                                                 | 0.750  | 0.000          | 0.700        | 0.750          | 0.675   | yes (+0.025) | 0.981 / 0.981                   |
| 1                                                                                                                 | 0.600  | 0.000          | 0.600        | 0.650          | 0.540   | yes (+0.060) | 0.974 / 0.960                   |
| 2                                                                                                                 | 0.700  | 0.000          | 0.750        | 0.650          | 0.630   | yes (+0.120) | 0.974 / 0.970                   |
| 3                                                                                                                 | 0.650  | 0.000          | 0.750        | 0.700          | 0.585   | yes (+0.165) | 0.959 / 0.967                   |
| $A_6$ ( $d_{\min} = 5$ , 40k steps): seed-mean 0.6750 vs. fixed bar 0.585, confirmed; self-referential bar 0.5850 |        |                |              |                |         |              |                                 |
| 0                                                                                                                 | 0.650  | 0.000          | 0.650        | 0.700          | 0.585   | yes (+0.065) | —                               |
| 1                                                                                                                 | 0.600  | 0.000          | 0.650        | 0.700          | 0.540   | yes (+0.110) | —                               |
| 2                                                                                                                 | 0.850  | 0.000          | 0.850        | 0.800          | 0.765   | yes (+0.085) | —                               |
| 3                                                                                                                 | 0.500  | 0.000          | 0.550        | 0.550          | 0.450   | yes (+0.100) | —                               |

Table 7: Four-seed causal detail (crosscheck rec@0.9) for the four groups extended under a pre-registration recorded before launch, on the same build, manifest, and decisional readout as seed 0;  $S_4$ ,  $A_5$ , and  $A_6$  at their seed-0 step pins,  $S_5$  at a 20k pin. The own bar is  $0.9\times$  each seed’s anchor and is disclosed, not decisional.  $k = d_{\min}-1$  reads exactly 0.000 in all 16 cells. The decisional comparison is the seed-mean of  $k = d_{\min}$  over seeds 0–3 against the bar fixed before the seeds ran: from seed 0 for  $S_4$ ,  $A_5$ ,  $A_6$  (0.585/0.630/0.585), and, for  $S_5$ ,  $0.9\times$  the seed-mean of its four 20k anchors (0.6075), since no seed-0 literal existed at that pin and the rule was fixed before launch.  $S_4$  0.6875,  $A_5$  0.6500,  $S_5$  0.7000, and  $A_6$  0.6750 confirm. The self-referential bar ( $0.9\times$  the four-seed anchor mean: 0.5625/0.5625/0.5850 for  $S_4/A_5/A_6$ ) is reported for symmetry with Table 6. Own-bar clears: 4/4 in every group. gate1a (min validation cosine over  $L \in [2, 5]$ , bar 0.92) is tabulated for  $S_5$ , whose pin was set on that criterion.  $S_5$ ’s original 8,000-step pin under-trained it (every 8k razor cell failed the 0.92 convergence bar, Appendix G); the pin was raised to 20,000 steps under a pre-registration recorded before the re-run, and the 8k cells remain archived with the design record.

## G Soft Convergence at the Shortest Pinned Budgets

| $G$   | anchor | $k=d_{\min}-1$ | $k=d_{\min}$ | $k=d_{\min}+1$ | bar (0.92)   |
|-------|--------|----------------|--------------|----------------|--------------|
| $S_3$ | 0.914  | 0.665          | 0.900        | 0.903          | fail (all 4) |
| $S_5$ | 0.876  | 0.801          | 0.879        | 0.877          | fail (all 4) |

Table 8: Convergence health (gate1a, min validation cosine over  $L \in [2, 5]$ ) for every  $S_3$  razor cell at its shortest pinned step budget and every  $S_5$  razor cell at its original 8k budget. All eight cells fall short of the 0.92 margin;  $S_5$ ’s 0.876–0.879 range is a larger shortfall than  $S_3$ ’s 0.900–0.914. The necessity leg (Section 5) is unaffected by construction;  $S_3$ ’s sufficiency leg should be read as directionally consistent under disclosed soft convergence. At  $S_5$ ’s 20k pin (Appendix F), every  $S_5$  anchor and  $k=d_{\min}$  cell passes gate1a (0.959–0.981), which is why that pin moved.

## H Depth-21 Periodicity Under the Single $K$ -Cycle

The binding task’s held-out composition probe uses a single Hamiltonian  $K$ -cycle, under which nominal depth 21 shares its target with the already-tested depth 5 ( $\pi^{21} = \pi^{21 \bmod 8} = \pi^5$  exactly).

Appendix A of a companion paper [Larson, 2026a] performs this periodicity analysis and the associated depth-decay measurement in full on the binding testbed; see that appendix for the derivation and the per-hop predicted-vs-measured table.