



An accurate learned network has geometric structure, but its coefficients are not automatically QI samples


Seed 0: learned second-layer curve

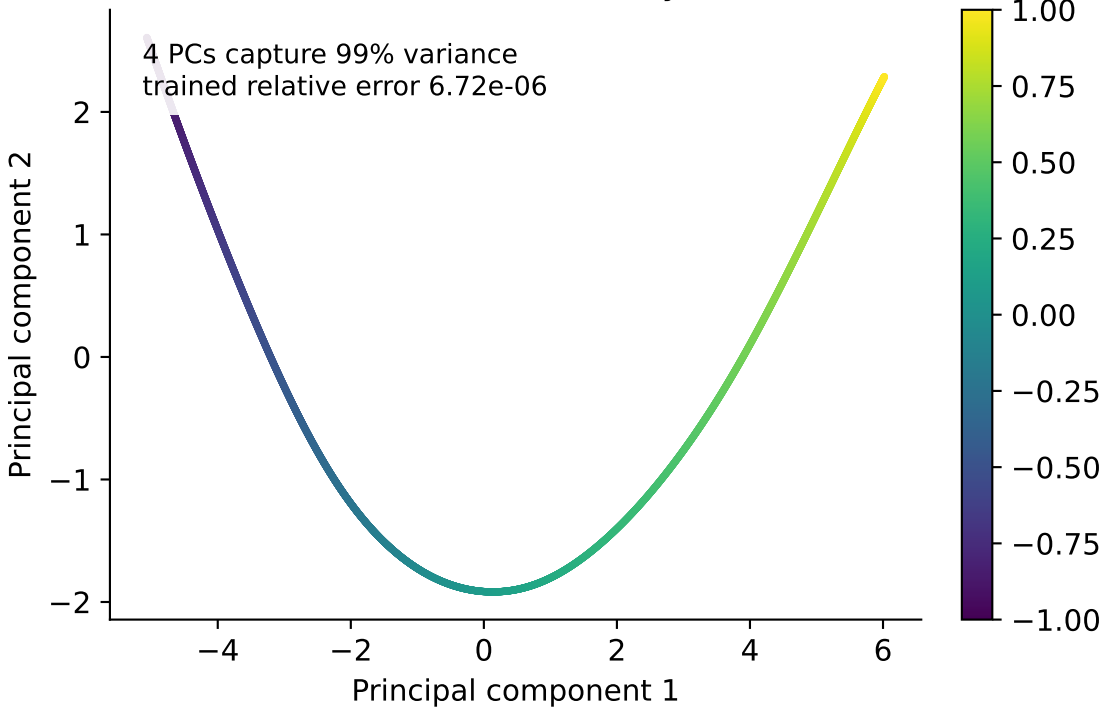


Derivative guess misses the learned weights

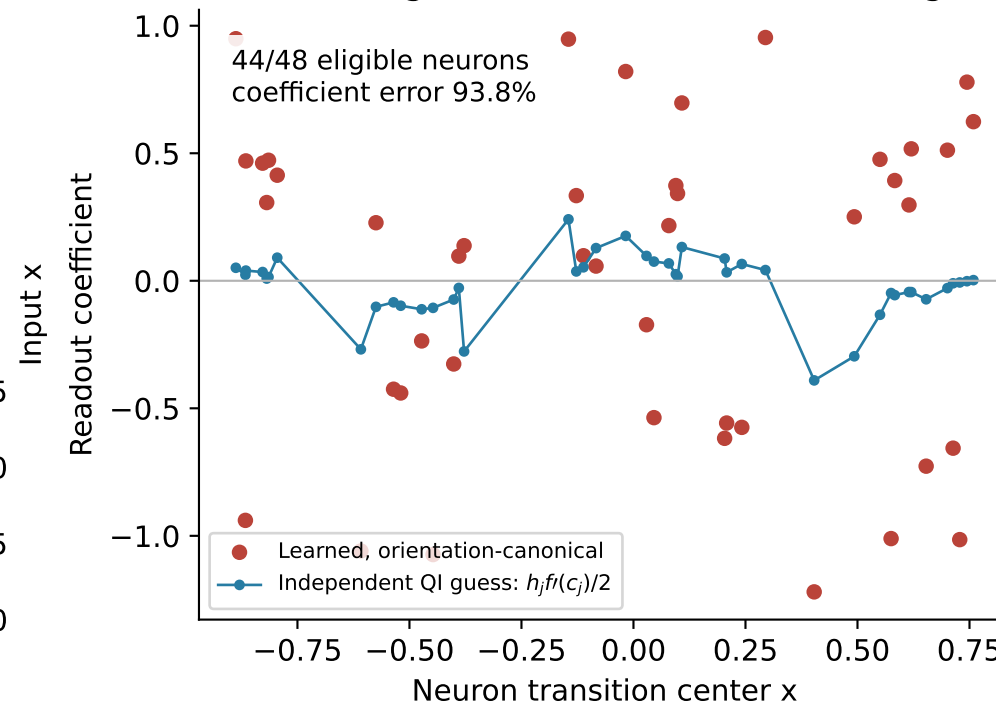


Reposition features, then refit readout

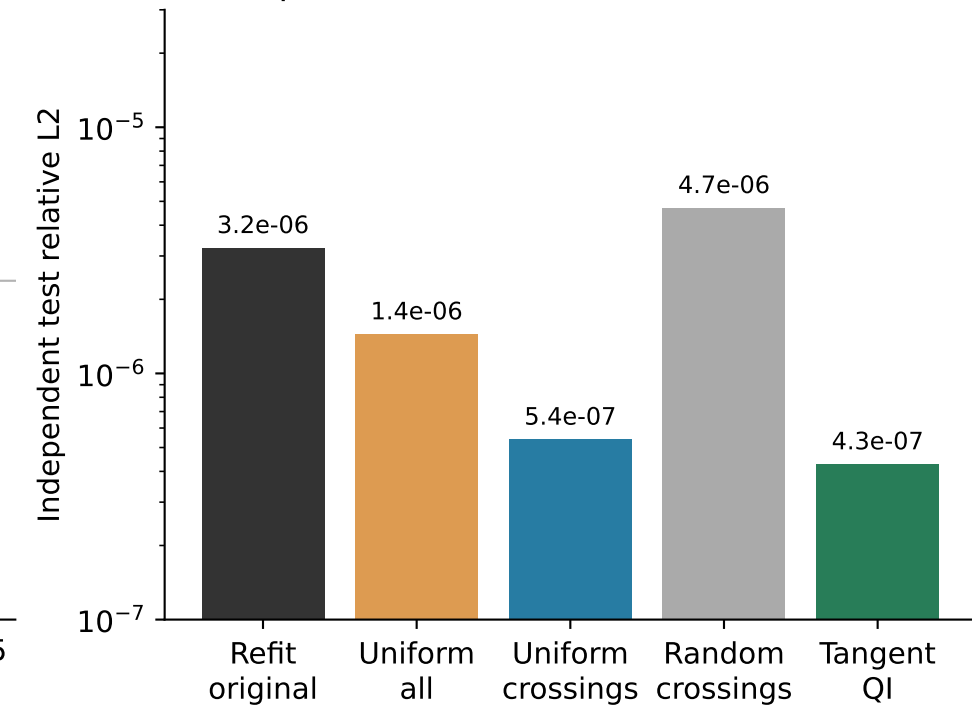


Seed 1: learned second-layer curve

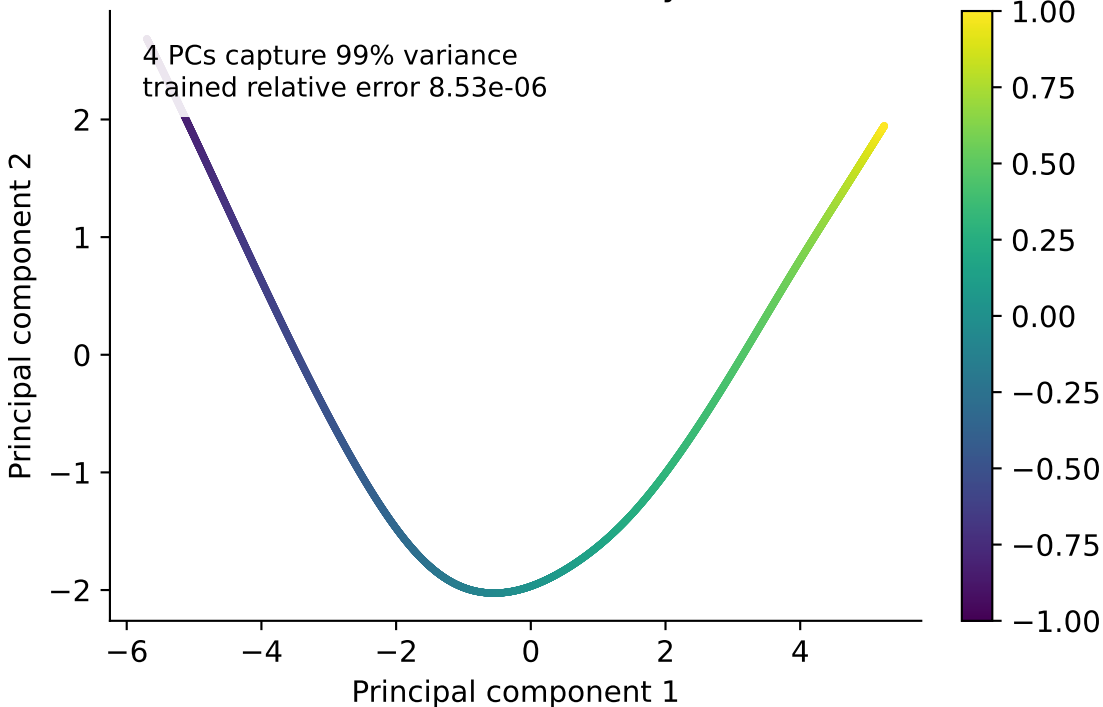

Derivative guess misses the learned weights

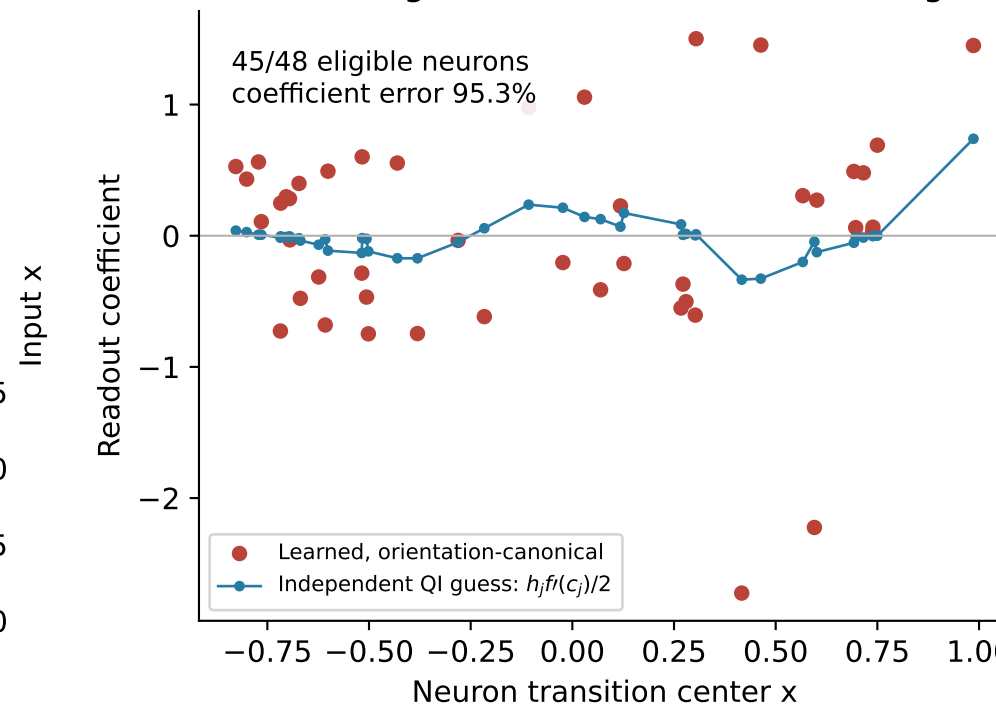

Reposition features, then refit readout

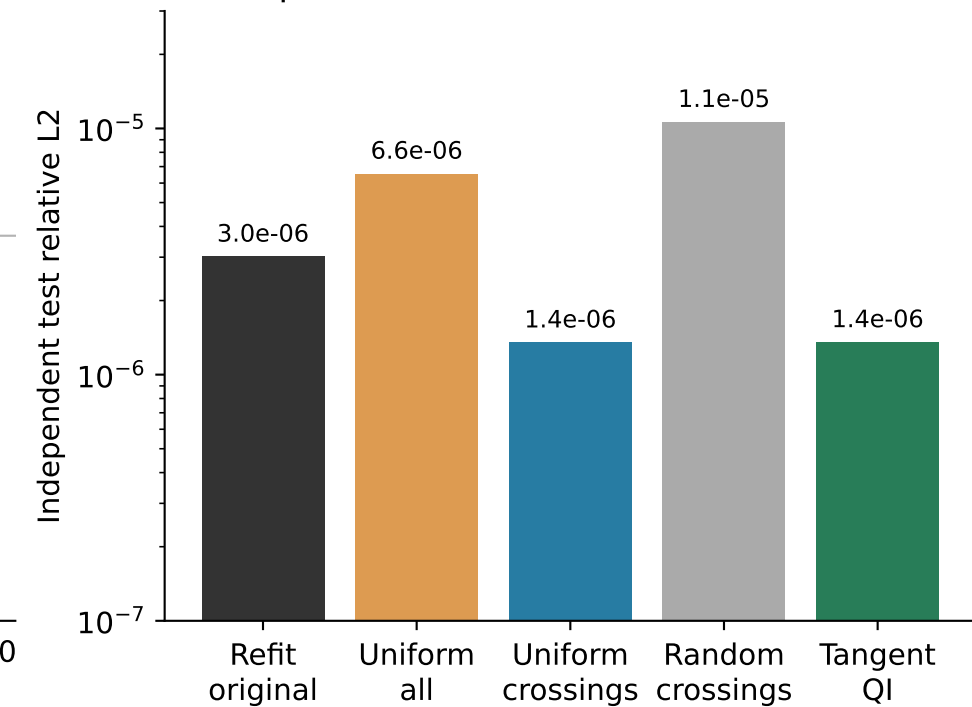

Uniform = equal first-layer arclength; random = median of 10 matched placements.
Refitted coefficient norms are about 1e7–1e8 and gains depend on the solve cutoff; improved precision does not imply improved conditioning.