


Folder structure

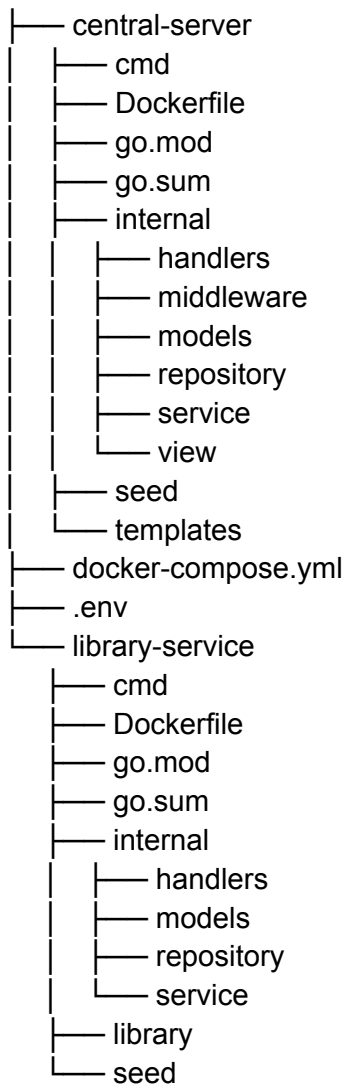

Run and deploy

The project requires Docker and docker compose, in fact each component (central server and each library) runs on a separated container.

To build and start the application, navigate in the project folder and execute the following command: **docker compose up --build**

To start the application without rebuilding the images run: **docker compose up**

Docker Compose will start all the required services.

After a few seconds, four containers should be up and running.

To access the web application: in your browser navigate to: <http://localhost>

If for any reason you can't use the default HTTP port (80), you have to change it in the .env file project in the CENTRAL_PORT section and make a new build.

Only the central server will be exposed, the libraries will be visible only in the docker environment.

.

Once in the application, users can create an account and start using the application immediately.