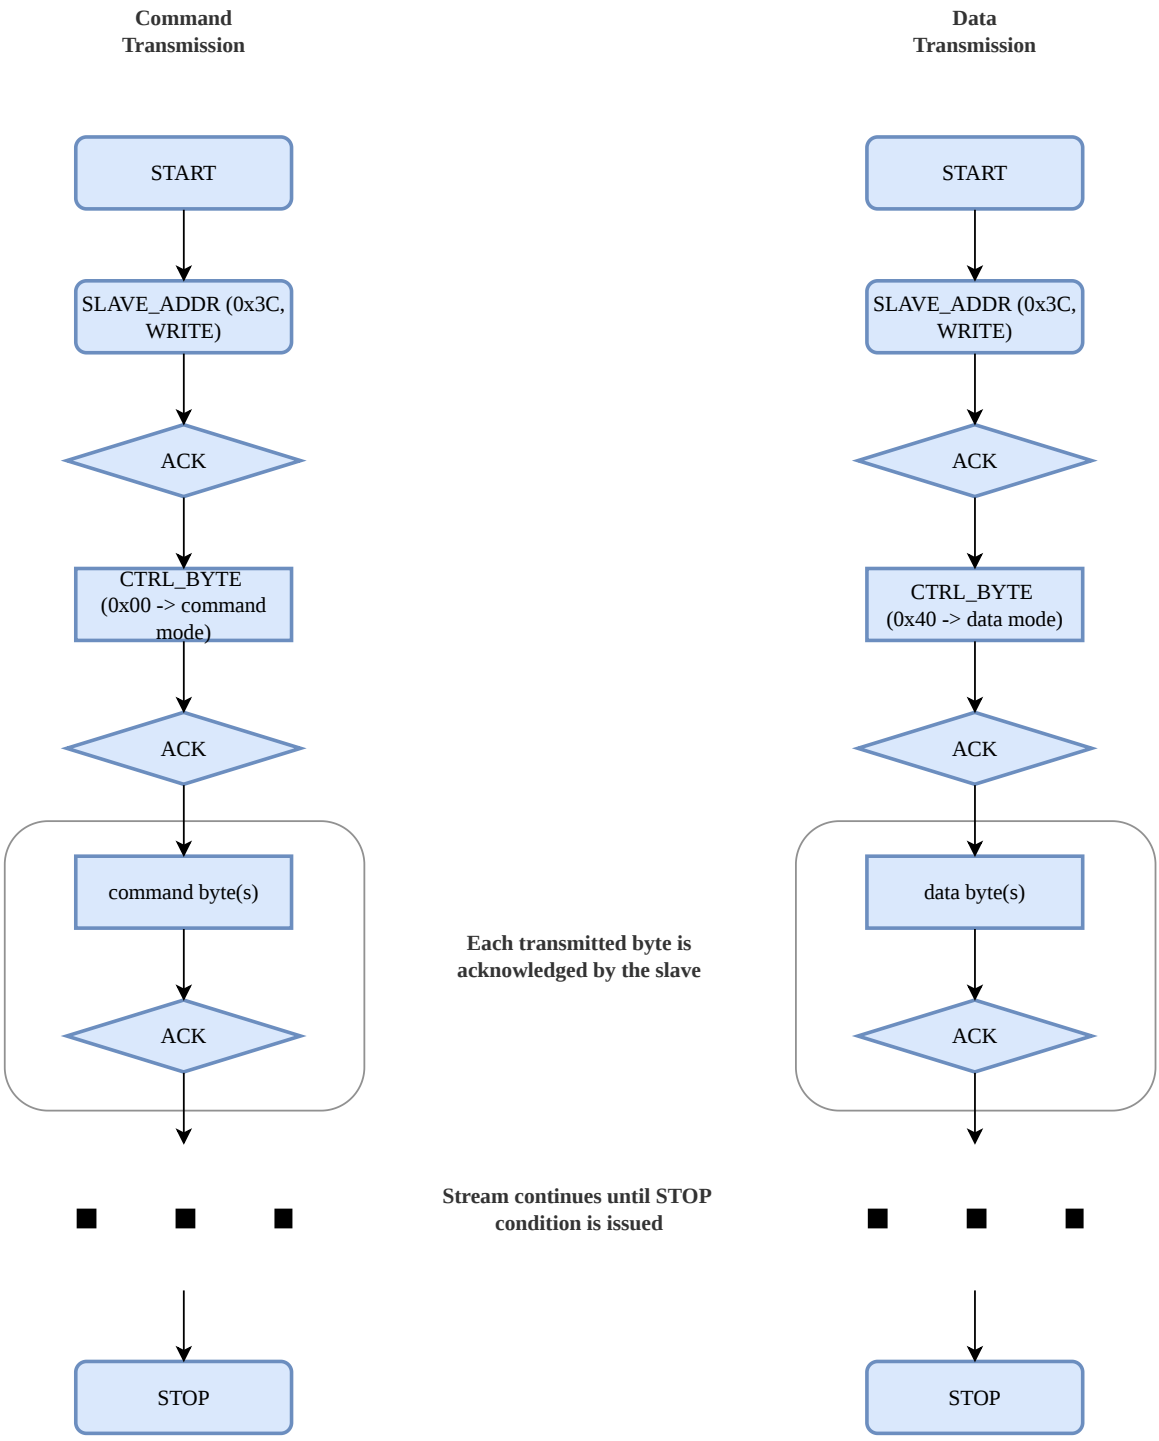
Command Transmission
Data Transmission
START
SLAVE_ADDR (0x3C, WRITE)
ACK
CTRL_BYTE (0x00 -> command mode)
ACK
command byte(s)
ACK
START
SLAVE_ADDR (0x3C, WRITE)
ACK
CTRL_BYTE (0x40 -> data mode)
ACK
data byte(s)
ACK
Each transmitted byte is acknowledged by the slave
Stream continues until STOP condition is issued
STOP
STOP