


## EAP Manage Template Version


Hold process to manage template version

### 1 Process Model Properties

Process Display Name	=rule!EAP_ProcessDisplayNameForTransformationModule(processName:"EAP Manage Template Version",referenceNumber:pv!referenceNumber)
Model Id	5273
UUID	0002e4d5-2614-8000-5c7a-1b4d981b4d98
Last updated	by ameya.kabnurkar@wipro.com

### 2 Process Model Diagram

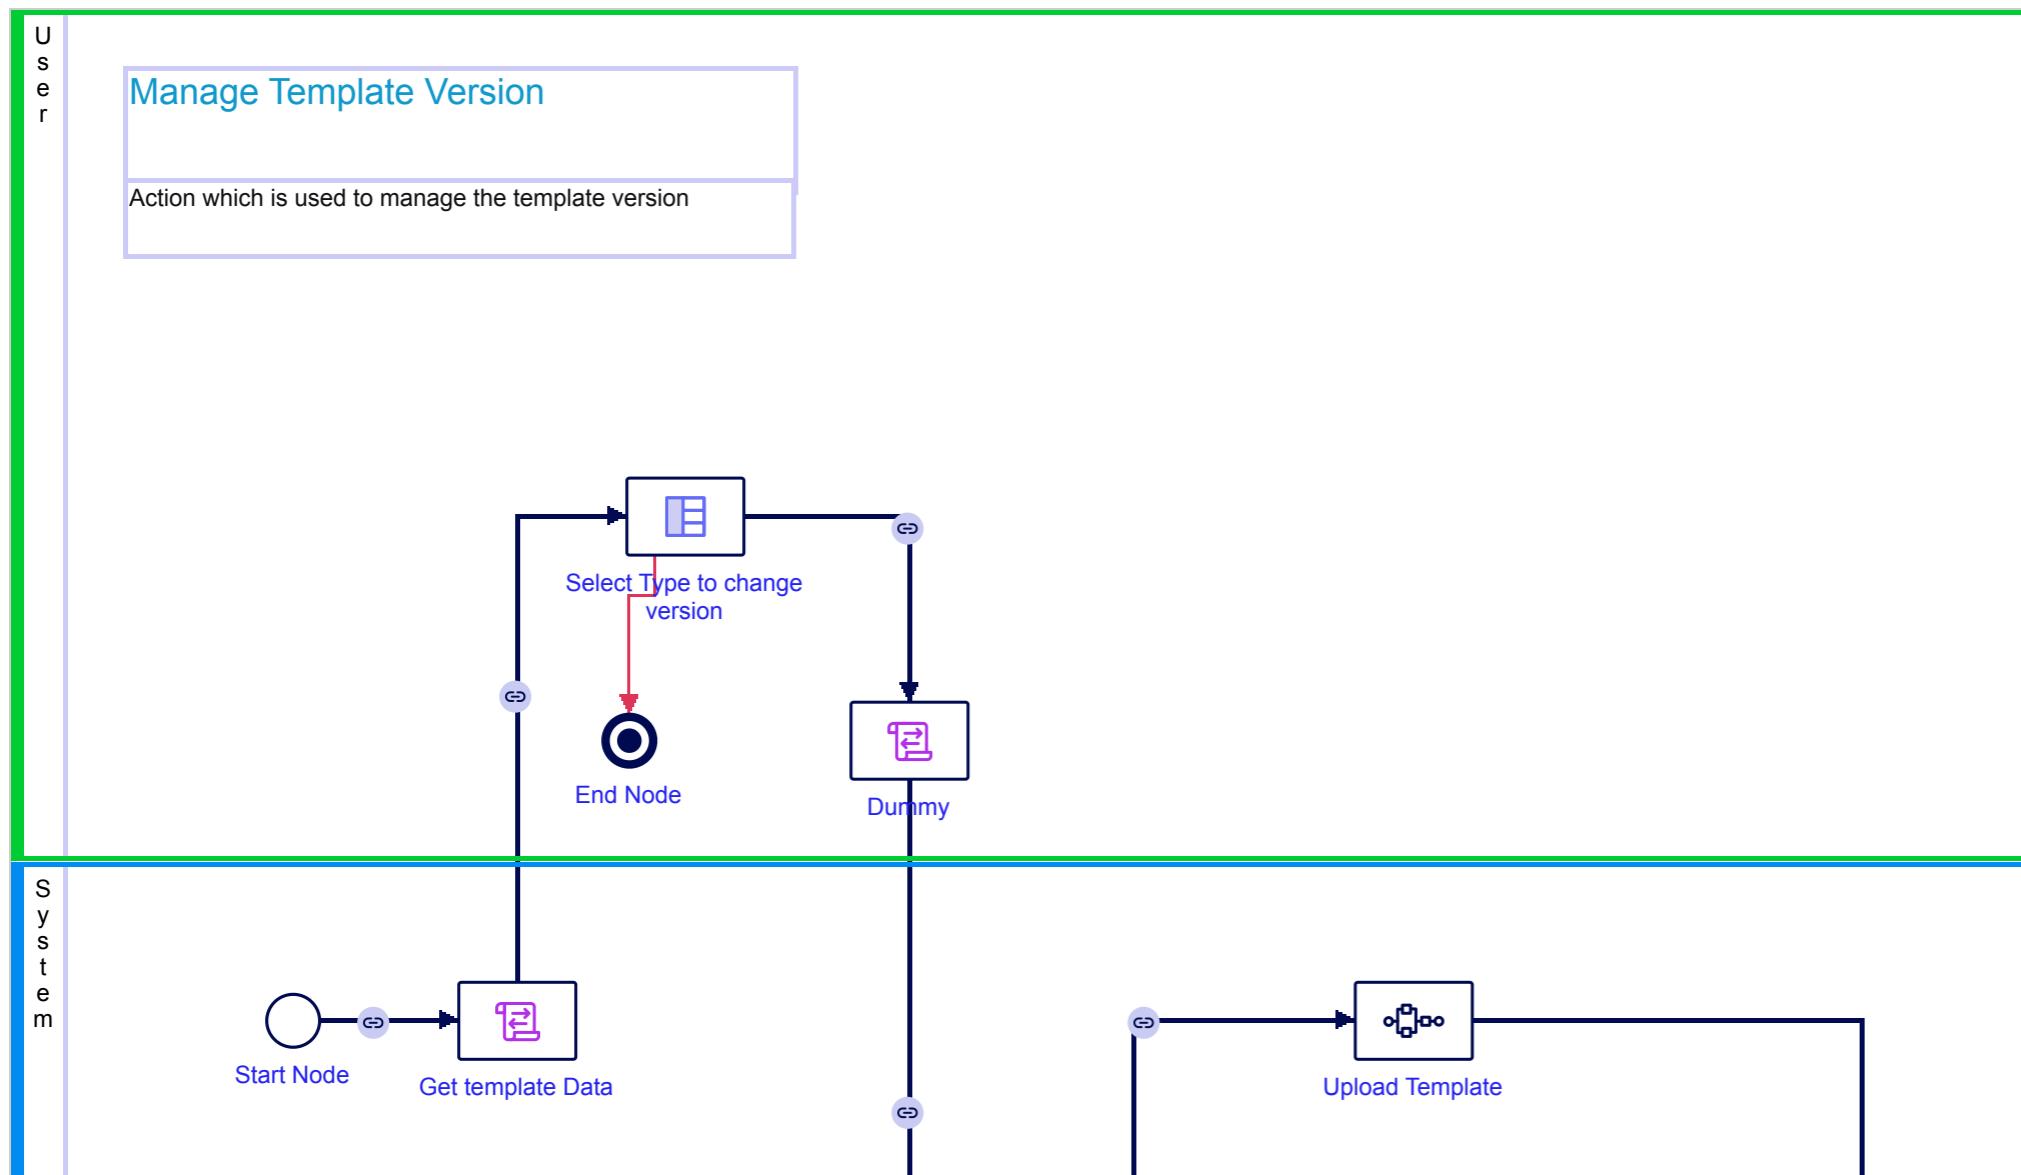

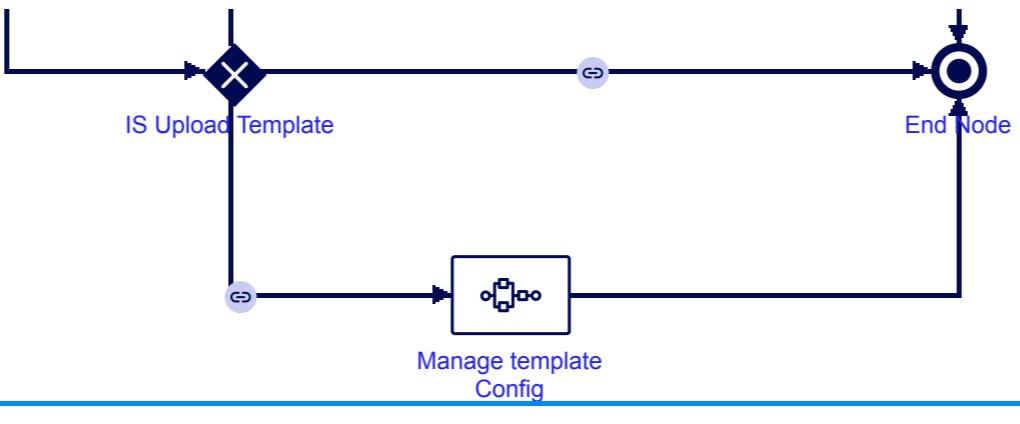

### 3 Process Model Contents

**Process Start Form Type** SAIL Form

**Process Variables (7)**

Name	Type	Multiple	Default Value	Parameter	Required	Hidden
buttonAction	Text	No		No	No	No
isUploadTemplate	Boolean	No		No	No	No
processId	Number (Integer)	No	0	Yes	No	No
referenceNumber	Text	No		Yes	No	No
runConfigId	Number (Integer)	No	0	Yes	No	No
templateConfigId	Number (Integer)	No	0	Yes	No	No
templateConfigView	EAP_V_ProcessTemplateConfig	No		No	No	No

**Lanes**

	Label	Size (px)	Lane Assignment	Attended	Assignees / Run As
0	User	426	No	N/A	N/A
1	System	348	No	N/A	N/A

**Nodes**

Id	GUI Id	Name	Task Display Name	Lane	Attended	Assignees / Run As
52903	7	End Node	End Node	User	No	Process Initiator
52905	8	Dummy	Dummy	User	No	Process Initiator
52899	1	End Node	End Node	System	No	Process Initiator
52901	6	Get template Data	Get template Data	System	No	Process Initiator
52904	5	IS Upload Template	IS Upload Template	System	No	Process Initiator
52902	4	Manage template Config	Manage template Config	System	No	Process Initiator
52906	2	Select Type to change version	=rule!EAP_TaskDisplayNameForTransformationModule(taskName :"Select Type to change version" , referenceNumber : pv!referenceNumber)	User	Yes	pplinitiator
52898	0	Start Node	Start Node	System	No	Process Initiator
52900	3	Upload Template	Upload Template	System	No	Process Initiator

**Annotations**

GUI Id	Text
0	Manage Template Version
8	Action which is used to manage the template version

## Connections

Start Node	End Node	Chained
Start Node	Get template Data	Yes
Upload Template	End Node	No
Get template Data	Select Type to change version	Yes
Manage template Config	End Node	No
IS Upload Template	Upload Template	Yes
IS Upload Template	Manage template Config	Yes
IS Upload Template	End Node	Yes
Dummy	IS Upload Template	Yes
Select Type to change version	Dummy	Yes

## 4 Process Model Nodes



### End Node

<b>Node Type</b>	End Node (core.1)
<b>UUID</b>	0001e4d6-0987-8000-5cc2-1b4d981b4d98
<b>Description</b>	
<b>Task Display Name</b>	End Node
<b>Lane</b>	User
<b>Assignment</b>	unattended, run as: Process Initiator
<b>Other</b>	



### Dummy

<b>Node Type</b>	Unattended Multiple Questions (internal.16)
<b>UUID</b>	0001e4d8-9ddb-8000-5e06-1b4d981b4d98
<b>Description</b>	
<b>Task Display Name</b>	Dummy
<b>Lane</b>	User
<b>Assignment</b>	unattended, run as: Process Initiator
<b>Other</b>	



### End Node

<b>Node Type</b>	End Node (core.1)
<b>UUID</b>	0001e4d5-2614-8000-5c7a-1b4d981b4d98
<b>Description</b>	
<b>Task Display Name</b>	End Node
<b>Lane</b>	System
<b>Assignment</b>	unattended, run as: Process Initiator
<b>Other</b>	



## Get template Data

**Node Type** Unattended Multiple Questions (internal.16)  
**UUID** 0001e4d6-0213-8000-5cbc-1b4d981b4d98

### Description

**Task Display Name** Get template Data  
**Lane** System  
**Assignment** unattended, run as: Process Initiator  
**Other**

### Outputs

Expression	Operation	Variable
rule!EAP_QE_VW_ProcessTemplateConfig( processId: pv!processId, templateConfigId:pv!templateConfigId )	is stored as	templateConfigView

## X IS Upload Template

**Node Type** XOR (core.4)  
**UUID** 0002e4d5-2816-8000-5c7c-1b4d981b4d98

### Description

**Task Display Name** IS Upload Template  
**Lane** System  
**Assignment** unattended, run as: Process Initiator  
**Other**

### Conditions

Condition	Result	Path Label
If or(cons!EAP_BUTTON_ACTION[2] = pv!buttonAction)	go to End Node	End
Else if pv!isUploadTemplate=true	go to Upload Template	Yes
If none of the above are TRUE	go to Manage template Config	



## Manage template Config

**Node Type** SUB\_PROC (internal.38)  
**UUID** 0004e4d5-2816-8000-5c7c-1b4d981b4d98

### Description

**Task Display Name** Manage template Config  
**Lane** System  
**Assignment** unattended, run as: Process Initiator  
**Other**  
**Is Asynchronous** No

Data from sub-process can be included in reports on the parent process model Yes

Sub-Process Model [Manage Transformation Template Config](#) (Id: 5271, UUID: 000ae4c6-9602-8000-54d2-1b4d981b4d98)

#### Input Variables

Sub-Process Variable	Set From
documentVersionId	=pv!templateConfigView.document_version_id
isManageVersion	=true()
isReadOnly	
isUploadNewVersion	
processId	=processId
referenceNumber	=referenceNumber
runConfigId	=runConfigId
templateConfigId	=templateConfigId

#### Output Variables

Sub-Process Variable	Save Into
This Sub-process does not have any output mappings	



#### Select Type to change version

**Node Type** User Input Task (internal.17)

**UUID** 0001e4d5-2816-8000-5c7c-1b4d981b4d98

##### Description

**Task Display Name** =rule!EAP\_TaskDisplayNameForTransformationModule(taskName :"Select Type to change version" , referenceNumber : pv!referenceNumber)

**Lane** User

**Assignment** attended, assigned to: ppl:initiator send email:true

##### Other

**Form Type** SAIL Form

#### Inputs

Name	Type	Multiple	Value	Save Into	Required	Generated	Hidden from designer
buttonAction	Text	No	=pv!buttonAction	buttonAction	No	No	No
isUploadTemplate	Boolean	No		isUploadTemplate	No	No	No
processId	Number (Integer)	No	=pv!processId	processId	No	No	No
templateConfigView	EAP_V_ProcessTemplateConfig	No	=pv!templateConfigView		No	No	No

#### Exception Flow Triggers

Type	Name	Listener Type	Conditions
Timer	Timer_1	N/A	N/A



### Start Node

<b>Node Type</b>	Start Node (core.0)
<b>UUID</b>	0000e4d5-2614-8000-5c7a-1b4d981b4d98
<b>Description</b>	
<b>Task Display Name</b>	Start Node
<b>Lane</b>	System
<b>Assignment</b>	unattended, run as: Process Initiator
<b>Other</b>	



### Upload Template

<b>Node Type</b>	SUB_PROC (internal.38)
<b>UUID</b>	0003e4d5-2816-8000-5c7c-1b4d981b4d98
<b>Description</b>	
<b>Task Display Name</b>	Upload Template
<b>Lane</b>	System
<b>Assignment</b>	unattended, run as: Process Initiator
<b>Other</b>	
<b>Is Asynchronous</b>	No
<b>Data from sub-process can be included in reports on the parent process model</b>	
	Yes
<b>Sub-Process Model</b>	<a href="#">Manage Transformation Template Config</a> (Id: 5271, UUID: 000ae4c6-9602-8000-54d2-1b4d981b4d98)

### Input Variables

Sub-Process Variable	Set From
isManageVersion	=false()
isReadOnly	
isUploadNewVersion	=true()
processId	=processId
referenceNumber	=referenceNumber
runConfigId	=runConfigId
templateConfigId	=templateConfigId

### Output Variables

Sub-Process Variable	Save Into
<i>This Sub-process does not have any output mappings</i>	