


EAP Manage Output File Type

Process model to manage output configuration

1 Process Model Properties

Process Display Name =rule!EAP_Utils_ProcessDisplayName(ProcessDisplayName: "EAP Manage Output File Type",CaseNumber:index(pv!outFiletype,"out_file_type_config_id",null))
Model Id 5284
UUID 0002e4dc-f2a7-8000-5f80-1b4d981b4d98
Last updated by ameya.kabnurkar@wipro.com

2 Process Model Diagram

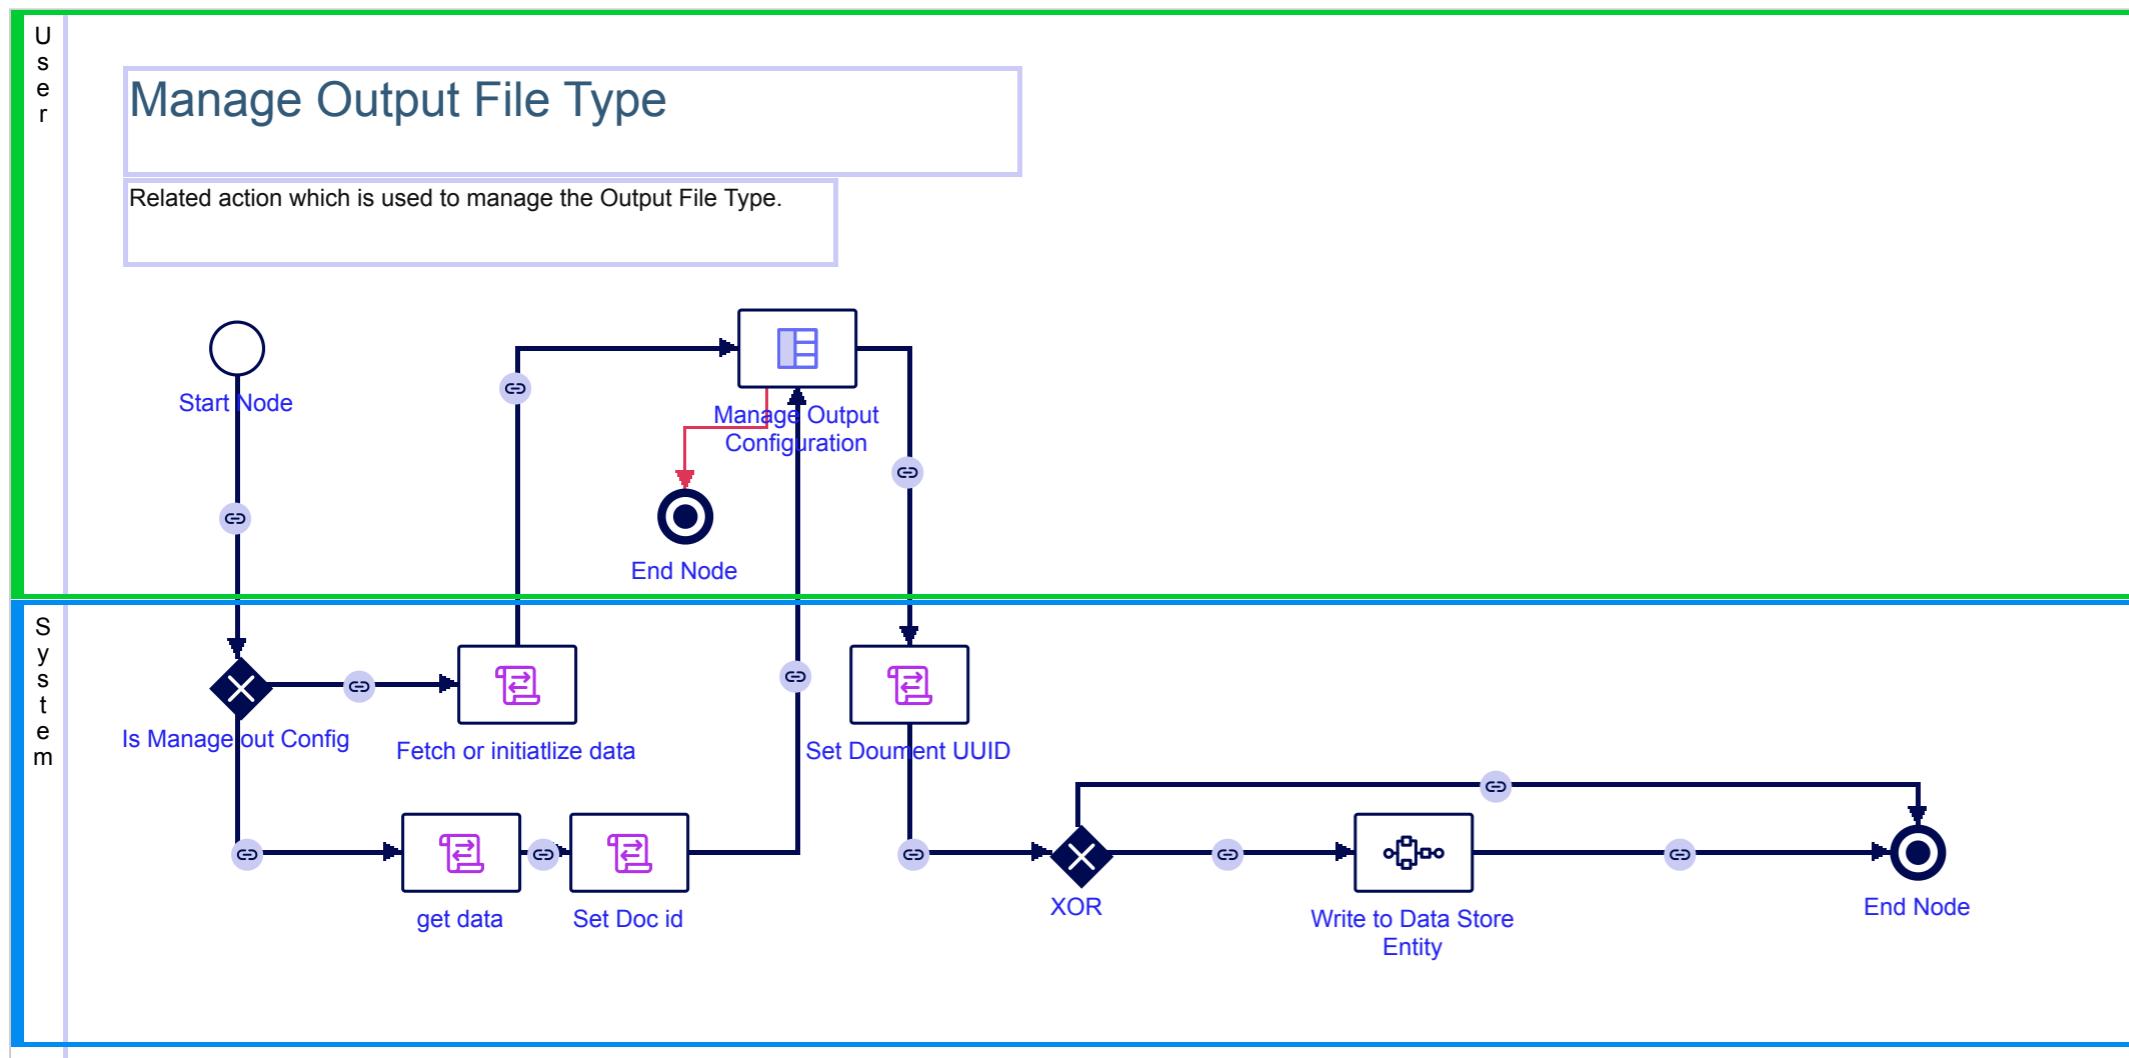

3 Process Model Contents

Process Start Form Type SAIL Form

Process Variables (6)

Name	Type	Multiple	Default Value	Parameter	Required	Hidden
document	Document	No		No	No	No
buttonAction	Text	No		No	No	No
isManageOutConfig	Boolean	No	False	Yes	No	No
masterLookupData	EAP_T_RefMaster	Yes		No	No	No
outFileType	EAP_T_RefProcessOutFileType	No		Yes	No	No
processId	Number (Integer)	No	0	Yes	No	No

Lanes

	Label	Size (px)	Lane Assignment	Attended	Assignees / Run As
0	User	295	No	N/A	N/A
1	System	224	No	N/A	N/A

Nodes

ID	GUI Id	Name	Task Display Name	Lane	Attended	Assignees / Run As
52716	8	End Node	End Node	User	No	Process Initiator
52713	1	End Node	End Node	System	No	Process Initiator
52717	7	Fetch or initialize data	Fetch or initialize data	System	No	Process Initiator
52714	6	Is Manage out Config	Is Manage out Config	System	No	Process Initiator
52721	2	Manage Output Configuration	Manage Output Configuration	User	Yes	pplinitiator
52722	10	Set Doc id	Set Doc id	System	No	Process Initiator
52720	9	Set Document UUID	Set Document UUID	System	No	Process Initiator
52712	0	Start Node	Start Node	User	No	Process Initiator
52718	3	Write to Data Store Entity	Write to Data Store Entity	System	No	Process Initiator
52719	4	XOR	XOR	System	No	Process Initiator
52715	5	get data	get data	System	No	Process Initiator

Annotations

GUI Id	Text
5	Manage Output File Type
7	Related action which is used to manage the Output File Type.

Connections

Start Node	End Node	Chained
Start Node	Is Manage out Config	Yes
Is Manage out Config	get data	Yes
Is Manage out Config	Fetch or initialize data	Yes
get data	Set Doc id	Yes
Fetch or initialize data	Manage Output Configuration	Yes
Write to Data Store Entity	End Node	Yes
XOR	Write to Data Store Entity	Yes

Start Node	End Node	Chained
XOR	End Node	Yes
Set Document UUID	XOR	Yes
Manage Output Configuration	Set Document UUID	Yes
Set Doc id	Manage Output Configuration	Yes

4 Process Model Nodes



End Node

Node Type End Node (core.1)
UUID 0001e4e8-c9d6-8000-61c5-1b4d981b4d98
Description
Task Display Name End Node
Lane User
Assignment unattended, run as: Process Initiator
Other



End Node

Node Type End Node (core.1)
UUID 0001e4dc-f2a7-8000-5f80-1b4d981b4d98
Description
Task Display Name End Node
Lane System
Assignment unattended, run as: Process Initiator
Other



Fetch or initialize data

Node Type Unattended Multiple Questions (internal.16)
UUID 0003e4df-89db-8000-6089-1b4d981b4d98
Description
Task Display Name Fetch or initialize data
Lane System
Assignment unattended, run as: Process Initiator
Other

Outputs

Expression	Operation	Variable
rule!EAP_QE_RefMaster(isActive: 1)	is stored as	masterLookupData
rule!EAP_ConvertTypeForRefProcessOutFileType(isActive:1, createdBy:pp!initiator, createdOn:now(), processId:pv!processId, includeBaseTemplate:0)	is stored as	outFileType

Is Manage out Config

Node Type XOR (core.4)
UUID 0001e4e7-2e35-8000-6164-1b4d981b4d98
Description
Task Display Name Is Manage out Config
Lane System
Assignment unattended, run as: Process Initiator
Other

Conditions

Condition	Result	Path Label
If pv!isManageOutConfig = true()	go to get data	
If none of the above are TRUE	go to Fetch or initialize data	

Manage Output Configuration

Node Type User Input Task (internal.17)
UUID 0001e4dc-f305-8000-5f82-1b4d981b4d98
Description
Task Display Name Manage Output Configuration
Lane User
Assignment attended, assigned to: pp!initiator send email:true
Other
Form Type SAIL Form

Inputs

Name	Type	Multiple	Value	Save Into	Required	Generated	Hidden from designer
buttonAction	Text	No		buttonAction	No	No	No
document	Document	No	=pv!document	document	No	No	No
isReadOnly	Boolean	No			No	No	No
masterLookUpData	EAP_T_RefMaster	Yes	=pv!masterLookupData	masterLookupData	No	No	No
outputFileType	EAP_T_RefProcessOutFileType	No	=pv!outFileType	outFileType	No	No	No
processId	Number (Integer)	No	=pv!processId	processId	No	No	No

Exception Flow Triggers

Type	Name	Listener Type	Conditions
Timer	Timer_1	N/A	N/A

Set Doc id

Node Type Unattended Multiple Questions (internal.16)
UUID 0001e562-1dcb-8000-6d2a-1b4d981b4d98
Description
Task Display Name Set Doc id
Lane System
Assignment unattended, run as: Process Initiator
Other

Outputs

Expression	Operation	Variable
tointeger(stripwith(index(split(getcontentdetailsbyuuid(index(pv!outFileType, "appian_base_template_doc_id", null)), ","), 2, {}), "Id: "))	is stored as	document



Set Document UUID

Node Type Unattended Multiple Questions (internal.16)
UUID 0001e562-1245-8000-6d22-1b4d981b4d98
Description
Task Display Name Set Document UUID
Lane System
Assignment unattended, run as: Process Initiator
Other

Outputs

Expression	Operation	Variable
if(rule!EAP_Utils_CheckIsNotNull(pv!document), index(pv!outFileType, "appian_base_template_doc_id", {}), toString(index(extract(getcontentobjectdetailsbyid(pv!document), "UUID:", ","), 1, {})))	is stored as	outFileType.appian_base_template_doc_id



Start Node

Node Type Start Node (core.0)
UUID 0000e4dc-f2a7-8000-5f80-1b4d981b4d98
Description
Task Display Name Start Node
Lane User
Assignment unattended, run as: Process Initiator
Other



Write to Data Store Entity

Node Type SUB_PROC (internal.38)
UUID 0001e4df-89db-8000-6089-1b4d981b4d98
Description
Task Display Name Write to Data Store Entity
Lane System

Assignment	unattended, run as: Process Initiator
Other	
Is Asynchronous	No
Data from sub-process can be included in reports on the parent process model	Yes
Sub-Process Model	EAP Write Datastore Entities Of Output Config (Id: 5283, UUID: 0002e4df-8038-8000-607d-1b4d981b4d98)

Input Variables

Sub-Process Variable	Set From
gtCustomGeneration	
gtFixedCellsFilters	
gtOutEntityFilters	
gtOutEntitySort	
gtOutFileEntityMapping	
gtOutFileFieldMapping	
gtSheetFixedCellsConfig	
outFileType	=outFileType

Output Variables

Sub-Process Variable	Save Into
outFileType	outFileType



XOR

Node Type	XOR (core.4)
UUID	0002e4df-89db-8000-6089-1b4d981b4d98
Description	
Task Display Name	XOR
Lane	System
Assignment	unattended, run as: Process Initiator
Other	

Conditions

Condition	Result	Path Label
If pv!buttonAction=cons!EAP_BUTTON_ACTION[1]	go to Write to Data Store Entity	Submit
If none of the above are TRUE	go to End Node	



get data

Node Type	Unattended Multiple Questions (internal.16)
UUID	0001e4e7-2c71-8000-6162-1b4d981b4d98
Description	
Task Display Name	get data

Lane System

Assignment unattended, run as: Process Initiator

Other

Outputs

Expression	Operation	Variable
rule!EAP_QE_RefMaster(isActive: 1)	is stored as	masterLookupData
rule!EAP_SetValueForRefProcessOutFileType(outputFileType:pv!outFileType)	is stored as	outFileType