

# The Kolmogorov Birthday Paradox

Samuel Epstein\*

July 23, 2022

## Abstract

We prove bounds for a Kolmogorov complexity variant of the birthday problem. Random subsets of strings are guaranteed to have two members  $x$  and  $y$  with low  $\mathbf{K}(x|y)$ . To prove this, we first show that the minimum Kolmogorov complexity between members of finite sets is very low if they are not exotic. Exotic sets have high mutual information with the halting sequence.

## 1 Introduction

In this paper, we prove a Kolmogorov complexity version of the birthday problem. In order to do so, we first prove an interesting property about bunches of finite strings. A  $(k, l)$ -bunch is a finite set of strings  $X$  where  $2^l > \max_{x, y \in X} \mathbf{K}(y/x)$  and  $2^k < |X|$ . The function  $\mathbf{K}$  is the prefix free Kolmogorov complexity. Bunches were introduced in [Rom03], but we use a slightly different definition. Though bunches have only two parameters, they exhibit many interesting properties. In the literature, there have been properties proven about the common information of bunches. Both [Rom03] and [Rom22] proved existence of strings simple to each member of the bunches. In [Eps21b], it was proven that each bunch has a member that is simple relative to all members of the bunch. If not, then the bunch has high mutual information with the halting sequence. The mutual information between a string (and the bunch it encodes) and the halting sequence is  $\mathbf{I}(x; \mathcal{H}) = \mathbf{K}(x) - \mathbf{K}(x/\mathcal{H})$ . We prove that if a non exotic bunch  $X$  has many members and low  $\max_{x, y \in X} \mathbf{K}(y/x)$  then it will have two elements  $x, y$  with very low  $\mathbf{K}(y/x)$ .

**Theorem.** For  $(k, l)$ -bunch  $X$ ,  $\min_{x, y \in X} \mathbf{K}(y|x) <^{\log} \lceil l - 2k \rceil^+ + \mathbf{I}(X; \mathcal{H}) + O(\mathbf{K}(l, k))$ .

**The Kolmogorov Birthday Paradox.** Lets say we select a random subset  $D$  of size  $2^{n/2}$  consisting of unique strings of length  $n$ , where each string is selected independently. For the simple Kolmogorov birthday paradox, with overwhelming probability, there are two strings  $x, y$ , such that  $\mathbf{K}(x|y) = O(1)$ , for a large enough constant. This due to reasoning from the classical birthday paradox. We now provide upper bounds for the general Kolmogorov birthday paradox. Let  $P$  be any measure over sets  $D$  consisting of  $2^{n/2}$  strings of length  $n$ . Since  $D \subset \Sigma^n$ , for all  $D$ ,  $\max_{x, y \in D} \mathbf{K}(x|y) <^+ n$ . Using conservation inequalities [Lev74, Gei12, Ver21], one can prove  $\Pr_{D \sim P}(\mathbf{I}(D; \mathcal{H}) > m) \stackrel{*}{<} 2^{-m + \mathbf{K}(P)}$ . Using the above theorem, we get the following result<sup>1</sup> using  $l = n + O(1)$ ,  $k = .5n - 1$ .

**Corollary.** With overwhelming  $P$  probability,  $\min_{x, y \in D} \mathbf{K}(x|y) <^{\log} \mathbf{K}(P) + O(\mathbf{K}(n))$ .

---

\*JP Theory Group. samepst@jpththeorygroup.org

<sup>1</sup>The inequality can be improved to  $\min_{x, y \in D} \mathbf{K}(x|y) <^{\log} \mathbf{I}(\langle P \rangle : \mathcal{H}) + O(\mathbf{K}(n))$ , where  $\mathbf{I}(\alpha : \beta) = \log \sum_{x, y \in \Sigma^*} \mathbf{m}(x|\alpha) \mathbf{m}(y|\beta) 2^{\mathbf{I}(x:y)}$  is the information between two finite or infinite sequences, introduced in [Lev74]. The bounds loosen as the size of  $D$  decreases.

## 2 Related Work

The study of Kolmogorov complexity originated from the work of [Kol65]. The canonical self-delimiting form of Kolmogorov complexity was introduced in [ZL70] and treated later in [Cha75]. The universal probability  $\mathbf{m}$  was introduced in [Sol64]. More information about the history of the concepts used in this paper can be found the textbook [LV08].

The main result of this paper is an inequality including the mutual information of the encoding of a finite set with the halting sequence. A history of the origin of the mutual information of a string with the halting sequence can be found in [VV04].

A string is stochastic if it is typical of a simple elementary probability distribution. A string is typical of a probability measure if it has a low deficiency of randomness. In the proof of Theorem 1, the stochasticity measure of encodings of finite sets is used. The notion of the deficiency of randomness with respect to a measure follows from the work of [She83], and also studied in [KU87, VY87, She99]. Aspects involving stochastic objects were studied in [She83, She99, VY87, VY99].

This work uses the notion of left total machine and the notion of the infinite “border” sequence, which is equal to the binary expansion of Chaitin’s Omega, (see Section 7). The works of [VV04, GTV01] introduced the notion of using the prefix of the border sequence to define strings into a two part code.

This paper can be seen as an update to main result in [EL11], focusing on conditional complexity instead of algorithmic probability. This paper uses theorems and lemmas found [Eps21a].

## 3 Conventions

We use  $\Sigma$ ,  $\Sigma^*$ ,  $\Sigma^\infty$  to denote finite strings, and infinite sequences. The positive part of a real is  $[a]^+ = \max\{a, 0\}$ . For string  $x \in \Sigma^*$ ,  $x0^- = x1^- = x$ . For  $x \in \Sigma^*$  and  $y \in \Sigma^* \cup \Sigma^\infty$ , we use  $x \sqsubset y$  if there is some string  $z \in \Sigma^* \cup \Sigma^\infty$  where  $xz = y$ . The indicator function of a mathematical statement  $A$  is denoted by  $[A]$ , where if  $A$  is true then  $[A] = 1$ , otherwise  $[A] = 0$ . The self delimiting code of a string  $x \in \Sigma^*$  is  $\langle x \rangle = 1^{\|x\|}0x$ . The encoding of (a possibly ordered) set  $\{x_1, \dots, x_m\} \subset \Sigma^*$ , is  $\langle m \rangle \langle x_1 \rangle \dots \langle x_m \rangle$ .

Probability measures  $Q$  over numbers are elementary if  $|\text{Support}(Q)| < \infty$  and  $\text{Range}(Q) \subset Q_{\geq 0}$ . Elementary probability measures  $Q$  with  $\{x_1, \dots, x_m\} = \text{Support}(Q)$  are encoded by finite strings, with  $\langle Q \rangle = \langle \{x_1, Q(x_1), \dots, x_m, Q(x_m)\} \rangle$ .

For nonnegative real function  $f$ , we use  $<^+ f$ ,  $>^+ f$ ,  $=^+ f$  to denote  $< f + O(1)$ ,  $> f - O(1)$ , and  $= f \pm O(1)$ . We also use  $<^{\log} f$  and  $>^{\log} f$  to denote  $< f + O(\log(f+1))$  and  $> f - O(\log(f+1))$ .

We use a universal prefix free algorithm  $U$ , where we say  $U_\alpha(x) = y$  if  $U$ , on main input  $x$  and auxiliary input  $\alpha$ , outputs  $y$ . We define Kolmogorov complexity with respect to  $U$ , with for  $x \in \Sigma^*$ ,  $y \in \Sigma^{*\infty}$ ,  $\mathbf{K}(x/y) = \min\{\|p\| : U_y(p) = x\}$ . The universal probability  $\mathbf{m}$  is defined as  $\mathbf{m}(x/y) = \sum_p [U_y(p) = x] 2^{-\|p\|}$ . By the coding theorem  $\mathbf{K}(x/y) =^+ -\log \mathbf{m}(x/y)$ . By the chain rule,  $\mathbf{K}(x, y) =^+ \mathbf{K}(x) + \mathbf{K}(y/x, \mathbf{K}(x))$ . The halting sequence  $\mathcal{H} \in \Sigma^\infty$  is the unique infinite sequence where  $\mathcal{H}[i] = [U(i) \text{ halts}]$ . The information that  $x \in \Sigma^*$  has about  $\mathcal{H}$ , conditional to  $y \in \Sigma^* \cup \Sigma^\infty$ , is  $\mathbf{I}(x; \mathcal{H}/y) = \mathbf{K}(x|y) - \mathbf{K}(x/\langle y, \mathcal{H} \rangle)$ .

This paper uses notions of stochasticity in the field of algorithmic statistics [VS17]. A string  $x$  is stochastic, i.e. has a low  $\mathbf{Ks}(x)$  score, if it is typical of a simple probability distribution. The deficiency of randomness function of a string  $x$  with respect to an elementary probability measure  $P$  conditional to  $y \in \Sigma^*$ , is  $\mathbf{d}(x|P, y) = \lfloor -\log P(x) \rfloor - \mathbf{K}(x/\langle P \rangle, y)$ .

**Definition 1 (Stochasticity)** For  $x, y \in \Sigma^*$ ,  
 $\mathbf{Ks}(x/y) = \min\{\mathbf{K}(P/y) + 3 \log \max\{\mathbf{d}(x|P, y), 1\} : P \text{ is an elementary probability measure}\}.$

## 4 Warm Up for Theorem 1

A labelled graph is a graph such that each vertex has a unique string attached to it. We use a vertex interchangeably with the string assigned to it. The general argument for the proof of Theorem 1 is as follows. Given a labelled graph  $G$ , if there is a random subgraph  $F$  that is large enough, then it will probably share an edge with most large complete subgraphs  $J$  of  $G$ . Thus large complete subgraphs of  $G$  with empty intersection with  $F$  will be considered atypical. If  $F$  shares an edge with subgraph  $J \subseteq G$ , then

$$\min_{(x,y) \in J} \mathbf{K}(y|x) \lesssim \log \max_{x \in F} \text{OutDegree}(x) + \mathbf{K}(F).$$

In this section, instead of using random subgraphs, we use random lists of vertices  $L_\bullet$ , indexed by  $x \in G$ . Thus for each  $x \in G$ ,  $L_x$  is a list of vertices, possibly with repetition. This allows for easier manipulation.

The warm up arguments are as follows. Let  $G$  be a graph of max degree  $2^l$  and  $\mathcal{J}$  be the set of complete subgraphs of  $G$  of size  $2^k$ . We assume  $l > 2k$ . For each vertex  $x \in G$  has a random list  $L_x$  of  $2^{l-2k}$  vertices where for  $i \in [1, 2^{l-2k}]$ ,  $\Pr(y = L_x[i]) = [(x, y) \in G]2^{-l}$  and  $\Pr(\emptyset = L_x[i]) = 1 - \text{OutDegree}(x)2^{-l}$ . For  $J \in \mathcal{J}$ , indexed list  $L_\bullet$ ,

$$\text{Miss}(J) \text{ is true iff } \forall x, y \in J, y \notin L_x.$$

For each  $J \in \mathcal{J}$ ,

$$\begin{aligned} \Pr(\text{Miss}(J)) &= \prod_{x \in J} \Pr(\forall y \in J, y \notin L_x) \\ &\leq \prod_{x \in J} \left(1 - 2^{k-l}\right)^{|L_x|} \\ &\leq \prod_{x \in J} \left(1 - 2^{k-l}\right)^{2^{l-2k}} \\ &\leq \left((1 - 2^{k-l})^{2^{l-2k}}\right)^{|J|} \\ &\leq \left(e^{-2^{-k}}\right)^{|J|} < e^{-1} < 1. \end{aligned}$$

Now assume that  $|L_x| = b2^{l-2k}$  for all  $x \in G$ . It is not hard to see that  $\Pr(\text{Miss}(J)) < e^{-b}$  for each  $J \in \mathcal{J}$ . We assume a uniform distribution  $\mathcal{U}$  over  $\mathcal{J}$ . Under this assumption,

$$\mathbf{E}[\text{Miss}(J)] < \sum_{J \in \mathcal{J}} |\mathcal{J}|^{-1} e^{-b} = e^{-b}.$$

Thus given all the parameters,  $G$ ,  $k$ ,  $l$ , and  $b$ , using brute force search, one can find a set of lists  $L_\bullet$  of size  $b2^{l-2k}$  indexed by  $x \in G$ , such that less than  $e^{-b}$  of members  $J$  of  $\mathcal{J}$  have  $\text{Miss}(J)$ . Thus  $t(J) = [\text{Miss}(J)]e^b$  is a  $\mathcal{U}$ -test, with  $\sum_{J \in \mathcal{J}} t(J)\mathcal{U}(J) < 1$ .

We set aside the parameters  $(G, k, l, b)$  because they complicate the discussion. That is, we roll the parameters into the additive constants of the inequalities. If  $\text{Miss}(J)$  is true for  $J \in \mathcal{J}$ , then

$$\mathbf{d}(J|\mathcal{U}) = -\log \mathcal{U}(J) - \mathbf{K}(J/\mathcal{U}) \tag{1}$$

$$>^+ \log |\mathcal{J}| - \mathbf{K}(J/L_\bullet, \mathcal{U}) \tag{2}$$

$$>^+ \log |\mathcal{J}| - \log t(J)\mathcal{U}(J) \tag{3}$$

$$>^+ b \log e. \tag{4}$$

Thus all subgraphs of  $G$  for which Miss is true will be atypical of  $\mathcal{U}$ , with randomness deficiency greater than  $b$ . Thus if a subgraph  $J \in \mathcal{J}$  is  $b$ -typical, then there exists  $x, y \in J$ , with  $y \in L_x$ . So  $b$ -typical subgraphs  $J \in \mathcal{J}$  will have

$$\min_{x, y \in J} \mathbf{K}(y|x) <^+ \log |L_x| <^+ l - 2k + \log b. \quad (5)$$

For Theorem 1, the uniform probability measure  $\mathcal{U}$  is replaced by a special computable measure  $P$  that realizes the stochasticity of the subgraph  $J$ . In addition,  $b$  is chosen to equal  $b \approx \mathbf{d}(J|P)$  so that the subgraph  $J$  is guaranteed to be typical of  $P$ , so Miss( $J$ ) is false. This means Equation 5 holds for  $J$ . In addition, in the next section, the parameters  $(G, k, l, b)$  must be taken into account, and to do so, a special constant  $c$  is introduced.

## 5 Labelled Graphs

In this section, we study exotic subgraphs of simple labelled graphs. A subgraph  $J$  is exotic if it has a lot of labelled edges  $(x, y) \in J$ , such that the conditional complexity  $\mathbf{K}(y|x)$  is high. This theorem may be of independent interest.

**Theorem 1** *For graph  $G$ , complete subgraph  $J$ ,  $2^\ell > \max \text{Outdegree}(G)$ ,  $2^k < |J|$ ,  $h = \mathbf{I}(J; \mathcal{H}/G, k)$ ,  $\min_{(x, y) \in J} \mathbf{K}(y|x) < \lceil l - 2k \rceil^+ + h + \mathbf{K}(G, k) + O(\mathbf{K}(h))$ .*

**Proof.** Let  $\ell = \max\{l, 2k\}$ . Let  $P$  realize  $\mathbf{Ks}(J/G, k)$  and  $d = \max\{\mathbf{d}(J|P, G, k), 1\}$ . Let  $V : G \times G \rightarrow \mathbb{R}_{\geq 0}$  be a conditional probability measure where  $V(y|x) = [(x, y) \in G]2^{-\ell}$  and  $V(\emptyset|x) = 1 - \text{OutDegree}(x)2^{-\ell}$ . We define a conditional probability measure over lists  $L$  of  $cd2^{\ell-2k}$  vertices of  $G$ , with  $\kappa : G \times G^{cd2^{\ell-2k}} \rightarrow \mathbb{R}_{\geq 0}$ , where  $\kappa(L|x) = \prod_{y \in L} V(y|x)$ . Let  $L_\bullet$  be an indexed list of  $cd2^{\ell-2k}$  elements, indexed by  $x \in G$ , where each list is denoted by  $L_x$  for  $x \in G$ . Let  $\kappa(L_\bullet) = \prod_{x \in G} \kappa(L_x|x)$ . For indexed list  $L_\bullet$ , graph  $H$ , we use the following indicator  $\mathbf{i}(L_\bullet, H) = [\text{Complete } H \subseteq G, 2^k < |H|, \forall (x, y) \in H, y \notin L_x]$ .

$$\begin{aligned} \mathbf{E}_{L_\bullet \sim \kappa} \mathbf{E}_{H \sim P} [\mathbf{i}(L_\bullet, H)] &\leq \sum_H P(H) \prod_{x \in H} (1 - 2^{k-\ell})^{|L_x|} \\ &\leq \sum_H P(H) \prod_{x \in H} (1 - 2^{k-\ell})^{cd2^{\ell-2k}} \\ &\leq \sum_H P(H) \prod_{x \in H} e^{-cd2^{-k}} \\ &< \sum_H P(H) e^{-cd} \\ &= e^{-cd}. \end{aligned}$$

Thus there exists an  $L_\bullet$  such that  $\mathbf{E}_{H \sim P} [\mathbf{i}(L_\bullet, H)] < e^{-cd}$ . This  $L_\bullet$  can be found with brute force search with all the parameters, with  $\mathbf{K}(L_\bullet/G, P, k, c, d) = O(1)$ . Thus  $t(H) = \mathbf{i}(L_\bullet, H)e^{cd}$  is a  $P$  test, where  $\mathbf{E}_{H \sim P} [t(H)] \leq 1$ . A diagram of the components can be found in Figure 1.

It must be that there is an  $(x, y) \in J$  where  $y \in L_x$ . Otherwise  $t_{L_\bullet}(J) = e^{cd}$  and for choice of  $c$

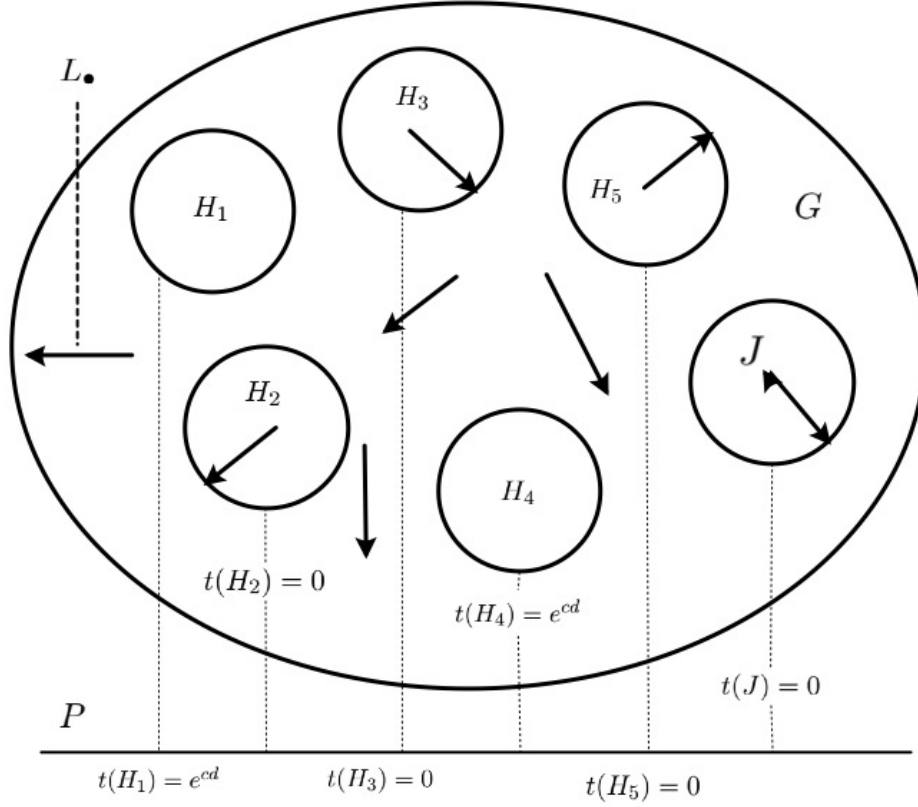


Figure 1: The above diagram is a graphical representation of the concepts used in the proof of Theorem 1. The main ellipse models the graph  $G$  and the circles in the graph represent complete subgraphs (labeled  $H_1$  to  $H_6$ ). Each subgraph is in the support of  $P$ , represented by the dotted lines. The set  $L_\bullet$  represents a collection of selected edges. If a subgraph  $H_i$  does not contain an edge in  $L_\bullet$ , then  $H_i$  is *atypical* and has a high score  $t(H_i)$ . By design,  $J$  is typical, thus shares an edge with  $L_\bullet$ .

solely dependent on the universal Turing machine,

$$\begin{aligned}
\mathbf{K}(J/P, G, k, c, d) &<^+ -\log t(J)P(J) \\
&<^+ -(\log e)cd - \log P(J) \\
(\log e)cd &<^+ -\log P(J) - \mathbf{K}(J/P, G, k, c, d) \\
(\log e)cd &<^+ -\log P(J) - \mathbf{K}(J/P, G, k) + \mathbf{K}(c, d) \\
(\log e)cd &<^+ d + \mathbf{K}(c, d),
\end{aligned}$$

which is a contradiction. The constant  $c$  is folded into the additive constants of the inequalities of the rest of the proof. Thus since exists  $x, y \in J$  where  $y \in L_x$ ,

$$\begin{aligned}
\mathbf{K}(y/x, G, k) &<^+ \log |L_x| + \mathbf{K}(L_\bullet/G, k) \\
&<^+ [l - 2k]^+ + \log d + \mathbf{K}(L_\bullet/G, P, k, d) + \mathbf{K}(P, d/G, k) \\
&<^+ [l - 2k]^+ + \log d + \mathbf{K}(P, d/G, k) \\
&<^+ [l - 2k]^+ + 3\log d + \mathbf{K}(P/G, k) \\
&<^+ [l - 2k]^+ + \mathbf{Ks}(J/G, k) \\
&<^+ [l - 2k]^+ + \mathbf{I}(J : \mathcal{H}) + O(\mathbf{K}(\mathbf{I}(J : \mathcal{H}))) \\
\mathbf{K}(y/x) &<^+ [l - 2k]^+ + \mathbf{I}(J : \mathcal{H}) + \mathbf{K}(G, k) + O(\mathbf{K}(\mathbf{I}(J : \mathcal{H}))).
\end{aligned} \tag{6}$$

□

Equation 6 is due to Lemma 10 in [Eps21a], which states  $\mathbf{Ks}(x) < \mathbf{I}(x : \mathcal{H}) + O(\mathbf{K}(\mathbf{I}(x : \mathcal{H})))$ .

## 6 Warm Up for Theorem 2

Theorem 1 can be used to prove results about the minimum conditional complexity between two elements of a bunch. This sections gives a broad overview of the arguments used in the proof of Theorem 2. Let  $X \subset \Sigma^*$  be a  $(k, l)$ -bunch, where  $|X| > 2^k$ , and  $\max_{x, y \in X} \mathbf{K}(y/x) < 2^{-l}$ .

Let  $\mathbf{K}^r(x/y)$  be the conditional complexity of  $x$  given  $y$  in time  $r$ . So given a number  $r$ ,  $\mathbf{K}^r$  is computable. We also assume  $\mathbf{K}^r(x/y) = 0$  if  $\|y\| > r$  to make sure that  $\mathbf{K}^r$  has finite support for each  $r$ .

Let  $r$  be the smallest number where  $\mathbf{K}^r(x/y) < l$ , for all  $x, y \in X$ . Let  $G$  be the labelled graph where  $(x, y) \in G$  iff  $\mathbf{K}^r(y/x) < l$ .  $X$  can be viewed as a complete subgraph of  $G$  of size  $> 2^k$ . Invoking Theorem 1, we get

$$\min_{(x, y) \in X} \mathbf{K}(y/x) \lesssim [l - 2k]^+ + \mathbf{I}(X : \mathcal{H}/G) + \mathbf{K}(G, k). \tag{7}$$

We have  $\mathbf{K}(r/G) <^+ \mathbf{K}(l)$  because  $r$  is the smallest number such that  $G$  can be constructed from  $l$  and  $\mathbf{K}^r$ . So

$$\begin{aligned}
\mathbf{K}(X/G) &<^+ \mathbf{K}(X/r) + \mathbf{K}(r/G) \\
&<^+ \mathbf{K}(X/r) + \mathbf{K}(l).
\end{aligned}$$

Now  $\mathbf{K}(G/r) <^+ \mathbf{K}(l)$  by the definition of  $G$ . By the definition of  $\mathbf{I}$ ,

$$\begin{aligned}
\mathbf{I}(X : \mathcal{H}/G) &= \mathbf{K}(X/G) - \mathbf{K}(X/G, \mathcal{H}) \\
&<^+ \mathbf{K}(X/r) - \mathbf{K}(X/G, \mathcal{H}) + \mathbf{K}(l) \\
&<^+ \mathbf{K}(X/r) - \mathbf{K}(X/r, \mathcal{H}) + \mathbf{K}(G/r) + \mathbf{K}(l) \\
&<^+ \mathbf{I}(X : \mathcal{H}/r) + O(\mathbf{K}(l)).
\end{aligned} \tag{8}$$

Using  $\mathbf{K}(G) <^+ \mathbf{K}(r) + \mathbf{K}(l)$  and combining Equations 7 and 8, we get

$$\min_{(x,y) \in J} \mathbf{K}(y/x) \lesssim [l - 2k]^+ + \mathbf{I}(X : \mathcal{H}/r) + \mathbf{K}(r) + O(\mathbf{K}(l, k)). \quad (9)$$

This inequality is close to the form of Theorem 2. The main difference is that the number  $r$  appears in Equation 9. This can be rectified if we use a different notion of computational resource. In the next section we introduce left-total universal machines, and the resource used is not a number  $r$  but a so-called total string  $b$ . Then Lemma 1 can be used to remove the  $b$  factor from the final inequality.

## 7 Left-Total Machines

We recall that for  $x \in \Sigma^*$ ,  $\Gamma_x = \{x\beta : \beta \in \Sigma^\infty\}$  is the interval of  $x$ . The notions of total strings and the “left-total” universal algorithm are needed in this paper. We say  $x \in \Sigma^*$  is total with respect to a machine if the machine halts on all sufficiently long extensions of  $x$ . More formally,  $x$  is total with respect to  $T_y$  for some  $y \in \Sigma^{*\infty}$  iff there exists a finite prefix free set of strings  $Z \subset \Sigma^*$  where  $\sum_{z \in Z} 2^{-\|z\|} = 1$  and  $T_y(xz) \neq \perp$  for all  $z \in Z$ . We say (finite or infinite) string  $\alpha \in \Sigma^{*\infty}$  is to the “left” of  $\beta \in \Sigma^{*\infty}$ , and use the notation  $\alpha \triangleleft \beta$ , if there exists a  $x \in \Sigma^*$  such that  $x0 \sqsubseteq \alpha$  and  $x1 \sqsubseteq \beta$ . A machine  $T$  is left-total if for all auxiliary strings  $\alpha \in \Sigma^{*\infty}$  and for all  $x, y \in \Sigma^*$  with  $x \triangleleft y$ , one has that  $T_\alpha(y) \neq \perp$  implies that  $x$  is total with respect to  $T_\alpha$ . An example can be seen in Figure 2.

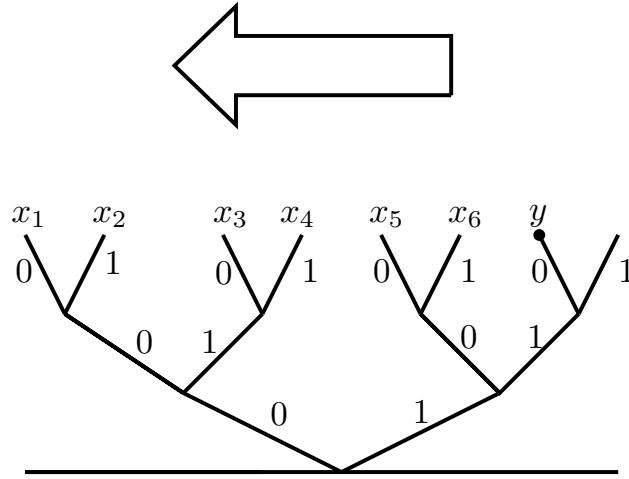


Figure 2: The above diagram represents the domain of a left total machine  $T$  with the 0 bits branching to the left and the 1 bits branching to the right. For  $i \in \{1, \dots, 5\}$ ,  $x_i \triangleleft x_{i+1}$  and  $x_i \triangleleft y$ . Assuming  $T(y)$  halts, each  $x_i$  is total. This also implies each  $x_i^-$  is total as well.

For the remaining of this paper, we can and will change the universal self delimiting machine  $U$  into a universal left-total machine  $U'$  by the following definition. The algorithm  $U'$  orders all strings  $p \in \Sigma^*$  by the running time of  $U$  when given  $p$  as an input. Then  $U'$  assigns each  $p$  an interval  $i_p \subseteq [0, 1]$  of width  $2^{-\|p\|}$ . The intervals are assigned “left to right”, where if  $p \in \Sigma^*$  and  $q \in \Sigma^*$  are the first and second strings in the ordering, then they will be assigned the intervals  $[0, 2^{-\|p\|}]$  and  $[2^{-\|p\|}, 2^{-\|p\|} + 2^{-\|q\|}]$ .

Let the target value of  $p \in \Sigma^*$  be  $(p) \in \mathbb{W}$ , which is the value of the string in binary. For example, the target value of both strings 011 and 0011 is 3. The target value of 0100 is 4. The target interval of  $p \in \Sigma^*$  is  $\Gamma(p) = ((p)2^{-\|p\|}, ((p)+1)2^{-\|p\|})$ .

The universal machine  $U'$  outputs  $U(p)$  on input  $p'$  if  $\Gamma(p')$  and not that of  $\Gamma(p'^-)$  is strictly contained in  $i_p$ . The same definition applies for the machines  $U'_\alpha$  and  $U_\alpha$ , over all  $\alpha \in \Sigma^{*\infty}$ .

Recall that a function  $f : \mathbb{N} \rightarrow \mathbb{N}$  is partial computable with respect to  $U$  if there is a string  $t \in \Sigma^*$  such that  $f(x) = U(t\langle x \rangle)$  when  $f(x)$  is defined and  $U(t\langle x \rangle)$  does not halt otherwise. Similarly a function  $f : \mathbb{N} \rightarrow \mathbb{N}$  is partial computable with respect to  $U'$  if there is  $t \in \Sigma^*$ , that whenever  $f(x)$  is defined, there is an interval  $i_{t\langle x \rangle}$  and for any string  $p$  where  $\Gamma(p)$  and not that of  $\Gamma(p^-)$ , is contained in  $i_{t\langle x \rangle}$ , then  $U'(p) = f(x)$ . Otherwise, if  $f(x)$  is not defined, there does not exist the interval  $i_{t\langle x \rangle}$ .

**Proposition 1**  $\mathbf{K}_U(x/y) =^+ \mathbf{K}_{U'}(x/y)$ .

**Proof.** It must be that  $\mathbf{K}_U(x/y) <^+ \mathbf{K}_{U'}(x/y)$ , because there is a Turing machine that computes  $U'$ . Therefore, do to the universality of  $U$ , there is a  $t \in \Sigma^*$ , such that  $U_y(tx) = U'_y(x)$ , thus proving the minimality of  $\mathbf{K}_U$ . It must be that  $\mathbf{K}_{U'}(x/y) <^+ \mathbf{K}_U(x/y)$ . This is because if  $U(x) = z$ , then there is interval  $i_x$  such that for all strings  $p$  where  $\Gamma(p)$  and not that of  $\Gamma(p^-)$  that are strictly contained in  $i_x$  has  $U'_y(p) = U_y(x)$ . Thus we have that  $\|p\| \leq \|x\| + 2$ . This implies that  $\mathbf{K}_{U'}(x/y) \leq \mathbf{K}_U(x/y) + 2$ .  $\square$

For the rest of the paper, we now set  $U$  to be equal  $U'$ , so the universal Turing machine can be considered to be left-total. Without loss of generality, as shown in Proposition 1 the complexity terms of this paper are defined with respect to the universal left total machine  $U$ .

**Proposition 2** *There exists a unique infinite sequence  $\mathcal{B}$  with the following properties.*

1. *All the finite prefixes of  $\mathcal{B}$  have total and non-total extensions.*
2. *If a finite string has total and non-total extensions then it is a prefix of  $\mathcal{B}$ .*

**Proof.** (1) Let  $\Omega \in \mathbb{R}$  be the Chaitin's Omega, the probability that a random sequence of bits halts when given to  $U$ , with  $\Omega = \sum_{p \in \Sigma^*} [U(p) \text{ halts}] 2^{-\|p\|}$ . Thus  $\Omega$  characterizes the domain of  $U'$ , with  $\bigcup_{p \in \Sigma^*} i_p = [0, \Omega)$ . Let  $\mathcal{B} \in \Sigma^\infty$  be the binary expansion of  $\Omega$ , which is a ML random string. For each  $n \in \mathbb{N}$ , let  $b_n \sqsubset \mathcal{B}$ ,  $\|b_n\| = n$ . Let  $m \in \mathbb{W}$  be the smallest whole number such that  $b_n 1^{(m)} 0 \sqsubset \mathcal{B}$ . Then  $b_n 1^{(m+1)}$  is a non-total string because  $[0, \Omega] \cap \Gamma(b_n 1^{(m+1)}) = \emptyset$ . Furthermore let  $m \in \mathbb{W}$  be the smallest whole number such that  $b_n 0^{(m)} 1 \sqsubset \mathcal{B}$ . Then  $b_n 0^{(m+1)}$  is a total string because  $\Gamma(b_n 0^{(m+1)}) \subset [0, \Omega)$ .

(2) Assume there are two strings  $x$  and  $y$  of length  $n$  that have total and non-total extensions, with  $x \triangleleft y$ . Since  $y$  has total extensions, there exist  $z$  such that  $U'(yz)$  halts. Since  $x \triangleleft yz$ , by the definition of left-total machines,  $x$  is total, causing a contradiction.  $\square$

The following lemma shows that if a prefix of the border sequence is simple relative to a string  $x$ , then it will be the common information between  $x$  and the halting sequence  $\mathcal{H}$ . Note that if a string  $b$  is total and  $b^-$  is not, then  $b^- \sqsubset \mathcal{B}$ , due to the fact that  $b^-$  has total and non-total extensions.

**Lemma 1** ([Eps21a]) *If  $b \in \Sigma^*$  is total and  $b^-$  is not, and  $x \in \Sigma^*$ , then  $\mathbf{K}(b) + \mathbf{I}(x : \mathcal{H}/b) <^{\log} \mathbf{I}(x : \mathcal{H}) + \mathbf{K}(b/\langle x, \|b\| \rangle)$ .*



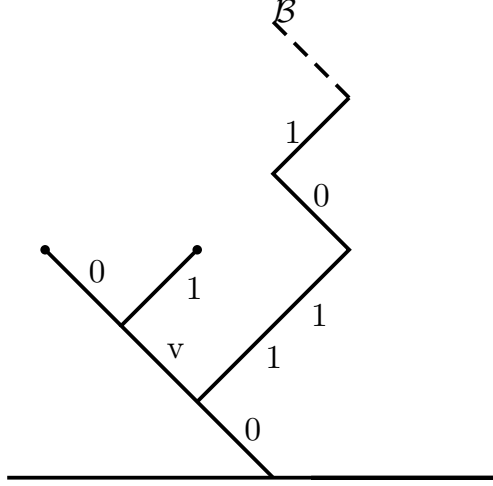


Figure 3: The above diagram represents the domain of the universal left-total algorithm  $U'$ , with the 0 bits branching to the left and the 1 bits branching to the right. The strings in the above diagram,  $0v0$  and  $0v1$ , are halting inputs to  $U'$  with  $U(0v0) \neq \perp$  and  $U(0v1) \neq \perp$ . So  $0v$  is a total string. The infinite border sequence  $\mathcal{B} \in \Sigma^\infty$  represents the unique infinite sequence such that all its finite prefixes have total and non total extensions. All finite strings branching to the right of  $\mathcal{B}$  will cause  $U'$  to diverge.

We call this infinite sequence  $\mathcal{B}$ , “border” because for any string  $x \in \Sigma^*$ ,  $x \triangleleft \mathcal{B}$  implies that  $x$  is total with respect to  $U$  and  $\mathcal{B} \triangleleft x$  implies that  $U$  will never halt when given  $x$  as an initial input. Figure 3 shows the domain of  $U'$  with respect to  $\mathcal{B}$ . We now set  $U$  to be equal  $U'$ . Without loss of generality, as shown in Proposition 1 the complexity terms of this paper are defined with respect to the universal left total machine  $U$ .

For total string  $b$ , we define the busy beaver function,  $\mathbf{bb}(b) = \max\{\|x\| : U(p) = x, p \triangleleft b \text{ or } p \sqsupseteq b\}$ . For total string  $b$ , the  $b$ -computable complexity of a string  $x$  with respect to a string  $y \in \Sigma^* \cup \Sigma^\infty$ , is  $\mathbf{K}_b(x/y) = \min\{\|p\| : U_y(p) = x \text{ in } \mathbf{bb}(b) \text{ time and } \|y\| \leq \mathbf{bb}(b)\}$ .

## 8 Minimum Conditional Complexity

We define a  $(k, l)$ -bunch  $X$  to be a finite set of strings, where  $2^k < |X|$  and for all  $x, x' \in X$ ,  $\mathbf{K}(x/x') < l$ . If  $l \gg k$ , such as the  $(k, l)$ -bunch consisting of two large independent random strings, then it is difficult to proof properties about it. If  $l \approx 2k$ , then interesting properties emerge.

**Theorem 2** For  $(k, l)$ -bunch  $X$ ,  $\min_{x, y \in X} \mathbf{K}(y/x) <^{\log} \lceil l - 2k \rceil^+ + \mathbf{I}(X; \mathcal{H}) + O(\mathbf{K}(l, k))$ .

**Proof.** We assume that the universal Turing machine  $U$  is left-total. Let  $b$  be the shortest total string such that  $\mathbf{K}_b(y/x) < l$  for all  $x, y \in X$ . We

$$\mathbf{K}(b/X) <^+ \mathbf{K}(\|b\|, l), \quad (10)$$

as there is a program that when enumerating total strings of length  $\|b\|$ , returns the first one with the desired properties. Thus  $b^-$  is not total, and  $b^-$  is a prefix of border. Let  $G$  be the graph

defined by  $(x, y) \in G$  iff  $\mathbf{K}_b(y/x) < l$ . We have

$$\mathbf{K}(G/b) <^+ \mathbf{K}(l) \quad (11)$$

$$\mathbf{K}(b/G) <^+ \mathbf{K}(\|b\|, l). \quad (12)$$

The second inequality is due to the existence of a program that will enumerate total strings of length  $\|b\|$  and return the first total string  $c$  such that  $(x, y) \in G$  iff  $\mathbf{K}_c(y/x) < l$ . This algorithm returns  $b$ , otherwise it returns some  $b' \triangleleft b$ . In this case  $b'^-$  is total and  $\mathbf{K}_{b'^-} \leq \mathbf{K}_{b'}$ , making  $b$  not the shortest total string where  $\mathbf{K}_b(y/x) < l$  for all  $x, y \in X$ , causing a contradiction.

Let  $J \subseteq G$  where  $J$  is a complete labelled subgraph of vertices equal to  $X$ . Theorem 1, gives  $x, y \in J$ , where

$$\begin{aligned} \mathbf{K}(y/x) &<^+ \lceil l - 2k \rceil^+ + \mathbf{I}(J; H/G, k) + \mathbf{K}(G, k) \\ &<^+ \lceil l - 2k \rceil^+ + \mathbf{I}(X; H/G, k) + \mathbf{K}(G, k). \end{aligned} \quad (13)$$

We have

$$\begin{aligned} \mathbf{K}(X/G) &<^+ \mathbf{K}(X/b) + \mathbf{K}(b/G) \\ &<^+ \mathbf{K}(X/b) + \mathbf{K}(\|b\|, l), \end{aligned} \quad (14)$$

where Equation 14 is due to Equation 12. We also have

$$\begin{aligned} \mathbf{K}(X/b, \mathcal{H}) &< \mathbf{K}(X/G, \mathcal{H}) + \mathbf{K}(G/b, \mathcal{H}), \\ &< \mathbf{K}(X/G, \mathcal{H}) + \mathbf{K}(l), \end{aligned} \quad (15)$$

where Equation 15 is due to Equation 11. So

$$\begin{aligned} \mathbf{I}(X : \mathcal{H}/G) &= \mathbf{K}(X/G) - \mathbf{K}(X/G, \mathcal{H}) \\ &<^+ \mathbf{I}(X : \mathcal{H}/b) + \mathbf{K}(l) + \mathbf{K}(\|b\|, l). \end{aligned} \quad (16)$$

Combing Equations 13 and 16,

$$\begin{aligned} \mathbf{K}(y/x) &<^+ \lceil l - 2k \rceil^+ + \mathbf{I}(X : \mathcal{H}/b) + \mathbf{K}(G) + \mathbf{K}(\|b\|) + O(\mathbf{K}(k, l)) \\ &<^+ \lceil l - 2k \rceil^+ + \mathbf{I}(X : \mathcal{H}/b) + \mathbf{K}(b) + \mathbf{K}(\|b\|) + O(\mathbf{K}(k, l)) \\ &<^{\log} \lceil l - 2k \rceil^+ + \mathbf{I}(X : \mathcal{H}/b) + \mathbf{K}(b) + O(\mathbf{K}(k, l)). \end{aligned} \quad (17)$$

Equation 17 is due to Equation 11. Using Lemma 1, we get

$$\begin{aligned} \mathbf{K}(y/x) &<^{\log} \lceil l - 2k \rceil^+ + \mathbf{I}(X : \mathcal{H}) + \mathbf{K}(b/X, \|b\|) + O(\mathbf{K}(k, l)) \\ &<^{\log} \lceil l - 2k \rceil^+ + \mathbf{I}(X : \mathcal{H}) + O(\mathbf{K}(k, l)), \end{aligned} \quad (18)$$

where Equation 18 is due to Equation 10. □

**Acknowledgements.** The author thanks the anonymous referees of the Theoretical Computer Science journal for their review of the paper and insightful comments.

## References

- [Cha75] G. J. Chaitin. A Theory of Program Size Formally Identical to Information Theory. *Journal of the ACM*, 22(3):329–340, 1975.
- [EL11] Samuel Epstein and Leonid Levin. On sets of high complexity strings. *CoRR*, abs/1107.1458, 2011.
- [Eps21a] Samuel Epstein. All sampling methods produce outliers. *IEEE Transactions on Information Theory*, 67(11):7568–7578, 2021.
- [Eps21b] Samuel Epstein. On the conditional complexity of sets of strings. *CoRR*, 1907.01018, 2021.
- [Gei12] Philipp Geiger. *Mutual information and Gödel incompleteness*. PhD thesis, Heidelberg University, 10 2012.
- [GTV01] P. Gács, J. Tromp, and P. Vitányi. Algorithmic Statistics. *IEEE Transactions on Information Theory*, 47(6):2443–2463, 2001.
- [Kol65] A. N. Kolmogorov. Three approaches to the quantitative definition of information. *Problems in Information Transmission*, 1:1–7, 1965.
- [KU87] A. N. Kolmogorov and V. A. Uspensky. Algorithms and Randomness. *SIAM Theory of Probability and Its Applications*, 32(3):389–412, 1987.
- [Lev74] L. A. Levin. Laws of Information Conservation (Non-growth) and Aspects of the Foundations of Probability Theory. *Problemy Peredachi Informatsii*, 10(3):206–210, 1974.
- [LV08] M. Li and P. Vitányi. *An Introduction to Kolmogorov Complexity and Its Applications*. Springer Publishing Company, Incorporated, 3 edition, 2008.
- [Rom03] Andrei E. Romashchenko. Extracting the mutual information for a triple of binary strings. In *IEEE Conference on Computational Complexity*, pages 221–229. IEEE Computer Society, 2003.
- [Rom22] A. Romashchenko. Clustering with respect to the information distance. *Theoretical Computer Science*, 2022.
- [She83] A. Shen. The concept of (alpha,beta)-stochasticity in the Kolmogorov sense, and its properties. *Soviet Mathematics Doklady*, 28(1):295–299, 1983.
- [She99] A. Shen. Discussion on Kolmogorov Complexity and Statistical Analysis. *The Computer Journal*, 42(4):340–342, 1999.
- [Sol64] R. J. Solomonoff. A Formal Theory of Inductive Inference, Part 1. *Information and Control*, 7:1–22, 1964.
- [Ver21] N. Vereshchagin. Proofs of conservation inequalities for levin’s notion of mutual information of 1974. *Theoretical Computer Science*, 856, 2021.
- [VS17] Nikolay K. Vereshchagin and Alexander Shen. Algorithmic statistics: Forty years later. In *Computability and Complexity*, pages 669–737, 2017.

- [VV04] N. Vereshchagin and P. Vitányi. Kolmogorov’s Structure Functions and Model Selection. *IEEE Transactions on Information Theory*, 50(12):3265 – 3290, 2004.
- [V’Y87] V.V. V’Yugin. On Randomness Defect of a Finite Object Relative to Measures with Given Complexity Bounds. *SIAM Theory of Probability and Its Applications*, 32:558–563, 1987.
- [V’Y99] V.V. V’Yugin. Algorithmic complexity and stochastic properties of finite binary sequences. *The Computer Journal*, 42:294–317, 1999.
- [ZL70] A. K. Zvonkin and L. A. Levin. The complexity of finite objects and the development of the concepts of information and randomness by means of the theory of algorithms. *Russian Math. Surveys*, page 11, 1970.