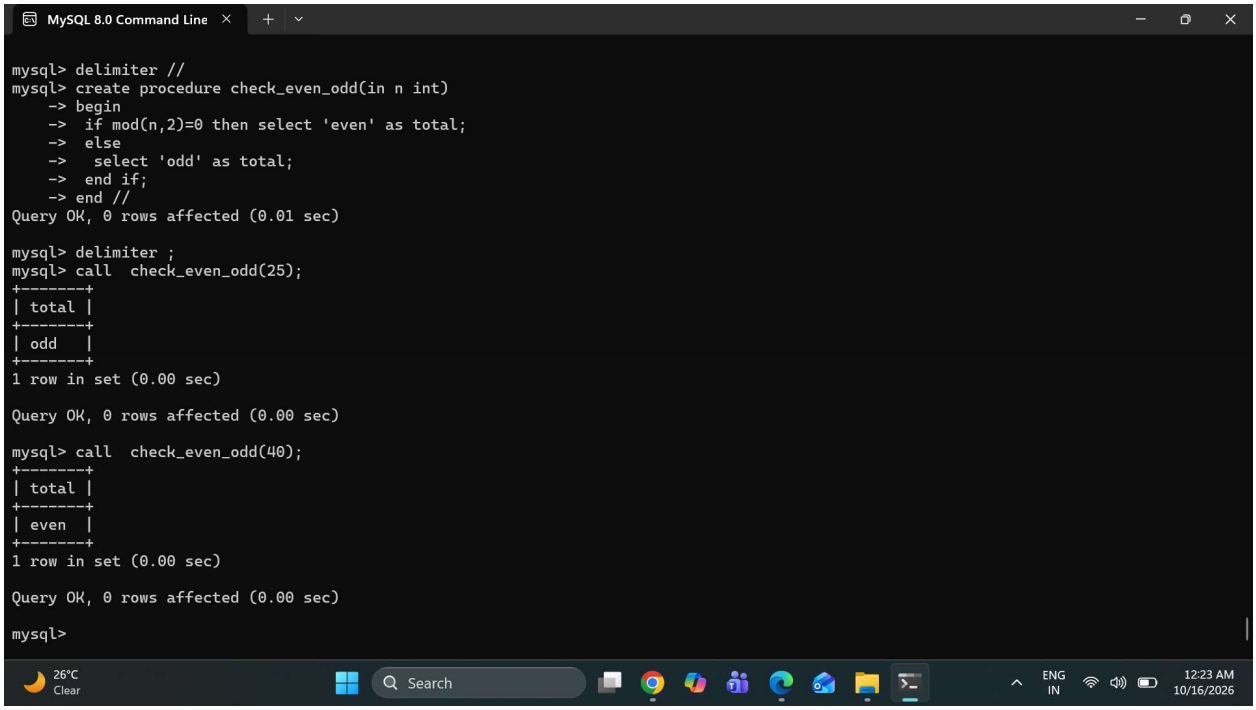
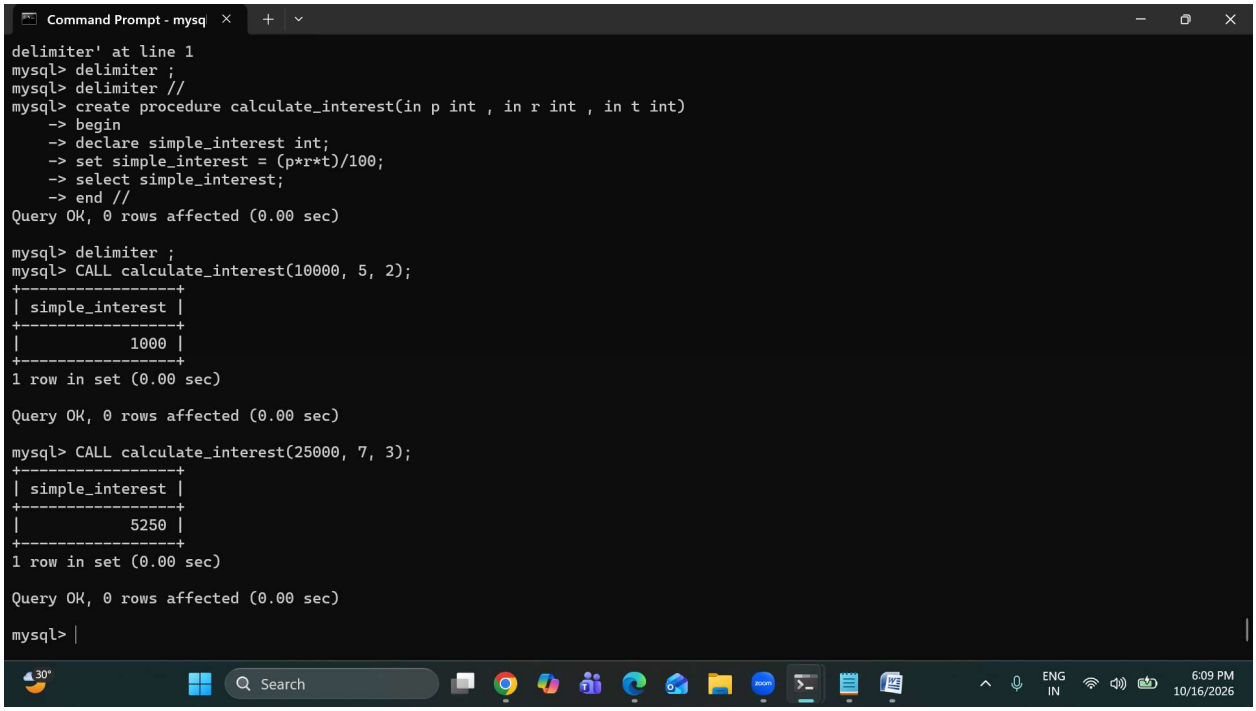
MySQL Stored Procedure Assignment

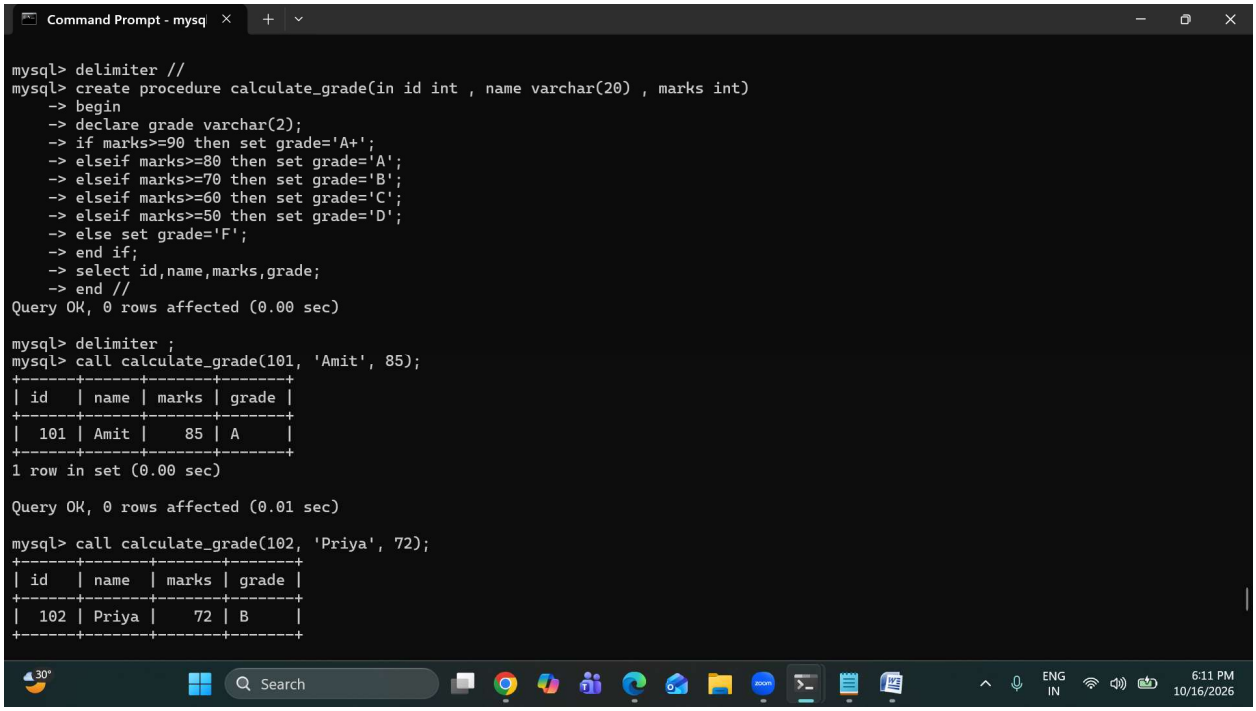
Q1.

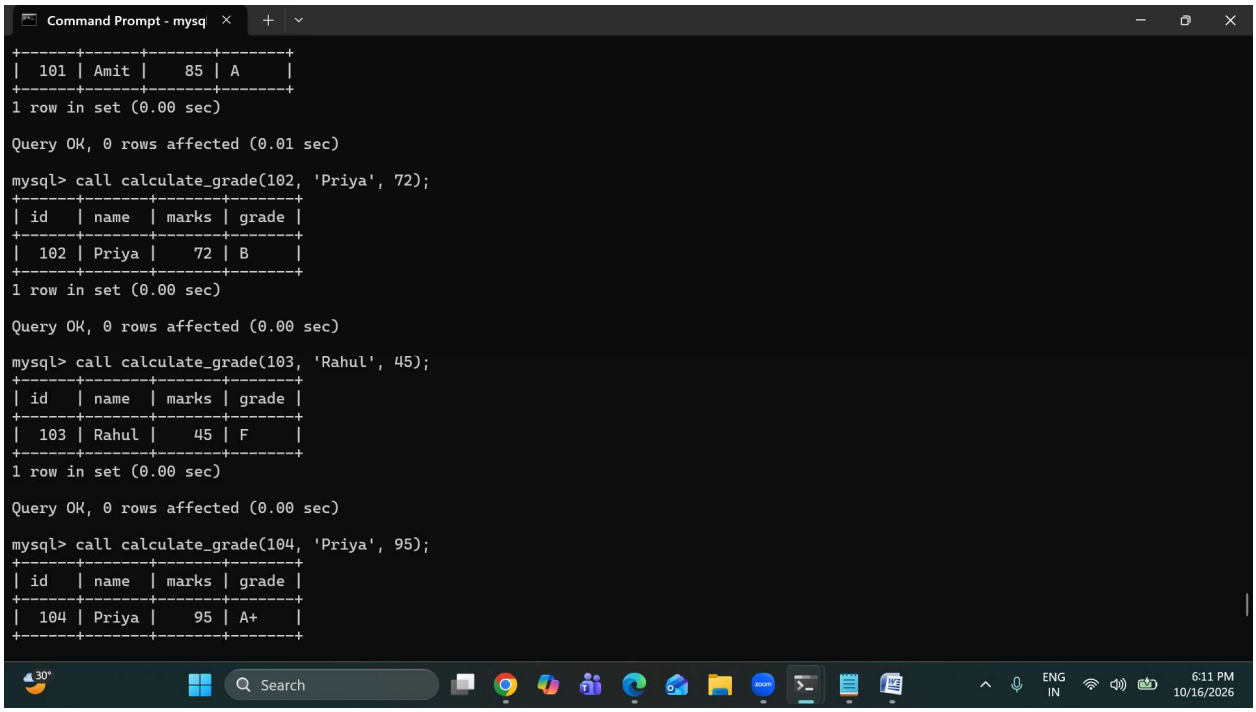


Q2.

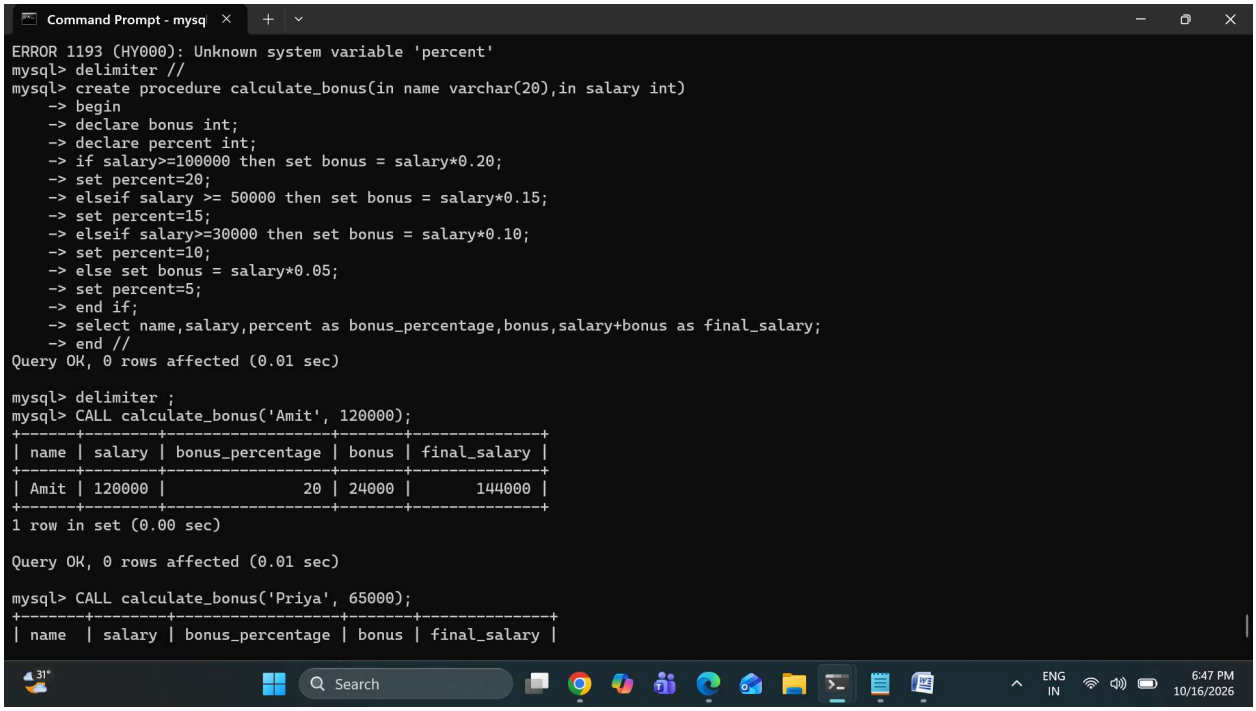


Q3.


Command Prompt - mysql
mysql> delimiter //
mysql> create procedure calculate_grade(in id int , name varchar(20) , marks int)
-> begin
-> declare grade varchar(2);
-> if marks>=90 then set grade='A+';
-> elseif marks>=80 then set grade='A';
-> elseif marks>=70 then set grade='B';
-> elseif marks>=60 then set grade='C';
-> elseif marks>=50 then set grade='D';
-> else set grade='F';
-> end if;
-> select id,name,marks,grade;
-> end //
Query OK, 0 rows affected (0.00 sec)
mysql> delimiter ;
mysql> call calculate_grade(101, 'Amit', 85);
| id | name | marks | grade |
| 101 | Amit | 85 | A |
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.01 sec)
mysql> call calculate_grade(102, 'Priya', 72);
| id | name | marks | grade |
| 102 | Priya | 72 | B |
Search
ENG
IN
6:11 PM
10/16/2026


Command Prompt - mysql
| 101 | Amit | 85 | A |
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.01 sec)
mysql> call calculate_grade(102, 'Priya', 72);
| id | name | marks | grade |
| 102 | Priya | 72 | B |
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.00 sec)
mysql> call calculate_grade(103, 'Rahul', 45);
| id | name | marks | grade |
| 103 | Rahul | 45 | F |
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.00 sec)
mysql> call calculate_grade(104, 'Priya', 95);
| id | name | marks | grade |
| 104 | Priya | 95 | A+ |
Search
ENG
IN
6:11 PM
10/16/2026

Q4.

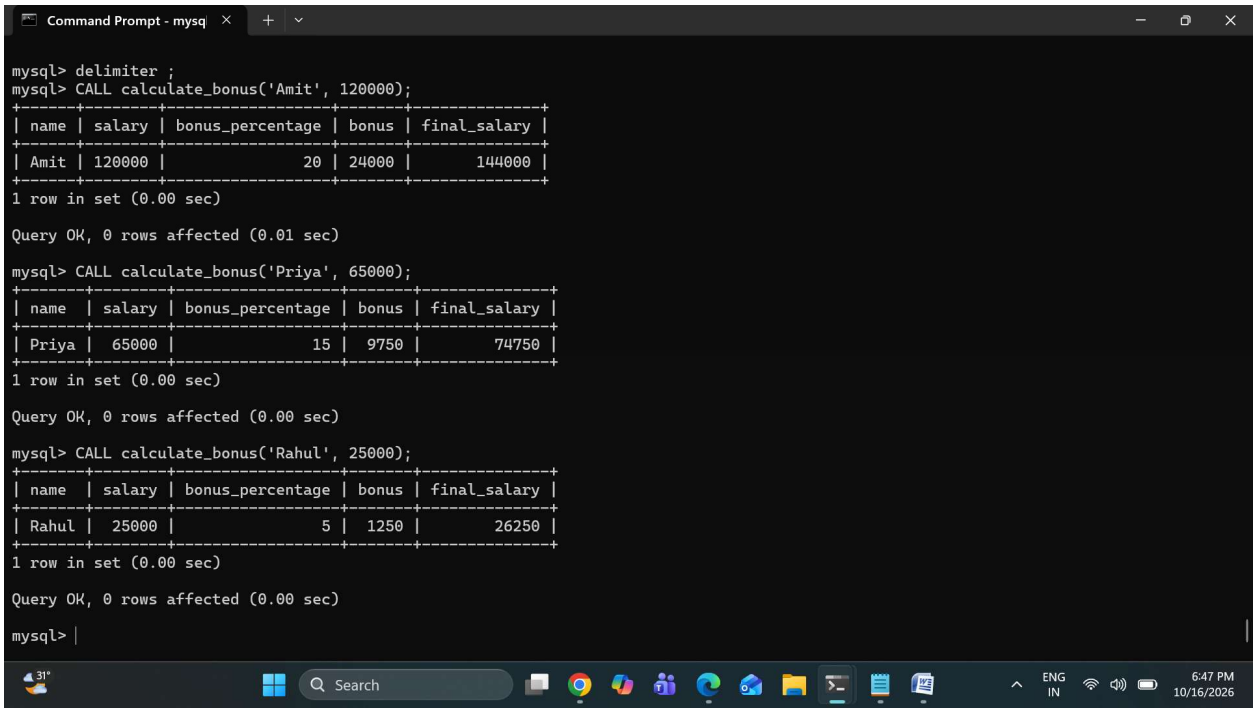


```
Command Prompt - mysq
ERROR 1193 (HY000): Unknown system variable 'percent'
mysql> delimiter //
mysql> create procedure calculate_bonus(in name varchar(20),in salary int)
    -> begin
    -> declare bonus int;
    -> declare percent int;
    -> if salary>=100000 then set bonus = salary*0.20;
    -> set percent=20;
    -> elseif salary >= 50000 then set bonus = salary*0.15;
    -> set percent=15;
    -> elseif salary>=30000 then set bonus = salary*0.10;
    -> set percent=10;
    -> else set bonus = salary*0.05;
    -> set percent=5;
    -> end if;
    -> select name,salary,percent as bonus_percentage,bonus,salary+bonus as final_salary;
    -> end //
Query OK, 0 rows affected (0.01 sec)

mysql> delimiter ;
mysql> CALL calculate_bonus('Amit', 120000);
+------+--------+------------------+-------+--------------+
| name | salary | bonus_percentage | bonus | final_salary |
+------+--------+------------------+-------+--------------+
| Amit | 120000 |               20 | 24000 |       144000 |
+------+--------+------------------+-------+--------------+
1 row in set (0.00 sec)

Query OK, 0 rows affected (0.01 sec)

mysql> CALL calculate_bonus('Priya', 65000);
+-------+--------+------------------+-------+--------------+
| name  | salary | bonus_percentage | bonus | final_salary |
```



```
Command Prompt - mysq

mysql> delimiter ;
mysql> CALL calculate_bonus('Amit', 120000);
+------+--------+------------------+-------+--------------+
| name | salary | bonus_percentage | bonus | final_salary |
+------+--------+------------------+-------+--------------+
| Amit | 120000 |               20 | 24000 |       144000 |
+------+--------+------------------+-------+--------------+
1 row in set (0.00 sec)

Query OK, 0 rows affected (0.01 sec)

mysql> CALL calculate_bonus('Priya', 65000);
+-------+--------+------------------+-------+--------------+
| name  | salary | bonus_percentage | bonus | final_salary |
+-------+--------+------------------+-------+--------------+
| Priya |  65000 |               15 |  9750 |        74750 |
+-------+--------+------------------+-------+--------------+
1 row in set (0.00 sec)

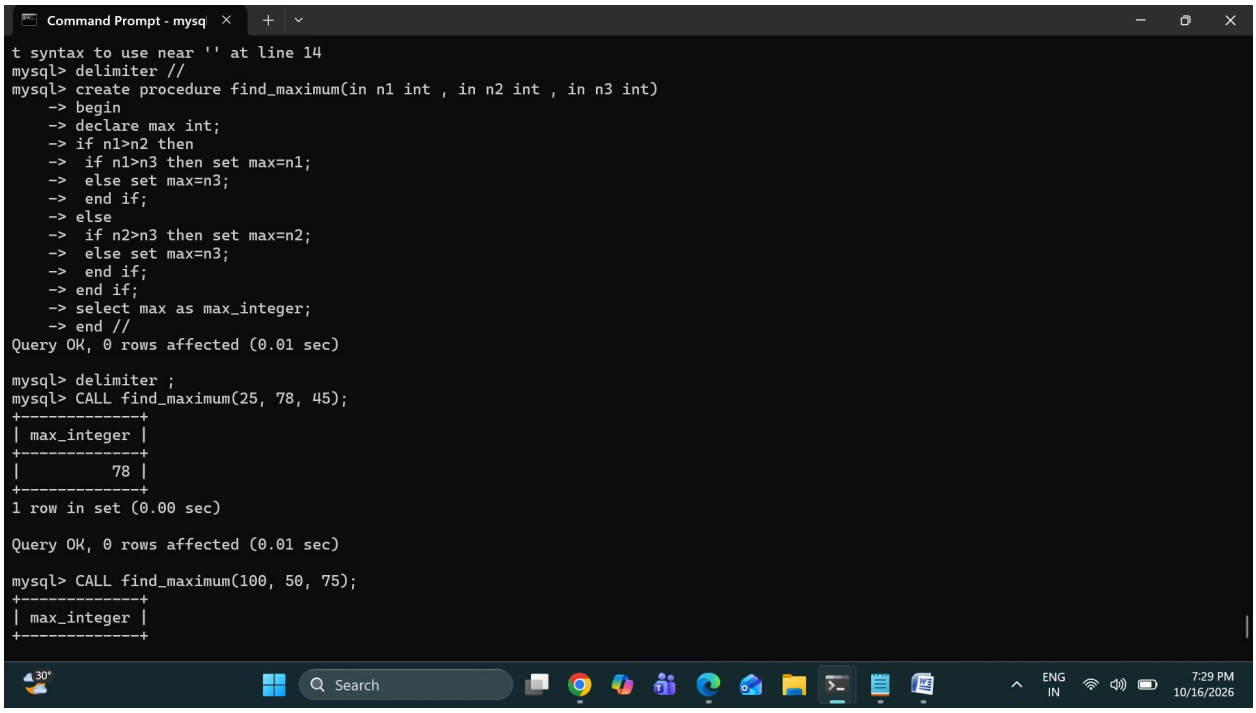
Query OK, 0 rows affected (0.00 sec)

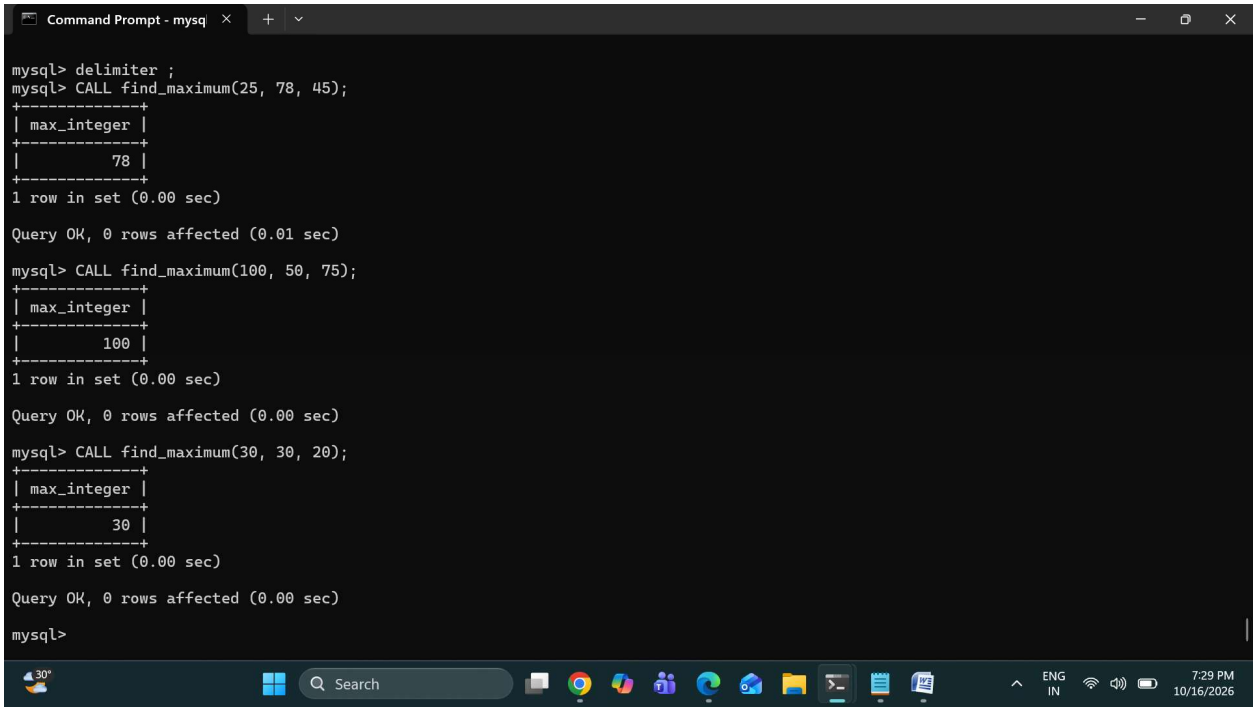
mysql> CALL calculate_bonus('Rahul', 25000);
+-------+--------+------------------+-------+--------------+
| name  | salary | bonus_percentage | bonus | final_salary |
+-------+--------+------------------+-------+--------------+
| Rahul |  25000 |                5 |  1250 |        26250 |
+-------+--------+------------------+-------+--------------+
1 row in set (0.00 sec)

Query OK, 0 rows affected (0.00 sec)

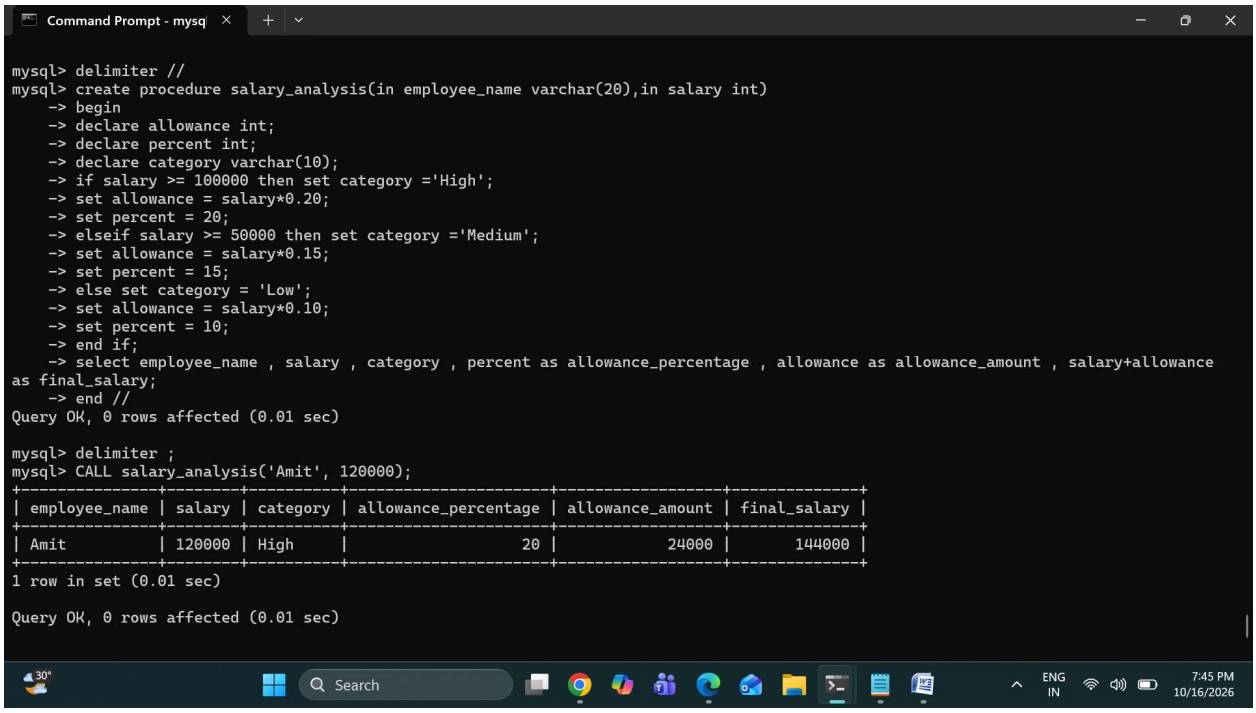
mysql>
```

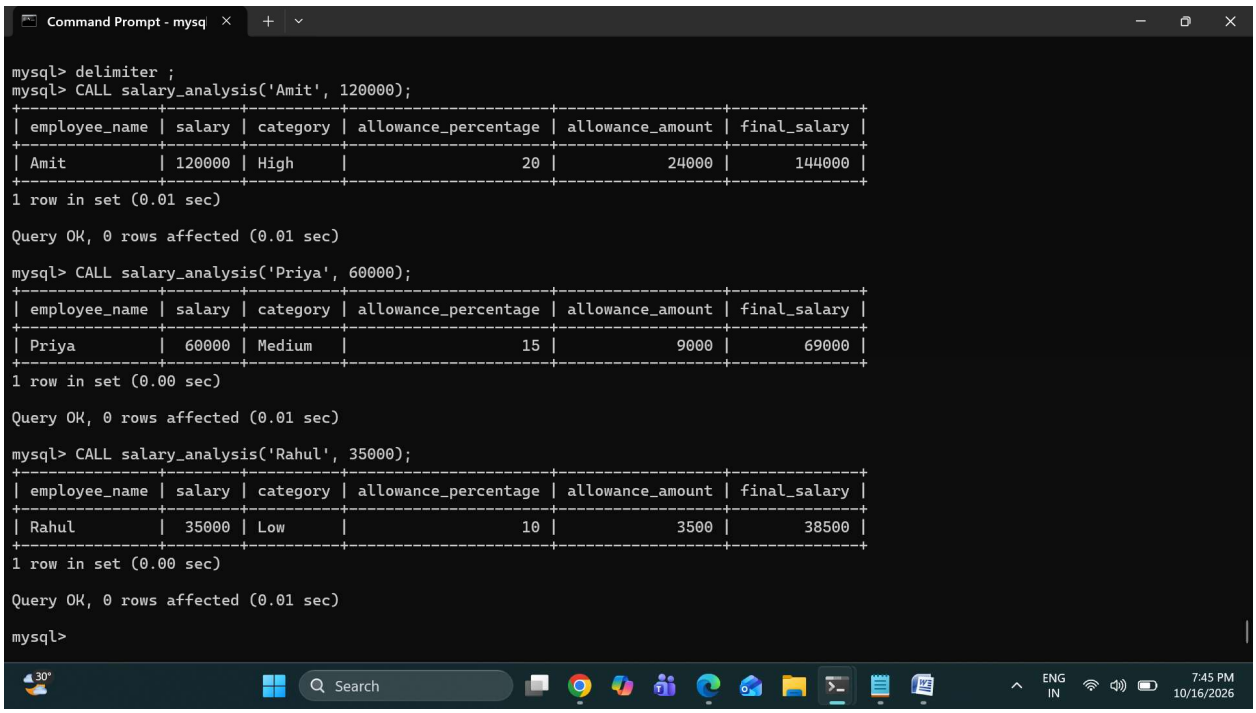
Q5.


Command Prompt - mysql
t syntax to use near '' at line 14
mysql> delimiter //
mysql> create procedure find_maximum(in n1 int , in n2 int , in n3 int)
-> begin
-> declare max int;
-> if n1>n2 then
-> if n1>n3 then set max=n1;
-> else set max=n3;
-> end if;
-> else
-> if n2>n3 then set max=n2;
-> else set max=n3;
-> end if;
-> end if;
-> select max as max_integer;
-> end //
Query OK, 0 rows affected (0.01 sec)
mysql> delimiter ;
mysql> CALL find_maximum(25, 78, 45);
| max_integer |
| 78 |
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.01 sec)
mysql> CALL find_maximum(100, 50, 75);
| max_integer |
Search
ENG
IN
7:29 PM
10/16/2026

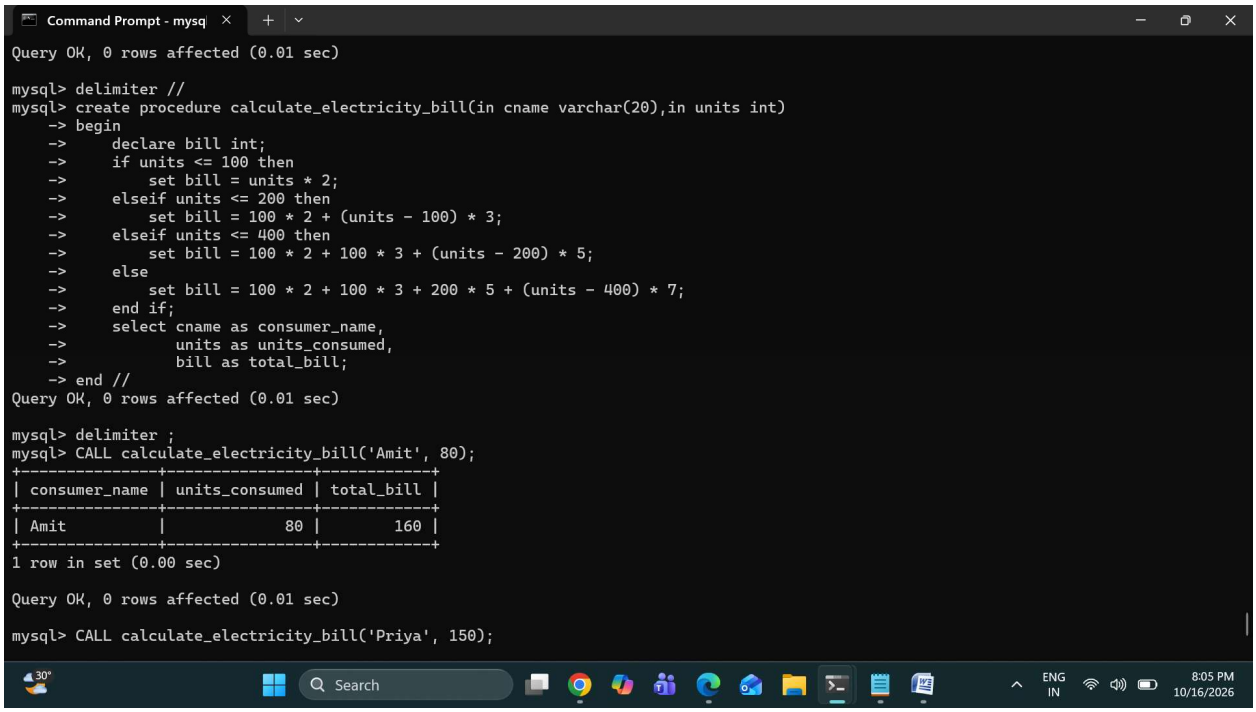

Command Prompt - mysql
mysql> delimiter ;
mysql> CALL find_maximum(25, 78, 45);
| max_integer |
| 78 |
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.01 sec)
mysql> CALL find_maximum(100, 50, 75);
| max_integer |
| 100 |
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.00 sec)
mysql> CALL find_maximum(30, 30, 20);
| max_integer |
| 30 |
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.00 sec)
mysql>
Search
ENG
IN
7:29 PM
10/16/2026

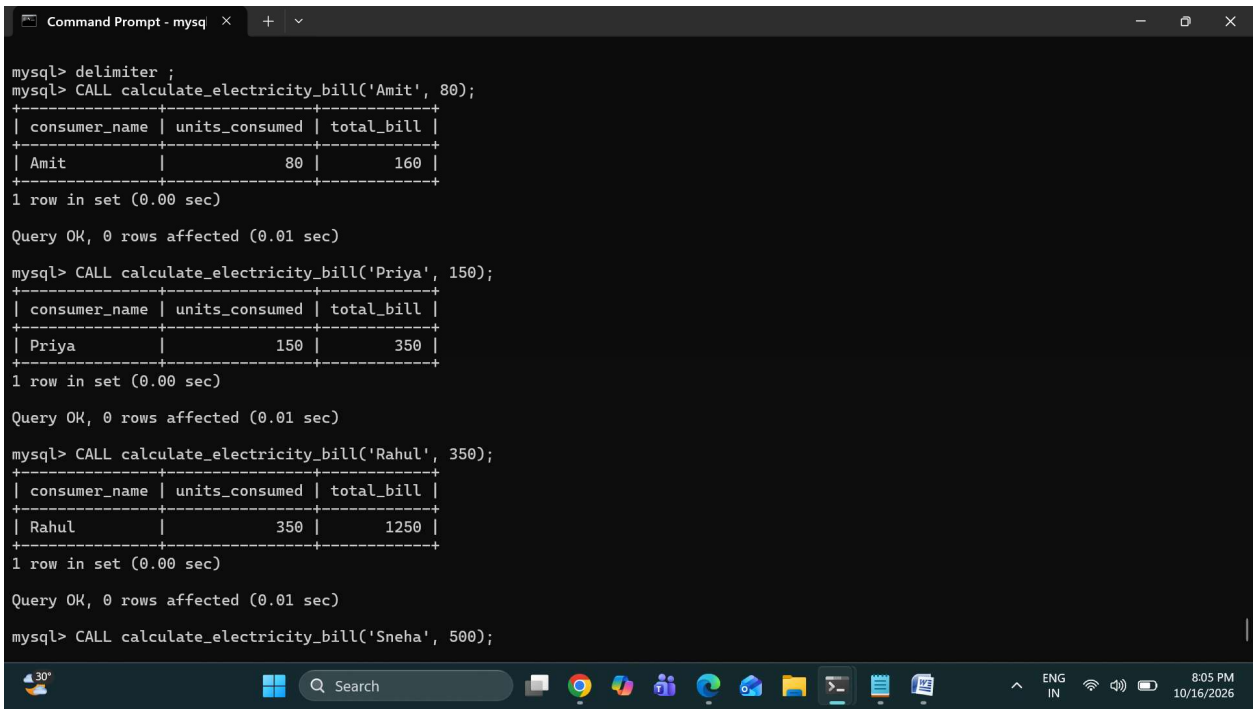
Q6.

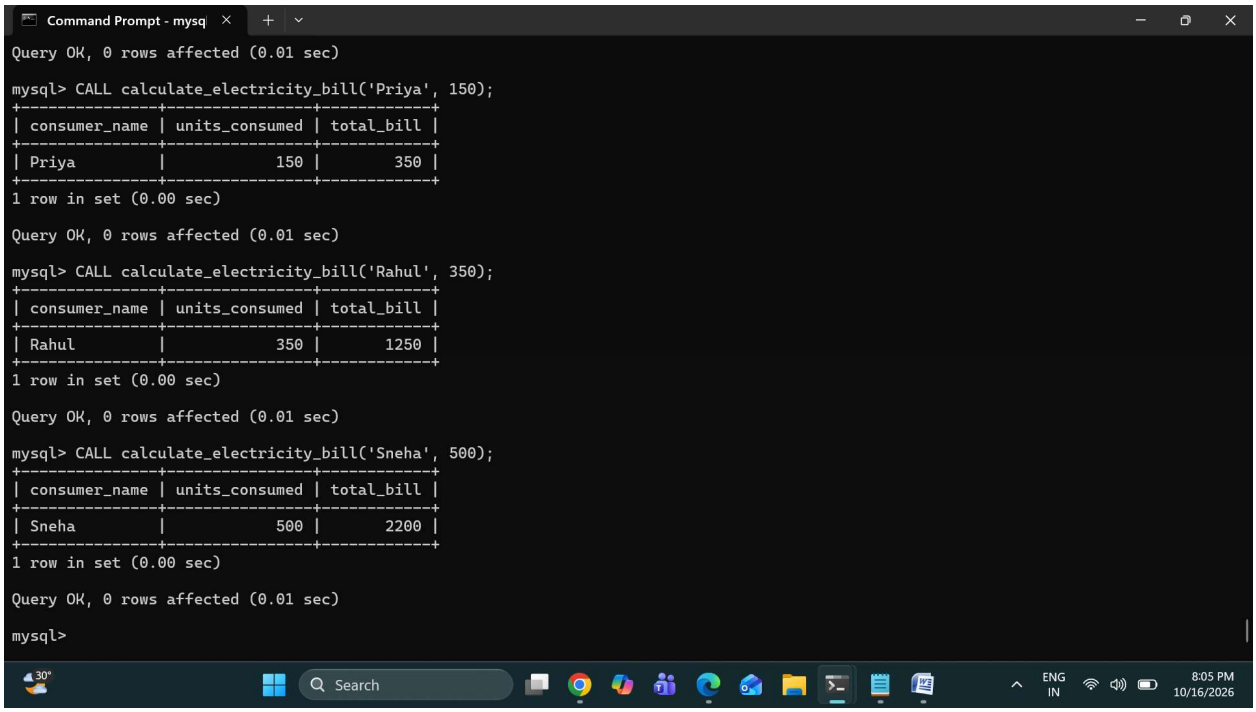

Command Prompt - mysql
mysql> delimiter //
mysql> create procedure salary_analysis(in employee_name varchar(20),in salary int)
-> begin
-> declare allowance int;
-> declare percent int;
-> declare category varchar(10);
-> if salary >= 100000 then set category ='High';
-> set allowance = salary*0.20;
-> set percent = 20;
-> elseif salary >= 50000 then set category ='Medium';
-> set allowance = salary*0.15;
-> set percent = 15;
-> else set category = 'Low';
-> set allowance = salary*0.10;
-> set percent = 10;
-> end if;
-> select employee_name , salary , category , percent as allowance_percentage , allowance as allowance_amount , salary+allowance as final_salary;
-> end //
Query OK, 0 rows affected (0.01 sec)
mysql> delimiter ;
mysql> CALL salary_analysis('Amit', 120000);
| employee_name | salary | category | allowance_percentage | allowance_amount | final_salary |
| Amit | 120000 | High | 20 | 24000 | 144000 |
1 row in set (0.01 sec)
Query OK, 0 rows affected (0.01 sec)
Search
ENG IN
7:45 PM 10/16/2026


Command Prompt - mysql
mysql> delimiter ;
mysql> CALL salary_analysis('Amit', 120000);
| employee_name | salary | category | allowance_percentage | allowance_amount | final_salary |
| Amit | 120000 | High | 20 | 24000 | 144000 |
1 row in set (0.01 sec)
Query OK, 0 rows affected (0.01 sec)
mysql> CALL salary_analysis('Priya', 60000);
| employee_name | salary | category | allowance_percentage | allowance_amount | final_salary |
| Priya | 60000 | Medium | 15 | 9000 | 69000 |
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.01 sec)
mysql> CALL salary_analysis('Rahul', 35000);
| employee_name | salary | category | allowance_percentage | allowance_amount | final_salary |
| Rahul | 35000 | Low | 10 | 3500 | 38500 |
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.01 sec)
mysql>
Search
ENG IN
7:45 PM 10/16/2026

Q7.


Command Prompt - mysql
Query OK, 0 rows affected (0.01 sec)
mysql> delimiter //
mysql> create procedure calculate_electricity_bill(in cname varchar(20),in units int)
-> begin
-> declare bill int;
-> if units <= 100 then
-> set bill = units * 2;
-> elseif units <= 200 then
-> set bill = 100 * 2 + (units - 100) * 3;
-> elseif units <= 400 then
-> set bill = 100 * 2 + 100 * 3 + (units - 200) * 5;
-> else
-> set bill = 100 * 2 + 100 * 3 + 200 * 5 + (units - 400) * 7;
-> end if;
-> select cname as consumer_name,
-> units as units_consumed,
-> bill as total_bill;
-> end //
Query OK, 0 rows affected (0.01 sec)
mysql> delimiter ;
mysql> CALL calculate_electricity_bill('Amit', 80);
| consumer_name | units_consumed | total_bill |
| Amit | 80 | 160 |
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.01 sec)
mysql> CALL calculate_electricity_bill('Priya', 150);
Search
ENG
IN
8:05 PM
10/16/2026


Command Prompt - mysql
mysql> delimiter ;
mysql> CALL calculate_electricity_bill('Amit', 80);
| consumer_name | units_consumed | total_bill |
| Amit | 80 | 160 |
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.01 sec)
mysql> CALL calculate_electricity_bill('Priya', 150);
| consumer_name | units_consumed | total_bill |
| Priya | 150 | 350 |
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.01 sec)
mysql> CALL calculate_electricity_bill('Rahul', 350);
| consumer_name | units_consumed | total_bill |
| Rahul | 350 | 1250 |
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.01 sec)
mysql> CALL calculate_electricity_bill('Sneha', 500);
Search
ENG
IN
8:05 PM
10/16/2026


Command Prompt - mysql
Query OK, 0 rows affected (0.01 sec)
mysql> CALL calculate_electricity_bill('Priya', 150);
+---------------+----------------+------------+
| consumer_name | units_consumed | total_bill |
+---------------+----------------+------------+
| Priya | 150 | 350 |
+---------------+----------------+------------+
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.01 sec)
mysql> CALL calculate_electricity_bill('Rahul', 350);
+---------------+----------------+------------+
| consumer_name | units_consumed | total_bill |
+---------------+----------------+------------+
| Rahul | 350 | 1250 |
+---------------+----------------+------------+
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.01 sec)
mysql> CALL calculate_electricity_bill('Sneha', 500);
+---------------+----------------+------------+
| consumer_name | units_consumed | total_bill |
+---------------+----------------+------------+
| Sneha | 500 | 2200 |
+---------------+----------------+------------+
1 row in set (0.00 sec)
Query OK, 0 rows affected (0.01 sec)
mysql>
30°
Search
ENG
IN
8:05 PM
10/16/2026