

Comparing WebAssembly and JavaScript for a web based photo editor

Sam Robbins

Durham University

What is the project about?

Web Assembly is a relatively new method for computation on the web, allowing for the use of a much wider range of languages. This is being used in high intensity contexts to improve computation time.

Research Question

The Research question is to find in which cases Web Assembly offers a benefit over JavaScript, finding this out by implementing image processing algorithms using both mechanisms.

Deliverables

The basic aim is compare the performance of one complex algorithm between Web Assembly and JPEG, for a complex algorithm, it should not simply loop over the pixels of the image, and instead be performing more sophisticated techniques. The intermediate aim is to extend this to multiple complex algorithms. The advanced aim is to look into tweaks that can be used to improve performance, such as compile time optimizations for Web Assembly.


What has been done by others?

Using Web Assembly for image processing — Next.js




96.5 MB \Rightarrow 69.2 MB

Performance of Web Assembly — Figma

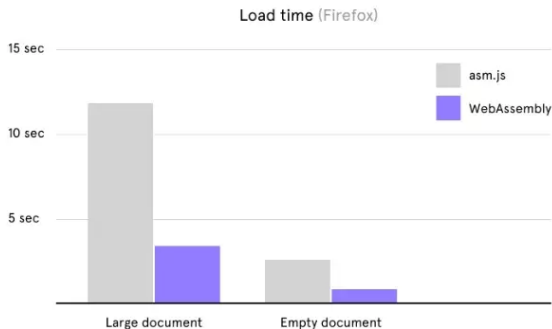

3× faster load times

Performance of Web Assembly — Fastq.bio

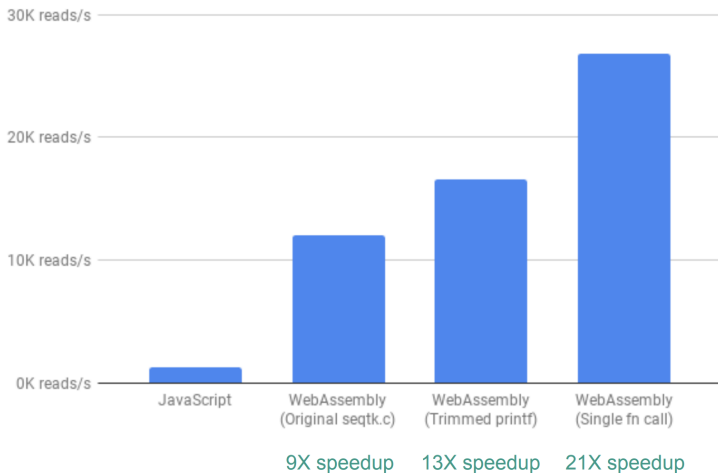


Performance of Web Assembly — Compared to native

Benchmark	Field	Native time(s)	Google Chrome time(s)
bzip2	Compression	370	864
mcf	Combinatorial	221	180
milc	Chromodynamics	375	369
namd	Molecular Dynamics	271	369
gobmk	Artificial Intelligence	352	537


How does it compare?

Results


Complex Algorithms

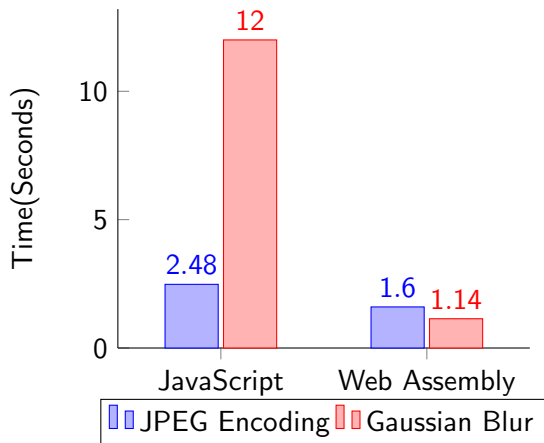


Simple Algorithms

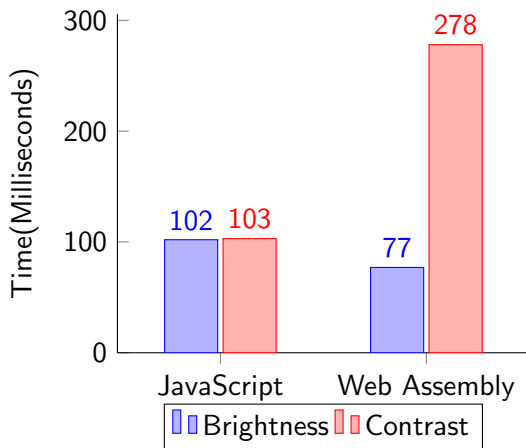

Time for the full process

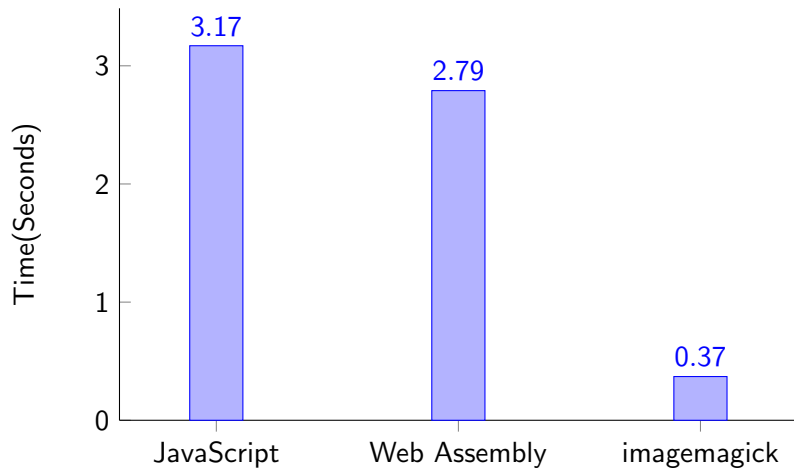

Memory consumption of the full process

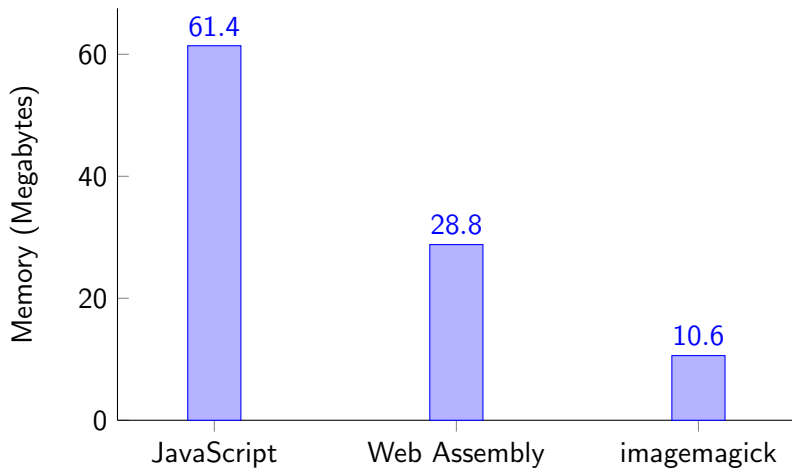

Evaluation

Further Work