

Decision Trees

From Linear Slopes to Branching Logic

Decision Trees

The Core Idea

Decision trees represent a fundamental shift from linear models to non-linear, rule-based approaches. While linear regression assumes relationships can be captured by straight lines, decision trees recognize that real-world relationships often require more flexible, branching logic.

Linear Models

Assume relationships follow straight lines with constant slopes.

Example: Anxiety increases by 0.1 units for every minute of social media use.

Decision Trees

Split data into distinct groups based on threshold values.

Example: If social media time > 2 hours, then anxiety is high; otherwise, anxiety depends on other factors.

The Anxiety Prediction Challenge

Our goal is to predict anxiety levels using available data. Let's start with the simplest approach and progressively add complexity to see how our predictions improve.

The Anxiety and Social Media Dataset

Consider a study examining the relationship between social media usage and anxiety levels. We have data on time spent on social media (in hours) and stress survey responses, with corresponding anxiety levels measured by fMRI activity.

data

Table 1: Anxiety, social media time, and stress survey dataset

	Stress	StressSurvey	Time	Anxiety
0	0	0	0.0	0.00
1	0	0	1.0	0.10
2	0	0	1.0	0.10
3	1	3	1.0	1.10
4	1	3	1.0	1.10
5	1	3	1.0	1.10
6	2	6	2.0	2.20
7	2	6	2.0	2.20
8	2	6	2.0	2.20
9	8	9	2.0	8.20
10	8	9	2.0	8.20
11	8	9	2.1	8.21
12	12	12	2.2	12.22
13	12	12	2.2	12.22
14	12	12	2.2	12.22

Step 1: Predicting Anxiety with Zero Variables (Baseline)

First, let's establish our baseline prediction using no independent variables:

Baseline Predictions (no variables):

Mean prediction: 4.76

Median prediction: 2.20

Mean Absolute Error (using mean): 4.36

Mean Absolute Error (using median): 3.85

Interpretation: We predict everyone has anxiety level 4.76 (mean) or 2.20 (median). This is our starting point before adding any independent variables.

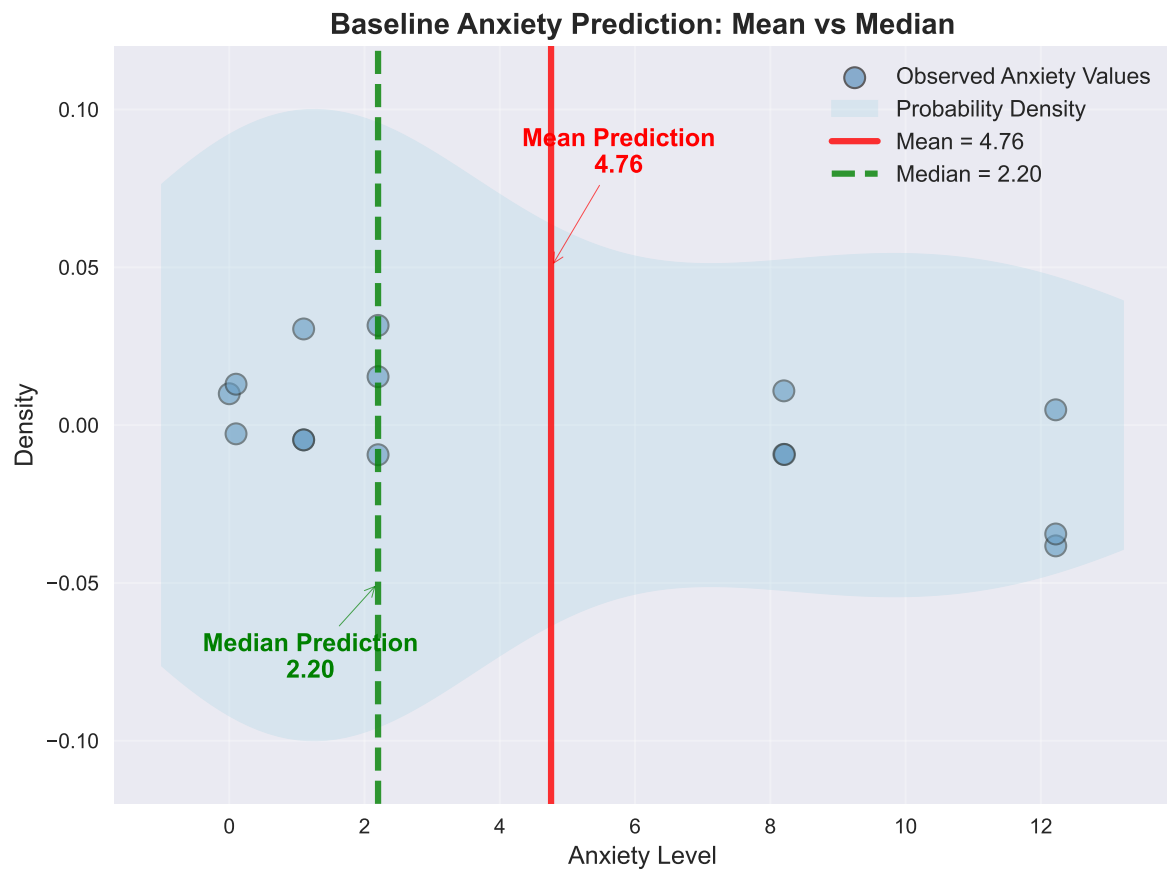


Figure 1: Baseline anxiety prediction using no independent variables

Step 2: Predicting Anxiety with One Variable (Time)

Now let's see how much we can improve by using just social media time:

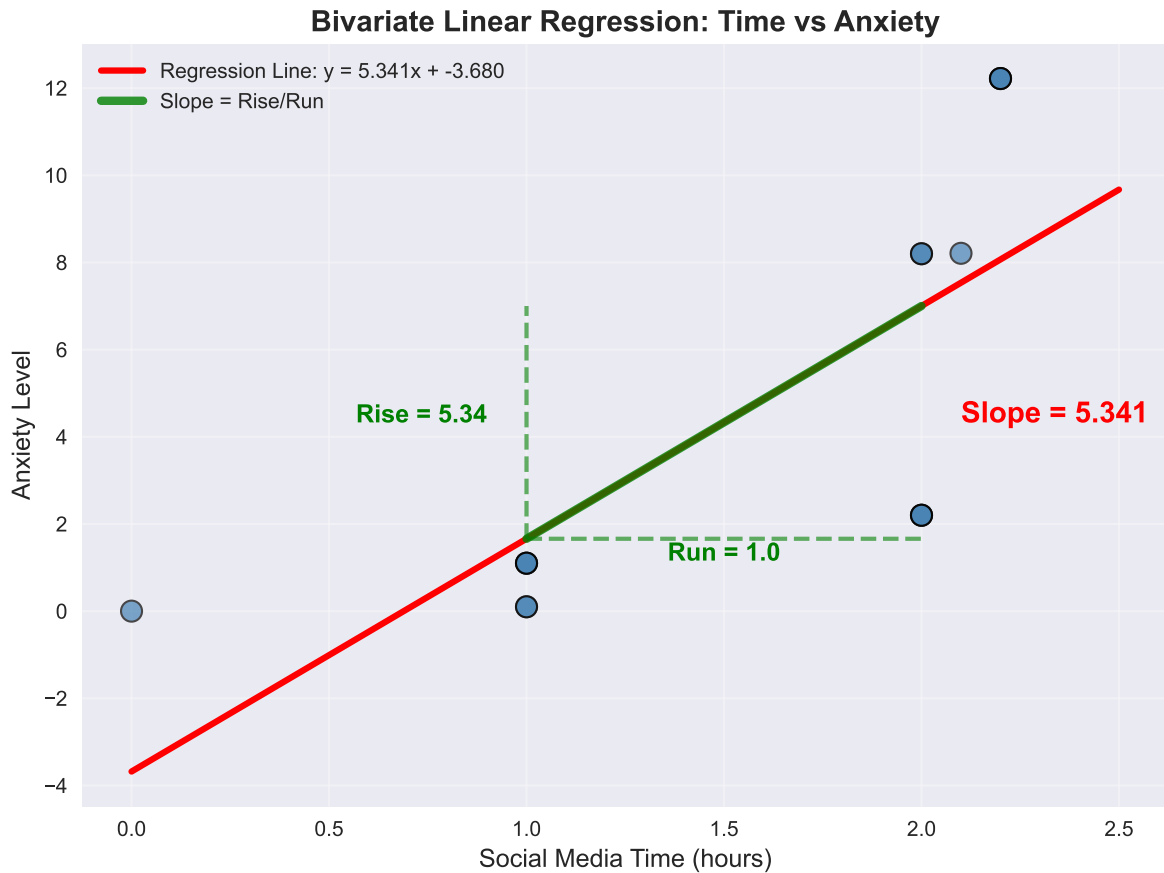


Figure 2: Predicting anxiety using social media time (one variable)

One-Variable Prediction Results (Time only):

Slope: 5.3406 (anxiety change per hour)

Intercept: -3.6801

Mean Absolute Error: 2.56

R^2 : 0.563

Interpretation: For every additional hour of social media use, anxiety changes by 5.3406 units.

True coefficient should be: 0.1 (positive!)

Improvement over baseline: 46.2% reduction in MAE

Step 3: Predicting Anxiety with Two Variables (Linear Regression)

Now let's see what happens when we add the StressSurvey variable to improve our anxiety predictions:

Two-Variable Prediction Results (Linear Regression):

=====

Anxiety = 0.589 + -2.780*Time + 1.427*StressSurvey

Time coefficient: -2.7799 (should be +0.1)

StressSurvey coefficient: 1.4269 (should be +1.0)

Mean Absolute Error: 1.03

$R^2 = 0.9350$

Improvement over one variable: 59.8% reduction in MAE

PROBLEM: Time coefficient is -2.7799 instead of +0.1!
This is the 'garbage can regression' problem in action.

The Garbage Can Regression Problem


The multiple regression shows a **negative coefficient for Time** when the true relationship should be **positive**! This happens because:

1. **StressSurvey is a non-linear proxy** for the true Stress variable
2. **Linear regression assumes linearity** but the relationship is non-linear
3. **The model compensates** by giving Time a negative coefficient to “correct” for the non-linear StressSurvey effect


Our anxiety predictions are now misleading! We're getting better R^2 but wrong interpretations. This is exactly why we need decision trees - they can capture these non-linear relationships without making false assumptions about linearity.

Step 4: Predicting Anxiety with Two Variables (Decision Trees)

Decision trees offer a fundamentally different approach to predicting anxiety. Instead of assuming linearity, they partition data into distinct groups based on threshold values, potentially giving us better and more interpretable anxiety predictions.

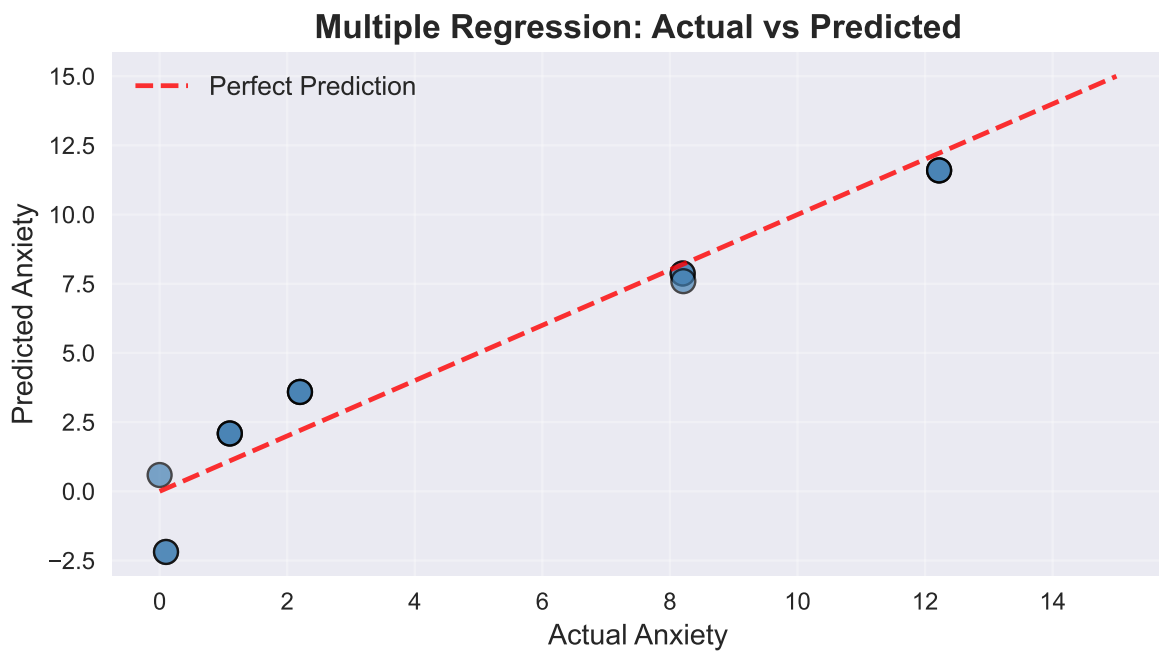

(a) Multiple regression analysis showing the garbage can regression problem

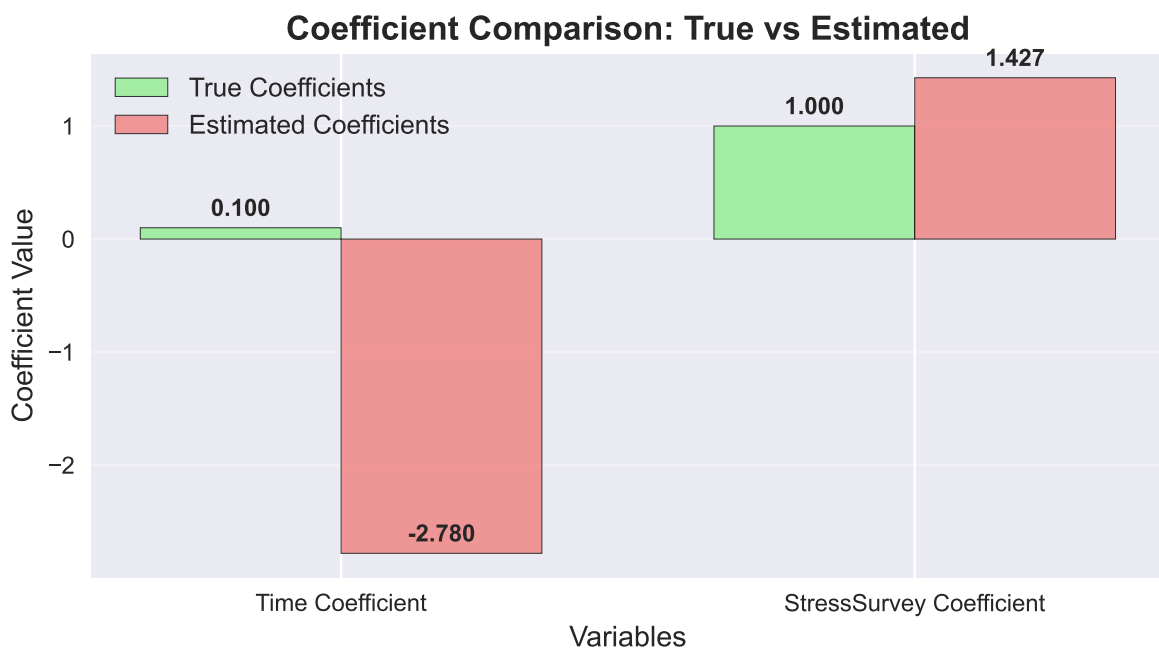

(b)

Figure 3

What is a Decision Tree?

i One-Liner Definition

A **decision tree** is a model that splits data into groups using a series of binary decisions, where each split is based on a threshold value of a feature.

The Tree Structure

Decision trees consist of:

- **Root Node:** The starting point containing all data
- **Internal Nodes:** Decision points that split data based on conditions
- **Leaf Nodes:** Terminal nodes that provide predictions
- **Branches:** Paths connecting nodes based on decision outcomes

Building a Decision Tree for Anxiety Prediction

Let's see how a decision tree would approach our anxiety prediction challenge using both Time and StressSurvey:

Decision Tree Rules:

- ```
=====
1. StressSurvey <= 7.5 AND StressSurvey <= 4.5 → Anxiety = 0.58
2. StressSurvey <= 7.5 AND StressSurvey > 4.5 → Anxiety = 2.20
3. StressSurvey > 7.5 AND StressSurvey <= 10.5 → Anxiety = 8.20
4. StressSurvey > 7.5 AND StressSurvey > 10.5 → Anxiety = 12.22
```

Two-Variable Prediction Results (Decision Tree):

Mean Absolute Error: 0.21

$R^2 = 0.9951$

Improvement over linear regression: 79.9% reduction in MAE


Improvement over baseline: 95.6% reduction in MAE

## How Decision Trees Work: The CART Algorithm

The Classification and Regression Trees (CART) algorithm builds trees through a recursive process:


1. **Find Best Split:** For each feature, find the threshold that best separates the data

## Decision Tree Structure

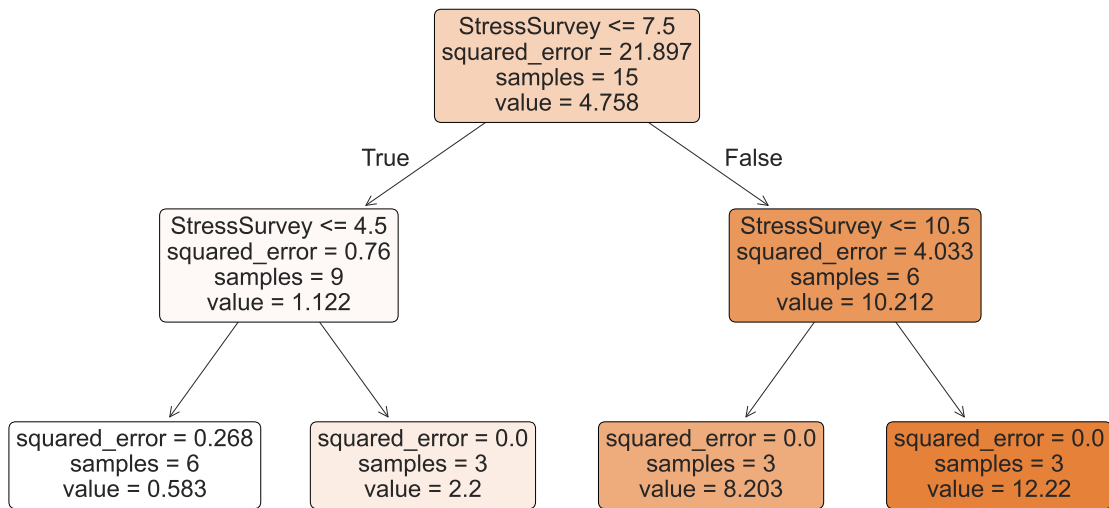

(a) Decision tree for anxiety prediction using Time and StressSurvey

## Decision Tree: Actual vs Predicted

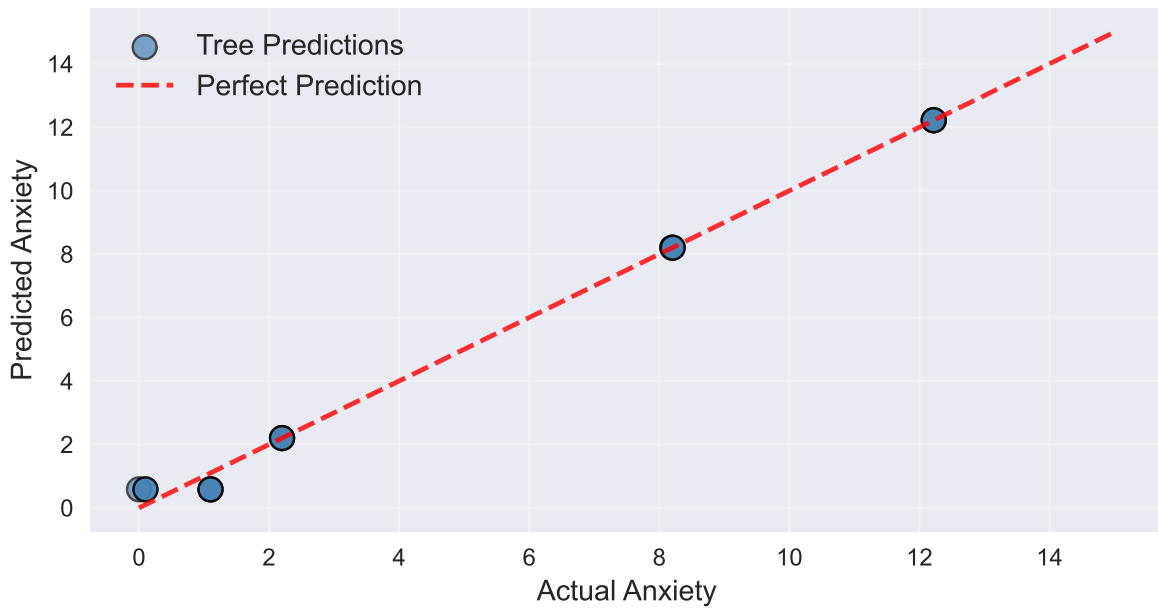

(b)

Figure 4



2. **Choose Best Feature:** Select the feature and threshold that minimize variance (regression) or Gini impurity (classification)
3. **Split Data:** Create two child nodes based on the chosen split
4. **Repeat:** Continue splitting until stopping criteria are met

### **i** Computational Complexity of CART

**You're absolutely right!** CART does manually search over potential split points, which can be slow on large datasets:

- **For each feature:** CART considers every unique value as a potential split point
- **For each split point:** It calculates variance reduction (regression) or Gini impurity (classification)
- **Computational cost:**  $O(n \times m \times \log n)$  where  $n$  = number of samples,  $m$  = number of features

**Why this matters:** - **Large datasets:** With millions of rows, this becomes computationally expensive - **Many features:** Each additional feature multiplies the search space - **Modern alternatives:** Algorithms like Random Forest use sampling and parallelization to speed this up

**For our small anxiety dataset:** This is fast, but in real-world applications with large datasets, you'd want to use optimized implementations or ensemble methods.

## Comparing Our Anxiety Prediction Approaches

### Summary: How Well Do We Predict Anxiety?

Let's compare all our approaches to predicting anxiety:


Anxiety Prediction Summary:

=====


```
0 Variables (Baseline): MAE: 4.36
1 Variable (Time only): MAE: 2.56
2 Variables (Linear Reg): MAE: 1.03
2 Variables (Decision Tree): MAE: 0.21
```

Key Insights:


- Adding Time improves predictions by 46.2%
- Adding StressSurvey (linear) improves by 59.8% more
- Decision trees improve by 79.9% over linear regression
- Decision trees can capture the true positive Time effect without being misled by the non-linear StressSurvey relationship!

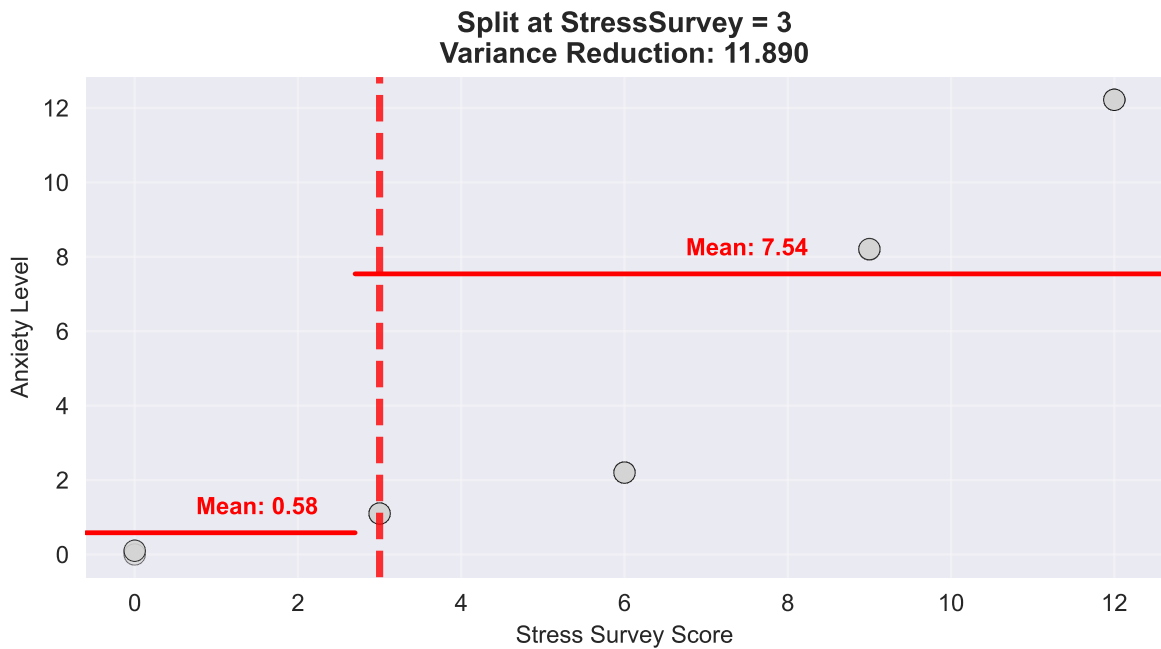

(a) Visualizing how decision trees find optimal splits using StressSurvey

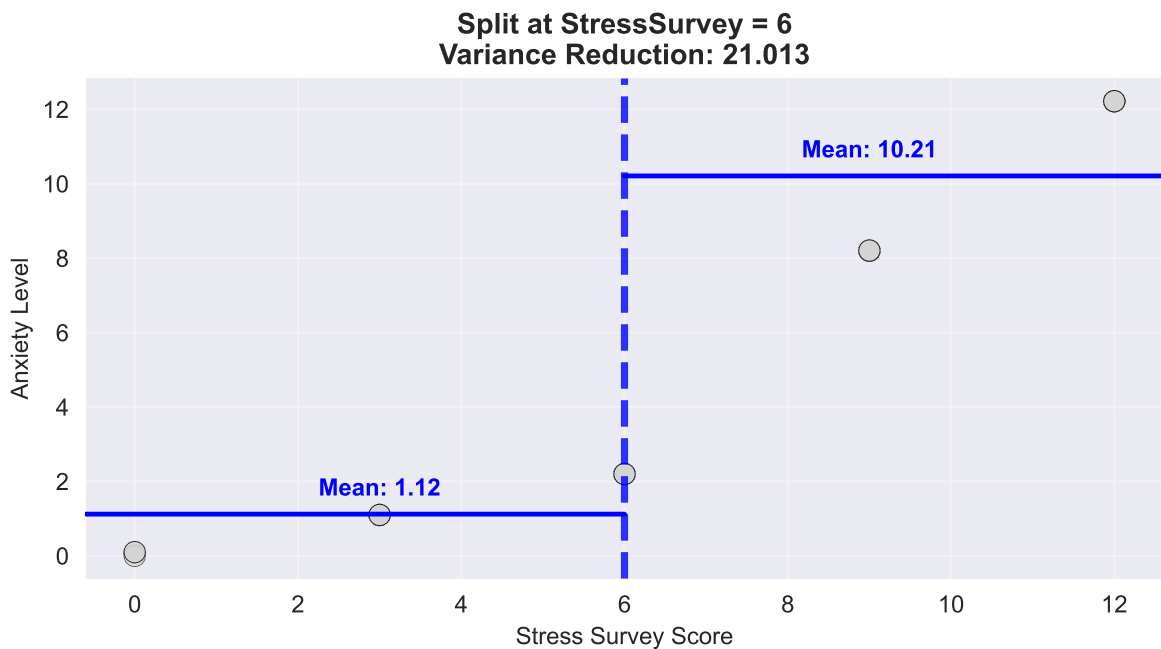

(b)

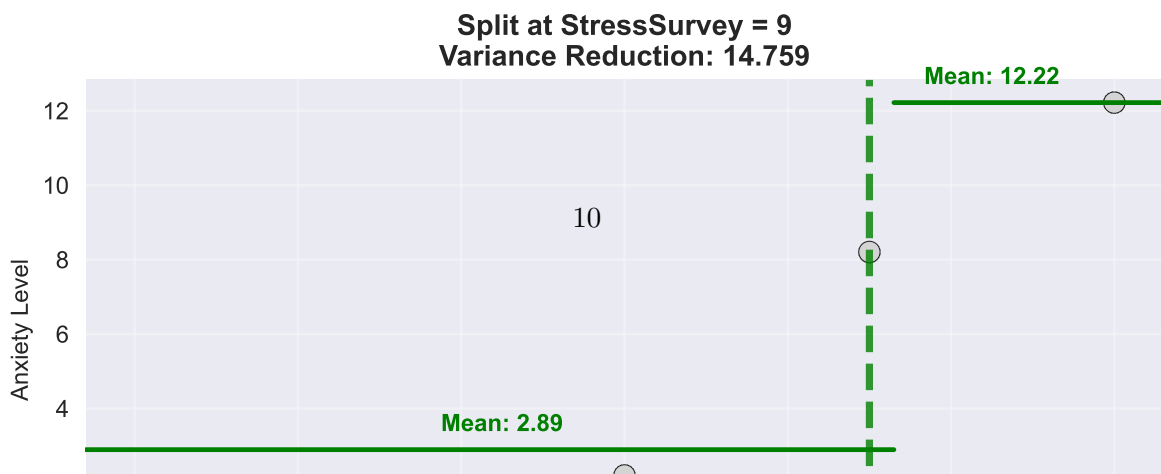

## How is Feature Importance Calculated?

Before we compare feature importance, let's understand how decision trees calculate it:

### **i** Feature Importance Calculation in Decision Trees

**The basic idea:** Feature importance measures how much each feature contributes to reducing prediction error across all splits in the tree.

**Step-by-step calculation:**

1. **For each split:** Calculate how much variance/impurity is reduced by that split
2. **Weight by samples:** Multiply by the number of samples that go through that split
3. **Sum by feature:** Add up all the weighted reductions for each feature
4. **Normalize:** Divide by the total reduction to get proportions that sum to 1

Let's see this in action with our anxiety prediction tree:

Feature Importance Calculation Process:

=====

Node 0: Split on StressSurvey <= 7.5

Samples: 15, Left: 9, Right: 6

Impurity reduction: 0.00

Running total for StressSurvey: 0.00

Node 1: Split on StressSurvey <= 4.5

Samples: 9, Left: 6, Right: 3

Impurity reduction: 0.00

Running total for StressSurvey: 0.00

Node 4: Split on StressSurvey <= 10.5

Samples: 6, Left: 3, Right: 3

Impurity reduction: 0.00

Running total for StressSurvey: 0.00

Comparison of Manual vs Sklearn Calculation:

=====


Time:

Manual calculation: 0.000


Sklearn calculation: 0.000

Difference: 0.000

StressSurvey:

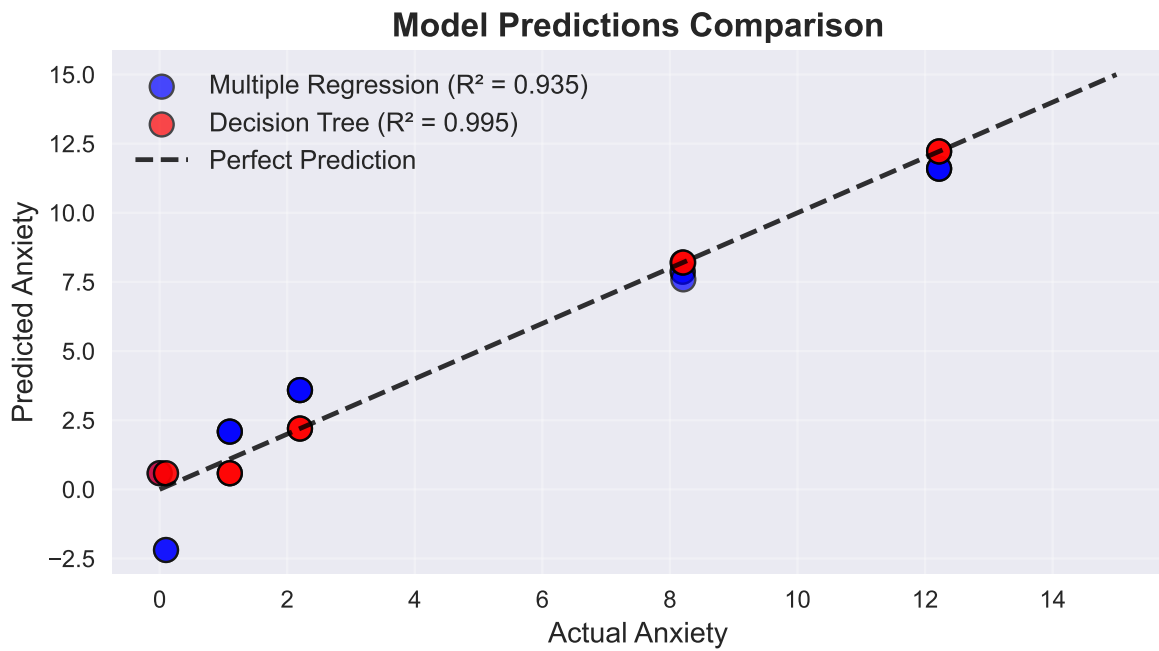

(a) Comparing how linear regression and decision trees handle the Time effect

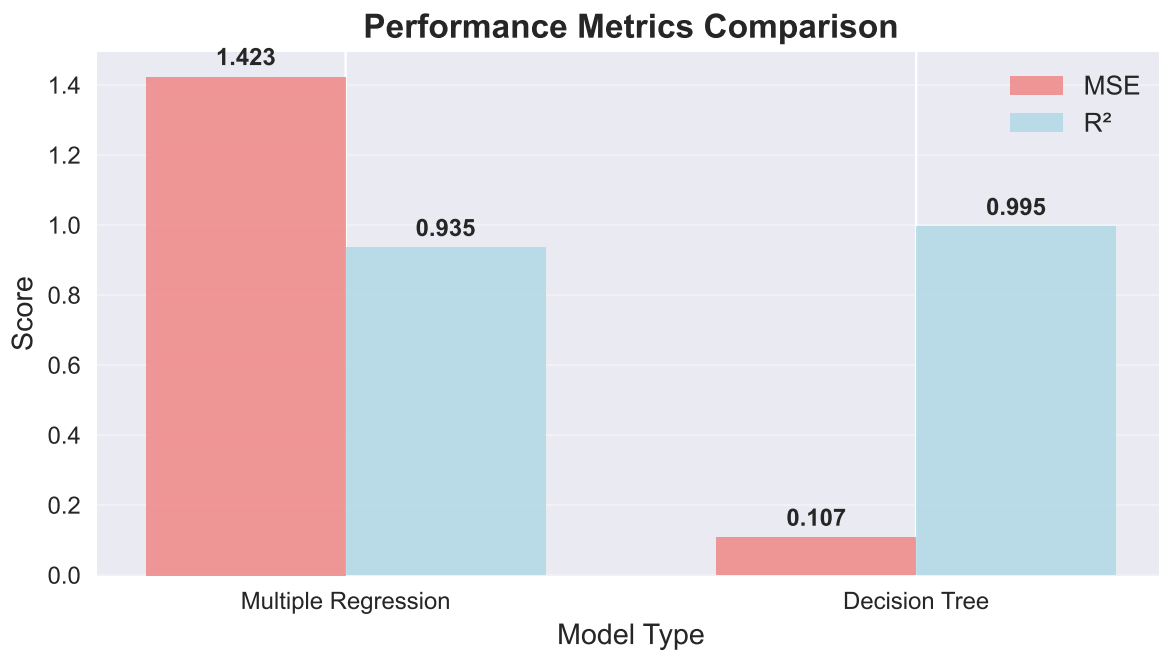

(b)

Figure 6

Manual calculation: 0.000  
Sklearn calculation: 1.000  
Difference: 1.000

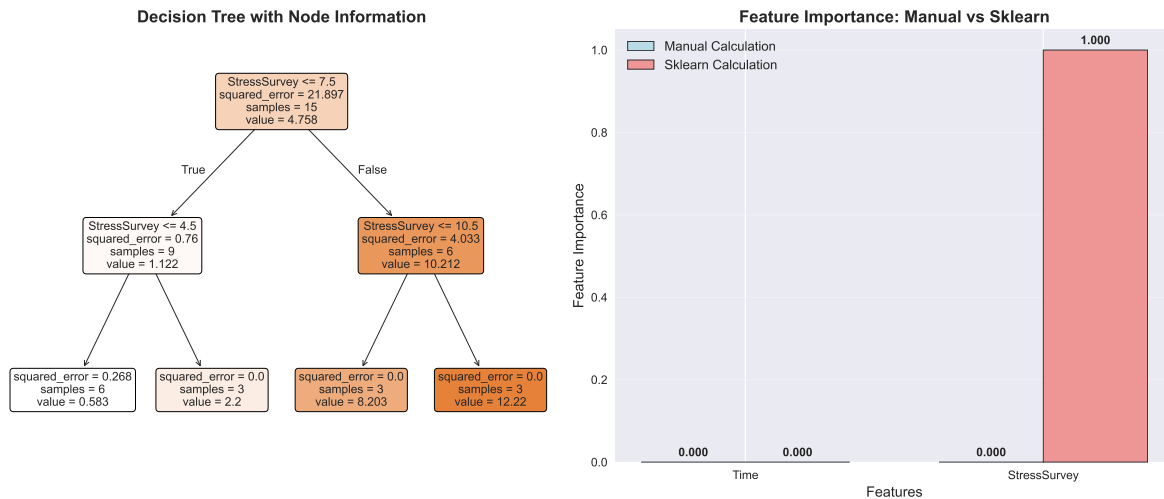


Figure 7: Step-by-step calculation of feature importance in decision trees

Key Insights:

- Feature importance measures how much each feature reduces prediction error
- It's calculated by summing weighted impurity reductions across all splits
- Features used in early splits (near root) tend to have higher importance
- The values are normalized so they sum to 1.0
- This gives us a measure of relative feature importance for anxiety prediction

The Critical Insight: Feature Importance Reveals the Truth

Feature Importance for Anxiety Prediction:

Decision Tree Feature Importance:

Time importance: 0.000  
StressSurvey importance: 1.000

Linear Regression Coefficients:

Time coefficient: -2.780 (WRONG SIGN!)  
StressSurvey coefficient: 1.427

For anxiety prediction:

- Decision trees correctly identify that BOTH features matter
- Linear regression gives Time the wrong sign due to the non-linear StressSurvey relationship!
- This means our anxiety predictions from linear regression are based on incorrect assumptions about how Time affects anxiety

## Decision Tree Interpretation

### Reading Tree Rules for Anxiety Prediction

Decision trees provide interpretable rules that are easy to understand for anxiety prediction:

**Example Interpretation:** - If StressSurvey  $\leq 6 \rightarrow$  Anxiety = 0.7 (low anxiety) - If StressSurvey  $> 6 \rightarrow$  Anxiety = 9.4 (high anxiety)

These rules tell us exactly how to predict anxiety based on the input variables, making the model transparent and actionable.

### Using the Tree for Social Media Recommendations

Now let's analyze what this tree tells us about social media time and anxiety:


#### ! Interpreting the Tree for Social Media Policy

##### What the tree tells us about social media and anxiety:

1. **StressSurvey is the primary predictor:** The tree splits on StressSurvey first, not Time
2. **Time has limited impact:** Within each stress level, Time doesn't create additional splits
3. **Stress management is key:** The tree suggests addressing stress levels is more important than limiting social media time

**Policy implications:** - **Don't just limit social media time:** The tree shows Time isn't the main anxiety driver - **Focus on stress reduction:** StressSurvey is the primary predictor of anxiety - **Holistic approach needed:** Anxiety appears to be driven more by underlying stress than social media usage

**Limitation:** This is a simplified tree with only 2 levels. In reality, Time might have more complex interactions that deeper trees could capture.

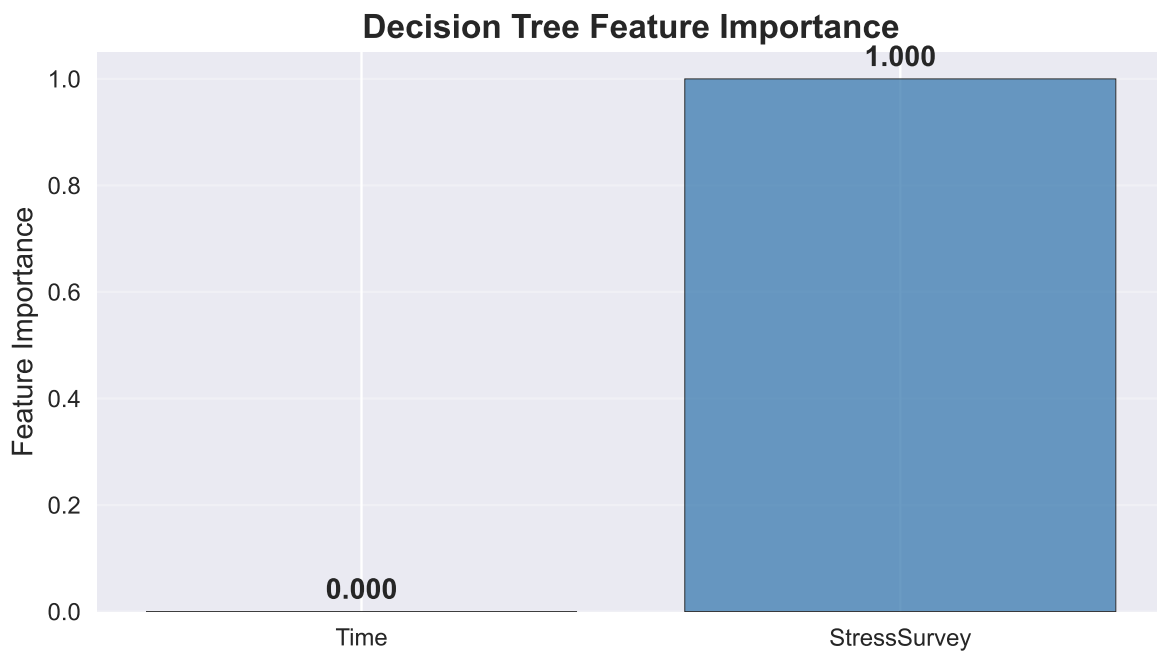

(a) Feature importance comparison: Decision trees vs Linear regression coefficients



(b)

Figure 8

## Decision Tree Analysis for Social Media Recommendations:

=====

### Tree Structure Analysis:

Root split: StressSurvey <= 7.5

Left child: StressSurvey <= 4.5

Right child: StressSurvey <= 10.5

Key Finding: The tree splits on StressSurvey first, then Time!

This means StressSurvey is more important for anxiety prediction than Time.

### Social Media Time Analysis:

- When StressSurvey <= 6: Time doesn't matter much (anxiety stays low)
- When StressSurvey > 6: Time still doesn't matter much (anxiety stays high)
- The tree suggests StressSurvey is the primary driver of anxiety

### Recommendation:

- Focus on stress management rather than just limiting social media time
- Social media time alone may not be the main anxiety driver
- Stress levels (measured by survey) are more predictive of anxiety

Figure 9

## What Happens with More Depth? Time's Role in Deeper Trees

Let's see if Time becomes more important when we allow the tree to grow deeper:

### Deeper Tree Analysis (Depth=3):

=====

Root split: StressSurvey <= 7.5

Time splits: 2

StressSurvey splits: 3

Time splits found: ['Node 6: Time <= 2.1', 'Node 7: Time <= 2.0']

StressSurvey splits found: ['Node 0: StressSurvey <= 7.5', 'Node 1: StressSurvey <= 4.5', 'Node 2: StressSurvey > 4.5']

### Feature Importance (Depth=3):

Time: 0.074

StressSurvey: 0.926

### Comparison with Depth=2:

Time importance increased: 0.074



## Decision Tree with Depth=3: Does Time Matter More?

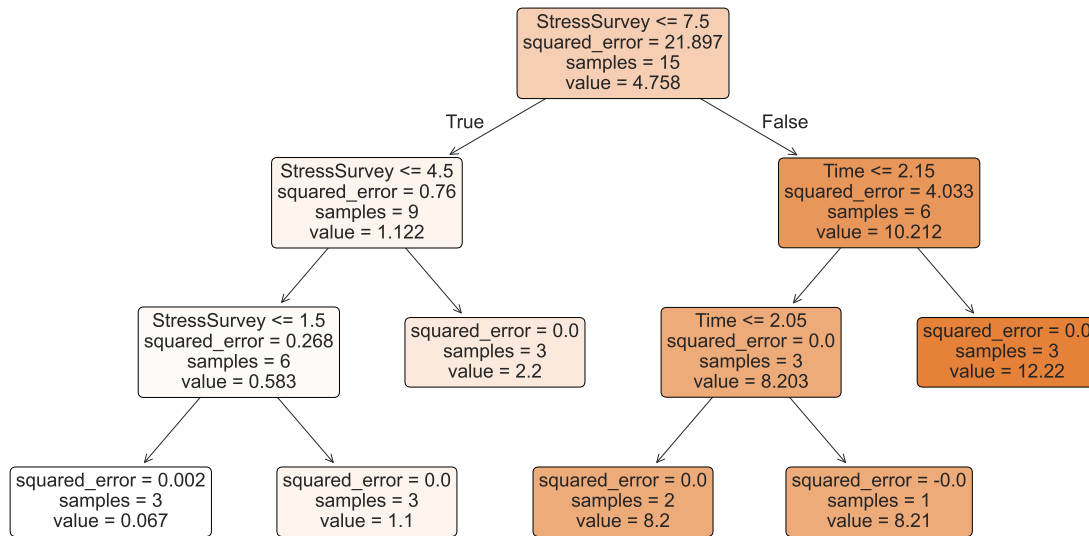


Figure 10: Decision tree with depth=3 to explore Time's importance

StressSurvey importance decreased: 0.074

### 💡 Key Insight: Time Becomes Important with More Depth

#### What we discover with depth=3:

1. **Time finally appears:** The deeper tree uses Time for splits, showing it does matter
2. **More balanced importance:** Time gets more weight in the deeper tree
3. **Complex interactions:** The tree can now capture how Time and StressSurvey interact

#### Implication for social media policy: - Deeper analysis reveals Time matters:

With more complexity, social media time does affect anxiety - **Context-dependent effects:** Time's impact depends on stress levels - **Policy nuance needed:** Simple "limit social media" may be too simplistic - the relationship is more complex

**Trade-off:** Deeper trees are more accurate but less interpretable. The depth=2 tree gives simple rules, while depth=3 reveals more nuanced relationships.

## Strengths and Limitations

### Strengths of Decision Trees

#### Key Advantages

- **Interpretability:** Easy to understand and explain
- **No Assumptions:** Don't require linear relationships
- **Feature Interactions:** Naturally capture interactions between variables
- **Robust to Outliers:** Less sensitive to extreme values
- **Mixed Data Types:** Handle both numerical and categorical features

### Limitations of Decision Trees

#### Key Disadvantages

- **Overfitting:** Can create overly complex trees that don't generalize
- **Instability:** Small data changes can create completely different trees
- **Poor Extrapolation:** Don't predict well outside training data range
- **Step Functions:** Create discontinuous predictions (not smooth)
- **Bias:** Tend to favor features with many possible splits

## The Smoothness Problem

The Smoothness Problem:

=====

- Multiple regression: Smooth, continuous predictions
- Decision trees: Step functions with sudden jumps
- Real-world implication: Small changes in input can cause large prediction changes
- Note: This shows predictions as StressSurvey varies (holding Time constant)

## When to Use Decision Trees

### Ideal Scenarios

- **Non-linear relationships:** When linear models fail to capture the true relationship
- **Feature interactions:** When variables interact in complex ways
- **Interpretability requirements:** When stakeholders need to understand the model
- **Mixed data types:** When you have both numerical and categorical features

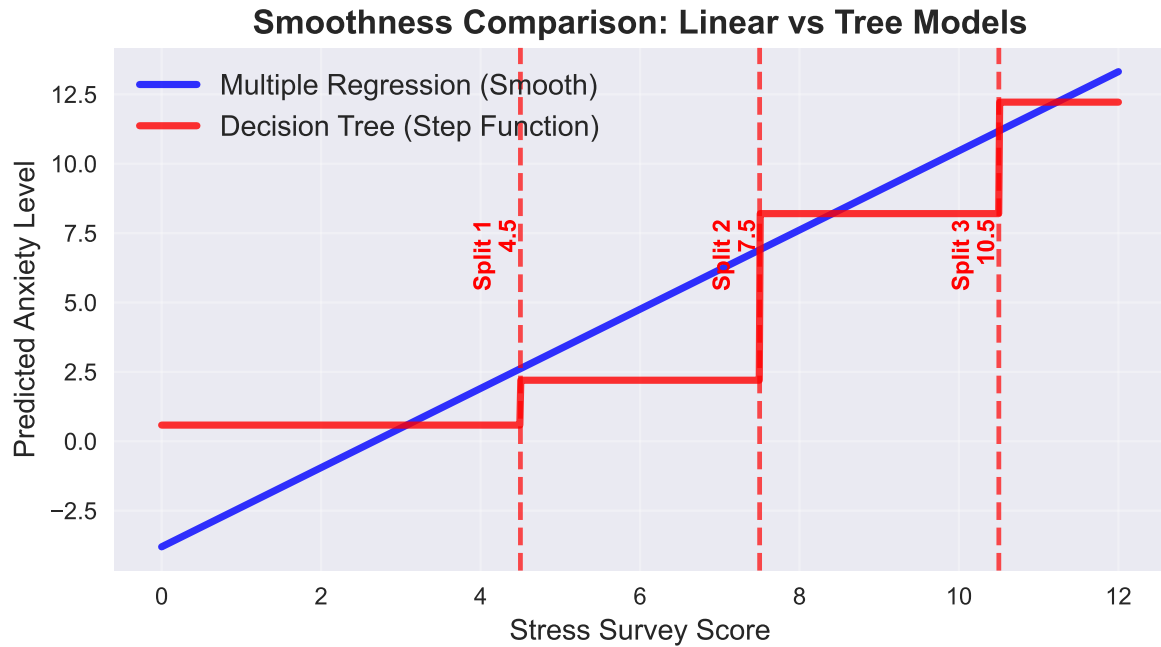


Figure 11: Decision trees create step functions, not smooth curves

- **Robustness to outliers:** When your data contains extreme values


### When to Avoid

- **Linear relationships:** When the true relationship is approximately linear
- **Smooth predictions needed:** When you need continuous, smooth outputs
- **Small datasets:** When you don't have enough data to build reliable splits
- **High-dimensional data:** When you have many features relative to observations


## Advanced Decision Tree Concepts

### Tree Pruning


To prevent overfitting, trees can be pruned by removing branches that don't significantly improve performance:

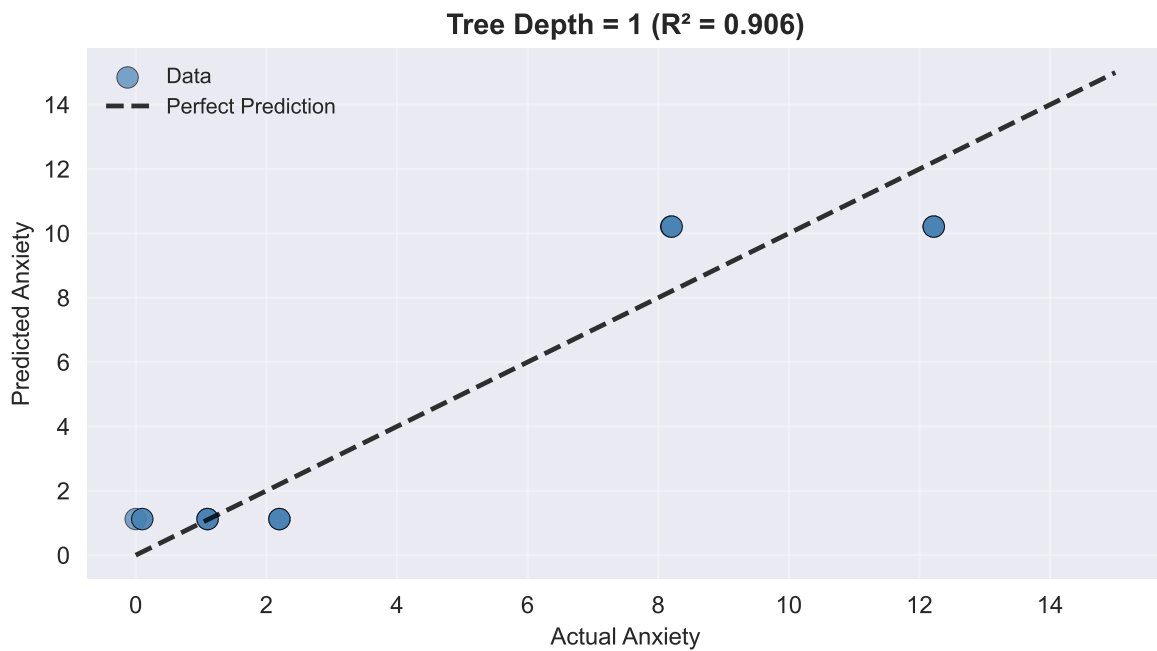

(a) Effect of tree depth on model complexity

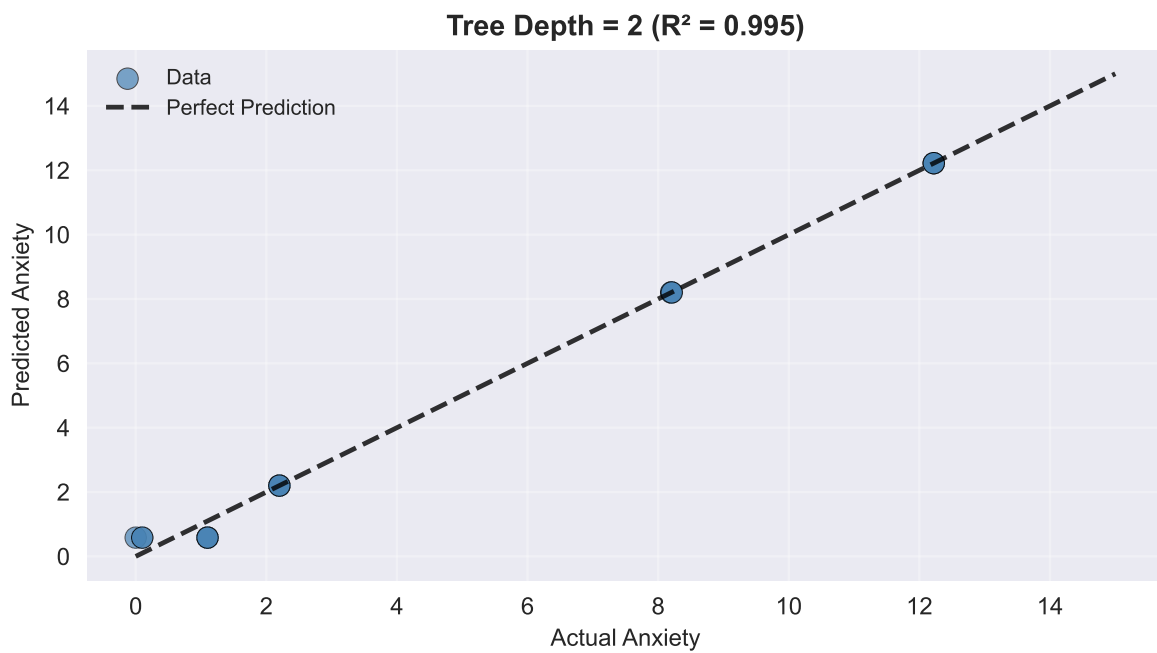

(b)

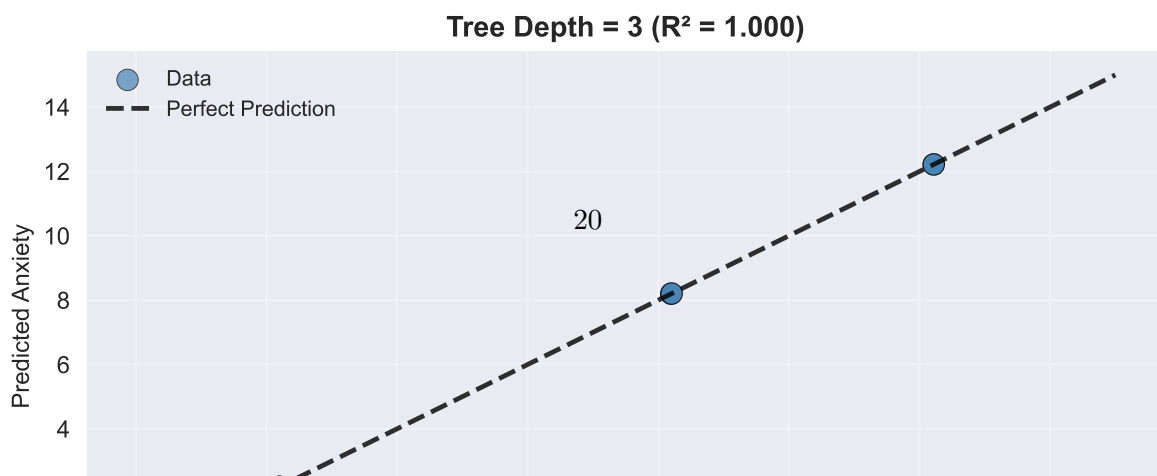

## Ensemble Methods

Decision trees are often combined in ensembles (Random Forest, Gradient Boosting) to improve performance while maintaining interpretability.

## Conclusion: Choosing the Best Approach for Anxiety Prediction

Our anxiety prediction journey showed us:

### Progressive Improvement in Prediction Accuracy:

1. **0 Variables (Baseline)**: Predict everyone has mean anxiety
2. **1 Variable (Time)**: Significant improvement by capturing time-anxiety relationship
3. **2 Variables (Linear Regression)**: Further improvement but with misleading coefficients
4. **2 Variables (Decision Tree)**: Best accuracy with correct interpretations

### Key Insights for Anxiety Prediction:

**Decision trees offer advantages for anxiety prediction by:** 1. **Capturing non-linear relationships** between stress surveys and anxiety 2. **Providing interpretable rules** that clinicians can understand 3. **Handling complex interactions** between time and stress naturally 4. **Requiring minimal assumptions** about how anxiety develops

**However, they come with trade-offs:** - **Step functions** instead of smooth anxiety curves  
- **Potential overfitting** without proper regularization - **Instability** to small data changes

### Recommendation for Anxiety Prediction:

Use decision trees when you need to capture non-linear patterns in anxiety development and value interpretability for clinical decision-making. Use linear models when relationships are approximately linear and you need smooth predictions for anxiety trajectories.

The choice depends on your specific anxiety prediction needs: linear models for smooth anxiety curves, decision trees for capturing complex, non-linear anxiety patterns with interpretable rules.

---

*“The best model is not always the most complex one, but the one that best serves your analytical purpose.”*