


Copyright Notice

These slides are distributed under the Creative Commons License.

[DeepLearning.AI](#) makes these slides available for educational purposes. You may not use or distribute these slides for commercial purposes. You may make copies of these slides and use or distribute them for educational purposes as long as you cite [DeepLearning.AI](#) as the source of the slides.

For the rest of the details of the license, see <https://creativecommons.org/licenses/by-sa/2.0/legalcode>

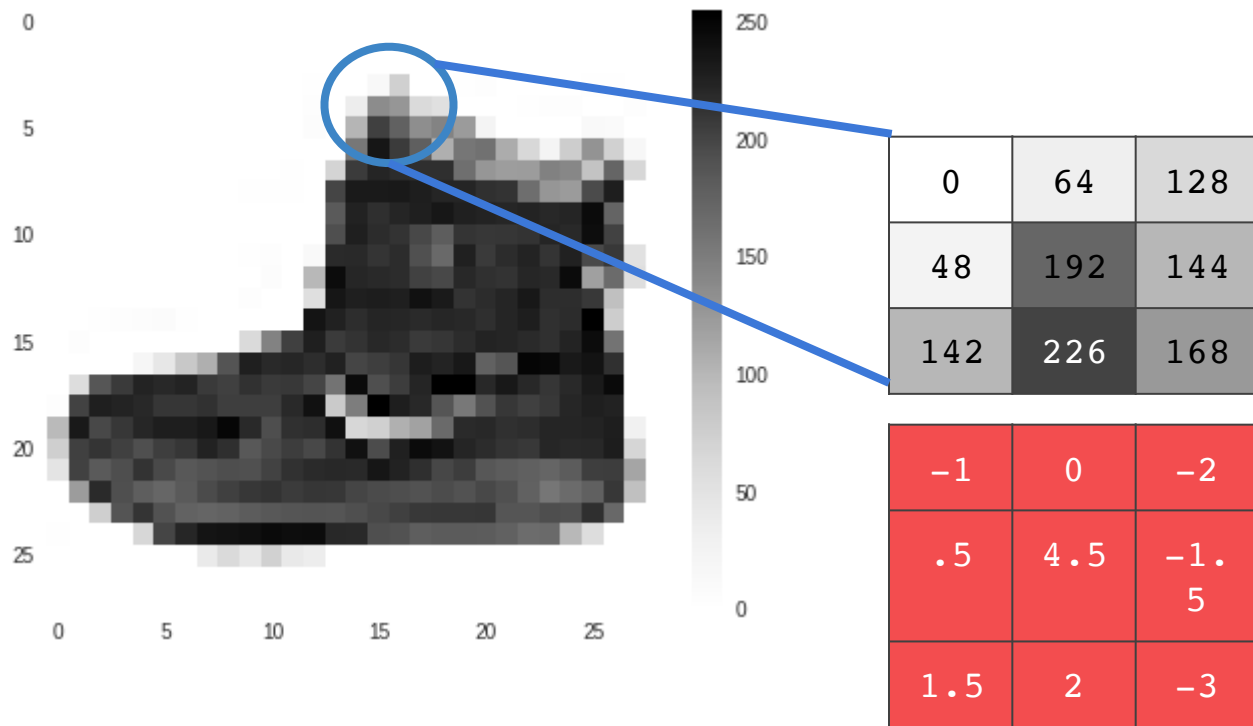



Current Pixel Value is
192

Consider neighbor Values

Filter Definition

$$\begin{aligned}\text{CURRENT_PIXEL_VALUE} &= 192 \\ \text{NEW_PIXEL_VALUE} &= (-1 * 0) + (0 * 64) + (-2 * 128) + \\ &\quad (.5 * 48) + (4.5 * 192) + (-1.5 * 144) \\ &\quad + \\ &\quad (1.5 * 142) + (2 * 226) + (-3 * 168)\end{aligned}$$

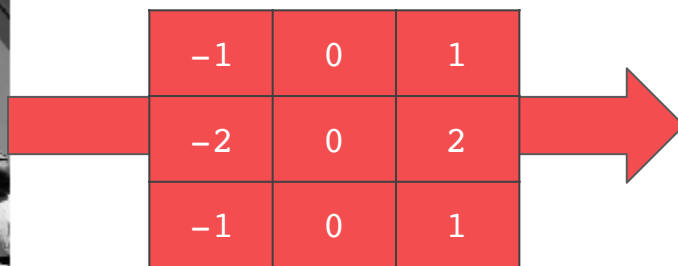

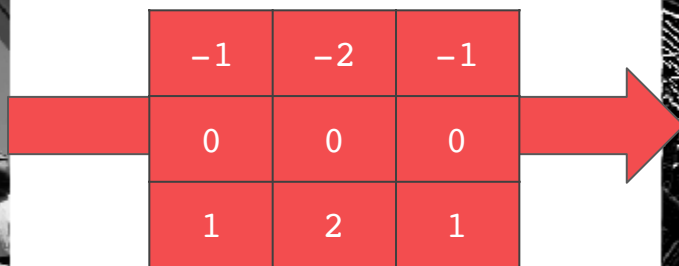

0	64	128	128
48	192	144	144
142	226	168	0
255	0	0	64

0	64
48	192

192

128	128
144	144

144

142	226
255	0

255

168	0
0	64

168

192	144
255	168

```
model = tf.keras.models.Sequential([  
    tf.keras.layers.Flatten(),  
    tf.keras.layers.Dense(128, activation=tf.nn.relu),  
    tf.keras.layers.Dense(10, activation=tf.nn.softmax)  
])
```

```
model = tf.keras.models.Sequential([  
    tf.keras.layers.Conv2D(64, (3,3), activation='relu',  
                            input_shape=(28, 28, 1)),  
    tf.keras.layers.MaxPooling2D(2, 2),  
    tf.keras.layers.Conv2D(64, (3,3), activation='relu'),  
    tf.keras.layers.MaxPooling2D(2,2),  
    tf.keras.layers.Flatten(),  
    tf.keras.layers.Dense(128, activation='relu'),  
    tf.keras.layers.Dense(10, activation='softmax')  
])
```

```
model = tf.keras.models.Sequential([
    tf.keras.layers.Conv2D(64, (3,3), activation='relu',
                           input_shape=(28, 28, 1)),
    tf.keras.layers.MaxPooling2D(2, 2),
    tf.keras.layers.Conv2D(64, (3,3), activation='relu'),
    tf.keras.layers.MaxPooling2D(2,2),
    tf.keras.layers.Flatten(),
    tf.keras.layers.Dense(128, activation='relu'),
    tf.keras.layers.Dense(10, activation='softmax')
])
```


Computer Vision Problems

Image Classification




Cat? (0/1)

Neural Style Transfer



Object detection



▶ PLAY ALL

Convolutional Neural Networks (Course 4 of the Deep Learning Specialization)

42 videos • 415,722 views • Last updated on Nov 7, 2017



Deeplearning.ai

SUBSCRIBE 28K

1



C4W1L01 Computer Vision

Deeplearning.ai

5:44

2

Vertical edge detection



C4W1L02 Edge Detection Examples

Deeplearning.ai

11:31

3

Vertical and Horizontal Edge Detection




C4W1L03 More Edge Detection

Deeplearning.ai

7:58

4



C4W1L04 Padding

Deeplearning.ai

9:50

5




C4W1L05 Strided Convolutions

Deeplearning.ai

9:02

6



C4W1L06 Convolutions Over Volumes

Deeplearning.ai

10:45

<https://bit.ly/2UGa7uH>


```
model = tf.keras.models.Sequential([
    tf.keras.layers.Conv2D(64, (3,3), activation='relu',
                           input_shape=(28, 28, 1)),
    tf.keras.layers.MaxPooling2D(2, 2),
    tf.keras.layers.Conv2D(64, (3,3), activation='relu'),
    tf.keras.layers.MaxPooling2D(2,2),
    tf.keras.layers.Flatten(),
    tf.keras.layers.Dense(128, activation='relu'),
    tf.keras.layers.Dense(10, activation='softmax')
])
```

```
model = tf.keras.models.Sequential([  
    tf.keras.layers.Conv2D(64, (3,3), activation='relu',  
        input_shape=(28, 28, 1)),  
    tf.keras.layers.MaxPooling2D(2, 2),  
    tf.keras.layers.Conv2D(64, (3,3), activation='relu'),  
    tf.keras.layers.MaxPooling2D(2,2),  
    tf.keras.layers.Flatten(),  
    tf.keras.layers.Dense(128, activation='relu'),  
    tf.keras.layers.Dense(10, activation='softmax')  
])
```


```
model.summary()
```

Layer (type)	Output Shape	Param #
conv2d_12 (Conv2D)	(None, 26, 26, 64)	640
max_pooling2d_12 (MaxPooling)	(None, 13, 13, 64)	0
conv2d_13 (Conv2D)	(None, 11, 11, 64)	36928
max_pooling2d_13 (MaxPooling)	(None, 5, 5, 64)	0
flatten_5 (Flatten)	(None, 1600)	0
dense_10 (Dense)	(None, 128)	204928
dense_11 (Dense)	(None, 10)	1290

Layer (type)	Output Shape	Param #
conv2d_12 (Conv2D)	(None, 26, 26, 64)	640
max_pooling2d_12 (MaxPooling)	(None, 13, 13, 64)	0
conv2d_13 (Conv2D)	(None, 11, 11, 64)	36928
max_pooling2d_13 (MaxPooling)	(None, 5, 5, 64)	0
flatten_5 (Flatten)	(None, 1600)	0
dense_10 (Dense)	(None, 128)	204928
dense_11 (Dense)	(None, 10)	1290

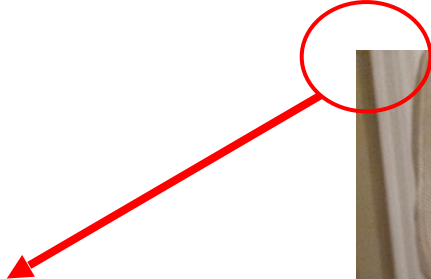



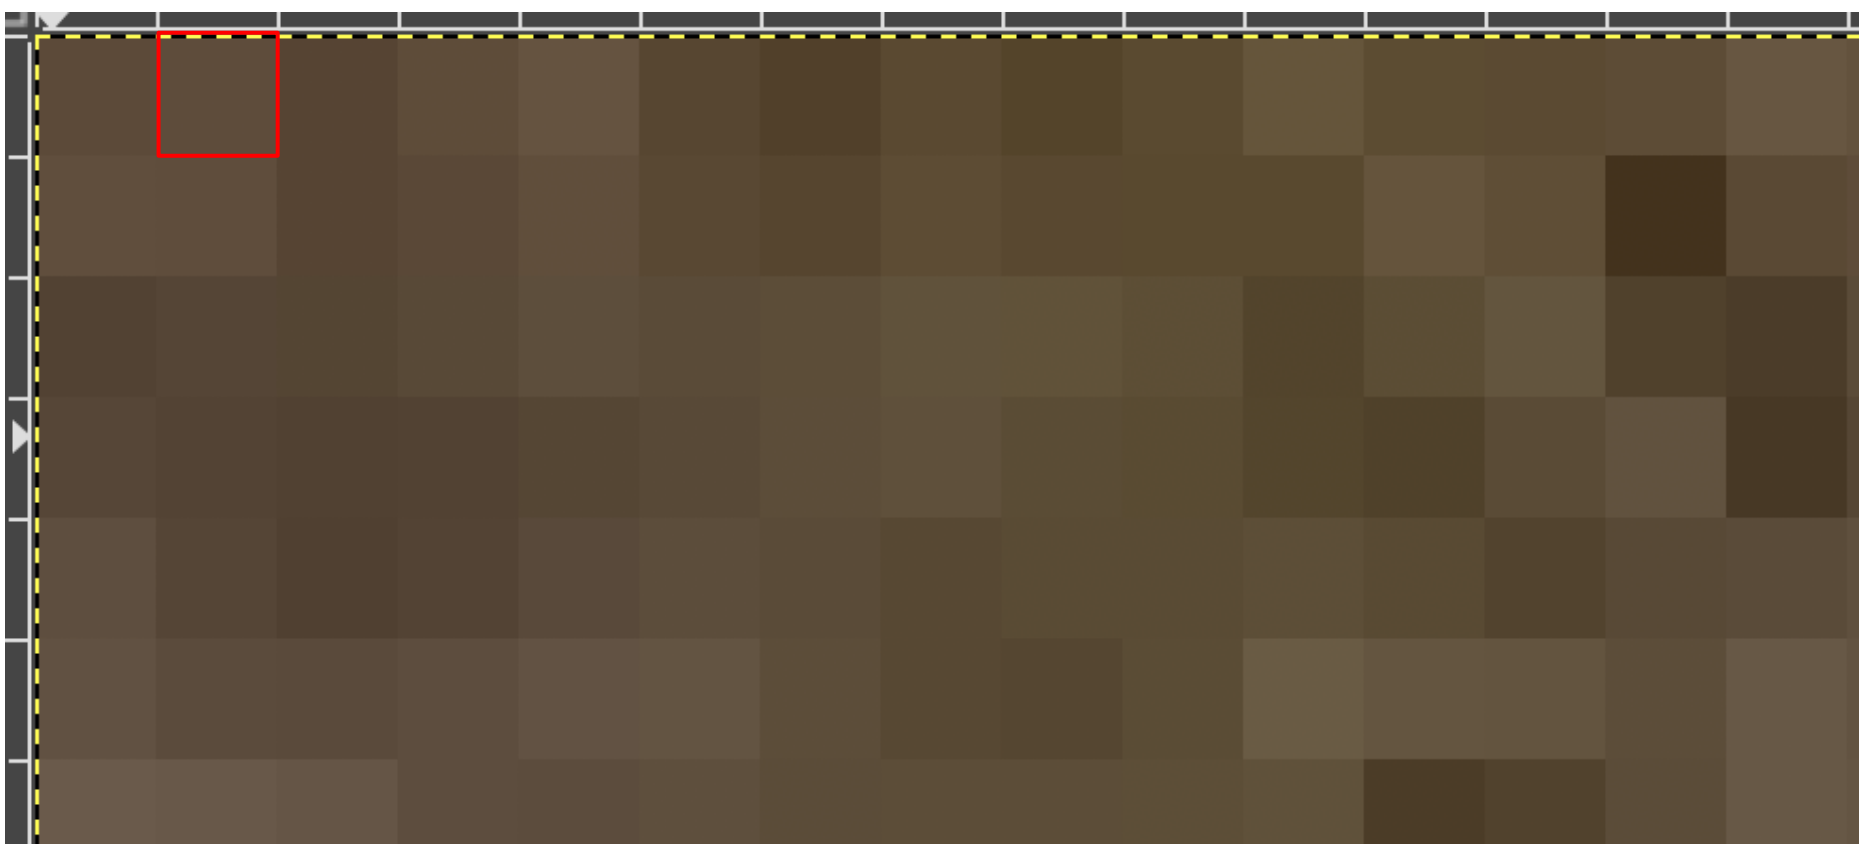





Layer (type)	Output Shape	Param #
conv2d_12 (Conv2D)	(None, 26, 26, 64)	640
max_pooling2d_12 (MaxPooling)	(None, 13, 13, 64)	0
conv2d_13 (Conv2D)	(None, 11, 11, 64)	36928
max_pooling2d_13 (MaxPooling)	(None, 5, 5, 64)	0
flatten_5 (Flatten)	(None, 1600)	0
dense_10 (Dense)	(None, 128)	204928
dense_11 (Dense)	(None, 10)	1290

Layer (type)	Output Shape	Param #
conv2d_12 (Conv2D)	(None, 26, 26, 64)	640
max_pooling2d_12 (MaxPooling)	(None, 13, 13, 64)	0
conv2d_13 (Conv2D)	(None, 11, 11, 64)	36928
max_pooling2d_13 (MaxPooling)	(None, 5, 5, 64)	0
flatten_5 (Flatten)	(None, 1600)	0
dense_10 (Dense)	(None, 128)	204928
dense_11 (Dense)	(None, 10)	1290

Layer (type)	Output Shape	Param #
conv2d_12 (Conv2D)	(None, 26, 26, 64)	640
max_pooling2d_12 (MaxPooling)	(None, 13, 13, 64)	0
conv2d_13 (Conv2D)	(None, 11, 11, 64)	36928
max_pooling2d_13 (MaxPooling)	(None, 5, 5, 64)	0
flatten_5 (Flatten)	(None, 1600)	0
dense_10 (Dense)	(None, 128)	204928
dense_11 (Dense)	(None, 10)	1290

Layer (type)	Output Shape	Param #
conv2d_12 (Conv2D)	(None, 26, 26, 64)	640
max_pooling2d_12 (MaxPooling)	(None, 13, 13, 64)	0
conv2d_13 (Conv2D)	(None, 11, 11, 64)	36928
max_pooling2d_13 (MaxPooling)	(None, 5, 5, 64)	0
flatten_5 (Flatten)	(None, 1600)	0
dense_10 (Dense)	(None, 128)	204928
dense_11 (Dense)	(None, 10)	1290

Layer (type)	Output Shape	Param #
conv2d_12 (Conv2D)	(None, 26, 26, 64)	640
max_pooling2d_12 (MaxPooling)	(None, 13, 13, 64)	0
conv2d_13 (Conv2D)	(None, 11, 11, 64)	36928
max_pooling2d_13 (MaxPooling)	(None, 5, 5, 64)	0
flatten_5 (Flatten)	(None, 1600)	0
dense_10 (Dense)	(None, 128)	204928
dense_11 (Dense)	(None, 10)	1290