

# UIL COMPUTER SCIENCE WRITTEN TEST

# 2018 INVITATIONAL A

**JANUARY/FEBRUARY 2018**

## General Directions (Please read carefully!)

---

1. DO NOT OPEN THE EXAM UNTIL TOLD TO DO SO.
2. There are 40 questions on this contest exam. You will have 45 minutes to complete this contest.
3. All answers must be legibly written on the answer sheet provided. Indicate your answers in the appropriate blanks provided on the answer sheet. Clean erasures are necessary for accurate grading.
4. You may write on the test packet or any additional scratch paper provided by the contest director, but NOT on the answer sheet, which is reserved for answers only.
5. All questions have ONE and only ONE correct answer. There is a 2-point penalty for all incorrect answers.
6. Tests may not be turned in until 45 minutes have elapsed. If you finish the test before the end of the allotted time, remain at your seat and retain your test until told to do otherwise. You may use this time to check your answers.
7. If you are in the process of actually writing an answer when the signal to stop is given, you may finish writing that answer.
8. All provided code segments are intended to be syntactically correct, unless otherwise stated. You may also assume that any undefined variables are defined as used.
9. A reference to many commonly used Java classes is provided with the test, and you may use this reference sheet during the contest. AFTER THE CONTEST BEGINS, you may detach the reference sheet from the test booklet if you wish.
10. Assume that any necessary import statements for standard Java SE packages and classes (e.g., `java.util`, `System`, etc.) are included in any programs or code segments that refer to methods from these classes and packages.
11. NO CALCULATORS of any kind may be used during this contest.

## Scoring

---

1. Correct answers will receive **6 points**.
2. Incorrect answers will lose **2 points**.
3. Unanswered questions will neither receive nor lose any points.
4. In the event of a tie, the student with the highest percentage of attempted questions correct shall win the tie.

# STANDARD CLASSES AND INTERFACES – SUPPLEMENTAL REFERENCE

## package java.lang

```
class Object
    boolean equals(Object anotherObject)
    String toString()
    int hashCode()

interface Comparable<T>
    int compareTo(T anotherObject)
        Returns a value < 0 if this is less than anotherObject.
        Returns a value = 0 if this is equal to anotherObject.
        Returns a value > 0 if this is greater than anotherObject.

class Integer implements Comparable<Integer>
    Integer(int value)
    int intValue()
    boolean equals(Object anotherObject)
    String toString()
    String toString(int i, int radix)
    int compareTo(Integer anotherInteger)
    static int parseInt(String s)

class Double implements Comparable<Double>
    Double(double value)
    double doubleValue()
    boolean equals(Object anotherObject)
    String toString()
    int compareTo(Double anotherDouble)
    static double parseDouble(String s)

class String implements Comparable<String>
    int compareTo(String anotherString)
    boolean equals(Object anotherObject)
    int length()
    String substring(int begin)
        Returns substring(begin, length()).
    String substring(int begin, int end)
        Returns the substring from index begin through index (end - 1).
    int indexOf(String str)
        Returns the index within this string of the first occurrence of str.
        Returns -1 if str is not found.
    int indexOf(String str, int fromIndex)
        Returns the index within this string of the first occurrence of str,
        starting the search at fromIndex. Returns -1 if str is not found.
    int indexOf(int ch)
    int indexOf(int ch, int fromIndex)
    char charAt(int index)
    String toLowerCase()
    String toUpperCase()
    String[] split(String regex)
    boolean matches(String regex)
    String replaceAll(String regex, String str)

class Character
    static boolean isDigit(char ch)
    static boolean isLetter(char ch)
    static boolean isLetterOrDigit(char ch)
    static boolean isLowerCase(char ch)
    static boolean isUpperCase(char ch)
    static char toUpperCase(char ch)
    static char toLowerCase(char ch)

class Math
    static int abs(int a)
    static double abs(double a)
    static double pow(double base, double exponent)
    static double sqrt(double a)
    static double ceil(double a)
    static double floor(double a)
    static double min(double a, double b)
    static double max(double a, double b)
    static int min(int a, int b)
    static int max(int a, int b)
    static long round(double a)
    static double random()
        Returns a double greater than or equal to 0.0 and less than 1.0.
```

## package java.util

```
interface List<E>
class ArrayList<E> implements List<E>
    boolean add(E item)
    int size()
    Iterator<E> iterator()
    ListIterator<E> listIterator()
    E get(int index)
    E set(int index, E item)
    void add(int index, E item)
    E remove(int index)

class LinkedList<E> implements List<E>, Queue<E>
    void addFirst(E item)
    void addLast(E item)
    E getFirst()
    E getLast()
    E removeFirst()
    E removeLast()

class Stack<E>
    boolean isEmpty()
    E peek()
    E pop()
    E push(E item)

interface Queue<E>
class PriorityQueue<E>
    boolean add(E item)
    boolean isEmpty()
    E peek()
    E remove()

interface Set<E>
class HashSet<E> implements Set<E>
class TreeSet<E> implements Set<E>
    boolean add(E item)
    boolean contains(Object item)
    boolean remove(Object item)
    int size()
    Iterator<E> iterator()
    boolean addAll(Collection<? extends E> c)
    boolean removeAll(Collection<?> c)
    boolean retainAll(Collection<?> c)

interface Map<K,V>
class HashMap<K,V> implements Map<K,V>
class TreeMap<K,V> implements Map<K,V>
    Object put(K key, V value)
    V get(Object key)
    boolean containsKey(Object key)
    int size()
    Set<K> keySet()
    Set<Map.Entry<K, V>> entrySet()

interface Iterator<E>
    boolean hasNext()
    E next()
    void remove()

interface ListIterator<E> extends Iterator<E>
    void add(E item)
    void set(E item)

class Scanner
    Scanner(InputStream source)
    Scanner(String str)
    boolean hasNext()
    boolean hasNextInt()
    boolean hasNextDouble()
    String next()
    int nextInt()
    double nextDouble()
    String nextLine()
    Scanner useDelimiter(String regex)
```

# UIL COMPUTER SCIENCE WRITTEN TEST – 2018 INVITATIONAL A

**Note:** Correct responses are based on **Java SE Development Kit 8 (JDK 8)** from Oracle, Inc. All provided code segments are intended to be syntactically correct, unless otherwise stated (e.g., "error" is an answer choice) and any necessary Java SE 8 Standard Packages have been imported. Ignore any typographical errors and assume any undefined variables are defined as used. **For all output statements, assume that the System class has been statically imported using: `import static java.lang.System.*;`**

## Question 1.

Which of the following decimal numbers is equivalent to  $1111111_2$ ?

- A) 64                      B) 128                      C) 127                      D) 255                      E) 256

## Question 2.

What is the output of the code segment to the right?

- A) 238      B) 76.2      C) 77      D) 76      E) -19

```
out.println(6*4*3+7-14/5);
```

## Question 3.

What is the output of the code segment to the right?

- A) Fourth Of July  
B) Fourth  
Of\nJuly  
C) Fourth  
OfJuly  
D) FourthOf  
July  
E) Fourth  
Of  
July

```
out.println("Fourth");  
out.print("Of\nJuly");
```

## Question 4.

What is the output of the code segment to the right?

- A) ##Hall    oween\*\*  
B) Hall    oween  
C) ##Halloween\*\*  
D) Halloween  
E) Error. Cannot call a method using a String literal.

```
out.print("##Hall    oween**".trim());
```

## Question 5.

What is the output of the code segment to the right?

- A) true                      B) false

```
out.print(!true^!false);
```

## Question 6.

What is the output of the code segment to the right?

- A) 5.64      B) 5.0      C) 5      D) 4.99      E) 6.0

```
double a=3.65,b=1.99;  
double c=Math.round(a)+Math.floor(b);  
out.print(c);
```

## Question 7.

What is the output of the code segment to the right?

- A) 5              B) 5.0              C) 9.75              D) -4.75              E) 5.25

```
int i=5;  
double d=4.75;  
double a=i-d+i;  
out.print(a);
```

<p><b>Question 8.</b></p> <p>What is the output of the code segment to the right?</p> <p>A) X Y B) X C) Y Z D) X Y Z E) Y</p>	<pre>double d1=1.8,d2=1.81,d3=1.8; if(d1&gt;=d2)     if(d1==d3)         out.print("X "); if(d1==d3)     if(d2&gt;d3)         out.print("Y "); out.print("Z");</pre>
<p><b>Question 9.</b></p> <p>How many hash tags are printed by the code shown to the right?</p> <p>A) 0      B) 1      C) 4      D) 5      E) 6</p>	<pre>int x=0; do {     out.print("# "); }while(x++&lt;5);</pre>
<p><b>Question 10.</b></p> <p>What is the output of the code segment to the right?</p> <p>A) [One, Two, Three, Four, null] B) [null, One, Two, Three, Four, null] C) [One, Two, Three, Four] D) [null, One, Two, Three, Four] E) [ , One, Two, Three, Four]</p>	<pre>String s[]=new String[5]; s[1]="One"; s[2]="Two"; s[3]="Three"; s[4]="Four"; out.print(Arrays.toString(s));</pre>
<p><b>Question 11.</b></p> <p>The file <code>datafile.dat</code> contains five words each listed on a separate line. Which of the following can correctly replace <code>&lt;code&gt;</code> in the code segment shown on the right so that each word in the file will be printed on the same line separated by a space? Assume that all required classes have been imported correctly.</p> <p>A) <code>s.next()</code> B) <code>s.hasNext()</code> C) <code>f.hasNext()</code> D) <code>s.hasNextInt()</code> E) <code>f.next()</code></p>	<pre>File f=new File("datafile.dat"); Scanner s=new Scanner(f); while(&lt;code&gt;)     out.print(s.next()+" ");</pre>
<p><b>Question 12.</b></p> <p>What is the output of the code segment to the right?</p> <p>A) 5 0 B) 4 0 C) 5 24 D) 4 24 E) 6 24</p>	<pre>int t=1,x; for(x=0;x&lt;5;x++)     t*=x; out.print(x+" "+t);</pre>

<p><b>Question 13.</b></p> <p>What is the output of the code segment to the right?</p> <p>A) -9 B) -19 C) -18 D) -22 E) There is no output due to a type mismatch error.</p>	<pre>short s=5; int i=-8; double d=3.5; int b=++s+i*(int)d; out.print(b);</pre>
<p><b>Question 14.</b></p> <p>Which of the following values can be stored in a variable that is of type byte?</p> <p>A) 64      B) 128      C) 256      D) 32767      E) All of these values can be stored in a byte type variable.</p>	
<p><b>Question 15.</b></p> <p>What is the output of the code segment to the right?</p> <p>A) [pig, kid, calf] B) [lamb, kid, pig, calf] C) [calf, pig, lamb, kid] D) [pig, lamb, kid, calf] E) Error. Throws an IndexOutOfBoundsException.</p>	<pre>ArrayList&lt;String&gt; a=new ArrayList&lt;String&gt;(); a.add(0, "lamb"); a.add(1, "kid"); a.add(0, "pig"); a.add("calf"); out.print(a);</pre>
<p><b>Question 16.</b></p> <p>What is the output of the code segment shown here?</p> <pre>String s="abcde"; for(int i=0;i&lt;s.length();i++)     out.print(s.substring(i, i+1).matches("[^aeiou]")+" "); }</pre> <p>A) true false false false true B) false true true true false C) false false false false false D) true false false false false E) false true true true true</p>	
<p><b>Question 17.</b></p> <p>What is printed by the client code shown here given the implementation of the method abc shown to the right?</p> <pre>out.print(abc(0));</pre> <p>A) 16 B) 30 C) 580 D) 21 E) 31</p>	<pre>public static int abc(int i) {     if(i&gt;5)         return 1;     else         return 2*i+abc(++i); }</pre>

<p><b>Question 18.</b></p> <p>What is the output of the code segment to the right?</p> <p>A) [earth, water, wind]  B) false [wind, earth, water]  C) false [earth, water, wind]  D) true [earth, water, wind]  E) false [earth, water, wind, wind]</p>	<pre>Set&lt;String&gt; s=new TreeSet&lt;String&gt;(); s.add("wind"); s.add("earth"); s.add("fire"); s.add("water"); s.add("wind"); s.remove("fire"); out.print(s.remove("fire")+" "+s);</pre>
<p><b>Question 19.</b></p> <p>Which of the following is the largest possible value that the code segment on the right might print?</p> <p>A) 20  B) 40  C) 38  D) 39  E) 19</p>	<pre>Random r=new Random(); System.out.print((r.nextInt(10)+10)*2);</pre>
<p><b>Question 20.</b></p> <p>What is the output of the code segment to the right?</p> <p>A) [5, 7, null, 9, 8]  B) [5, 7, 0, 9, 8]  C) [5, 7, 9, 8]  D) Prints the hexadecimal value of the memory location for each of the objects stored in the array.  E) There is no output due to an error.</p>	<pre>Object[] o=new Object[5]; o[0]=5; o[1]=new Integer(7); o[3]=9; o[4]="8"; out.print(Arrays.toString(o));</pre>

**Question 21.**

Variables a, b and c are called \_\_\_\_\_?

- A) instance variables
- B) fields
- C) class variables
- D) both A and B.
- E) A, B, and C

**Question 22.**

Which of the following reserved words must replace **<code>** in the `setC` method?

- A) `super`
- B) `this`
- C) `null`
- D) `instanceof`
- E) `static`

**Question 23.**

What is the output of the client code shown here if **<code>** has been filled in correctly?

```
Uil a=new Uil(3,4,5);
a.a=6;
a.b=7;
a.c=8;
out.println(a.a+" "+a.b+" "+a.getC());
```

- A) 6 7 8
- B) 6 7 5
- C) 3 4 5
- D) 3 4 8
- E) No output. Will not compile.

**Question 24.**

What is the output of the client code shown here if **<code>** has been filled in correctly?

```
Uil b=new Uil();
b.setC(6);
b.a=1;
out.print(b.a+" "+b.b+" "+b.getC());
```

- A) 1 6
- B) 1 null 6
- C) 1 4 6
- D) 1 0 6
- E) No output. Will not compile.

//Use the code shown here to answer  
//questions 21 - 24.

```
public class Uil {

    int a,b;
    private int c;

    public Uil(int x, int y, int z) {
        a = x;
        b = y;
        c = z;
    }

    public Uil() {}

    public int getC() {
        return c;
    }

    public void setC(int c) {
        <code>.c = c;
    }

}
```

**Question 25.**

What is the output of the code segment to the right?

- A) -32
- B) 32
- C) 8
- D) -8
- E) -1

```
String s="String";  
String t="strange";  
out.print(s.compareTo(t));
```

**Question 26.**

What is the output of the code segment to the right?

- A) 9 36
- B) 3 15
- C) 9 16
- D) 3 16
- E) 3 6

```
int[][] i= {{5,7,4},{3,0,2},{1,8,6}};  
out.print(i.length+" ");  
int s=0;  
for(int x=1;x<3;x++)  
    for(int y=1;y<3;y++)  
        s+=i[x][y];  
out.print(s);
```

**Question 27.**

What is the output of the code segment to the right?

- A) 17 12 -4
- B) 18 12 -6
- C) 18 1 -4
- D) 17 1 -6
- E) 18 1 -6

```
byte r=17,s=18,t=-5;  
s/=++r+t--;  
out.print(r+" "+s+" "+t);
```



**Question 28.**

Which of the following methods will return the index number of the last occurrence of the character passed as parameter `c` or -1 if the character is not present in the string?

<p><b>A.</b></p> <pre>public static int lastIndexOf(String s,char c) {     int k=-1;     for(int i=s.length()-1;i&gt;=0;i++) {         if(s.charAt(i)==c){             k=i;             break;         }     }     return k; }</pre>	<p><b>B.</b></p> <pre>public static int lastIndexOf(String s,char c) {     int k=-1;     for(int i=s.length()-1;i&gt;=0;i--) {         if(s.charAt(i)==c){             k=i;             break;         }     }     return k; }</pre>
<p><b>C.</b></p> <pre>public static int lastIndexOf(String s,char c) {     int k=0;     for(int i=s.length()-1;i&gt;=0;i--) {         if(s.charAt(i)==c){             k=i;             break;         }     }     return k; }</pre>	<p><b>D.</b></p> <pre>public static int lastIndexOf(String s,char c) {     int k=-1;     for(int i=0;i&lt; s.length()-1;i++) {         if(s.charAt(i)==c){             k=i;             break;         }     }     return k; }</pre>
<p><b>E.</b></p> <pre>public static int lastIndexOf(String s,char c) {     int k=-1;     for(int i=s.length()-1;i&gt;=0;i--) {         if(s.charAt(i)==c){             k=i;             break;         }     } }</pre>	

**Question 29.**

Which of the following Java statements will compile and correctly calculate the Celsius temperature when given a Fahrenheit temperature? The formula is shown on the right where `f` is the Fahrenheit temperature and `c` is the Celsius temperature.

- A)** `double c=5.0/9.0 (f-32);`
- B)** `double c=5/9*(f-32);`
- C)** `double c=5.0/9.0*(f-32);`
- D)** All of the above.
- E)** None of the above.

$$C = 5/9 (F - 32)$$

<p><b>Question 30.</b></p> <p>What is the output of the code segment to the right?</p> <p>A) 49.0 33.0 17.0  B) 61.0 41.0 21.0  C) 58.0 40.0 22.0  D) 50.0 37.0 24.0  E) 47.0 35.0 23.0</p>	<pre>double x=10.0,y=5.0,z=8.0; while(x&lt;50) {     x=y--+z;     y+=5;     z=y*2-x; } out.println(x+" "+y+" "+z);</pre>
<p><b>Question 31.</b></p> <p>What is the output of the code segment to the right?</p> <p>A) 420  B) 212  C) 312  D) 303  E) 0</p>	<pre>String s="amigdexaul"; int sum=0; for(int i=0;i&lt;s.length();i++) {     if(s.charAt(i)&lt;110)         char c=s.charAt(i);         boolean vowel=c=='a'    c=='e'    c=='i'                        c=='o'    c=='u';         if(vowel)             continue;         else             sum+=s.charAt(i);         else             break; } out.print(sum);</pre>
<p><b>Question 32.</b></p> <p>Which of the following shows the order of the elements in array a when code execution reaches the comment statement and i equals 3 given the following client code?</p> <pre>int[] a= {3,2,4,1,0}; sort(a);</pre> <p>A) [1, 2, 3, 4, 0]  B) [2, 3, 4, 1, 0]  C) [0, 1, 2, 3, 4]  D) [1, 0, 2, 3, 4]  E) [0, 1, 2, 4, 3]</p>	<p><b>//Use the following to answer  //questions 32, 33 and 34.</b></p> <pre>public static void sort(int[] a) {     for(int i=1;i&lt;a.length;i++) {         int ce=a[i];         int k;         for(k=i-1;k&gt;=0&amp;&amp; a[k]&gt;ce;k--) {             a[k+1]=a[k];         }         a[k+1]=ce;         <b>//comment</b>     } }</pre>
<p><b>Question 33.</b></p> <p>Which of the following sorting algorithms is implemented by the sort method shown on the right?</p> <p>A) selection sort  B) insertion sort  C) bubble sort  D) quick sort  E) merge sort</p>	






**Question 34.**

What is the worst case run time efficiency (Big O value) for the sort method shown on the right?

- A)  $O(n)$
- B)  $O(n^2)$
- C)  $O(n^3)$
- D)  $O(\log n)$
- E)  $O(n \log n)$


**Question 35.**

If 1, 8, 3, 5 and 9 are placed into a binary search tree, in that order, which of the following is the correct representation of that tree?

**A)****B)****C)****D)****E)****Question 36.**

Which of the following best describes the graph shown on the right?

- A) weighted, directed and complete
- B) weighted and directed
- C) unweighted and directed
- D) weighted and undirected
- E) unweighted and undirected

**Question 37.**

If A is true, B is false and C is false, what is the result of the expression shown in the diagram shown on the right?

- A) true
- B) false

**Question 38.**

What is the worst case time complexity for accessing an element in a linked list?

- A)  $O(1)$
- B)  $O(\log n)$
- C)  $O(n)$
- D)  $O(n^2)$
- E)  $O(n \log n)$

**Question 39.**

Evaluate the postfix expression shown on the right and write your answer in the blank provided. The operands are 19, 4, 5, -5, and 3.

19 4 5 + -5 - 3 \* -

**Question 40.**

Write the 8-bit two's complement binary equivalent of -50.

# UIL COMPUTER SCIENCE WRITTEN TEST

**Questions** (+6 points for each correct answer, -2 points for each incorrect answer)

- |           |           |           |           |
|-----------|-----------|-----------|-----------|
| 1) _____  | 11) _____ | 21) _____ | 31) _____ |
| 2) _____  | 12) _____ | 22) _____ | 32) _____ |
| 3) _____  | 13) _____ | 23) _____ | 33) _____ |
| 4) _____  | 14) _____ | 24) _____ | 34) _____ |
| 5) _____  | 15) _____ | 25) _____ | 35) _____ |
| 6) _____  | 16) _____ | 26) _____ | 36) _____ |
| 7) _____  | 17) _____ | 27) _____ | 37) _____ |
| 8) _____  | 18) _____ | 28) _____ | 38) _____ |
| 9) _____  | 19) _____ | 29) _____ | 39) _____ |
| 10) _____ | 20) _____ | 30) _____ | 40) _____ |

## FOR ADMINISTRATIVE USE ONLY

# Right:	×	6 pts	=	
# Wrong:	×	-2 pts	=	
# Skipped:	×	0 pts	=	0

	Score	Initials
Judge #1:	<input type="text"/>	<input type="text"/>
Judge #2:	<input type="text"/>	<input type="text"/>
Judge #3:	<input type="text"/>	<input type="text"/>

# ★ ANSWER KEY – CONFIDENTIAL ★

## UIL COMPUTER SCIENCE – 2018 INVITATIONAL A

Questions (+6 points for each correct answer, -2 points for each incorrect answer)

- |                  |                  |                  |                          |
|------------------|------------------|------------------|--------------------------|
| 1) <u>  D  </u>  | 11) <u>  B  </u> | 21) <u>  D  </u> | 31) <u>  C  </u>         |
| 2) <u>  C  </u>  | 12) <u>  A  </u> | 22) <u>  B  </u> | 32) <u>  A  </u>         |
| 3) <u>  E  </u>  | 13) <u>  C  </u> | 23) <u>  E  </u> | 33) <u>  B  </u>         |
| 4) <u>  A  </u>  | 14) <u>  A  </u> | 24) <u>  D  </u> | 34) <u>  B  </u>         |
| 5) <u>  A  </u>  | 15) <u>  D  </u> | 25) <u>  A  </u> | 35) <u>  E  </u>         |
| 6) <u>  B  </u>  | 16) <u>  B  </u> | 26) <u>  D  </u> | 36) <u>  B  </u>         |
| 7) <u>  E  </u>  | 17) <u>  E  </u> | 27) <u>  E  </u> | 37) <u>  A  </u>         |
| 8) <u>  C  </u>  | 18) <u>  C  </u> | 28) <u>  B  </u> | 38) <u>  C  </u>         |
| 9) <u>  E  </u>  | 19) <u>  C  </u> | 29) <u>  C  </u> | *39) <u>  -23  </u>      |
| 10) <u>  D  </u> | 20) <u>  A  </u> | 30) <u>  D  </u> | *40) <u>  11001110  </u> |

\* See "Explanation" section below for alternate, acceptable answers.

**Note:** Correct responses are based on **Java SE Development Kit 8 (JDK 8)** from Sun Microsystems, Inc. All provided code segments are intended to be syntactically correct, unless otherwise stated (e.g., "error" is an answer choice) and any necessary Java SE 8 Standard Packages have been imported. Ignore any typographical errors and assume any undefined variables are defined as used.

Explanations:

1.	D	128+64+32+16+8+4+2+1=255																				
2.	C	6*4*3+7-14/5 = 72+7-2 = 79-2 = 77																				
3.	E	println and \n both produce a new line.																				
4.	A	The trim method removes whitespace from either end of a string.																				
5.	A	!true ^ !false = false ^ true = true. Exclusive or (^) is true if one but not both of the operands are true.																				
6.	B	4 + 1.0 = 5.0																				
7.	E	5 - 4.75 + 5 = 0.25 + 5 = 5.25																				
8.	C	1.8 = 1.8 and 1.81 > 1.8																				
9.	E	<table><tr><td>Value of x</td><td>Number of hash tags</td></tr><tr><td>0</td><td>#</td></tr><tr><td>1</td><td>##</td></tr><tr><td>2</td><td>###</td></tr><tr><td>3</td><td>####</td></tr><tr><td>4</td><td>#####</td></tr><tr><td>5</td><td>#####</td></tr></table>	Value of x	Number of hash tags	0	#	1	##	2	###	3	####	4	#####	5	#####						
Value of x	Number of hash tags																					
0	#																					
1	##																					
2	###																					
3	####																					
4	#####																					
5	#####																					
10.	D	<table><tr><td colspan="5">Default value of a String variable is null.</td></tr><tr><td>0</td><td>1</td><td>2</td><td>3</td><td>4</td></tr><tr><td>Null</td><td>One</td><td>Two</td><td>Three</td><td>Four</td></tr></table>	Default value of a String variable is null.					0	1	2	3	4	Null	One	Two	Three	Four					
Default value of a String variable is null.																						
0	1	2	3	4																		
Null	One	Two	Three	Four																		
11.	B	The File class does not contain a hasNext method. The next method within the Scanner class returns a String, not a boolean.																				
12.	A	Since the initial value of x is zero, the value of t becomes and stays zero throughout the loop because of multiplication by zero. The value of x reaches 5, which ends the loop."																				
13.	C	++5 + (-8) * (int) 3.5 = 6 + (-8) * 3 = 6 + (-24) = -18. Casting a double to an int truncates 3.5 to be just 3.																				
14.	A	Range of values for the byte data type is -128 to 127.																				
15.	D	<table><tr><td>0</td><td>1</td><td>2</td><td>3</td></tr><tr><td>lamb</td><td></td><td></td><td></td></tr><tr><td>lamb</td><td>kid</td><td></td><td></td></tr><tr><td>pig</td><td>lamb</td><td>kid</td><td></td></tr><tr><td>pig</td><td>lamb</td><td>kid</td><td>calf</td></tr></table>	0	1	2	3	lamb				lamb	kid			pig	lamb	kid		pig	lamb	kid	calf
0	1	2	3																			
lamb																						
lamb	kid																					
pig	lamb	kid																				
pig	lamb	kid	calf																			
16.	B	[^aeiou] is a set that includes any character that is <u>not</u> a vowel. Therefore, the code prints true if a letter is a consonant and false if it is a vowel.																				
17.	E	The call stack is popped as follows 1+10+8+6+4+2+0, which equals 31.																				
18.	C	TreeSet stores elements in sorted order with no duplicates. The remove method returns false if the element to be removed is not in the set.																				
19.	C	nextInt(x) returns a random whole number from 0 inclusive to x exclusive. Therefore, (9 + 10) * 2 = 38 is the largest possible value.																				
20.	A	Any value or object may be stored as an Object data type. null is the default value for an unassigned object within an array.																				
21.	D	Field and instance variable have the same meaning. They are variables that contained within and belong to each instance of the class (every object that is instantiate from that class). A class variable is a static variable. There is only one class variable regardless of how many objects are instantiated from the class.																				
22.	B	The reserved word this designates the variable as an instance variable and not a local variable.																				
23.	E	Cannot access the field c from outside the class because it has been designated as private.																				
24.	D	The instance variable b was never assigned. Default value is 0.																				
25.	A	The ASCII value of S is 83 and s is 115. 83 – 115 = -32.																				
26.	D	A two-dimensional array is an array of arrays. So, the length is how many arrays are in the array. In this case 3. 0 + 2 + 8 + 6 = 16																				
27.	E	s = 18/(++17+(-5)--)= 18/(18-6) = 18/12 = 1. r is incremented by one and t is decremented by 1. So, r=18, s=1 and t=-6.																				
28.	B	A increments i, thus moving the wrong direction. C returns 0 if the character is not present in the string. D finds the first occurrence. E never returns anything.																				

29.	C	A is missing the multiplication operator. B uses integer division. 5/9=0.												
30.	D	These are the values for each variable at the beginning of each iteration of the loop and the final line is the values after the loop has stopped execution. 10.0 5.0 8.0 13.0 9.0 5.0 14.0 13.0 12.0 25.0 17.0 9.0 26.0 21.0 16.0 37.0 25.0 13.0 38.0 29.0 20.0 49.0 33.0 17.0 50.0 37.0 24.0												
31.	C	continue skips the remainder of the loop body. break stops loop execution. The loop executes until it encounters a character greater than or equal to n. Prior to that if the character is a vowel it is skipped. If it is a consonant, that characters ASCII value is added to sum. 109 + 103 + 100 = 312.												
32.	A	<table><tr><td>i</td><td></td><td></td></tr><tr><td>1</td><td>2 3 4 1 0</td><td></td></tr><tr><td>2</td><td>2 3 4 1 0</td><td></td></tr><tr><td>3</td><td>1 2 3 4 0</td><td></td></tr></table>	i			1	2 3 4 1 0		2	2 3 4 1 0		3	1 2 3 4 0	
i														
1	2 3 4 1 0													
2	2 3 4 1 0													
3	1 2 3 4 0													
33.	B	An insertion sort works by choosing the next element in the array and then placing it into its proper location within the already sorted portion of the array. A common analogy is picking up playing cards from a table and placing them in order in your hand.												
34.	B	Best Case O(n), Average Case O(n²), Worst Case O(n²)												
35.	E	The first value is the root. After inserting the root, in this case 1, each value is inserted to the right if it is greater than the root or to the left if it is less than the root. After moving to the left or right of the root, the next node is considered the root and the process is repeated until there is no longer another node to compare to.												
36.	B	Weighted means each edge has a value. Directed means you can only travel one direction along an edge. This graph is not complete because not every pair of vertices are connected.												
37.	A	!((true&&false)^false) = !(false ^ false) = !false = true												
38.	C	Elements within a linked list must be traversed from the first node and progressing one node at a time. The element to be accessed might be the last element in the list.												
39.	-23	19 4 5 + -5 - 3 * - = 19 9 -5 - 3 * - = 19 14 3 * - = 19 42 - = -23												
40.	11001110	Binary value of 50 is 00110010. Find the complement (flip the bits) to get 11001101, which represents the value -51 (complement is opposite, minus 1). Add 1 to get 11001110.												



# Computer Science Competition Invitational A 2018 Programming Problem Set

## I. General Notes

1. Do the problems in any order you like. They do not have to be done in order from 1 to 12.
2. All problems have a value of 60 points.
3. There is no extraneous input. All input is exactly as specified in the problem. Unless specified by the problem, integer inputs will not have leading zeros. Unless otherwise specified, your program should read to the end of file.
4. Your program should not print extraneous output. Follow the form exactly as given in the problem.
5. A penalty of 5 points will be assessed each time that an incorrect solution is submitted. This penalty will only be assessed if a solution is ultimately judged as correct.

## II. Names of Problems

Number	Name
Problem 1	Aaron
Problem 2	Chaoxiang
Problem 3	Déshì
Problem 4	Isabel
Problem 5	Klara
Problem 6	Linus
Problem 7	Logan
Problem 8	Polina
Problem 9	Rocío
Problem 10	Stelios
Problem 11	Vicente
Problem 12	Wally



## 1. Aaron

**Program Name:** Aaron.java

**Input File:** None

In computer science class Aaron has learned some basic output techniques and has been asked to produce the following output, which requires no input. Please help him achieve this task by writing a program for it.

```
.....  
  
_____  
^^^^^^^^^^^^^^^^^^^^  
]]]]]]]]]]]]]]]]]]]]  
\\\\\\\\\\\\\\\\\\\\\\  
[[[[[[[[[[[[[[[[[[[[
```

**Input:** None

**Output:** The six lines of output as shown above, the first consisting of twenty-one tilde characters (~), the next line twenty underscore symbols, then a row of caret symbols, followed by some right square brackets, backslashes, and finally a row of left square brackets. All of these characters can be found on the keyboard.

## 2. Chaoxiang

(pronounced “shauw sheng”)

**Program Name:** Chaoxiang.java

**Input File:** chaoxiang.dat

In science class, Chaoxiang is learning about Kelvin as it relates to Fahrenheit and has been taught two ways to convert from one to the other. He has decided to use his computer science skills and write a program, but still needs some help from you.

Write a program to input values from a file representing temperatures in Fahrenheit and express the equivalent value in the Kelvin temperature measuring system. This temperature scale was designed by Lord Kelvin (William Thomson, 1824-1907). Kelvin was a British inventor and scientist (he was born in Belfast, Northern Ireland in 1824).

The following chart represents three common temperatures in the three systems we use, with zero Kelvin representing the theoretical temperature called absolute zero, supposedly at which all molecular movement stops.

	Kelvin	Celsius	Fahrenheit
Water boils	373.16K	100°C	212°F
Water freezes	273.16K	0°C	32°F
Absolute zero	0K	-273.16°C	-459.68°F

(<http://www.enchantedlearning.com/chemistry/glossary/Kelvin.shtml> ... For reference AFTER the contest)

There are two generally recognized formulas to do this, shown below. Both will produce the same output, and will produce the correct values for this program.

$$K = (y^{\circ}\text{F} - 32) \times 5/9 + 273.16$$

$$K = (y^{\circ}\text{F} - 32) \div 1.8 + 273.16$$

**Input:** A data file containing several Fahrenheit values, each on one line.

**Output:** The equivalent Kelvin temperature measure, rounded and expressed to two places of precision.

**Sample input:**

212  
32  
-459.68

**Sample output:**

373.16  
273.16  
0.00

### 3. Déshi

**Program Name:** Deshi.java

**Input File:** deshi.dat

Deshi has just learned about strings in CS class, and wants to test her string processing skills. She creates some random strings using all lowercase letters and makes up a rule that determines whether or not the string fits a particular criteria.

She decides that a string is "ACCEPTABLE" if it has a good balance and sequence of vowels and consonants, and not acceptable if it does not.

The criteria she decides on is as follows:

- A string is "ACCEPTABLE" if there are never more than 7 consonants together in sequence, and never more than 4 vowels together, otherwise it is "NOT ACCEPTABLE".

For example, the string "eairphnanf" contains 10 characters and is "ACCEPTABLE" since the longest vowel sequence, "eai", is only 3 characters long and the longest consonant sequence, "rphn", is only 4 characters long.

The string "dekfqkexcx eoiecooqmjvkqujitie" is "NOT ACCEPTABLE" since there is a vowel sequence of length 5, "eoiee", exceeding her limit of 4.

The string "hqloiuyy cblqjsxo" is "NOT ACCEPTABLE" since there is a consonant sequence of length 8, "y cblqjsx", longer than 7, the consonant sequence length limit.

The string "utuqlezn ljaqih tbqiua oeezdldbkw dalc esee cyd" is NOT ACCEPTABLE for both situations. There is a consonant sequence of length 8, "zldbkw d", and a vowel sequence of length 6, "iuaoee", both exceeding the established limits.

**Input:** A data file of several strings, each containing a random sequence of only lowercase letters from the English alphabet, 'a' through 'z'.

**Output:** The word ACCEPTABLE or the phrase NOT ACCEPTABLE based on the rules stated above, followed by a single space, and then the string being tested.

**Assumptions:**

- The data file will contain no more than 50 strings.
- Each line will contain only one string.
- The length of each string will be no more than 50 and no fewer than 10 characters.

**Sample Input:**

```
eairphnanf
dekfqkexcx eoiecooqmjvkqujitie
hqloiuyy cblqjsxo
utuqlezn ljaqih tbqiua oeezdldbkw dalc esee cyd
```

**Sample Output:**

```
ACCEPTABLE eairphnanf
NOT ACCEPTABLE dekfqkexcx eoiecooqmjvkqujitie
NOT ACCEPTABLE hqloiuyy cblqjsxo
NOT ACCEPTABLE utuqlezn ljaqih tbqiua oeezdldbkw dalc esee cyd
```

## 4. Isabel

**Program Name:** Isabel.java

**Input File:** isabel.dat

Isabel is curious about her classmates, specifically on which day of the week they were born. She needs your help in devising an algorithm to do this, given only three values for each person: the year number, month number and day number of their birthday. She was born on September 9, 2003, which she knows was a Thursday. Two other friends, Rocio and Wally, were born on Christmas Day, 2004, a Saturday, and Halloween, 2003, a Friday, respectively. Klara was born on Friday, November 1, 2002.

She wants to output a list, sorted by day of the week, and then by first name, showing a report of all her classmates' birthdays. For two or more classmates born on the same day of the week, she needs them listed alphabetically by first name. In the sample output below, Wally and Klara are both born on Friday, and so Klara is listed first, then Wally.

**Input:** A data file consisting of several lines, each containing four items: a first name, followed by three integers representing birth year, month, and day, with single space separation.

**Output:** Each name, birth day of the week, and birthday in the format shown, listed first by day of the week in order from Sunday to Saturday, and then by first name for any names born on the same day of the week. The output format is as shown, with the name left aligned starting in column 1, the colon following the name located in column 12, and single space separation for the rest of the line.

**Sample input:**

```
Isabel 2003 9 18
Rocio 2004 12 25
Wally 2003 10 31
Klara 2002 11 1
```

**Sample output:**

```
Isabel      : Thursday, September 18, 2003
Klara       : Friday, November 1, 2002
Wally       : Friday, October 31, 2003
Rocio       : Saturday, December 25, 2004
```

## 5. Klara

**Program Name:** Klara.java

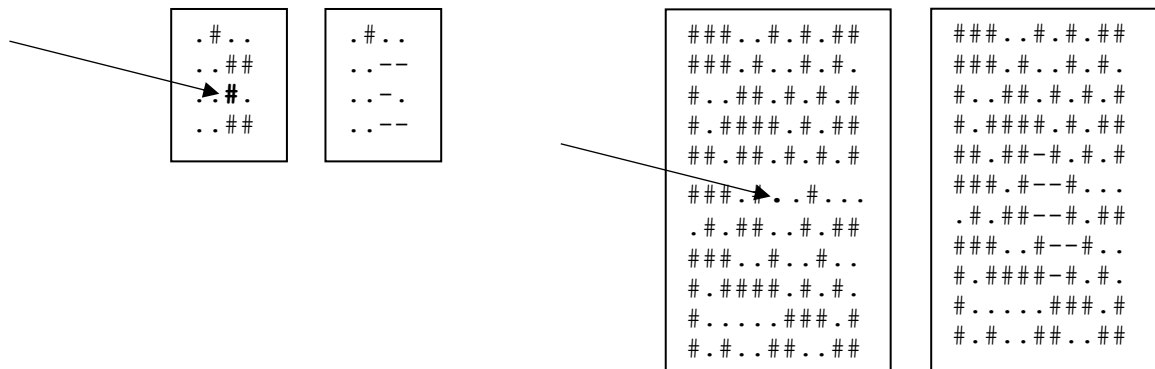
**Input File:** klara.dat

Klara is learning how to manipulate character grids and decides to do some experimenting with her newly learned techniques. She creates some random square character patterns, anywhere from 4 to 20 as the side dimension of the square, and uses two characters, the pound sign ('#') and the dot ('.') to fill the square. She then finds the very middle of the square, discovers what that character is, and then proceeds to change every instance of that character in the grid to a dash ('-'). However, to make it a bit more of a challenge, she decides that this can only happen if it is “accessible” from the middle, going up, left, down, or right, but not diagonally. If the other character is blocking the way, acting as a wall, she can’t go that way and has to find a way around somehow, if it is even possible. She discovers that sometimes she can’t change all the characters because they are unreachable.

Let’s look at two examples, shown in the boxes below. The size of the first grid is 4, which means the middle character is located in row 2, column 2, which contains a pound sign. All the remaining pounds signs are reachable, except for the one on the top row, which is blocked from being reached by dots, as shown in the second box.

The third box is an eleven by eleven grid, and the middle character of the box is a dot, which means she wants to change all of the dots to dashes. However, she can only reach a few of them as you can see in the second box since the pound signs are blocking the way and there is no way to reach the other dots.

Let’s look at one of her squares, shown in the first box on the right. The side length of the grid is 11, which means it has eleven rows and eleven characters in each row. The middle character of the box is a dot, which means she wants to change all of the dots to dashes. However, she can only reach a few of them as you can see in the fourth box since the pound signs are blocking the way and there is no way to reach the other dots.



**Input:** The data file will contain several sets of data, each set consisting of an integer N, followed by an N x N square grid of characters as described above.

**Output:** The resulting grid after changing all possible characters, reachable from the center character, to dashes as described above, followed by the string “=====”.

*(Sample input and output on next page)*

(Klara continued)

Sample input:

```
4
.#..
..##
..#.
..##
11
###...#.#.##
###.#...#.#.
#...##.#.#.#
#.#...#.#.#
##.##.#.#.#
###.#...#...
.#...#.#.#
###...#...#
#.#...#.#.#
#.....##.#
#.#...#.#.#
7
.#.####
#...#...
#...#.#
.####.
#.#...#
##.####
#...##.
```

Sample output:

```
.#..
..--
..-.
.---
====
###...#.#.##
###.#...#.#.
#...##.#.#.#
#.#...#.#.#
##.##-#.#.#
###.#--#...
.#.##-#.#.#
###...#--#...
#.#...#-#.#.
#.....##.#
#.#...#.#.#
====
.#.####
#...#...
#...-#.#
.----.
#.-...#
##.####
#...##.
=====
```

## 6. Linus

**Program Name:** Linus.java

**Input File:** linus.dat

Your little brother Linus is in the 4<sup>th</sup> grade, and his math class is learning all about fractions. Their most recent lesson was about reducing fractions to their lowest terms. Sometimes that is called simplifying the fraction. Linus has promised to do all your chores for a week if you will write a program for him that will reduce the fractions he has been assigned for homework. Of course, you have declined the opportunity because you don't want to set a bad example for Linus by enabling his cheating, but, since you are very handy with Java code let's see what that program might look like anyway.

The worksheet that Linus brought home for homework requires that all the fractions be reduced to their lowest terms and any improper fractions be written as a mixed number. They haven't learned about negative numbers yet and they don't know what to do if a denominator is zero so no need to worry about those situations. They have learned that zero divided by any number is equal to zero and that a number divided by itself is one.

Now, write a program that will reduce fractions to their lowest terms and display them in the proper format. Just don't show it to Linus!

**Input:** The first line of data will be a number N that represents the number of fractions to be reduced. There will be N more lines each containing two values separated by a space. The first number is the numerator and the second value the denominator. There will be no negative values and none of the denominators will be zero.

**Output:** For each of the lines of data print a simplified fraction or mixed number equivalent to the one given. Each proper fraction should be printed showing the numerator followed by a forward slash then the denominator with no spaces between any of the three. For example,  $3/4$ . If the fraction is improper, print the fraction as a mixed number. For example,  $3/2$  becomes  $1\ 1/2$ . Any fraction that reduces to a whole number should be printed as such with no fractional part displayed. For example,  $10/5$  simplifies as 2.

**Sample input:**

```
6
2 4
12 14
6 8
9 27
25 4
7 7
```

**Sample output:**

```
1/2
6/7
3/4
1/3
6 1/4
1
```

## 7. Logan

**Program Name: Logan.java**

**Input File: logan.dat**

Logan collects valuables of all sorts, including marbles, jewels, rocks, whatever is of interest and value to him. He keeps them in soft leather bags of assorted colors, each color unique, and has marked each bag with the weight, estimated value of the bag, and a general description of the contents. No two bags are identical. Two might weigh the same, but will be of different values. Two might have the same value, but have different weights.

He is about to load up a tote bag with as many of the colored bags as he can carry, to sell at the local flea market, but wants to maximize the value so that he can have the most value to sell. The tote bag has a weight limit he cannot exceed. He needs your help in deciding which of the colored bags he should put into the tote bag to get the most value to sell at the flea market.

For example, let's say that his tote bag has a weight capacity of 5 pounds, and he has 3 colored bags in inventory, one that is blue, another red, and a third green. The blue bag has a value of \$5 and weighs 3 pounds, the red bag is worth \$3 and weighs 2 pounds, and the green bag is worth \$4 and only weighs 1 pound. Altogether, the three bags weigh 6 pounds, too much to carry in the selected tote bag, which means Logan must decide the best two bags to take.

He considers each combination. The blue and red bags will fit, with a total weight of 5 pounds, and a total value of \$8. The red and green bags are not as valuable a combination, with 3 pounds of weight, but only a \$7 value. The best value combination is blue and green, with a combined weight of only 4 pounds, but a value of \$9, the best of all.

He does have tote bags of varying weight capacities, some that can handle up to 1000 pounds, and up to one hundred different colored bags that contain various precious items. Depending on the tote bag he chooses, and the number colored bags he has in his current inventory, write a program that helps Logan make the best decision about which colored bags to place in the selected tote bag in order to maximize the value of his flea market inventory.

**Assumptions:**

Tote bag weight range, 1 to 1000 pounds

Capacity of any colored bag, 1 to 100 pounds

Number of different colored bags, 1 to 100

Value of any particular bag, \$1 to \$100

Every bag has a unique single word color description, weight, and value combination, no bag the same as another.

**Input:** The data file will contain an initial integer N, indicating N data sets to follow. Each data set consists of an integer T representing the total weight capacity of the tote bag, an integer I indicating how many colored bags he has in inventory, followed by I sets of data, each on one line consisting of three items, an integer V representing the total value of the colored bag in dollars, an integer W indicating the weight of the colored bag in pounds, and the color of the bag. The description of the contents of the bag will not be considered in this process.

**Output:** For each data set, list the original weight capacity of the bag, how much of the weight capacity is used, the total value of the contents, and the colors of the bags included, listed in original order as listed in the data file. Each element of the output is shown on its own line.

*(Sample input and output on next page)*



(Logan, cont)

**Sample input:**

```
3
5
3
5 3 BLUE
3 2 RED
4 1 GREEN
6
5
1 5 BLUE
6 4 RED
4 3 GREEN
7 2 YELLOW
3 1 ORANGE
10
6
9 2 VIOLET
4 5 INDIGO
7 3 RED
6 7 PINK
2 1 BLACK
5 4 BROWN
```

**Sample output:**

```
5
4
$9
BLUE
GREEN
6
6
$14
GREEN
YELLOW
ORANGE
10
10
$23
VIOLET
RED
BLACK
BROWN
```

## 8. Polina

**Program Name:** Polina.java

**Input File:** polina.dat

In a recent CS lesson on encryption, the students were given an assignment to work with a partner to create their own encryption algorithm for encoding and decoding messages. After much thought, trial and error, Polina and her partner decided on the following encoding process.

1. For each code number following the message, convert it to an equivalent three-digit hexadecimal value. (They were careful to choose code numbers that would always convert to three digits in hex.)
2. If the first digit of the code number was even, for step 3 they would start counting from the left of the current message, otherwise they would count from the right side.
3. Switch the message characters in the places given by the 2nd and 3rd digits of the code number, counting from the side determined by step 2. (Polina was also careful to make sure these two digits for each code number were different, and also designated positions within the length of the message.)
4. Add an "A" to the left side of the message and "AA" to the right side.
5. Add the 1st character of the hex value to the left side of the message and the 3rd character to the right side.
6. Repeat steps 1, 2, 3 and 5 for each additional code number.

For example, if the message was "INVITATIONAL" and the code number is 914 (392 in hex), the encoding result would be "3AINVITATILNAOAA2". Since the code number first digit is odd, they counted from the right 1 and 4 places, and switching the characters "L" and "O", which resulted in "INVITATILNAO". They then added an "A" to the front and "AA" to the back, and finally put the first hex digit (3) at the front and the last hex digit (2) at the back, resulting in the final encoded message, "3AINVITATILNAOAA2".

For the message "DISTRICT" followed by two code numbers, 425 (1A9) and 562 (232), the first encoded message was "1ADRSTIICTAA9", and the final one "21ADRSTIACTAI92".

**Input:** Several messages, each on one line, followed by one or more code numbers (no more than ten) to be used to encode the message. All messages are single words containing all uppercase letters and no symbols or spaces.

**Output:** The encoded message according to the rules stipulated above, with all letters in uppercase.

**Sample input:**

```
INVITATIONAL 914
DISTRICT 425 562
UILCONTEST 691 472 456
```

**Sample output:**

```
INVITATIONAL 3AINVITATILNAOAA2
DISTRICT 21ADRSTIACTAI92
UILCONTEST 112OSLICANTEUTAA388
```

## 9. Rocío

**Program Name:** Rocio.java

**Input File:** rocio.dat

Output star patterns have always fascinated Rocio, and recently she came up with this design. She picks two integer values A and B, such that A represents a square the size of the entire pattern, and B will be the spine length of each corner, with the middle of the pattern being a square of stars. It's a bit difficult to express this, so look at the samples below. For the two values 7 and 2, the output shows a pattern contained within a 7 by 7 area, with the center of the pattern being a square of stars, and spines of length 2 extending diagonally from each corner. She picks two number such that B is always less than half the value of A, to make the pattern possible.

Write a program that creates the pattern she devised, and end each pattern with a line of equal signs to underline the pattern exactly.

**Input:** Several pairs of non-negative integers A and B, each pair on one line separated by a single space,  $A > B$ ,  $B < A/2$ .

**Output:** The pattern formed by these two integers, as described above and shown below. Each pattern is underlined with a row of equal signs of length A.

**Sample input:**

```
7 2
10 3
9 1
```

**Sample output:**

```
*      *
*      *
* * *
* * *
* * *
* * *
*      *
*      *
=====
*      *
*      *
*      *
* * * *
* * * *
* * * *
* * * *
*      *
*      *
*      *
=====
*      *
* * * * *
* * * * *
* * * * *
* * * * *
* * * * *
* * * * *
*      *
```


## 10. Stelios

**Program Name:** Stelios.java

**Input File:** stelios.dat

Stelios is researching efficient ways to make connections within graphs and needs to determine the fewest number of steps it takes to get from one node to any other node. He knows about the direct connections within a network system, but needs to know about the indirect connections as well, ones that take two or more steps to reach.


For example, in a simple graph as shown below, with nodes A, B and C, and direct connections between A and B, B and C, and A and C, it only takes one step to get from one node to any other node. The direct connections would be designated using alphabet pairs, like AB, BC and CA. The order of the letters in each pair does not matter. The link from A to B is the same as the link from B to A. The data could also be written BA, CB and AC and mean the same.



	A	B	C
A	0	1	1
B	1	0	1
C	1	1	0


This graph can be represented by a connection matrix such as the one shown above. The value 1 means there is a direct connection from one node to the next. The first 1 in the top row means that you can get from node A to node B in one step. The next 1 indicates the direct connection from node A to C. The first 1 in the second row indicates the connection from B to A, and so on.

In a four-way graph like the one shown below, indicated by these data pairs - **AB BC CD BD** - it may take more than one step to get from node to another, as you can see in the connection matrix. To get from A to either C or D takes two steps, which is indicated by all the 2 values in the grid: A to C, A to D, C to A, and D to A.



	A	B	C	D
A	0	1	2	2
B	1	0	1	1
C	2	1	0	1
D	2	1	1	0

In this 6-node graph, the one-step connections are designated as AB, AC, CF, BF, BD, BE and ED, resulting in a graph and connection matrix as shown below.



	A	B	C	D	E	F
A	0	1	1	2	2	2
B	1	0	2	1	1	1
C	1	2	0	3	3	1
D	2	1	3	0	1	2
E	2	1	3	1	0	2
F	2	1	1	2	2	0

The longest connections in this example are between nodes C and D, or C and E, going either direction, each taking three steps.

Stelios needs your help to write a program to calculate the connection matrix given the number of nodes in the graph, and a number of alphabet pairs representing the one-step connections within the graph.

**Input:** Several sets of data, each set consisting of an integer N, followed by several uppercase alphabet pairs on the same line, as described and shown above, with single space separation.

(Stelios, cont)

**Output:** The N x N connection matrix as described above and shown in the sample outputs below, each value of the matrix representing the fewest steps it takes to get between nodes. Single space separation is required between all values on each line. Each grid is followed by a dashed line exactly the length taken by the grid, as shown in the sample output below.

**Assumptions:**

- $3 \leq N \leq 26$
- The alphabet pairs will be derived from a set of sequential uppercase letters labeling the nodes of the graph, always starting with A and ending with the corresponding letter for the value of N, i.e. N = 5, last node letter is E, N = 6, last letter is F, etc. For example, a three-node graph will always use the letters A, B, and C, a four-node graph the letters A through D, a ten node graph the letters A through J, and so on.
- The most number of possible steps between any two nodes will be 9.

**Sample Input:**

```
3 AB BC CA
4 AB BC CD BD
6 AB AC CF BF BD BE ED
```

**Sample Output:**

```
0 1 1
1 0 1
1 1 0
-----
0 1 2 2
1 0 1 1
2 1 0 1
2 1 1 0
-----
0 1 1 2 2 2
1 0 2 1 1 1
1 2 0 3 3 1
2 1 3 0 1 2
2 1 3 1 0 2
2 1 1 2 2 0
-----
```

## 11. Vicente

**Program Name:** Vicente.java

**Input File:** vicente.dat

Bit parity is a new topic for Vicente and his fellow CS classmates, and they have been given a simple program assignment to take a binary string, determine its current parity, and make it even or odd.

Parity is a way to send data in such a way that the receiver has some idea if the value sent is in its original form, or if there might be an error due to data corruption during transmission of the signal, perhaps due to a packet collision as is known to happen on some network systems.

A simple way to do parity is to sum all the bits of the original message, decide on either an EVEN or ODD parity, let your receiver know what that parity is, and then ensure that the transmitted data fits that parity criteria.

For example, in a bit string like this one, 10110101, with EVEN parity required, the sum of the bits is 5, which means it currently has ODD parity, and needs to be adjusted. The adjustment process is simply to add a bit to the end of the string, either a zero or a 1, making it the desired parity. In this case a 1 is attached to the end to make the total sum 6 of the bits in string, which ensures EVEN parity.

The assignment is to read two items from a data file, the bit string itself and the parity required, and then adjust the bit string accordingly and then expressing both the original string and the parity adjusted string in hexadecimal form.

The original example above, 10110101, converts to B5 in hex, and the parity adjusted string, 101101011, converts to 16B. The same string with ODD parity results in the hex string 16A.

**Input:** A bit string and a parity designation, either EVEN or ODD, each on one line with a single space of separation.

**Assumption:** The original bit string will be of length 8, 16 or 32.

**Output:** Two uppercased hex values representing the original string and the parity-adjusted string, separated by a single space.

**Sample input:**

```
10110101 EVEN
10110101 ODD
1000000001110001 ODD
```

**Sample output:**

```
B5 16B
B5 16A
8071 100E2
```

## 12. Wally

**Program Name:** Wally.java

**Input File:** wally.dat

Wally is taking Computer Science 1 this year, and his class has gotten to the point where they need to learn about identifiers. They have learned that identifiers are the names given to various parts of programs such as variables, constants, methods and classes. Wally has also learned that the identifiers that he chooses for his programs must follow this set of rules.

- An identifier must be a sequence of characters that consist of letters, digits, underscores ( \_ ), and the dollar sign ( \$ ).
- An identifier must start with a letter, underscore or dollar sign. It cannot start with a digit.
- An identifier cannot be a keyword (reserved word).
- An identifier cannot be true, false, or null.

The CS teacher has provided the class with a list of keywords to learn, which are listed below.

abstract	do	implements	protected	throws
assert	double	import	public	transient
boolean	else	instanceof	return	true
break	enum	int	short	try
byte	extends	interface	static	void
case	false	long	strictfp	volatile
catch	final	native	super	while
char	finally	new	switch	
class	float	null	synchronized	
continue	for	package	this	
default	if	private	throw	

Wally is a bit of an over achiever, and has decided to come up with a list of valid identifiers that he can choose from whenever he needs one. He has created a long list of potential identifiers and stored them into a data file and now wants to write a program that will read that list and print out only the valid identifiers. What would Wally's program look like?

**Input:** The list of reserved words as shown above, ended by the value 999, followed by a list with an unknown number of potential identifiers each listed on a separate line. Each line of the data file contains either a reserved word, the 999 value indicating the end of the reserved words list, or potential identifiers after the 999 sentinel value.

**Output:** An alphabetized list of Wally's valid identifiers shown one per line.

<b>Sample input:</b>	final	return	num	<b>Sample output:</b>
abstract	finally	short	while	\$amount
assert	float	static	final	C3PO
boolean	for	strictfp	count	Control
break	if	super	3com	_time
byte	implements	switch	_time	alb2c3
case	import	synchronized	\$amount	count
catch	instanceof	this	this	num
char	int	throw	break	x
class	interface	throws	7seven	
continue	long	transient	8	
default	native	true	Control	
do	new	try	alb2c3	
double	null	void	C3PO	
else	package	volatile		
enum	private	while		
extends	protected	<b>999</b>		
false	public	x		



# UIL Computer Science Competition

## Invitational A 2018

### **JUDGES PACKET - CONFIDENTIAL**

#### **I. Instructions**

1. The attached printouts of the judge test data are provided for the reference of the contest director and programming judges. Additional copies may be made if needed for this purpose.
2. This packet must remain CONFIDENTIAL. Additional copies may be made and returned to schools when other confidential contest material is returned.

#### **II. Table of Contents**

Number	Name
Problem 1	Aaron
Problem 2	Chaoxiang
Problem 3	Déshì
Problem 4	Isabel
Problem 5	Klara
Problem 6	Linus
Problem 7	Logan
Problem 8	Polina
Problem 9	Rocío
Problem 10	Stelios
Problem 11	Vicente
Problem 12	Wally



**Problem #1**  
**60 Points**

**1. Aaron**

**Program Name: Aaron.java**

**Input File: None**

**Test Output To Screen**

.....

^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^

]]]]]]]]]]]]]]]]]]]]]]]]]]]]]

\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\

[[[[[[[[[[[[[[[[[[[[[[[[[[[[

**Problem #2**  
**60 Points**

## 2. Chaoxiang

**Program Name: Chaoxiang.java**

**Input File: chaoxiang.dat**

**Test Input File:**

```
212
32
-459.68
55
-20
500
-200
299.99
-456
```

**Test Output To Screen**

```
373.16
273.16
0.00
285.94
244.27
533.16
144.27
422.04
2.05
```

**Problem #3**  
**60 Points**

### 3. Déshì

**Program Name: Deshi.java**

**Input File: deshi.dat**

**Test Input File:**

```
eairphnanf
dekfqkexcxoeiiecooqmjvkqujitie
hqlouuycblgjsxo
utuqleznljagihbtbgiuaoeezdlbkwadalceseecyd
uqirqqrlfqekbmtii
bbooevaauliqzuaqzelbketgzepv
ducmixmbyebuccjsqrqabskcieixmiidpceacfezp
yieezaraieicrsdbigeuhbcottlncqebuewkmzel
auxuvnaoldqemuineiaubeuiaoudeoejaejaeilomknuciud
ibocmluyeajacgdbbnilbaujkhallqovniiaudjledqwkddje
xblcbwckaezekjnudggnqznqdegcu
mweulehfzguemcizdtdcdjikfwozmtrimacuje
ltijmeunonyaldombzamm
jl ijedruthmjbwkrncicuzoncu
ofayfucxda jizmewqjpeedasmloiuudlu
ipduteuwjlqpietjcekaijbae
jmkmokutieduicpeacheibomaxbtkldgdjyieircuaa
ajdmjgmqqedlkuceabrjjpjeneniemmduaiumokoiuyeoli
aqhoiiqqyidbiluuzfpebj
cbboniqijceuamjoaxjjga
abnmcccjyniefyowxebkriyuimubemijqdaiooglemyobe
muwmbpkcopuliuicm
ufdocdmqkl dbaupqcqgeourqjdkoiw
goueaazjayzenzauykumqddcdmbqutjtxaiqjyaogeede
uomasumgleoviopsmifcaisieauchjnuurmui
naoutkeuuan
eismoxiiouykieiearixjinynobzimuztuguytsi
kueiseemtavvmbbegicicwiafeenl
necnedcwqjd
orauilvpmqpaauhedcvnsujdjawezlooioqmbdkb
qdkemnanovuejomzatdoamxqveioieuoecooumgdocbe
veobjdzakevpikuukkcljderoirihhfkralei
guxexvsbdiuultuhofuphaldimuvzlduneiluaotclp
oknyozpiimecajlokbsrkxicfnjeathoocs
xeioangteullqoanbasfoxcoboieayiincducankrol
eoeagmdkduigldaf
yhjejbdbhullgeomdekedzaend
dzeikeauaescixyiqofjoeiqpeuedeej
eidlioallryeaaiiatavbdoualihoomb
izymsubbbqemga
bboudwoeafsgheohzashexvhkafediacu
beqqxeyuhekrewqpeaoteveugwluounkobtuuoedjupkudv
akmdnzsuqgriccdiuaejnkmekhjoyzodweicarkxoqti
bksnihrnodlufakldpqajiaelapdqou
uuuckdzyvyxoenjicplmope
sdrnlncikzjprdcqnfofoueocumu
bdjpwnaodlojqeaodguosalnxaioaujpfugeaunkgndimzo
hdapergcowuahimrju fkuouqvnsvxyqenejckvir
ectugvugvynueueuasol
epcoibebejtjdiawnocxajchfwaxgulqimoebbjjcl
```

(Deshi, cont)

Test Output To Screen

ACCEPTABLE eairphnanf  
 NOT ACCEPTABLE dekfqkexcxcxeoiiecooqmjvkqujitie  
 NOT ACCEPTABLE hqloiuyycblgjsxo  
 NOT ACCEPTABLE utuqleznljagihbtbqiuaoeezdldbkwadalceseecyd  
 ACCEPTABLE uqirqqrllfqekbmtii  
 ACCEPTABLE bbooevaauliqzuaqzelbketgzevp  
 NOT ACCEPTABLE ducmixmbyebbcjsqrqabskcieixmiidpceacfezp  
 ACCEPTABLE yieezaraieicrsdbigeuhbcottlncqebuewkmzel  
 NOT ACCEPTABLE auxuvnaoldqemuineiaubeuiaoudeoejaejaeilomknuciud  
 ACCEPTABLE ibocmluyeajacgdbbnlbaujkhallqovniiaudjledqwkddje  
 NOT ACCEPTABLE xblcbwckaezekjnudggnqznzqdegcu  
 ACCEPTABLE mweulehfhzguemcizdtdcjikfwozmtrimacuje  
 ACCEPTABLE ltijmeunonyaldombzamm  
 NOT ACCEPTABLE jlijedruthmjbwkrncicuzoncu  
 ACCEPTABLE ofayfucxdajizmewqjpeedasmlouiuudlu  
 ACCEPTABLE ipduteuwjllqpietjcekaijbae  
 NOT ACCEPTABLE jmkmokutieduicpeacbeibomaxbtkdldgdyieircuaa  
 NOT ACCEPTABLE ajdmjgmqqedlkuceabrjppjeneniemmduaiaumokoiuyeoli  
 ACCEPTABLE aqhoiiqqyidbiluuzfpebj  
 ACCEPTABLE cbboniqijceuamjoaxjjga  
 NOT ACCEPTABLE abnmcccjynieifyowxebkriyuimubemijqdaiooglemyobe  
 ACCEPTABLE muwmbpkcopuliuicm  
 NOT ACCEPTABLE ufdocdmqkldbaupqcqgeourqjdkoiw  
 NOT ACCEPTABLE goueaazjayzenzauykumqddcdmbqutjttxaiqjyaogeede  
 ACCEPTABLE uomasumqleoviopsmifcalsieauchjnuurmui  
 ACCEPTABLE naoutkeuan  
 NOT ACCEPTABLE eismoxiiouykueiearixjinynobzimuuztuguytsi  
 ACCEPTABLE kueiseemtavvmbbegcicwiaefeenl  
 ACCEPTABLE necnedcwqjd  
 NOT ACCEPTABLE orauilvpmqpaaaauhedcvnsujdjawezlooioqmbdkb  
 NOT ACCEPTABLE qdkemnanovuejomzatdoamxqveioieuoecooumgdocbe  
 ACCEPTABLE veobjdzakevpikuukkcljderoirihhfkralei  
 ACCEPTABLE guxexvsbdiuultuhofuphaldimuvzlduneiluaotclp  
 ACCEPTABLE oknyozpiimecajlokbsrkxicfnjeathoocs  
 ACCEPTABLE xeioangteullqoanbasfoxcoboieayiincluducanvkrol  
 NOT ACCEPTABLE eoeagmdkduigldaf  
 ACCEPTABLE yhjejbdjhullgeomdekedzaend  
 NOT ACCEPTABLE dzeikeauaescixyiqofjoeiqpeuedeej  
 NOT ACCEPTABLE eidlioallryeaaiiatavbdoualihoomb  
 ACCEPTABLE izymsubbbqemga  
 ACCEPTABLE bboudwoeafsgheohzashexvhkafediacu  
 ACCEPTABLE beqqxeyuhekrewqpeaoteveugwluounkobtuuoedjupkudv  
 ACCEPTABLE akmdnzsuqriccdiuaejnkmekhjyozdweicarkxoqti  
 ACCEPTABLE buksnihrnodlufakldpqajiaelapdqou  
 NOT ACCEPTABLE uuuckdzyvyxoenjicplmope  
 NOT ACCEPTABLE sdrnlncikzjprdcqnfofoueocumu  
 NOT ACCEPTABLE bdjpwnaodlojgeaodguosalnxaioaujpfugeaunkgndimzo  
 ACCEPTABLE hdapergcowuahimrjufkuouquvnxsyqenejckvir  
 NOT ACCEPTABLE ectugvugvyneueuasol  
 ACCEPTABLE epcoibebejtjdiawnocxajchfwaxgulqimoebbjjcl

**Problem #4**  
**60 Points**

**4. Isabel**

**Program Name: Isabel.java**

**Input File: isabel.dat**

**Test Input File:**

```
Isabel 2003 9 18
Rocio 2004 12 25
Wally 2003 10 31
Klara 2002 11 1
Chaoxiang 2001 2 16
Stelios 2002 6 6
Linus 2001 4 21
Deshi 2002 3 7
Logan 2003 8 17
Polina 2002 5 15
Vicente 2001 7 9
Aaron 2000 1 23
```

**Test Output To Screen**

```
Aaron      : Sunday, January 23, 2000
Logan      : Sunday, August 17, 2003
Vicente    : Monday, July 9, 2001
Polina     : Wednesday, May 15, 2002
Deshi      : Thursday, March 7, 2002
Isabel     : Thursday, September 18, 2003
Stelios    : Thursday, June 6, 2002
Chaoxiang  : Friday, February 16, 2001
Klara      : Friday, November 1, 2002
Wally      : Friday, October 31, 2003
Linus      : Saturday, April 21, 2001
Rocio     : Saturday, December 25, 2004
```

**Problem #5**  
**60 Points**

## 5. Klara

**Program Name: Klara.java**

**Input File: klara.dat**

**Test Input File:**

```

4
.#..
..##
..#.
..##
11
###..#.#.##
###.#.#.#.#
#..##.#.#.#
#.#.#.#.#.#
###.#.#.#.#
###.#.#.#...
.#.##.#.#.#
###..#.#.#..
#.#.#.#.#.#
#.....##.#
#.#.#.#.#.#
7
.#.####
#..#...
#...#.#
.####..
#.#...#
##.####
#...##.
17
.##.....#.....
#.#.#.#.#.#.#.#
..##.##.##.##.
#.#.#.#.#.#.#.#
.#.#.#.#.#.#.#
#.#.#.#.#.#.#.#
#.#.#.#.#.#.#.#
#.#.#.#.#.#.#.#
#.#.#.#.#.#.#.#
#.#.#.#.#.#.#.#
13
13
##.##..#.#.#.
.#.#.....#.#.
.....###....
...#.....##.#
###.#.....###
.#.....#.#.#
###..#.#.#....
.#.#.....#.#.
.....#.....#
..##..#.....#
##.....##..#.#
...##.#.#.#.
#.#.#.#.#.#.#
18
#..#.....##.#####
.....##.#.#####
##.##.....#.....##
##..#.#.#.#.#.##.
...#.#.#.#.#.##.
#####.###.###.#
###.....#.....###..#
...#.....#.#.#.#...
#.#.....###..##..
#.#.#####.#.#.#.
.###..##.#.###....
.#..#.....#.#.#.##
#.....#.#.###.###
##..##..##.###.##
#..##.#####.#.#.#.
#..#.#.#.#.#.##.
#####...#.#.#####
...#####.#.....#

```



**Problem #6**  
**60 Points**

**6. Linus**

**Program Name: Linus.java**

**Input File: linus.dat**

**Test Input File:**

```
16
2 4
12 14
6 8
9 27
25 4
7 7
5 7
2 10
26 13
26 14
0 5
1 5
381 549
9 18
18 9
18 10
```

**Test Output To Screen**

```
1/2
6/7
3/4
1/3
6 1/4
1
5/7
1/5
2
1 6/7
0
1/5
127/183
1/2
2
1 4/5
```



**Problem #7**  
**60 Points**

## 7. Logan

**Program Name: Logan.java**

**Input File: logan.dat**

**Test Input File:**

5	15 53 O	41 2 AD	77 47 BO
5	20 88 P	6 72 AE	26 68 BP
3	25 73 Q	58 26 AF	24 39 BQ
5 3 BLUE	30 83 R	52 2 AG	45 18 BR
3 2 RED	35 93 S	82 76 AH	86 91 BS
4 1 GREEN	40 103 T	12 2 AI	90 23 BT
6	1000	2 40 AJ	71 39 BU
5	100	3 29 AK	2 56 BV
1 5 BLUE	84 62 A	19 66 AL	99 36 BW
6 4 RED	49 14 B	87 39 AM	76 77 BX
4 3 GREEN	98 24 C	1 45 AN	32 31 BY
7 2 YELLOW	79 64 D	85 41 AO	62 29 BZ
3 1 ORANGE	17 22 E	64 90 AP	78 11 CA
10	8 8 F	59 97 AQ	4 17 CB
6	13 56 G	58 81 AR	97 9 CC
9 2 VIOLET	98 62 H	34 68 AS	47 49 CD
4 5 INDIGO	73 32 I	98 16 AT	31 92 CE
7 3 RED	12 1 J	65 43 AU	86 17 CF
6 7 PINK	59 72 K	4 33 AV	19 85 CG
2 1 BLACK	74 13 L	86 94 AW	9 92 CH
5 4 BROWN	59 41 M	96 7 AX	67 88 CI
100	18 11 N	37 49 AY	9 29 CJ
20	66 98 O	91 87 AZ	58 46 CK
1 1000 A	34 23 P	72 92 BA	100 99 CL
49 25 B	68 37 Q	98 45 BB	1 16 CM
14 19 C	24 1 R	32 95 BC	18 37 CN
73 61 D	82 85 S	68 66 BD	60 18 CO
9 23 E	58 2 T	76 76 BE	70 97 CP
52 11 F	54 60 U	98 60 BF	27 13 CQ
7 54 G	37 51 V	18 31 BG	75 53 CR
14 14 H	2 23 W	20 72 BH	48 96 CS
7 2 I	78 47 X	22 53 BI	80 70 CT
16 4 J	18 50 Y	95 95 BJ	57 5 CU
88 42 K	62 47 Z	6 8 BK	56 17 CV
82 23 L	33 6 AA	36 21 BL	
5 33 M	54 45 AB	21 72 BM	
10 43 N	21 71 AC	1 96 BN	

# UIL – Computer Science Programming Judge Packet – Invitational A - 2018

(Logan, cont)

Test Output To Screen

5	M
4	N
\$9	P
BLUE	Q
GREEN	R
6	T
6	X
\$14	Z
GREEN	AA
YELLOW	AD
ORANGE	AF
10	AG
10	AI
\$23	AM
VIOLET	AO
RED	AT
BLACK	AU
BROWN	AX
100	BB
96	BF
\$259	BL
F	BO
H	BR
I	BT
J	BU
K	BW
L	BZ
1000	CA
1000	CC
\$2644	CF
B	CO
C	CQ
H	CR
I	CU
J	CV
L	

**Problem #8**  
**60 Points**

**8. Polina**

**Program Name: Polina.java**

**Input File: polina.dat**

**Test Input File:**

```
INVITATIONAL 914
DISTRICT 425 562
UILCONTEST 691 472 456
ELEPHANT 756 451
GIRAFFE 451 284 962 942
CHEETAH 962 756
RHINOCEROS 693 454 314 285
CHIMPANZEE 325 451 314 586 618 442
COMPUTERS 325
PROGRAMMING 962 451 618
ZEBRA 451 314 586 618 442
PACKETSWEEP 756 451 284 693 942 876 693 454 314 285
```

**Test Output To Screen**

```
INVITATIONAL 3AINVITATILNAA2
DISTRICT 21ADRSTIACTAI92
UILCONTEST 112OSLICANTEUTAA388
ELEPHANT 1PAEL2EHANTAA43
GIRAFFE 3311AFFRAG3EACIA2E
CHEETAH 23ACAEETHAA24
RHINOCEROS 1112ANOHROCERIS6A5AAD
CHIMPANZEE 12111IACH2MPENEAZ3A5AAAAA
COMPUTERS 1ACOMPTEUSAA5
PROGRAMMING 2ROAPR3G1NMMIAGAA23A
ZEBRA 1211EAARB23AAZAAAA
PACKETSWEEP 1112311A3PEA22KCSTWEEPAAC3456C5EAD
```

### Problem #9

60 Points

## 9. Rocio

**Program Name: Rocio.java**

**Input File: rocio.dat**

**Test Input File:**

7 2	12 4	6 2
10 3	10 3	10 4
9 1	30 12	
11 3	3 1	

## Test Output To Screen

[illegible]

**Problem #10**  
**60 Points**

# 10. Stelios

**Program Name: Stelios.java**

**Input File: stelios.dat**

**Test Input File:**

```
3 AB BC CA
4 AB BC CD BD
6 AB AC CF BF BD BE ED
5 AB BD DA DC DE
7 AB BC CD DE EF FG BD CF GA
8 HG GF FE ED DC CB BA
9 AB BC CD EF GH EI FE
12 AB BC CD EF GH EI FE AK KJ JI BJ KB BD GK LA
25 AB BC CD EF GH EI FE AK KJ JI BJ KB BD GK LA AM AN BO CP DQ ER FS GT HU IV JW KX LY
```

**Test Output To Screen**

```
0 1 1
1 0 1
1 1 0
-----
0 1 2 2
1 0 1 1
2 1 0 1
2 1 1 0
-----
0 1 1 2 2 2
1 0 2 1 1 1
1 2 0 3 3 1
2 1 3 0 1 2
2 1 3 1 0 2
2 1 1 2 2 0
-----
0 1 2 1 2
1 0 2 1 2
2 2 0 1 2
1 1 1 0 1
2 2 2 1 0
-----
0 1 2 2 3 2 1
1 0 1 1 2 2 2
2 1 0 1 2 1 2
2 1 1 0 1 2 3
3 2 2 1 0 1 2
2 2 1 2 1 0 1
1 2 2 3 2 1 0
-----
0 1 2 3 4 5 6 7
1 0 1 2 3 4 5 6
2 1 0 1 2 3 4 5
3 2 1 0 1 2 3 4
4 3 2 1 0 1 2 3
5 4 3 2 1 0 1 2
6 5 4 3 2 1 0 1
7 6 5 4 3 2 1 0
-----
0 1 2 3 0 0 0 0 0
1 0 1 2 0 0 0 0 0
2 1 0 1 0 0 0 0 0
3 2 1 0 0 0 0 0 0
0 0 0 0 0 1 0 0 1

0 0 0 0 1 0 0 0 2
0 0 0 0 0 0 0 1 0
0 0 0 0 0 0 1 0 0
0 0 0 0 1 2 0 0 0
-----
0 1 2 2 4 5 2 3 3 2 1 1
1 0 1 1 3 4 2 3 2 1 1 2
2 1 0 1 4 5 3 4 3 2 2 3
2 1 1 0 4 5 3 4 3 2 2 3
4 3 4 4 0 1 4 5 1 2 3 5
5 4 5 5 1 0 5 6 2 3 4 6
2 2 3 3 4 5 0 1 3 2 1 3
3 3 4 4 5 6 1 0 4 3 2 4
3 2 3 3 1 2 3 4 0 1 2 4
2 1 2 2 2 3 2 3 1 0 1 3
1 1 2 2 3 4 1 2 2 1 0 2
1 2 3 3 5 6 3 4 4 3 2 0
-----
0 1 2 2 4 5 2 3 3 2 1 1 1 1 2 3 3 5 6 3 4 4 3 2 2
1 0 1 1 3 4 2 3 2 1 1 2 2 2 1 2 2 4 5 3 4 3 2 2 3
2 1 0 1 4 5 3 4 3 2 2 3 3 3 2 1 2 5 6 4 5 4 3 3 4
2 1 1 0 4 5 3 4 3 2 2 3 3 3 2 2 1 5 6 4 5 4 3 3 4
4 3 4 4 0 1 4 5 1 2 3 5 5 4 5 5 1 2 5 6 2 3 4 6
5 4 5 5 1 0 5 6 2 3 4 6 6 6 5 6 6 2 1 6 7 3 4 5 7
2 2 3 3 4 5 0 1 3 2 1 3 3 3 3 4 4 5 6 1 2 4 3 2 4
3 3 4 4 5 6 1 0 4 3 2 4 4 4 4 5 5 6 7 2 1 5 4 3 5
3 2 3 3 1 2 3 4 0 1 2 4 4 4 3 4 4 2 3 4 5 1 2 3 5
2 1 2 2 2 3 2 3 1 0 1 3 3 3 2 3 3 3 4 3 4 2 1 2 4
1 1 2 2 3 4 1 2 2 1 0 2 2 2 2 3 3 4 5 2 3 3 2 1 3
1 2 3 3 5 6 3 4 4 3 2 0 2 2 3 4 4 6 7 4 5 5 4 3 1
1 2 3 3 5 6 3 4 4 3 2 2 0 2 3 4 4 6 7 4 5 5 4 3 3
1 2 3 3 5 6 3 4 4 3 2 2 0 3 4 4 6 7 4 5 5 4 3 3
2 1 2 2 4 5 3 4 3 2 2 3 3 3 0 3 3 5 6 4 5 4 3 3 4
3 2 1 2 5 6 4 5 4 3 3 4 4 4 3 0 3 6 7 5 6 5 4 4 5
3 2 2 1 5 6 4 5 4 3 3 4 4 3 3 0 6 7 5 6 5 4 4 5
5 4 5 5 1 2 5 6 2 3 4 6 6 6 5 6 6 0 3 6 7 3 4 5 7
6 5 6 6 2 1 6 7 3 4 5 7 7 7 6 7 7 3 0 7 8 4 5 6 8
3 3 4 4 5 6 1 2 4 3 2 4 4 4 4 5 5 6 7 0 3 5 4 3 5
4 4 5 5 6 7 2 1 5 4 3 5 5 5 5 6 6 7 8 3 0 6 5 4 6
4 3 4 4 2 3 4 5 1 2 3 5 5 5 4 5 5 3 4 5 6 0 3 4 6
3 2 3 3 3 4 3 4 2 1 2 4 4 4 3 4 4 4 5 4 5 3 0 3 5
2 2 3 3 4 5 2 3 3 2 1 3 3 3 3 4 4 5 6 3 4 4 3 0 4
2 3 4 4 6 7 4 5 5 4 3 1 3 3 4 5 5 7 8 5 6 6 5 4 0
```

**Problem #11**  
**60 Points**

## 11. Vicente

**Program Name:** Vicente.java

**Input File:** vicente.dat

**Test Input File:**

```
10110101 EVEN
10110101 ODD
1000000001110001 ODD
10110100 EVEN
10110100 ODD
1101001011000111 EVEN
1111111111111110 ODD
10101010011000101010101001100010 ODD
11111111111111111111111111111110 EVEN
```

**Test Output To Screen**

```
B5 16B
B5 16A
8071 100E2
B4 168
B4 169
D2C7 1A58F
FFFE 1FFFC
AA62AA62 154C554C5
FFFFFFFFE 1FFFFFFFFFD
```

**Problem #12**  
**60 Points**

## 12. Wally

**Program Name: Wally.java**

**Input File: wally.dat**

**Test Input File:**

abstract  
assert  
boolean  
break  
byte  
case  
catch  
char  
class  
continue  
default  
do  
double  
else  
enum  
extends  
false  
final  
finally  
float  
for  
if  
implements  
import  
instanceof  
int  
interface

long  
native  
new  
null  
package  
private  
protected  
public  
return  
short  
static  
strictfp  
super  
switch  
synchronized  
this  
throw  
throws  
transient  
true  
try  
void  
volatile  
while  
999  
x  
num  
while

final  
count  
3com  
\_time  
\$amount  
this  
break  
7seven  
8  
Control  
alb2c3  
C3PO  
TEMP  
a123456  
elapsed time  
true  
false  
null  
Q13  
abc%def  
123456789  
valid  
valid\_identifier  
value\$  
double  
Int  
#hashtag

**Test Output To Screen**

\$amount  
C3PO  
Control  
Int  
Q13  
TEMP  
\_time  
a123456  
alb2c3  
count  
num  
valid  
valid\_identifier  
value\$  
x