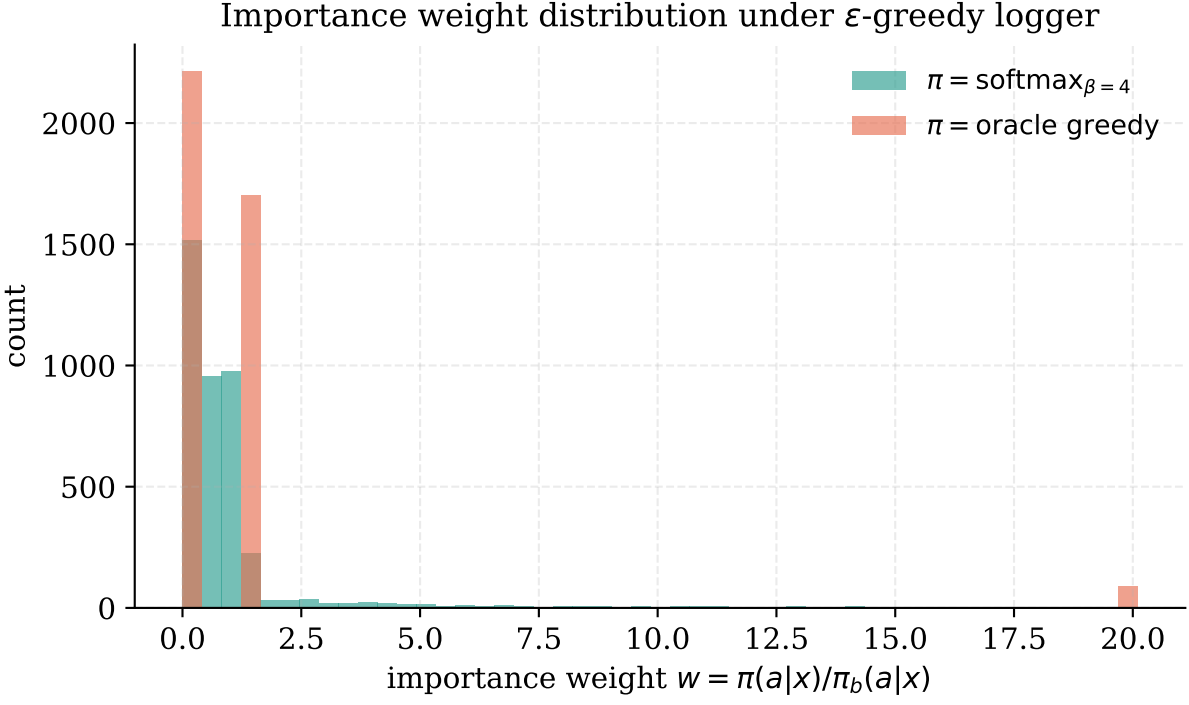
Importance weight distribution under ε-greedy logger
π = softmax_{β = 4}
π = oracle greedy
count
2000
1500
1000
500
0
0.0
2.5
5.0
7.5
10.0
12.5
15.0
17.5
20.0
importance weight w = π(a|x)/π_b(a|x)