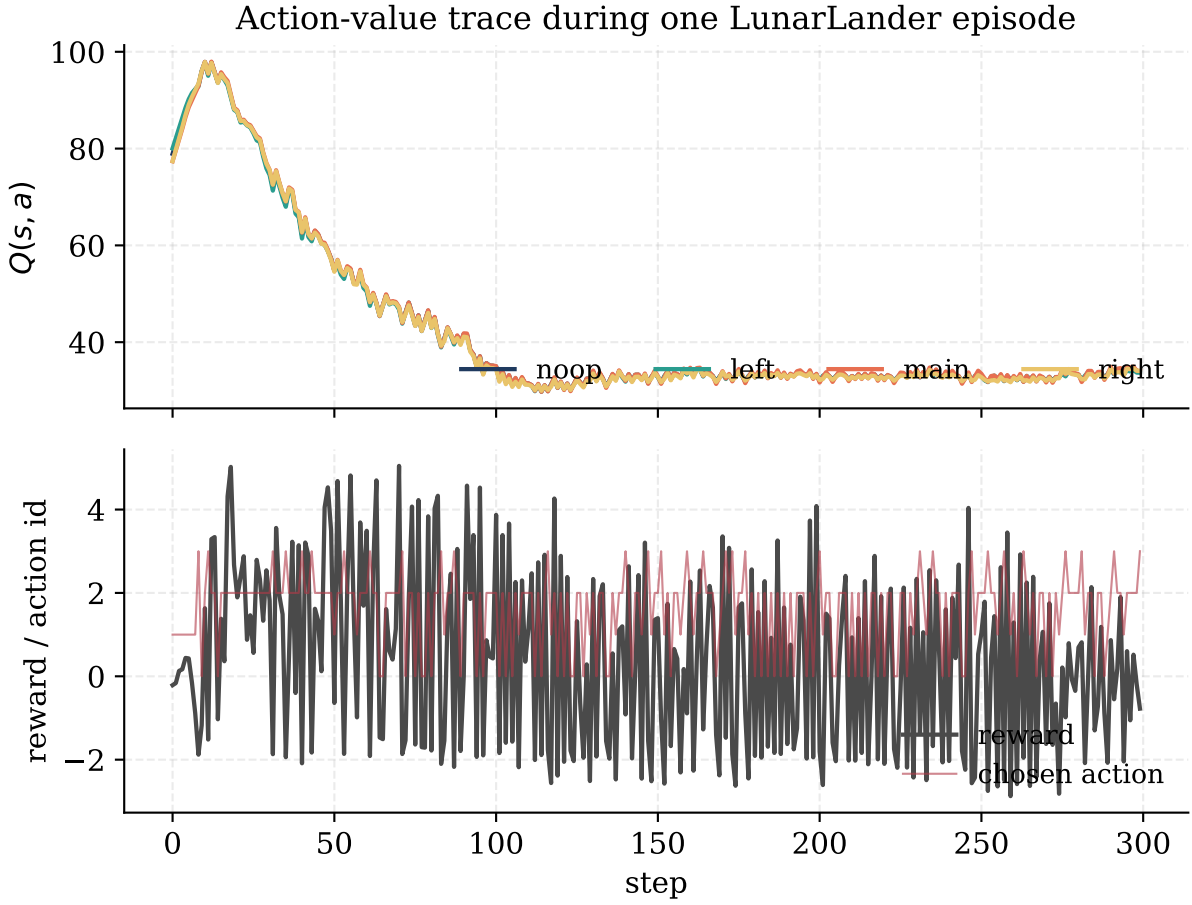
Action-value trace during one LunarLander episode
100
80
60
40
$Q(s, a)$
noop
left
main
right
4
2
0
−2
reward / action id
reward
chosen action
0
50
100
150
200
250
300
step