

Name: Samuel Alejandro Cueva Lozano

Batch code: LISUM01

Submission date: 07/07/2021

Submitted to: Data Glacier

1. Model Creation

I'm going to use a Tensorflow model to detect COVID-19 in chest x-rays, this model has already been trained by me and its trained weights will be loaded into a restored model.

The code to train the model is on my [Github](#)

The trained weights is on my [Google Drive](#)

2. Model Building

Preprocess function

```
import tensorflow as tf

path_weights = 'weights_covidResnet/cp-0030.ckpt'

def preprocess_image(path, image_size):
    raw_img = tf.keras.preprocessing.image.load_img(path)
    img_array = tf.keras.preprocessing.image.img_to_array(raw_img)
    img = tf.keras.preprocessing.image.smart_resize(img_array, image_size)
    img = tf.expand_dims(img, 0)
    return img
```

Function to create COVID-RESNET model.

```
def create_covidResnet(base_model):
    """create top layers to customize ResNet50
    to a network for Covid-19 detection"""

    input = tf.keras.Input(shape=(256, 256, 3))
    preprocess_input = tf.keras.applications.resnet.preprocess_input(input)
    model_base = base_model(preprocess_input)
    global_average_layer = tf.keras.layers.GlobalAveragePooling2D()(model_base)
    drop_out_1 = tf.keras.layers.Dropout(0.4)(global_average_layer)
    dense_layer = tf.keras.layers.Dense(4096, activation='relu')(drop_out_1)
    drop_out_2 = tf.keras.layers.Dropout(0.4)(dense_layer)
    output_model = tf.keras.layers.Dense(3, activation='softmax')(drop_out_2)

    # create the model
    model = tf.keras.models.Model(inputs=input, outputs=output_model)

    return model
```

Create and serialize the model by using a Resnet-50 as base model, the method 'save' is used to serialize the model.

```
# create the base model(Resnet 50)
resnet50 = tf.keras.applications.ResNet50(include_top=False, input_shape=(256, 256, 3),
                                         weights=None)

# create COVID-RESNET
covid_resnet = create_covidResnet(resnet50)

# Load the trained weights into the model
covid_resnet.load_weights(path_weights)

# Save the trained model
covid_resnet.save('covid_resnet_model')
```

3. Define an endpoint for API

Hyper parameters and model loading, Keras function 'load_model' is used to deserialize the model that was saved in the file 'covid_resnet_model'

```
from flask import Flask, render_template, request
import tensorflow as tf
from model import preprocess_image
import numpy as np

IMAGE_SIZE = (256, 256)
PATHOLOGIES = ['COVID-19', 'NORMAL', 'PNEUMONIA']
path_img = 'images/image.jpg'
# To load the serialized model
model = tf.keras.models.load_model('covid_resnet_model')
```

Create the endpoint to submit a chest x-ray image and return the pathology (COVID19, pneumonia, normal)

```
app = Flask(__name__)

@app.route('/')
def home():
    return render_template('index.html')

@app.route('/predict', methods=['POST'])
def predict():
    print(type(request.files['image']))
    request.files['image'].save(
        path_img) # this save the image in a path but in production maybe it's not the better
    output = model.predict(preprocess_image(path_img, IMAGE_SIZE))[0]

    prediction = PATHOLOGIES[np.argmax(output)]
    p = output[np.argmax(output)] * 100

    return render_template('index.html',
                           prediction='The x-ray result is: {} with a {:.2f} % probability'.format(
                               prediction, p))
```

HTML Template (index.html) to send the image

```
<body>
<div class="container">
<form action="/predict" method="post" enctype="multipart/form-data">
  <input class="btn" id="imageinput" type="file" name="image" onchange="readUrl(this)" oninvalid="th
  <br />
  <img id="imgSalida" width="50%" height="50%" src="" />
  <br />
  <button class="btn" type="submit" name="send" id = "sendbutton">Send</button>
</form>
</div>
<div class="container">
  <br />
  <div class="result"><p>{{prediction}}</p></div>
</div>
</body>
```

Add CSS and Javascript files to load and preview the image

```
$(window).load(function(){

  $(function() {
    $('#imageinput').change(function(e) {
      addImage(e);
    });

    function addImage(e){
      var file = e.target.files[0],
          imageType = /image.*/;

      if (!file.type.match(imageType))
        return;

      var reader = new FileReader();
      reader.onload = fileOnload;
      reader.readAsDataURL(file);
    }
  })
})
```

```
.container{
  background-color: #fafafa;
  margin: 1rem;
  padding: 1rem;
  border: 2px solid #ccc;
  text-align: center;
}

.btn{
  display: block;
  padding: 10px 21px;
  border: none;
  color: #fff;
  font-size: 18px;
  background-color: #3991A9;
  border-radius: 3px;
  cursor: pointer;
  border-bottom: 3px solid #237085;
  font-family: sans-serif;
  text-align: center;
```

Work tree

```
app.py
covid_resnet_model
├── assets
├── saved_model.pb
├── variables
│   ├── variables.data-00000-of-00001
│   └── variables.index
images
├── image
├── image.jpg
model
model.py
├── pycache
├── model.cpython-38.pyc
resnet_images
├── Covid_1.jpg
├── covid_2.jpg
├── normal_1.jpg
├── normal_2.jpg
├── pneumonia_1.jpg
├── pneumonia_2.jpg
static
├── index.css
├── index.js
templates
├── index.html
├── result.html
weights_covidResnet
├── checkpoint
├── cp-0030.ckpt.data-00000-of-00001
├── cp-0030.ckpt.index
9 directories, 22 files
```

4. Run Flask App

Head to the project directory and activate the conda environment

```
samuelcueva@debiansc:~$ cd machine_learning/deploy_covid_resnet/
samuelcueva@debiansc:~/machine_learning/deploy_covid_resnet$ conda activate ml
(ml) samuelcueva@debiansc:~/machine_learning/deploy_covid_resnet$ ls -l
total 36
-rw-r--r-- 1 samuelcueva samuelcueva 1218 jul  8 01:47 app.py
drwxr-xr-x 4 samuelcueva samuelcueva 4096 jul  8 01:36 covid_resnet_model
drwxr-xr-x 2 samuelcueva samuelcueva 4096 jul  6 23:30 images
-rw-r--r-- 1 samuelcueva samuelcueva   0 jul  5 22:06 model
-rw-r--r-- 1 samuelcueva samuelcueva 1538 jul  7 23:59 model.py
drwxr-xr-x 2 samuelcueva samuelcueva 4096 jul  8 00:51 __pycache__
drwxr-xr-x 2 samuelcueva samuelcueva 4096 jul  8 01:07 resnet_images
drwxr-xr-x 2 samuelcueva samuelcueva 4096 jul  8 00:30 static
drwxr-xr-x 2 samuelcueva samuelcueva 4096 jul  7 00:16 templates
drwxr-xr-x 2 samuelcueva samuelcueva 4096 jul  5 18:59 weights_covidResnet
```

Run the 'app.py' file and open the URL where the flask app is running

```
(ml) samuelcueva@debiansc:~/machine_learning/deploy_covid_resnet$ python app.py
2021-07-08 17:40:01.985049: I tensorflow/compiler/jit/xla_cpu_device.cc:41] Not creating XLA devices, tf_xla_enable_xla_devices not set
2021-07-08 17:40:01.985646: I tensorflow/core/platform/cpu_feature_guard.cc:142] This TensorFlow binary is optimized with oneAPI Deep Neural Network Library (oneDNN) to use the following CPU instructions in performance-critical operations: SSE4.1 SSE4.2 AVX AVX2 FMA
To enable them in other operations, rebuild TensorFlow with the appropriate compiler flags.
2021-07-08 17:40:02.047841: I tensorflow/core/common/runtime/process_util.cc:146] Creating new thread pool with default inter op setting: 2. Tune using inter_op_parallelism_threads for best performance.
2021-07-08 17:40:17.021689: W tensorflow/python/util/util.cc:348] Sets are not currently considered sequences, but this may change in the future, so consider avoiding using them.
WARNING:tensorflow:No training configuration found in save file, so the model was *not* compiled. Compile it manually.
* Serving Flask app 'app' (lazy loading)
* Environment: production
  WARNING: This is a development server. Do not use it in a production deployment.
  Use a production WSGI server instead.
* Debug mode: on
* Running on http://127.0.0.1:5000/ (Press CTRL+C to quit)
```

4. Predicting results using Enpoints


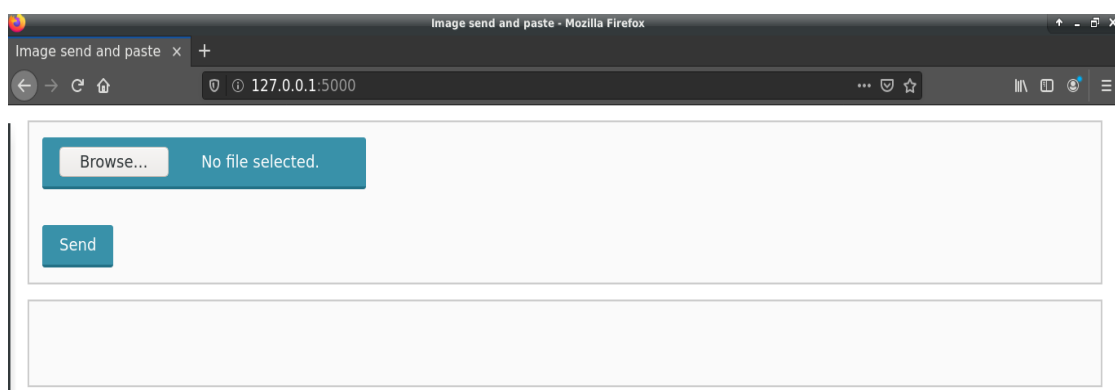


Image Loading



Response

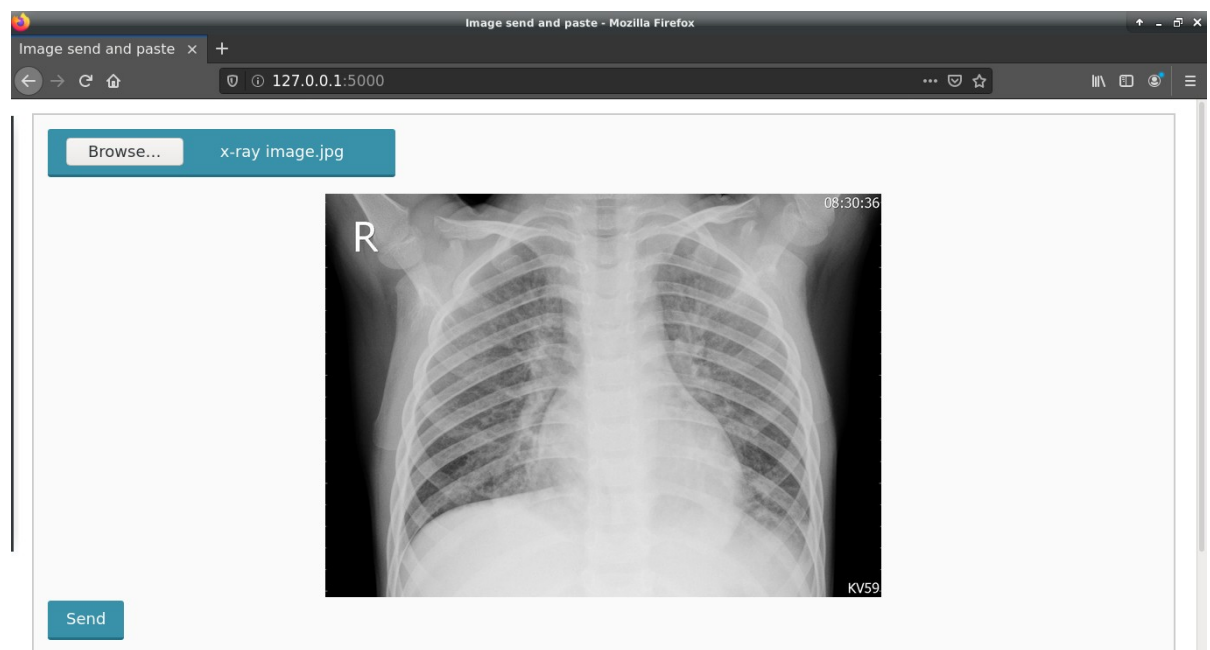