



POLITECNICO
MILANO 1863

Prova Finale di Ingegneria Del Software

**Client-Server Communication
Protocol Documentation**

Professor: Gianpaolo Saverio Cugola
Academic Year 2024 - 2025

Authors:

Samuele Segrini, Manuela Terribile, Alessandra Varricchio, Diego Zanca

Index

1	Introductions	2
1.1	Purpose	2
1.2	System Overview	2
2	Network Architecture	3
2.1	Communication Technologies	3
2.2	Connection Management	3
3	Message Structure	5
3.1	Message Interface	5
3.2	AbstractMessage Class	5
3.3	Payload and Data Transfer Objects (DTOs)	6
4	System Messages	7
4.1	Client to Server	7
4.2	Server to Client	7
5	Set up Phase Messages	10
5.1	Client to Server	10
5.2	Server to Client	11
6	Ship Building Phase Messages	14
6.1	Client to Server	14
6.2	Server to Client	15
7	Flight Phase Messages	19
7.1	Client to Server	19
7.2	Server to Client	20

1. Introductions

1.1 Purpose

This document details the client-server communication protocol for the "Galaxy Trucker" game. It outlines the network architecture, message structures, and the sequence of interactions between the client and server components. The primary goal is to provide a comprehensive technical reference for understanding and maintaining the communication layer of the application.

1.2 System Overview

The Galaxy Trucker game is a distributed application employing a client-server architecture. Clients can connect to a central server to participate in game sessions, which involve various phases such as lobby management, ship building, and flight. Communication between clients and the server is facilitated by a set of well-defined messages exchanged over the network. The system supports multiple concurrent game sessions and players. The client application offers both a Graphical User Interface (GUI) using JavaFX and a Terminal User Interface (TUI), providing flexibility for users. The server manages game logic, state, and synchronizes information across all connected clients within a session.

2. Network Architecture

The network architecture is designed to be modular and support multiple communication technologies. It relies on a clear separation of concerns between network handling, message dispatch, and application logic.

2.1 Communication Technologies

The system supports two primary network communication technologies:

- **TCP/IP Sockets:** Utilizes Java's `java.net.Socket` and `java.net.ServerSocket` for reliable, stream-based communication. Message objects are serialized and deserialized using `java.io.ObjectInputStream` and `java.io.ObjectOutputStream`.
- **Java RMI (Remote Method Invocation):** Allows objects on one Java Virtual Machine (JVM) to invoke methods on objects in another JVM. This is used for a more object-oriented approach to remote communication.

The choice of technology can be configured at runtime, typically at client startup

2.2 Connection Management

- **Client Connection:**
 - **Socket:** The client initiates a TCP connection to the server's IP and port. The server accepts this, and a dedicated communication channel is established.
 - **RMI:** The client looks up the `IServerRemote` stub in the RMI registry. It then calls `registerClient()` on this stub, passing its own `IClientRemoteListener` implementation. The server returns a unique session token.
- **Client Identification:** Each connected client is assigned a unique `networkClientId` by the `ServerNetworkManager` (or its adapters). This ID is used internally by the server to route messages and manage client state. For RMI, this is often the session token.
- **Disconnection Handling:**
 - If a client actively disconnects or a network error occurs (e.g., socket closure, `RemoteException`), the respective network adapter detects this.

- The adapter then invokes its `onDisconnectedCallback`, which in turn triggers the `ClientNetworkManager`'s (client-side) or `ServerNetworkManager`'s (server-side) disconnection logic.
 - On the server, the `LoginController` is notified to handle the client's departure from any game sessions.
 - On the client, the `ClientViewModel` is updated to reflect the disconnected state.
- Pinging (RMI): To ensure RMI connections remain active and detect unresponsive clients/servers:
 - The `RMIClientAdapter` periodically calls `pingServer()` on the `IServerRemote` stub.
 - The server (via `RMIServerAdapter`) can, if needed, call `pingClient()` on the `IClientRemoteListener` stubs it holds. (Your current 'pingClient' implementation in 'RMIClientAdapter' doesn't do much other than check connectivity, but the mechanism exists). Failures in pinging can lead to connection termination.

3. Message Structure

All messages exchanged between the client and server adhere to a common structure defined by base classes and interfaces.

3.1 Message Interface

Located in `it.polimi.ingsw.common.message`, this is a marker interface.

```
1 package it.polimi.ingsw.common.message;
2
3 import java.io.Serializable;
4
5 /**
6  * Marker interface for all messages/events in the system.
7  */
8 public interface Message extends Serializable { }
```

- Purpose: Serves as a common supertype for all messages, ensuring they are Serializable for network transmission.
- Serialization: Implementing Serializable allows Java's object serialization mechanism to convert message objects into a byte stream and vice-versa.

3.2 AbstractMessage Class

Located in `it.polimi.ingsw.common.message`, this class provides common functionality for most messages.

- Inheritance: Most concrete message classes extend AbstractMessage
- serialVersionUID: A version identifier for Serializable classes, crucial for ensuring compatibility during deserialization if class versions change.
- timestamp: A long value automatically set to `System.currentTimeMillis()` upon message creation. This can be used for logging, ordering, or debugging purposes.

3.3 Payload and Data Transfer Objects (DTOs)

Many messages carry additional data, often referred to as the payload. This payload is typically composed of:

- Primitive types (e.g., boolean, String, int).
- Data Transfer Objects (DTOs) from the `it.polimi.ingsw.common.dto` package. These DTOs are records or simple classes designed to encapsulate data for transfer, ensuring they are also `Serializable`. Examples include `PlayerInfoDTO`, `ComponentDTO`, `GameLobbyInfoDTO`, etc.

The specific fields constituting the payload are defined within each concrete message class.

4. System Messages

System messages handle fundamental interactions like login, error reporting, and basic notifications.

4.1 Client to Server

- **LoginRequest** : Sent by the client to request login to the server with a chosen nickname.

```
{
  "type": "LoginRequest",
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": "nickname"
}
```

- **ReconnectRequest** : Request to reconnect to an existing session.

```
{
  "type": "ReconnectRequest",
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "playerId",
    "value": "sessionToken"
  }
}
```

4.2 Server to Client

- **LoginResponse** : Sent by the server in response to a ClientLoginRequest, indicating success or failure of the login attempt.

```
{
  "type": "LoginResponse",
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "playerId" ,

```



```

        "value": "nickname"
    }
}

```

- **ErrorResponse** : A generic message used by the server to inform the client of an error condition.

```

{
    "type": "ErrorResponse",
    "RequestId": "RequestId",
    "CorrelationId": "CorrelationId",
    "payload": {
        "value": "errorMessage",
        "value": "errorCode"
    }
}


```

- **ReconnectResponse** : Response to a reconnection request.

```

{
    "type": "ReconnectResponse",
    "RequestId": "RequestId",
    "CorrelationId": "CorrelationId",
    "payload": {
        "value": "playerId" ,
        "value": "nickname" ,
        "value": "gameId" ,
        "value": "gameState" ,
    }
}

```

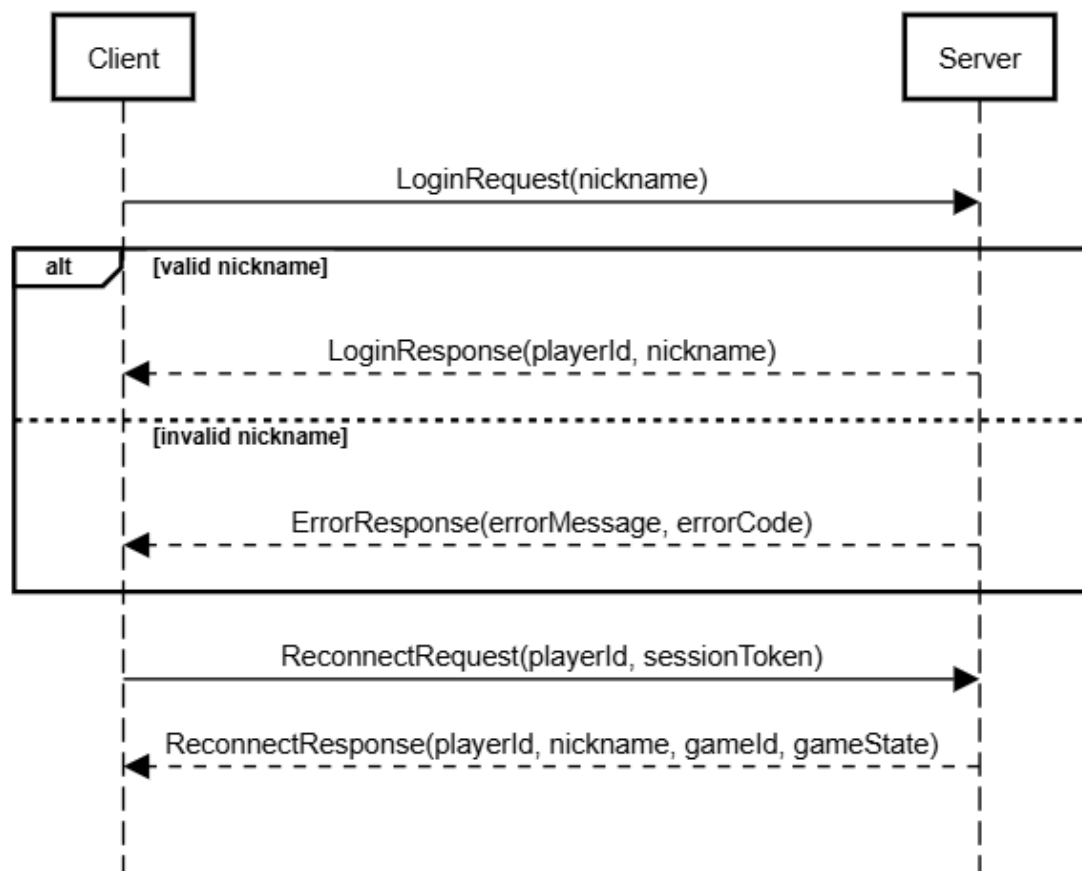

5. Set up Phase Messages

These messages are used during the game setup phase, including creating, listing, joining, and managing game lobbies.

5.1 Client to Server

- **CreateGameRequest** : sent by a player who wants to create a new game.

```
{
  "type": "CreateGameRequest",
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "maxPlayers",
    "value": "gameLevel",
    "value": "gameName"
  }
}
```

- **ListGamesRequest** : sent by a player who wants a list of the already existing games.

```
{
  "type": "ListGamesRequest",
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": "context"
}
```

- **JoinGameRequest** : sent by a player who wants to access an already existing game.

```
{
  "type": "JoinGameRequest",
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": "gameId"
}
```

- **LeaveGameRequest** : sent by a player to requests to leave their current game session.

```
{
  "type": "LeaveGameRequest",
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": "gameId"
}
```

- **SetPlayerReadyRequest** : Client updates their ready status within a game lobby.

```
{
  "type": "SetPlayerReadyRequest",
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": "ready"
}
```

- **StartGameRequest** : sent by the host who wants to start the game.

```
{
  "type": "StartGameRequest",
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": "gameId"
}
```

5.2 Server to Client

- **CreateGameResponse** : sent by the Server to indicate success or failure of game creation.

```
{
  "type": "CreateGameResponse",
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "gameId",
    "value": "gameName"
  }
}
```

- **ListGamesResponse** : sent by the Server to confirm that a list of the already existing games is showing.

```
{
  "type": "ListGamesResponse",
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
}
```

```
    "payload": "games"
}
```

- **JoinGameResponse** : sent by the server to signal whether the access to an already existing game succeeded or failed.


```
{
  "type": "JoinGameResponse",
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": "gameInfo"
}
```

- **StartGameResponse** : Response to start game request.

```
{
  "type": "StartGameResponse",
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "gameId"
    "value": "gameModel"
  }
}
```

- **LeaveGameResponse** : sent by the server to signal whether the player left the game with success or not.

```
{
  "type": "LeaveGameResponse",
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": false
}
```

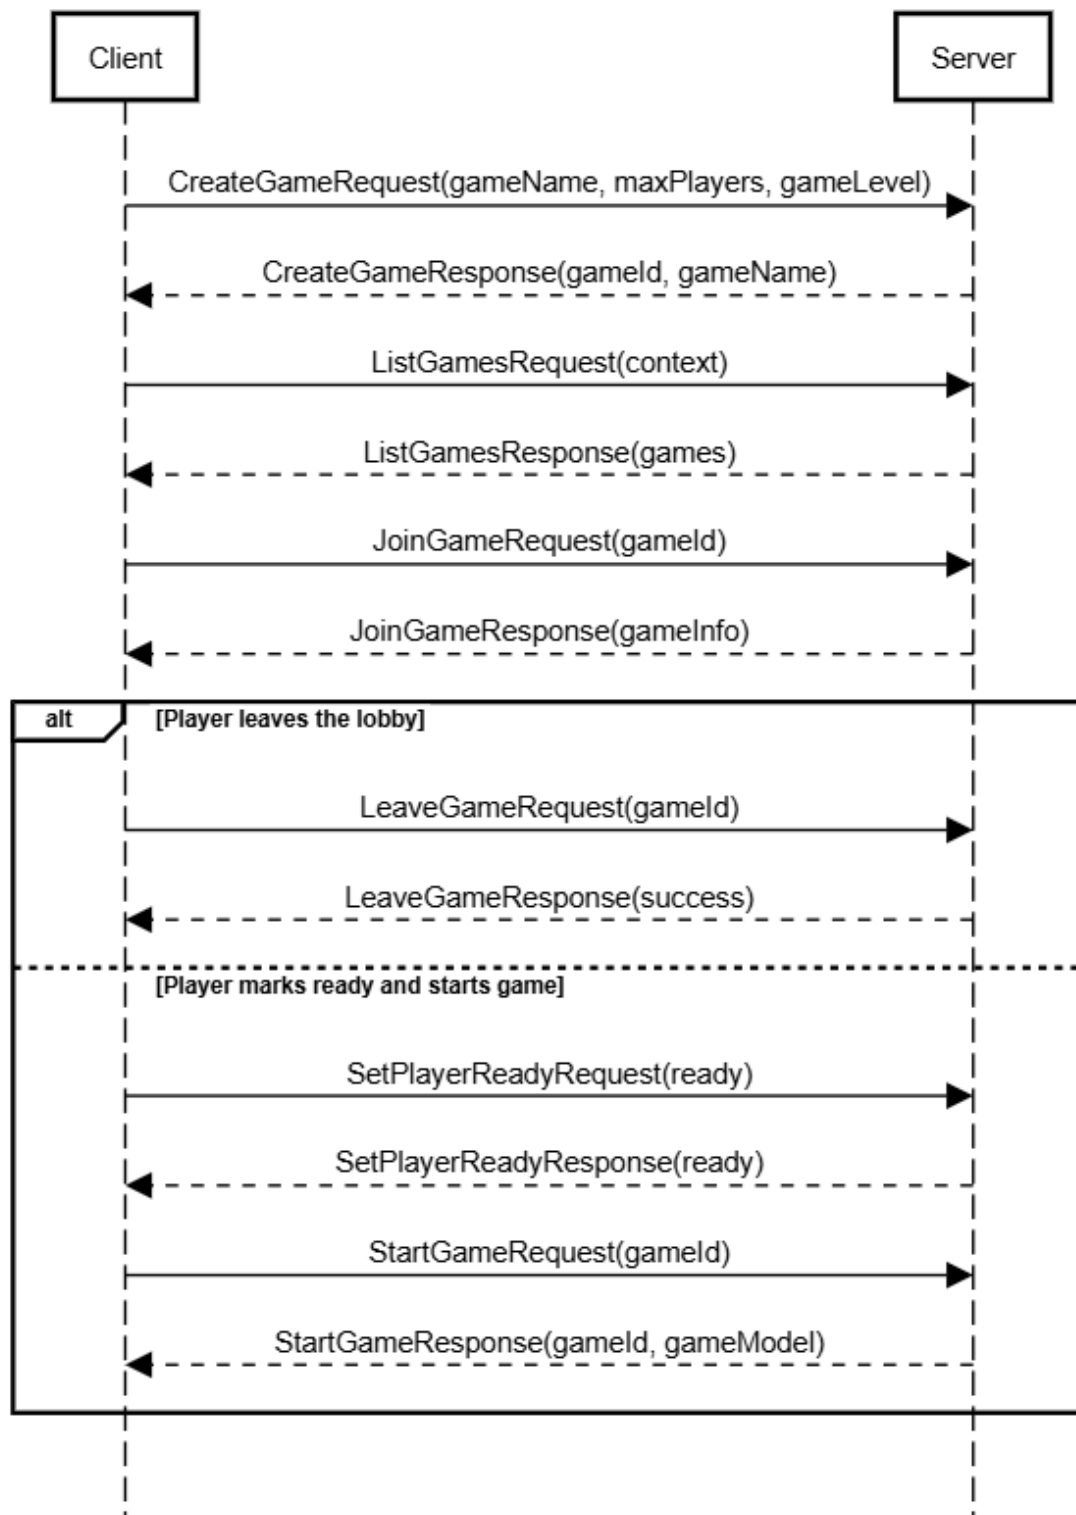

6. Ship Building Phase Messages

These messages facilitate the ship building phase of the game.

6.1 Client to Server

- **RequestFaceUpTileRequest** : sent by the client to request to take a face-up component tile.

```
{  
  "type": "RequestFaceUpTileRequest",  
  "RequestId": "RequestId",  
  "CorrelationId": "CorrelationId",  
  "payload": "tileId"  
}
```

- **TakeTileRequest**: sent to pick a component tile from the central face-down pile.

```
{  
  "type": "TakeTileRequest"  
  "RequestId": "RequestId",  
  "CorrelationId": "CorrelationId",  
  "payload": false  
}
```

- **ReserveTileRequest**: sent to server a component tile.

```
{  
  "type": "ReserveTileRequest"  
  "RequestId": "RequestId",  
  "CorrelationId": "CorrelationId",  
  "payload": "tileId"  
}
```

- **PlaceTileRequest**: sent to place the component on the ship board.

```
{  
  "type": "PlaceTileRequest",  
  "RequestId": "RequestId",  
  "CorrelationId": "CorrelationId",  
}
```

```

    "payload": {
      "value": "tileId",
      "value": "row",
      "value": "col",
      "value": "rotation"
    }

```

- **ReturnTileRequest:** Client returns a component (that they were "holding" or took from reserve but decided not to place) to the common face-up pile.

```

{
  "type": "ReturnTileRequest",
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": "tileId"
}

```

- **FlipBuildingTimerRequest:** sent to flip the hourglass on the game board.

```

{
  "type": "FlipBuildingTimerRequest"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": false
}

```

- **ValidateShipRequest:** sent by the Client to request the validation of their ship.

```

{
  "type": "ValidateShipRequest"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": false
}

```

6.2 Server to Client

- **RequestFaceUpTileResponse:** sent by the Server to offer a drawn component to the player who requested it. The player can then decide to place, reserve, or return it.

```

{
  "type": "RequestFaceUpTileResponse"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "correlationId",
    "value": "tile"
  }
}

```


- **TakeTileResponse**: sent by the Server to offer a drawn component to the player who requested it. The player can then decide to place, reserve, or return it.

```
{
  "type": "TakeTileResponse"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "correlationId",
    "value": "componentData"
  }
}
```

- **ReserveTileResponse**: Response to a reserve tile request.

```
{
  "type": "ReserveTileResponse"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": "correlationId"
}
```

- **PlaceTileResponse**: Confirms that a component was successfully placed on a player's ship board.

```
{
  "type": "PlaceTileResponse"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": "correlationId"
}
```

- **ValidateShipResponse**: Informs a player about the validation result of their ship component placement or overall ship structure.

```
{
  "type": "ValidateShipResponse"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "correlationId",
    "value": "errors"
  }
}
```

- **FlipBuildingTimerResponse**: Notifies players about changes to the building timer's state.

```
{
  "type": "FlipBuildingTimerResponse"
  "RequestId": "RequestId",
```

```

    "CorrelationId": "CorrelationId",
    "payload": {
      "value": "correlationId",
      "value": "newTimeRemaining"
    }
  }
}


```

- **SetPlayerReadyResponse**: Notifies all players that a player has finished building and secured a flight order position.

```

{
  "type": "SetPlayerReadyResponse"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "correlationId",
    "value": "ready"
  }
}

```

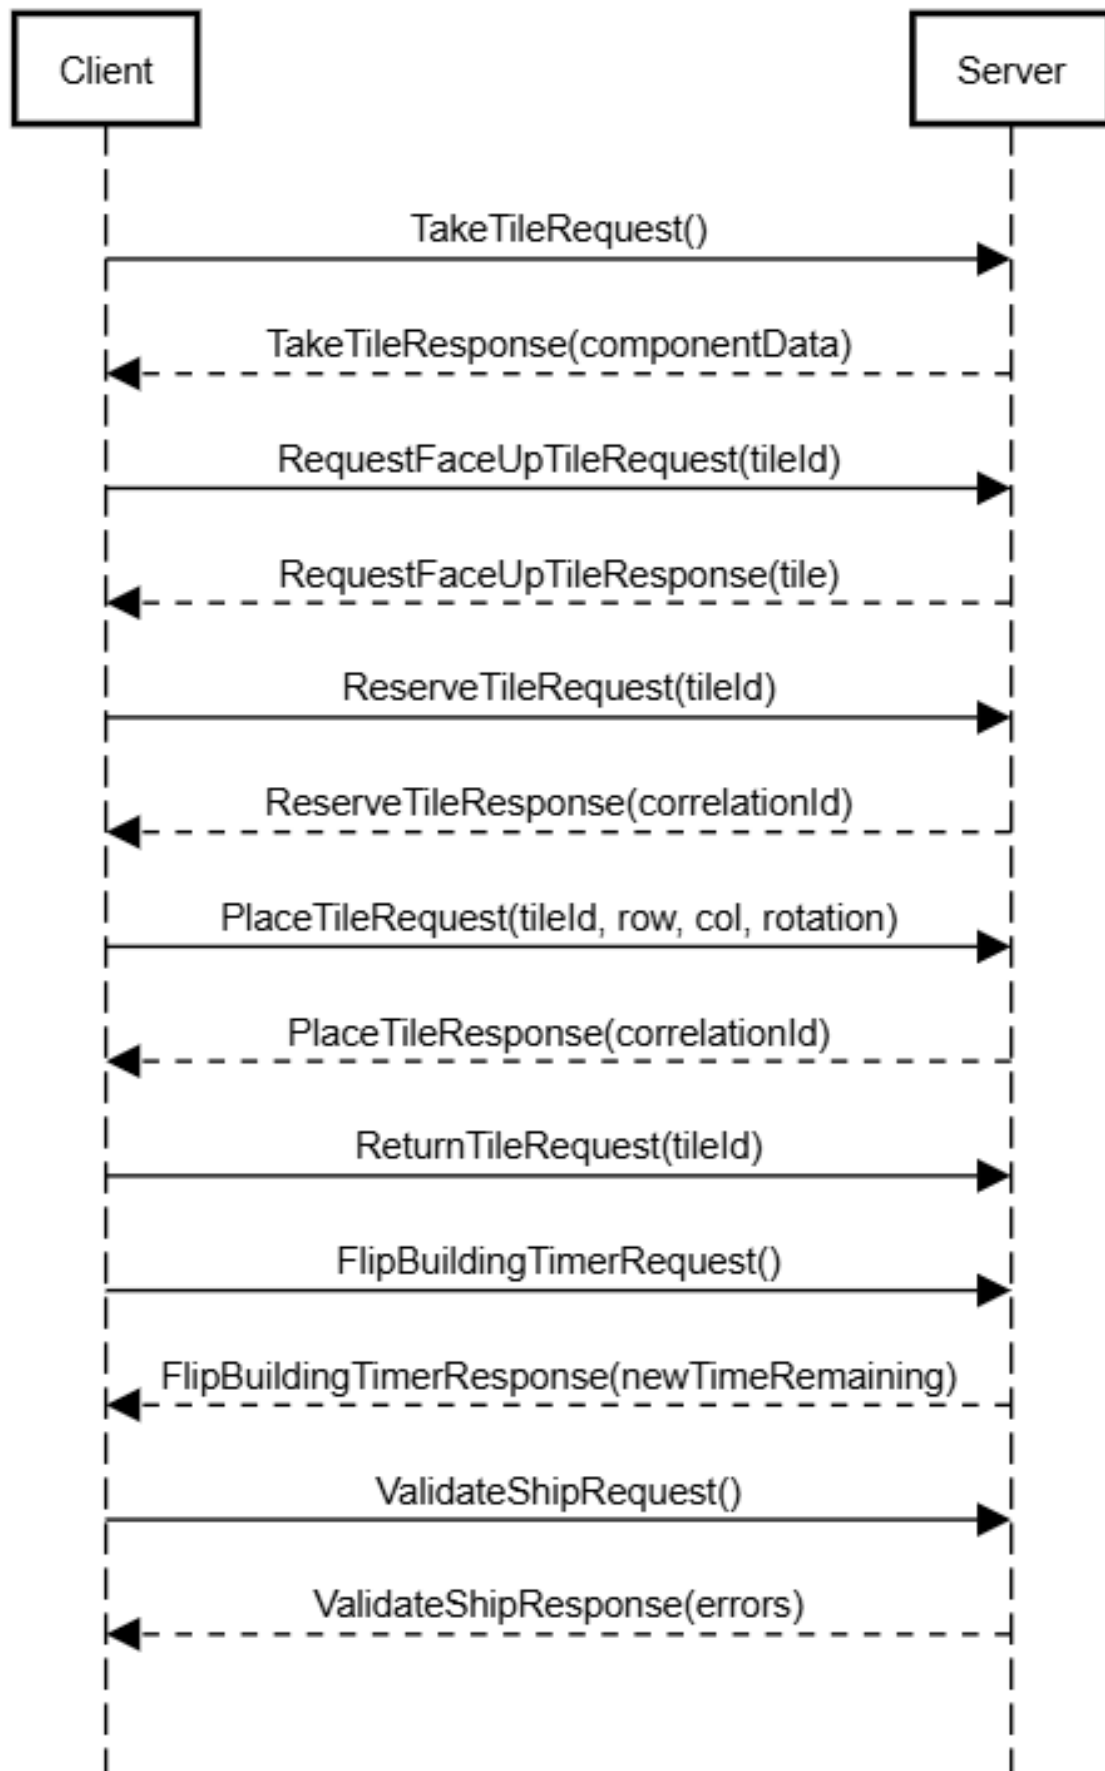

7. Flight Phase Messages

These messages facilitate the flight phase of the game.

7.1 Client to Server

- **DeclareStrengthRequest:** Request from a player to declare strength for an action, such as powering up engines or cannons, by committing batteries.

```
{
  "type": "DeclareStrengthRequest"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "decisionType",
    "value": "batteriesToUse"
  }
}
```

- **LandPlanetRequest:** Request from a player to land on a planet (after PlanetsCard).

```
{
  "type": "LandPlanetRequest"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": "planetIndex"
}
```

- **DockRequest:** Request from a player to dock after either AbandonedShipCard or AbandonedStationCard.

```
{
  "type": "DockRequest"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": "isDocking"
}
```

7.2 Server to Client

- **CombatZoneResponse:** Response to a successful DeclareStrengthRequest (following a CombatZoneCard).

```
{
  "type": "CombatZoneResponse"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "usedBatteries",
    "value": "lostFlightDays"
    "value": "lostCrew"
  }
}
```

- **LandPlanetResponse:** Response to a successful land on a planet request.

```
{
  "type": "LandPlanetResponse"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "lostFlightDays",
    "value": "collectedGoods"
  }
}
```

- **MeteorSwarmResponse:** Response to a successful DeclareStrengthRequest (following a MeteorShowerCard)

```
{
  "type": "MeteorSwarmResponse"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "usedBatteries",
    "value": "destroyedComponents"
  }
}
```

- **OpenSpaceResponse:** Response to a successful DeclareStrengthRequest (following an OpenSpaceCard).

```
{
  "type": "OpenSpaceResponse"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "newFlightPosition",
    "value": "usedBatteries"
  }
}
```

```
}
```

- **PiratesLossResponse:** Response to a successful DeclareStrengthRequest (following the loss to a PiratesCard).

```
{
  "type": "PiratesLossResponse"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "usedBatteries",
    "value": "destroyedComponents"
  }
}
```

- **PiratesResponse:** Response to a successful DeclareStrengthRequest (following a PiratesCard).

```
{
  "type": "PiratesResponse"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "usedBatteries",
    "value": "hasWon"
    "value": "collectedCredits"
  }
}
```

- **SlaversResponse:** Response to a successful DeclareStrengthRequest (following a SlaversCard).

```
{
  "type": "SlaversResponse"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "usedBatteries",
    "value": "hasWon" ,
    "value": "lostCrew",
    "value": "lostFlightDays" ,
    "value": "collectedCredits"
  }
}
```

- **SmugglersResponse:** Response to a successful DeclareStrengthRequest (following a SmugglersCard).

```
{
  "type": "SmugglersResponse"
  "RequestId": "RequestId",
```

```

    "CorrelationId": "CorrelationId",
    "payload": {
      "value": "usedBatteries",
      "value": "hasWon" ,
      "value": "lostGoods",
      "value": "lostFlightDays" ,
      "value": "collectedGoods"
    }
  }
}

```

- **DockResponse:** Response to a successful dock on an abandoned ship/station request.

```

{
  "type": "DockResponse"
  "RequestId": "RequestId",
  "CorrelationId": "CorrelationId",
  "payload": {
    "value": "lostFlightDays",
    "value": "lostCrew"
    "value": "collectedGoods"
    "value": "collectedCredits"
  }
}

```

