


The image shows a VS Code editor window with the file 'pagina-actividades.html' open. The code is written in Angular and includes the following elements:

- HTML Structure:** A `<section>` with `class="pagina"` and `aria-labelledby="titulo-pagina"`. Inside, there's a `<h2>` with `id="titulo-pagina"` and the text 'Tablero de prioridades'. Below this is an `<app-panel-seccion>` with `titulo="Resumen"`, followed by an `<app-filtros-actividades>` component, and then another `<app-panel-seccion>` with `titulo="Actividades"`.
- JavaScript Logic:** An `@if` block that checks if `seleccionada()` is selected. If so, it displays the selected item's title and a 'creada el' date. There are also `<strong>` tags for 'elegida.titulo' and 'elegida.creadaEn'.
- Component Interactions:** The `<app-filtros-actividades>` component has attributes for `termino`, `estado`, and `prioridad`. The `<app-panel-seccion titulo="Actividades">` has a `button` with `acciones` type and a `click` event that calls `restablecer()` to 'Vaciar el tablero'.
- Component Data:** The `<app-lista-actividades>` component has attributes for `actividades`, `seleccionadaId`, `mensajeVacio`, `hayFiltros`, `seleccionCambiada`, `destacadoCambiado`, `avanzadoSolicitado`, `eliminacionSolicitada`, and `limpiezaSolicitada`.

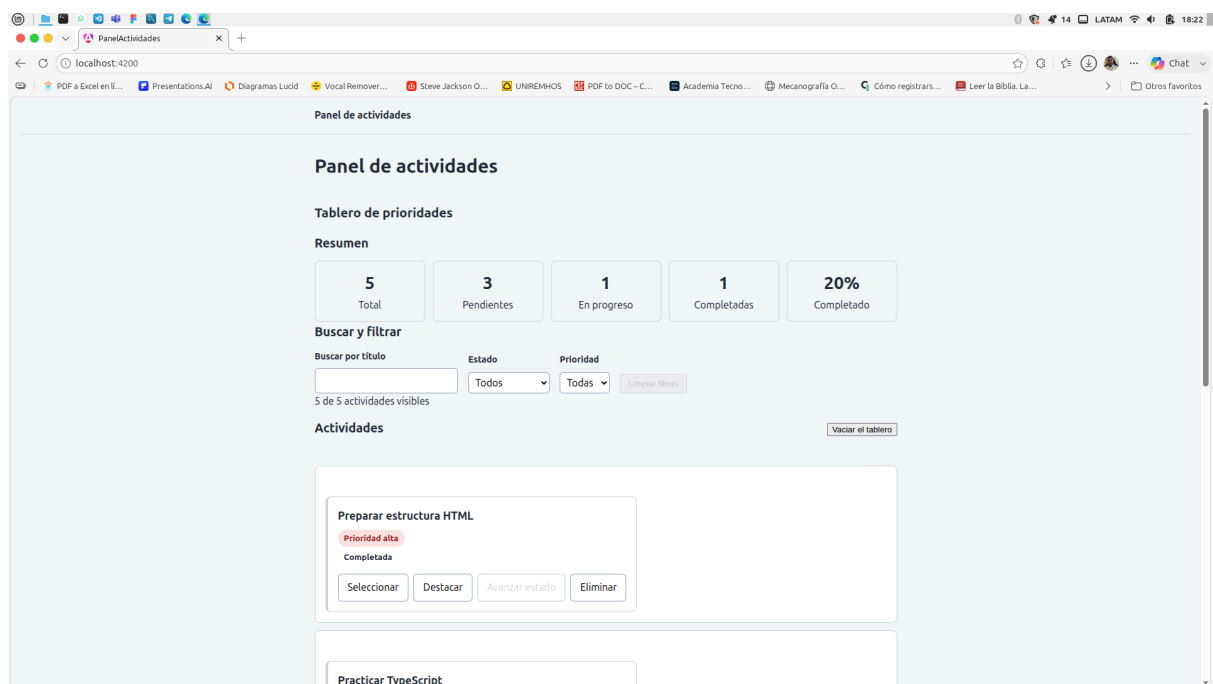

https://github.com/samuelguridis/curso_angular/tree/main/panel-actividades