



# Set a breakpoint based on a certain condition



By Umar Hansa

Umar is a front-end web developer

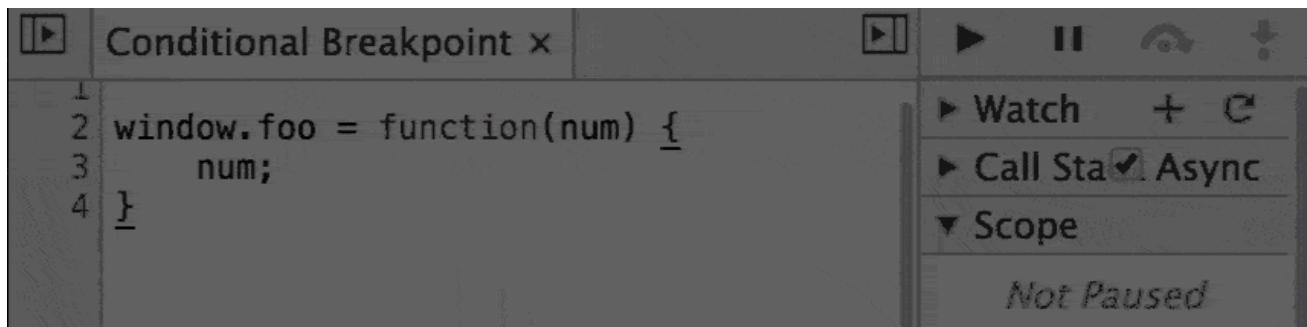

DevTools:

## Conditional Breakpoints

Dev Tips

[umaar.com/dev-tips](http://umaar.com/dev-tips)

@umaar

When you set a breakpoint, you can make it conditional based on the result of an expression. Right click on the line gutter and select *Add Conditional Breakpoint* and enter your expression.

If you have a callback like:

```
function callback(result, err) {  
  //set a conditional breakpoint based on the existence of err  
}
```

You could set a conditional breakpoint based on the existence of `err`.

---

*Except as otherwise noted, the content of this page is licensed under the [Creative Commons Attribution 3.0 License](#), and code samples are licensed under the [Apache 2.0 License](#). For details, see our [Site Policies](#). Java is a registered trademark of Oracle and/or its affiliates.*

*Last updated July 2, 2018.*