



Get and debug event listeners



By Umar Hansa

Umar is a front-end web developer

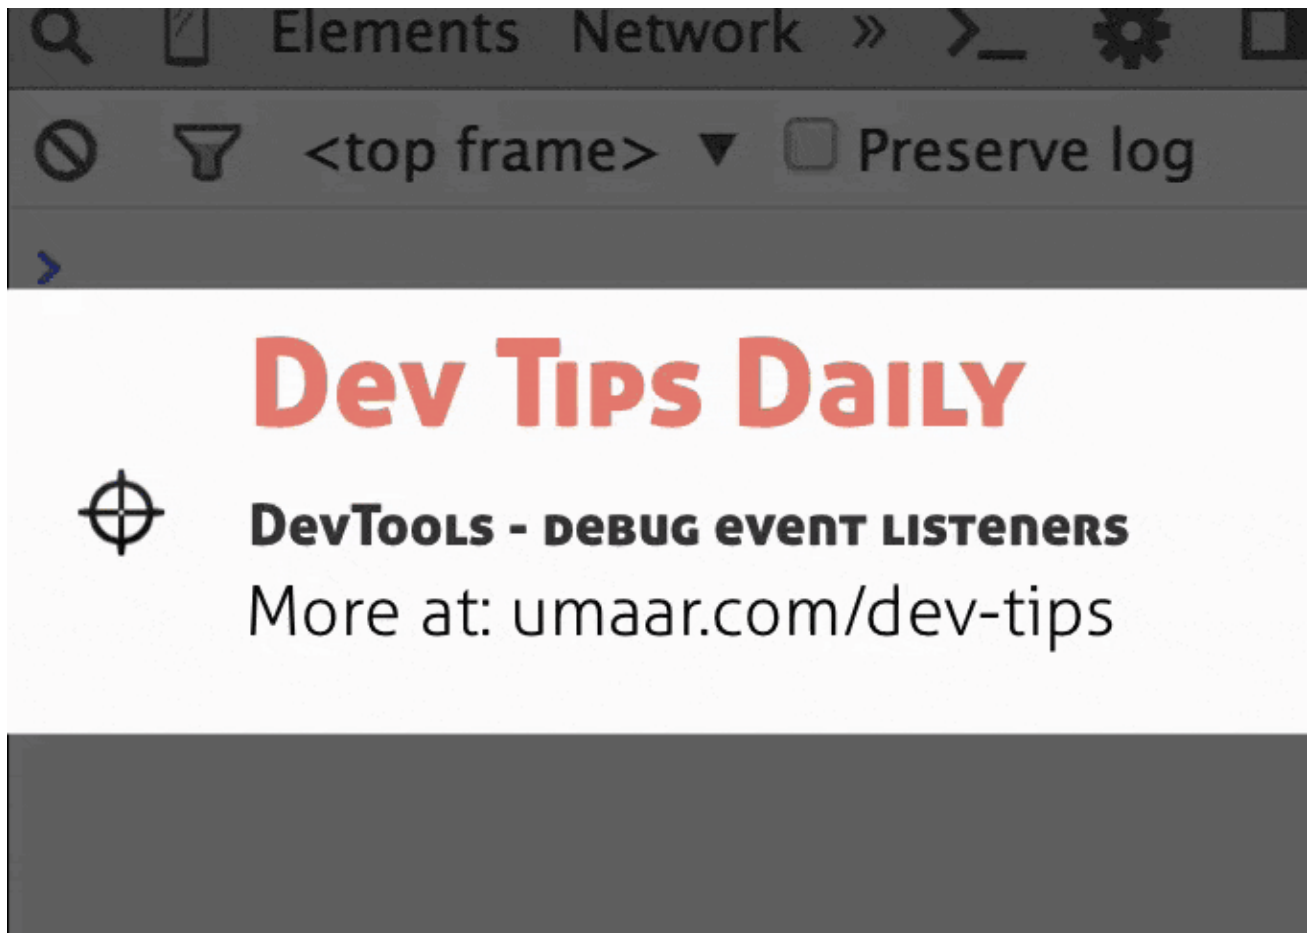

You can use `getEventListeners(node)` in the Console Panel to retrieve registered event listeners on the passed in DOM node. In addition to that, the video clip shows `debug(fn)` invoking the debugger when `fn` is called.

Except as otherwise noted, the content of this page is licensed under the [Creative Commons Attribution 3.0 License](#), and code samples are licensed under the [Apache 2.0 License](#). For details, see our [Site Policies](#). Java is a registered trademark of Oracle and/or its affiliates.

Last updated July 2, 2018.