

Department of Computer Sciences
University of Salzburg

PS Natural Computation
SS 15/16

Evolution of a Poker Player Using Genetic Programming

July 14, 2016

Project Members:

Thomas Samy Dafir, 1331483, tdafir@cosy.sbg.ac.at
Laurentiu Vlad, 1423336, lvlad@cosy.sbg.ac.at
Dominik Baumgartner, 0920177, dbaumgart@cosy.sbg.ac.at
Sebastian Strumegger, 1420277, sstrumegg@cosy.sbg.ac.at

Academic Supervisor:

Helmut MAYER
helmut@cosy.sbg.ac.at

Correspondence to:

Universität Salzburg
Fachbereich Computerwissenschaften
Jakob-Haringer-Straße 2
A-5020 Salzburg
Austria

Contents

1	Frameworks	2
1.1	JEvolution	2
1.2	GPoker	2
1.3	Interaction	2
2	Genetic Programming	4
2.1	Chromosome Tree	4
2.1.1	Functions	4
2.1.2	Terminals	4
2.1.3	Root	4
2.1.4	Example	5
2.2	Evolution	5
2.2.1	Crossover	5
2.2.2	Mutation	6
3	Implementation	7
3.1	Initial changes	7
3.2	Final implementation	8
3.2.1	Raise	8
3.2.2	Fold	8
4	Experiments	9
4.1	Setup	9
4.1.1	Evolution against PatternPlayer	9
4.1.2	Evolution against TestPlayer	9
4.1.3	Experiment parameter	10
4.2	Results	10
4.2.1	Evolution against PatternPlayer	10
4.2.2	Evolution against TestPlayer	11
5	Links	13

Abstract

The goal of this project is to evolve a GP poker player by means of genetic programming techniques. The GP Players evolve over generations through selection, mutation and cross mutation of their chromosome tree.

A good computer player has to emerge after a sufficient amount of generation have played in a "heads up" texas-hold-em no limit poker game. Good players are determined by their fitness value which is determined through assessing a player's success after each poker round.

The focus of our work lies in the chromosome tree. Although the current API provides some basics functions for that tree, it is likely that they are not sufficient for the evolution of a good player. The second focus lies on the poker game itself. We have to determine what kind and how much information a player needs in order to evolve properly without interfering with its evolution. This means, that we don't want to "tell" the player what the next best action is, but rather let evolution decide. Additionally we will do some fine-tuning of evolutionary-parameters like population size or number of generations to achieve the best possible result.

1 Frameworks

This project requires the use and interaction two frameworks namely GPoker and JEvolution. In the following both frameworks and their interactions with one another will be briefly explained.

1.1 JEvolution

JEvolution is the most essential part of this project. JEvolution provides functionality for Evolutionary Computation including Evolutionary Algorithms and Genetic Programming. We use the latter. JEvolution completely implements the evolution of syntax trees including selection, mutation and crossover. Syntax trees are made up from objects of type *ProgramNode*. Each node includes an array containing all child nodes. In order for the evolution to work a set of function- and terminal-nodes has to be provided. These are implemented as subclasses of the *ProgramNode* class. Selection is conducted based on the computed fitness of every syntax tree. For our application of the framework nodes are provided by the GPoker framework and by us. In order for JEvolution to conduct evolution correctly a function calculating a tree's fitness has to be supplied (fitness function). In our case this function has to somehow compute how good a syntax tree (here: representing a poker player) is able to complete the given task (in this case: play poker and win chips). Details about Genetic Programming are supplied in chapter 2.

1.2 GPoker

GPoker is a poker-framework by Helmut A. Mayer. It provides a set of classes implementing a working poker setup including several game modes, different players and the possibility for a human player to play against computer players. The most essential functionality for our application is the possibility to include evolved players and hence use the framework to do genetic programming. GPoker provides nodes which are subclasses of the JEvolution *ProgramNode* class representing decisions, actions and queries a poker player might perform. Parameters like game-mode, competing players, big/small blind and rounds to play can be specified in the gpoker.xml file.

1.3 Interaction

How does the interaction of these two frameworks enable us to evolve a poker player? JEvolution evolves syntax trees made up from *ProgramNode* objects. It does not care about what the functionality of a node is. As long as it's specified as a subclass of *ProgramNode* it can be used in a syntax tree. Once GPoker detects that a GPlayer (evolved player) is specified in the gpoker.xml file it communicates with JEvolution to invoke the evolutionary process. GPoker provides nodes for constructing syntax trees. JEvolution then builds and evolves these trees made up from the supplied nodes. A vital component of the evolutionary process is the calculation of the fitness value. In the case of the evolution of a poker player the fitness value should of course reflect the player's skill. The most intuitive way of defining a player's skill is measuring the amount of won/lost chips. This value can be determined by letting the player play games of poker against other players and is then recorded as the player's fitness. JEvolution can then execute the selection part of the evolutionary

process using this fitness value provided by GPoker.

Interactions can be summarized as follows:

- GPoker detects an evolved player in the xml file and invokes JEvolution providing poker specific nodes.
- JEvolution builds syntax trees and uses GPoker to calculate fitness values of individual syntax trees.

2 Genetic Programming

As mentioned, a GP Player is represented by a so-called chromosome tree. Or more precisely, the poker player's strategy is represented by this tree.

This means, that each player's tree has a root node and zero or more child nodes, where nodes with children are called functions and leave nodes are called terminals. From the very beginning there is a fixed set of functions and terminals available. At first, a population of GP Players with random nodes are created which play a predetermined number of games. In each generation there is a chance for every player that its tree is changed by mutation or crossover.

2.1 Chromosome Tree

2.1.1 Functions

Functions play the most important role in a GP Player's strategy, since functions are the decision-makers.

They can have one or more child nodes and a specific return type. Further all nodes (except the root) need to have a parent node. Child nodes can either be terminals or functions, where it is also very important that the child nodes return the very type the function expects.

As an example we could define a lower-than function that expects floating point values from both children and returns a boolean value to its parent node.

2.1.2 Terminals

Terminals are the leave nodes in a player's tree. They cannot have child nodes but return a certain type themselves.

This does not necessarily mean that a terminal's value has to be static. They can have dynamic values like "pot size" or "higher hand card".

2.1.3 Root

The root node is a special function, since it does not have any parent nodes.

For a proper evaluation of the player's tree it needs to be rooted, so we can start making further decisions at one point. For GPoker we need to have a root node that always returns a poker move which is returned to the game.


A GPlayer, for example, uses the root node "IfMove" which has three children:

The very left child is the if-condition, that needs to return a boolean type.

The middle child is the then-branch and returns a move.

And at last, the right child represents the else-branch, which also returns a move.

2.1.4 Example

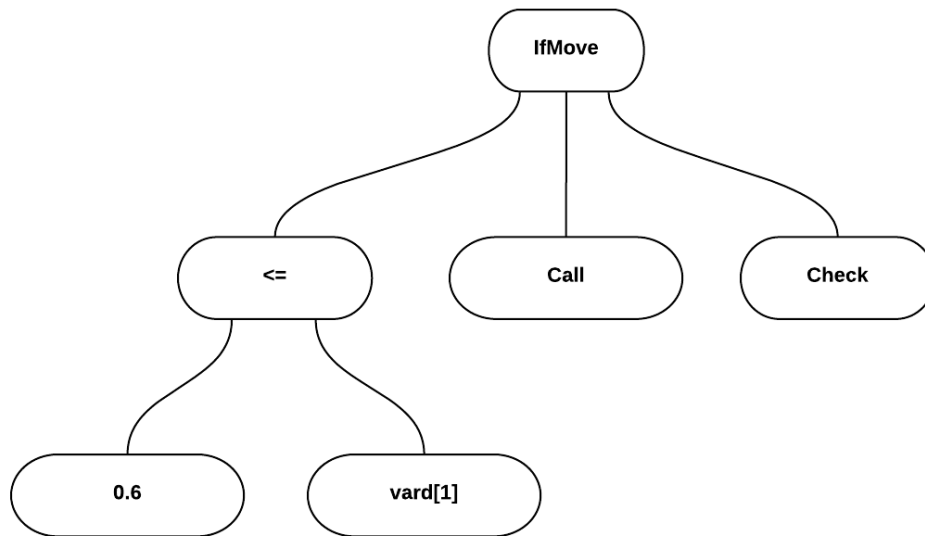

This very simple tree represents the following strategy:

If 0.6 (Two to Ace normalized in 0 to 1) is less than or equal to the player's lower hand card, make a call.


Else: check. Note that checking can also mean folding, in case there has been a raise.

2.2 Evolution

There are two fundamentally different ways for evolution to change a tree, namely crossover and mutation.


2.2.1 Crossover

Crossover takes two individual players and swaps subtrees in a random point. Of course both subtrees need to have the same return type. This method is more common, since good players that were not sorted out by evolution usually have good subtrees. So the the well-playing trees are not completely destroyed by the process of evolution, but there is much room for new combinations.

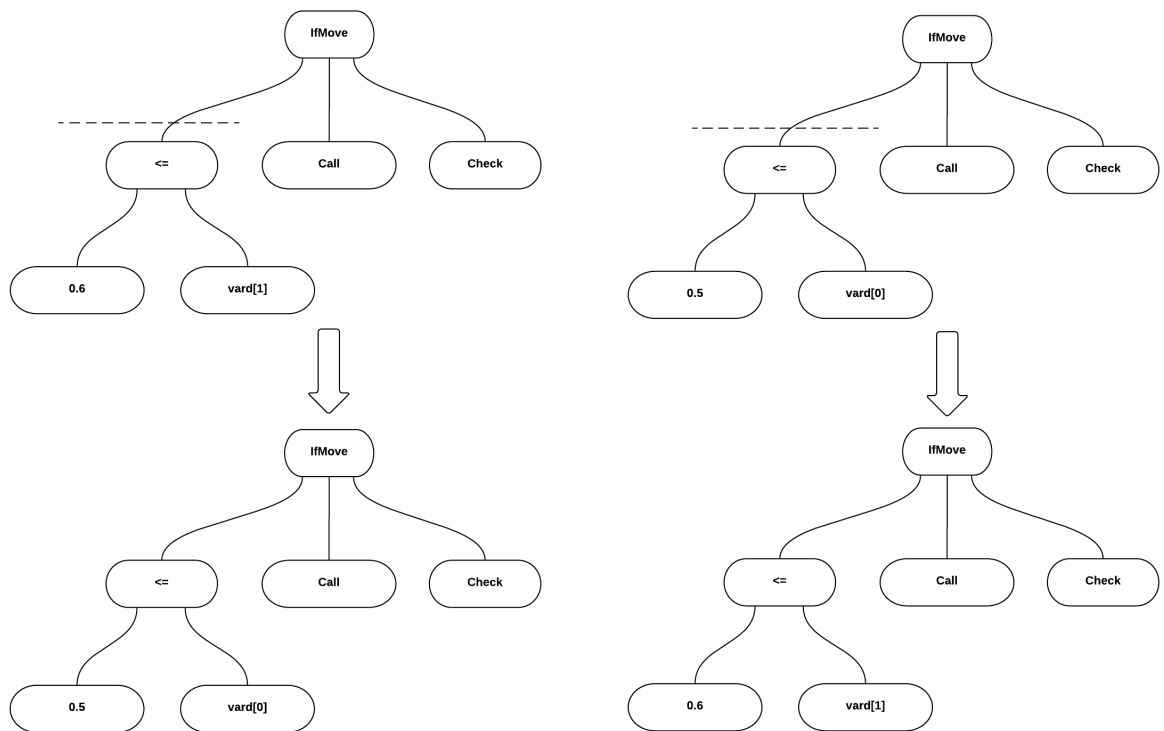

2.2.2 Mutation

In contrast to crossover, mutation does not require two individual trees to operate. Either a single node is chosen at random and changed to some other random node that returns the same type, or a randomly chosen subtree is modified. Mutation has to be used carefully, since random changes can render a very good player useless.

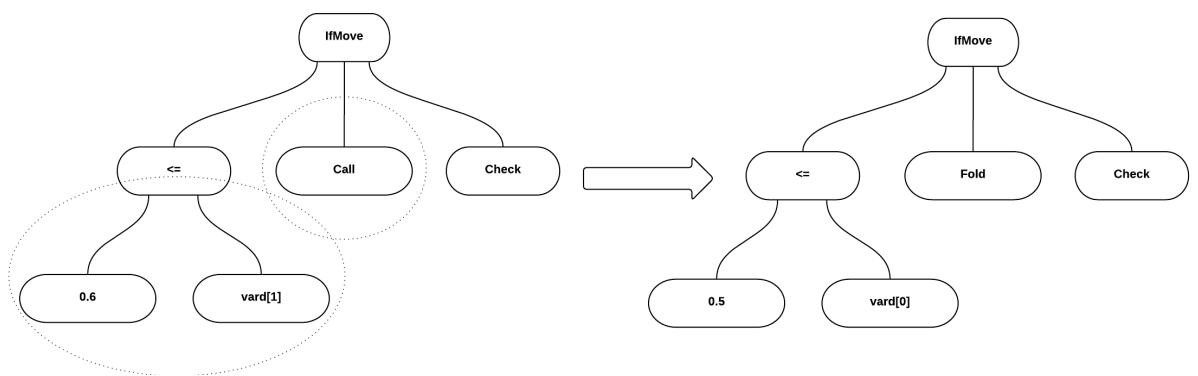

3 Implementation

3.1 Initial changes

As mentioned above, our focus in this work was to change existing nodes and/or add new nodes to the chromosome tree. When we first evaluated the existing code, especially the implemented functions and terminals, we observed that the raise value was randomly calculated [0.0 to 2.0 * pot]. The value was neither decided nor influenced by evolution.

Raising plays a vital role in a Texas Hold'em No Limit poker game and this was also noticed by the evolution which often returned players who's trees were made up of a single raise node. Therefore we decided to concentrate on making the raise node accessible to the evolution so its value can be evolved.

The first attempt was to allow the raise leaf-node to have a subtree which would potentially get evolved. For this purpose we introduced a new function node called "IfDouble". It evaluates a boolean expression and returns a double value which is the factor of the raise [i.e 1,9397 * pot size]. In this case, a ConstMove terminal could either be a terminal or a function node.

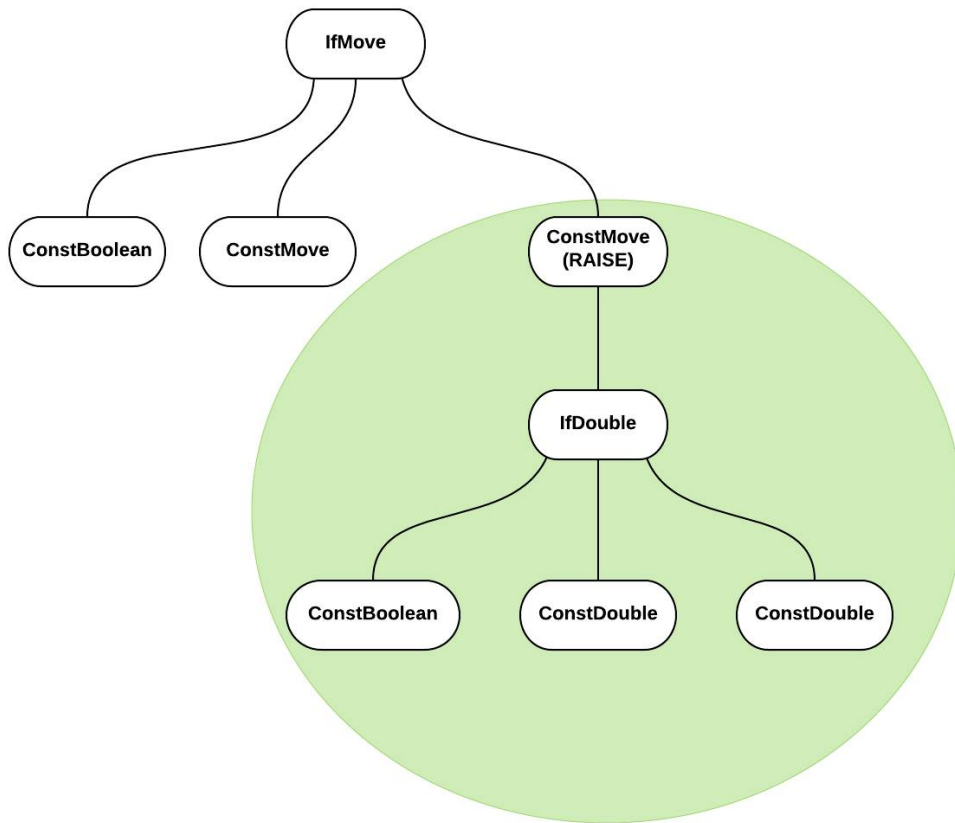


Figure 1: Example tree of an evolved player with a IfDouble-subtree appended to raise

This however led to undesirable mutations like the following:

- GPoker produced IfDouble-Nodes that only have one child (ConstBoolean).
- GPoker produced ConstMove(RAISE) Nodes that have a ConstDouble child which does not get evaluated.

3.2 Final implementation

3.2.1 Raise

As a final solution, the raise move was moved out from ConstMove and redesigned as an independent function node. It still has only one child but now the lines between a function and a terminal are not blurred anymore. With this change, the evolution can now remove raise entirely if it finds that it is not a good functions. In addition to that, it is now easier to mutate the factor of a raise which is more dynamic and granular.

This is due to a raise subtree now being able to grow or shrink and build up different calculations for the raise factor like multiplying the high card with another factor. Also any node returning double can be attached to the new raise node.

3.2.2 Fold

After some testing we noticed that sometimes a player would emerge that would always fold. A fold-only player does not make any sense since it would gradually lead to the loss of all the player's chips. Although this is a crucial mechanism and a valid move, we deleted fold from the ConstMove class to avoid these kinds of players. ConstMove is now limited to returning a "Call" or "Check".

This is possible because the *checkMove(Player player, Move move)* method of the "Dealer" class handles invalid player moves and automatically folds [i.e. when a player checks in response to a raise].

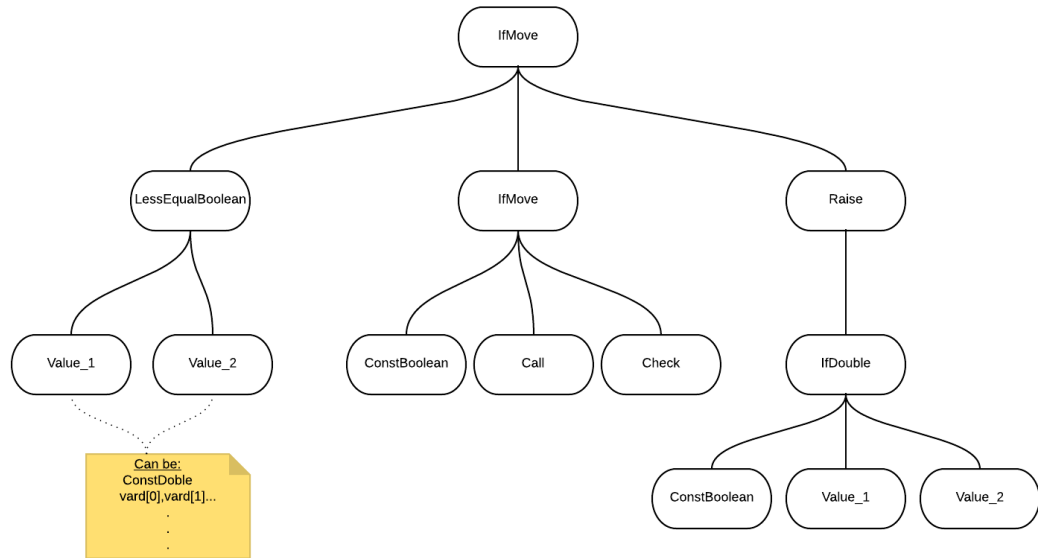


Figure 2: Example tree of an evolved player after the final implementation

4 Experiments

For the experiments we evolved two GPlayers both against a "PatternPlayer" and a "TestPlayer" in multiple runs. The first player was the one with the original function- and terminal-set and had no additional alterations. The second player had the aforementioned changes applied. After all test runs were completed the fitness of the old and new player were compared.

4.1 Setup

Nodes used:

New GPlayer	Old GPlayer
IfMove	IfMove
LessEqualBoolean	LessEqualBoolean
ConstDouble(0.0, 1.0)	ConstDouble(0.0, 1.0)
VarDouble	VarDouble
ConstBoolean	ConstBoolean
MultDouble	MultDouble
NewConstMove	ConstMove
IfDouble	---
RaiseMove	---

4.1.1 Evolution against PatternPlayer

The way the PatternPlayer plays is by evaluating his hand value and the overall values of the cards [deviding their rank by an ace and adding those values together]. The move made depends on their normalized value.

4.1.2 Evolution against TestPlayer

One TestPlayer was choosen from previously evolved players that made sane moves and played as follows.

```

    if (getCards().get(1).getRank() < Card.JACK) {
        if (dealer.getCallBet(this) < 9)
            move.setType(Move.CALL);
        else
            move.setType(Move.CHECK);
    } else
        move.setBet((int)(0.9849 * dealer.getPot()));

    return move;

```

In short, this player was playing more defensively and only performed a "Call" or "Check" when his highest card was lower than a JACK. If his highest card was better he played aggressively and raised with a value of $0.9849 * \text{pot-size}$.

4.1.3 Experiment parameter

For both experiments the parameter were chosen as follows:

- Game Mode: Doyle
- Test-Runs: 8 for each player
- Generations: 10.000
- Population-Size: 100
- Rounds: 1000
- Mutation-Rate: 0.0369

A generation of 10.000 seems to be sufficient for an overall assessment of the fitness. It was noticed from previous test runs, with a generation size of 20.000, that the best players would emerge all within the threshold of 10.000 .

4.2 Results


The following diagrams show the fitness of the old and new player of each run. On the y-axis the fitness is plotted and the x-axis displays one run. The values had been sorted in an ascending order to have a better interpretation basis because the order of the runs do not play any particular role. In short, the diagram does not show a function. This needs to be kept in mind when assessing the diagrams.

4.2.1 Evolution against PatternPlayer

The evolution against the PatternPlayer resulted in a disimprovement of the GPlayer.

The average calculated fitness of the new GPlayer: 102001

The average calculated fitness of the old GPlayer: 113168

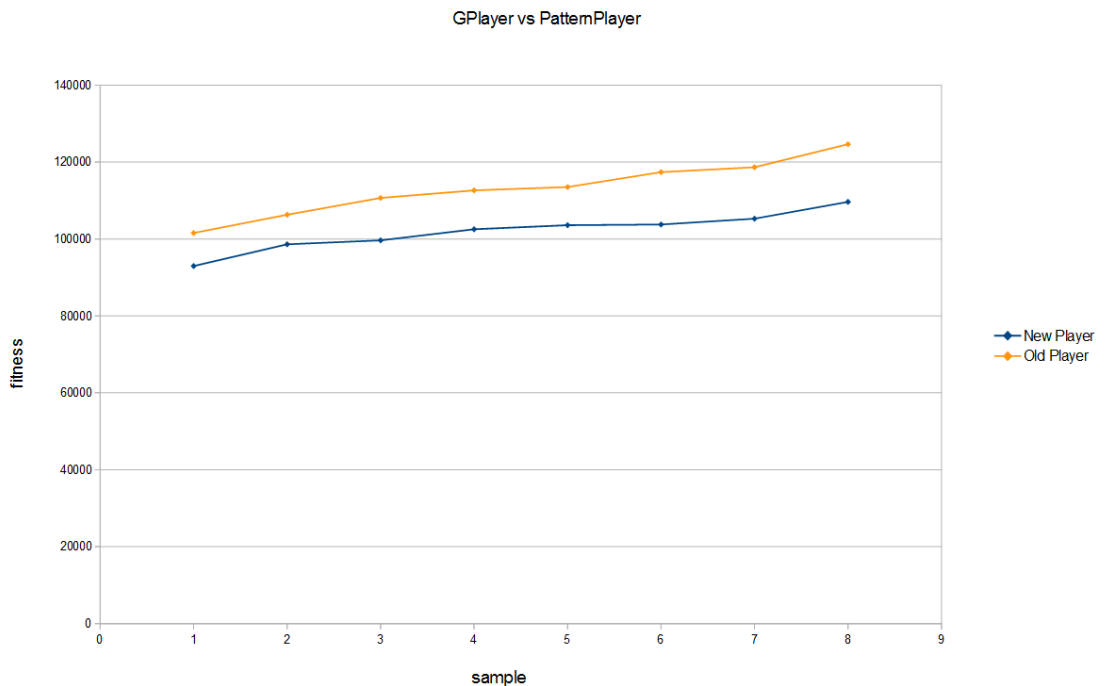

Evolved trees against the PatternPlayer

```
ifm <=d cd[0,8291] cd[0,2086] rcm[Check] rm /d vard[1] *d *d cd[0,5560]
cd[0,0537] *d cd[0,0519] cd[0,9908]
```

```
ifm <=d cd[0,1068] *d cd[0,7747] vard[1] rm cd[0,4432] rm *d vard[0] cd[0,9040]
```

```
ifm <=d vard[1] *d cd[0.5569] vard[0] ifm <=d cd[0.3677] vard[0] rm *d
cd[0.0629] cd[0.1581] ncm[Check] ncm[Call]
```

```
ifm <=d vard[0] cd[0,6326] ifm <=d vard[1] *d cd[0,3969] vard[0] ncm[Check]
ncm[Call] rm cd[0,5256]
```


```
ifm <=d cd[0,5573] vard[0] rm *d cd[0,7988] *d cd[0,3149] cd[0,3444] ifm
<=d *d vard[0] cd[0,5125] vard[1] ncm[Call] ncm[Check]
```

4.2.2 Evolution against TestPlayer

Overall it is safe to say that the changes improved the performance against the Test-Player. Although there can be some cases where the old player has a higher fitness than the new one. Also notable is that the overall fitness is cut down to approximately a third compared to the test runs against the PatternPlayer.

The average calculated fitness of the new GPlayer: 31153

The average calculated fitness of the old GPlayer: 26710

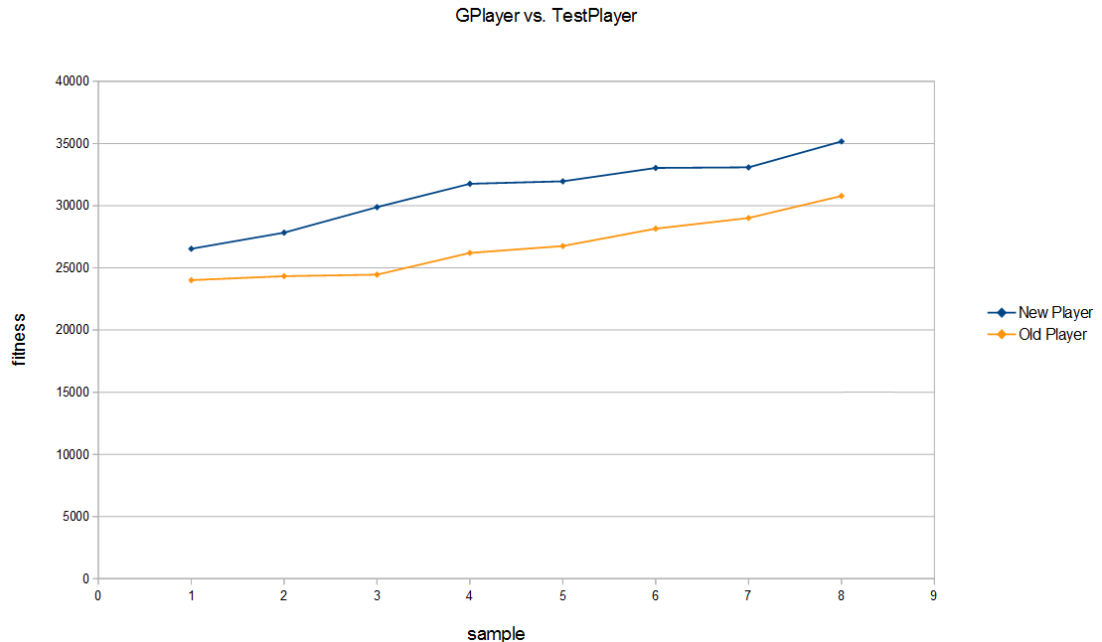

Evolved trees against the TestPlayer

```
ifm <=d cd[0.5750] vard[0] rm cd[0.3671] ifm <=d vard[0] vard[1] ncm[Call]
ncm[Check]
```

```
ifm <=d cd[0.6027] vard[0] rm cd[0.8510] ifm <=d *d *d vard[0] cd[0.5788]  
cd[0.9339] vard[1] ncm[Call] ncm[Check]
```

```
ifm <=d cd[0,1670] *d cd[0,3417] *d cd[0,7303] cd[0,9367] rm cd[0,9624]  
ncm[Check]
```

```
ifm <=d cd[0,8291] cd[0,2086] rcm[Check] rm /d vard[1] *d *d cd[0,5560]  
cd[0,0537] *d cd[0,0519] cd[0,9908]
```

```
ifm <=d cd[0,4988] /d *d cd[0,2995] cd[0,5651] cd[0,0693] rm /d cd[0,5110]  
*d *d vard[1] vard[0] ifd cb[false] cd[0,3461] cd[0,5974] rcm[Check]
```

5 Links

- Project Page: <https://student.cosy.sbg.ac.at/~tdafir/nc/>
- PS Page: <http://www.cosy.sbg.ac.at/~helmut/Teaching/NaturalComputation/proseminar.html>