

EXPERIMENT-12

End –End Communication at Transport Layer

- a) Implement echo client server using TCP/UDP sockets.
- b) Implement a chat program using socket programming.

```
tcp_server.py import socket server =  
socket.socket(socket.AF_INET, socket.SOCK_STREAM)  
server.bind(("127.0.0.1", 5000)) server.listen(1) print("TCP  
Echo Server started...") conn, addr = server.accept()  
print("Connected:", addr)  
while True:  
data = conn.recv(1024) if not  
data: break  
print("Client:", data.decode())  
conn.send(data)  
conn.close() server.close()  
  
tcp_client.py import  
socket  
client = socket.socket(socket.AF_INET, socket.SOCK_STREAM)  
client.connect(("127.0.0.1", 5000))  
print("Connected to TCP Echo Server")  
while True:  
msg = input("Enter message: ")  
if msg.lower() == "exit":  
break  
client.send(msg.encode())  
data = client.recv(1024)
```

EXPERIMENT-12

```
print("Server:", data.decode())  
client.close()
```

```
udp_server.py import socket  
  
server = socket.socket(socket.AF_INET, socket.SOCK_DGRAM)  
  
server.bind(("127.0.0.1", 5001))  
  
print("UDP Echo Server started...")  
  
while True:  
    data, addr = server.recvfrom(1024)  
  
    print("Client:", data.decode())  
  
    if data.decode().lower() == "exit":  
        break  
  
    server.sendto(data, addr)  
  
server.close()
```

```
udp_client.py import  
  
socket  
  
client = socket.socket(socket.AF_INET, socket.SOCK_DGRAM)  
  
print("Connected to UDP Echo Server")  
  
while True:  
    msg = input("Enter message: ")  
  
    client.sendto(msg.encode(), ("127.0.0.1", 5001))  
  
    if msg.lower() == "exit":  
        break  
  
    data, addr = client.recvfrom(1024)  
  
    print("Server:", data.decode())  
  
client.close()
```

EXPERIMENT-12

```
chat_server.py import socket
server = socket.socket(socket.AF_INET, socket.SOCK_STREAM)
server.bind(("127.0.0.1", 5002))
server.listen(1)

print("Chat Server started...")
conn, addr = server.accept()

print("Connected:", addr)
while True:
    msg = conn.recv(1024).decode()

    if msg.lower() == "exit":
        break

    print("Client:", msg)
    reply = input("You: ")
    conn.send(reply.encode())

    if reply.lower() == "exit":
        break

conn.close()
server.close()

chat_client.py import
socket

client = socket.socket(socket.AF_INET, socket.SOCK_STREAM)
client.connect(("127.0.0.1", 5002))

print("Connected to Chat Server")

while True:
    msg = input("You: ")
    client.send(msg.encode())

    if msg.lower() == "exit":
        break


    reply = client.recv(1024).decode()

print("Server:", reply)

    if reply.lower() == "exit":
        break
    client.close()
```

EXPERIMENT-12

EXPERIMENT-12

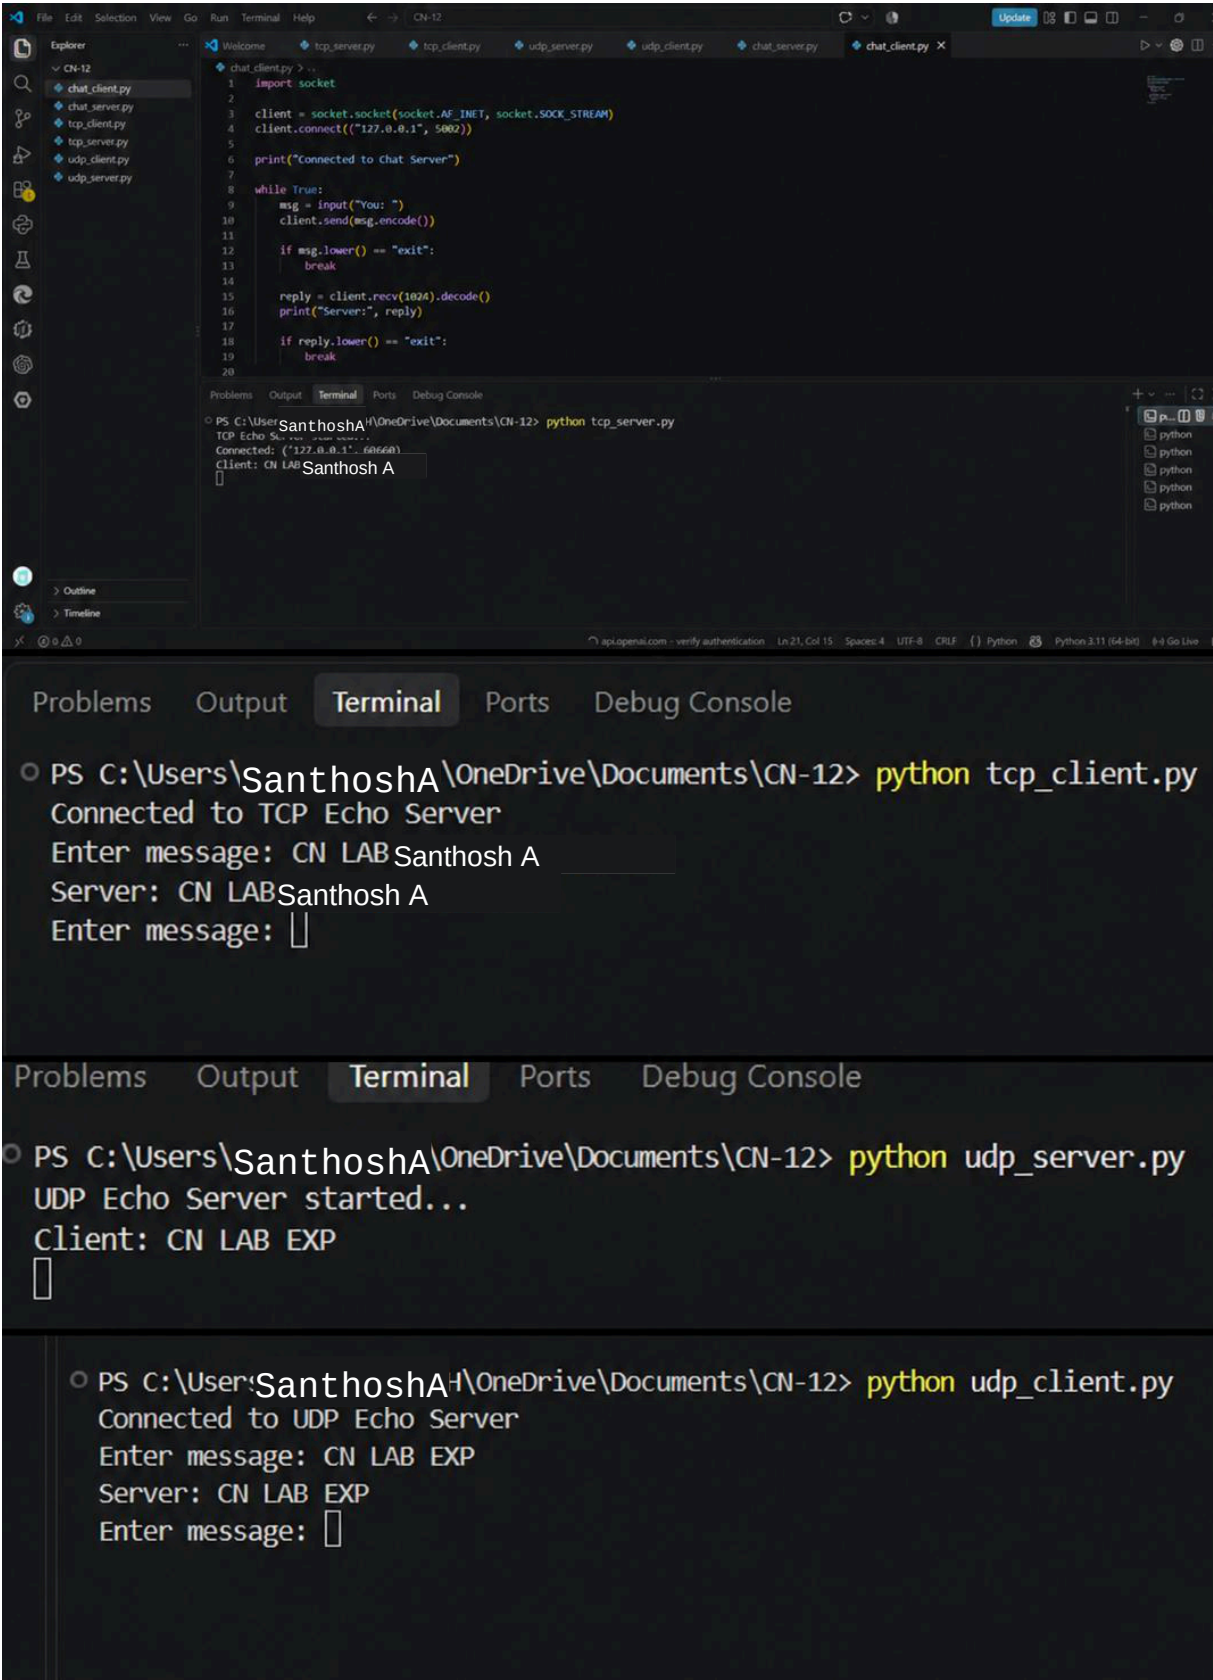

EXPERIMENT-12

```
PS C:\Users\SanthoshA\OneDrive\Documents\CN-12> python chat_server.py
Chat Server started...
Connected: ('127.0.0.1', 58511)
Client: HII
You: GOOD MORNING
Client: WELCOME
You: 
```

Problems Output **Terminal** Ports Debug Console

```
PS C:\Users\SanthoshA\OneDrive\Documents\CN-12> python chat_client.py
Connected to Chat Server
You: HII
Server: GOOD MORNING
You: WELCOME

```