


PREPARED FOR JANTZ / BLACK BELT BUILDING

12 FT 8 IN / 3V DOME

GEOMETRY FIELD REFERENCE

Independent 5/8 Class-I node-center model / construction package incomplete

CANONICAL 3V / 5-8 NODE-CENTER MESH - NTS

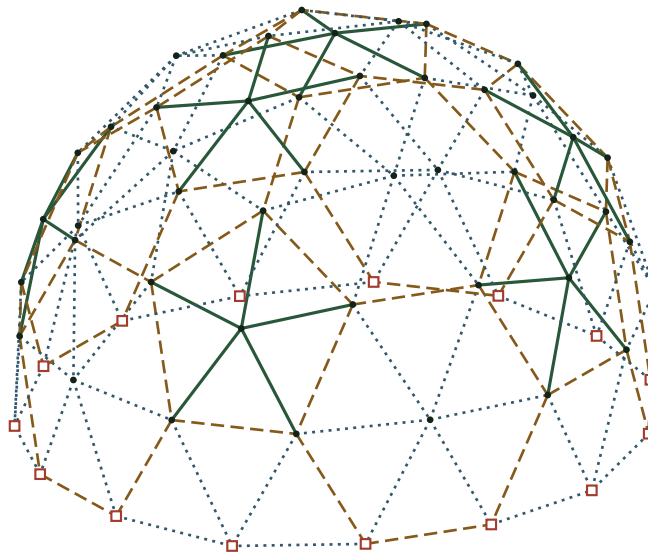

— A 27.051163

- - - B 31.313722

..... C 32.001477

UNIQUE AXES

165

30 A / 55 B / 80 C node-center chords

NODES

61

15 four-way / 6 five-way / 40 six-way

GROSS FACES

105

30 A-A-B / 75 B-C-C triangles

RELEASE

HOLD

No joinery, doorway, platform, or capacity

USE THIS PDF TO IDENTIFY THE AUDITED GEOMETRY AND OPEN QUESTIONS. DO NOT USE ANY DIMENSION AS A SAW, SHOULDER, BEVEL, MITER, HUB, PANEL, OR JOINERY CUT.

Print-optimized and text-searchable. This document is not represented as PDF/UA tagged.


Interactive companion: monroe-domes.vercel.app/3v

G3-101 / CANONICAL MODEL

Plan and elevation


Every line terminates at mathematical node centers. The 152 inch normalization is a maximum boundary-node span, not a proven outside-frame diameter.

PLAN / NODE-CENTER AXES - NTS

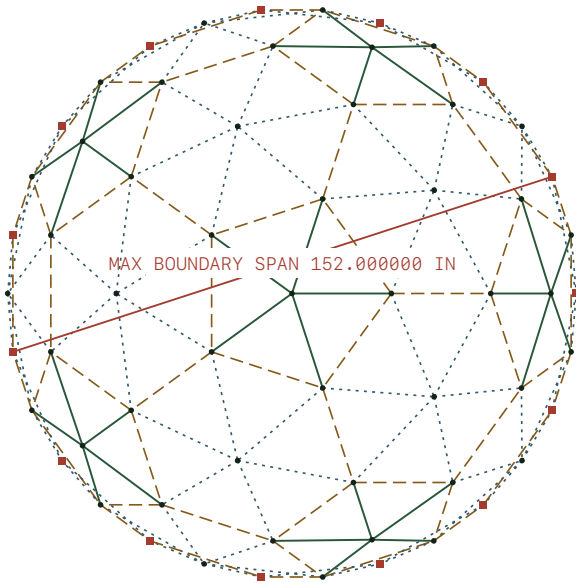

Red squares: 15 non-planar boundary nodes

FRONT ELEVATION / LOW DATUM - NTS

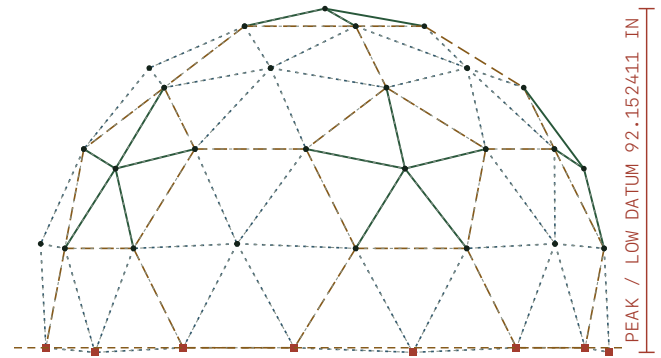

BOUNDARY RIPPLE 1.237902 IN / 5 LOW + 10 HIGH

PARAMETER	AUDITED VALUE	MODEL MEANING
Sphere radius	77.595988 in	Radial projection sphere
Max boundary-node span	152.000000 in	Normalization datum; not outside timber
Minimum boundary caliper	151.042328 in	Directional width of 15-node boundary
Maximum mesh plan span	152.888905 in	Any two modeled nodes in plan
Peak / low datum	92.152411 in	Highest node above five low boundary nodes
Boundary ripple	1.237902 in	Ten boundary nodes above five low nodes

THE 15-NODE BOUNDARY IS NOT PLANAR. A PONY WALL OR SUPPORT DATUM IS NOT MODELED.

CHECKS: $V-E+F = 61-165+105 = 1$ / $2E = 330 = \text{HUB PORTS} / \text{BOUNDARY} = 15 \text{ EDGES}$

G3-201 / NODE SCHEDULE

All 61 mathematical nodes

Coordinates use +Y up and the five lowest boundary nodes at Y = 0. Values shown to 0.001 inch are display rounding only, not fabrication tolerance.

NODE FAMILY	QTY	IDS	BOUNDARY
4-way	15	V047-V061	All 15 are boundary nodes
5-way	6	V001 / V027-V031	Interior
6-way	40	V002-V026 / V032-V046	Interior

ID	V	B	X	Y	Z (IN)	ID	V	B	X	Y	Z (IN)
V001	5	-	+0.000	+92.152	+0.000	V032	6	-	+61.662	+29.113	+44.800
V002	6	-	+26.637	+87.437	+0.000	V033	6	-	-23.553	+29.113	+72.488
V003	6	-	+8.231	+87.437	+25.333	V034	6	-	-76.218	+29.113	+0.000
V004	6	-	-21.550	+87.437	+15.657	V035	6	-	-23.553	+29.113	-72.488
V005	6	-	-21.550	+87.437	-15.657	V036	6	-	+61.662	+29.113	-44.800
V006	6	-	+8.231	+87.437	-25.333	V037	6	-	+74.824	+27.875	+15.657
V007	6	-	+38.109	+76.218	+27.688	V038	6	-	+38.012	+27.875	+66.324
V008	6	-	-14.556	+76.218	+44.800	V039	6	-	+8.231	+27.875	+76.000
V009	6	-	-47.106	+76.218	+0.000	V040	6	-	-51.331	+27.875	+56.647
V010	6	-	-14.556	+76.218	-44.800	V041	6	-	-69.737	+27.875	+31.314
V011	6	-	+38.109	+76.218	-27.688	V042	6	-	-69.737	+27.875	-31.314
V012	6	-	+53.274	+70.975	+0.000	V043	6	-	-51.331	+27.875	-56.647
V013	6	-	+16.463	+70.975	+50.667	V044	6	-	+8.231	+27.875	-76.000
V014	6	-	-43.100	+70.975	+31.314	V045	6	-	+38.012	+27.875	-66.324
V015	6	-	-43.100	+70.975	-31.314	V046	6	-	+74.824	+27.875	-15.657
V016	6	-	+16.463	+70.975	-50.667	V047	4	Y	+69.737	+1.238	+31.314
V017	6	-	+61.505	+54.512	+25.333	V048	4	Y	+51.331	+1.238	+56.647
V018	6	-	+43.100	+54.512	+50.667	V049	4	Y	-8.231	+1.238	+76.000
V019	6	-	-5.087	+54.512	+66.324	V050	4	Y	-38.012	+1.238	+66.324
V020	6	-	-34.868	+54.512	+56.647	V051	4	Y	-74.824	+1.238	+15.657
V021	6	-	-64.649	+54.512	+15.657	V052	4	Y	-74.824	+1.238	-15.657
V022	6	-	-64.649	+54.512	-15.657	V053	4	Y	-38.012	+1.238	-66.324
V023	6	-	-34.868	+54.512	-56.647	V054	4	Y	-8.231	+1.238	-76.000
V024	6	-	-5.087	+54.512	-66.324	V055	4	Y	+51.331	+1.238	-56.647
V025	6	-	+43.100	+54.512	-50.667	V056	4	Y	+69.737	+1.238	-31.314
V026	6	-	+61.505	+54.512	-25.333	V057	4	Y	+76.218	+0.000	+0.000
V027	5	-	+69.404	+49.258	+0.000	V058	4	Y	+23.553	+0.000	+72.488
V028	5	-	+21.447	+49.258	+66.007	V059	4	Y	-61.662	+0.000	+44.800
V029	5	-	-56.149	+49.258	+40.795	V060	4	Y	-61.662	+0.000	-44.800
V030	5	-	-56.149	+49.258	-40.795	V061	4	Y	+23.553	+0.000	-72.488
V031	5	-	+21.447	+49.258	-66.007						

NODE VALENCE IS TOPOLOGY, NOT A HUB SPECIFICATION. HUB SIZE, LAYUP, PORT GEOMETRY, LIGAMENTS, GRAIN, RETENTION, AND CAPACITY ARE NOT DESIGNED.

G3-202 / UNIQUE AXIS SCHEDULE

A and B node-center chords

The IDs below enumerate unique mesh edges once. Lengths are center-to-center chord geometry only; no stock allowance, shoulder, tenon, hub, bevel, miter, or tolerance is included.

CLASS	QTY	NODE-CENTER CHORD	CHORD FACTOR	FABRICATION STATUS
A	30	27.051163 in	0.348615488820	NOT A FINISHED CUT
B	55	31.313722 in	0.403548212335	NOT A FINISHED CUT

PIECE	EDGE	START>END	BND	PIECE	EDGE	START>END	BND	PIECE	EDGE	START>END	BND
A-001	E001	V001>V002	-	A-030	E105	V031>V045	-	B-029	E081	V022>V042	-
A-002	E002	V001>V003	-	B-001	E006	V002>V003	-	B-030	E082	V023>V024	-
A-003	E003	V001>V004	-	B-002	E007	V002>V006	-	B-031	E085	V023>V043	-
A-004	E004	V001>V005	-	B-003	E010	V002>V012	-	B-032	E088	V024>V044	-
A-005	E005	V001>V006	-	B-004	E011	V003>V004	-	B-033	E089	V025>V026	-
A-006	E048	V012>V027	-	B-005	E014	V003>V013	-	B-034	E092	V025>V045	-
A-007	E051	V013>V028	-	B-006	E015	V004>V005	-	B-035	E095	V026>V046	-
A-008	E054	V014>V029	-	B-007	E018	V004>V014	-	B-036	E126	V037>V046	-
A-009	E057	V015>V030	-	B-008	E019	V005>V006	-	B-037	E127	V037>V047	-
A-010	E060	V016>V031	-	B-009	E022	V005>V015	-	B-038	E129	V038>V039	-
A-011	E062	V017>V027	-	B-010	E025	V006>V016	-	B-039	E130	V038>V048	-
A-012	E065	V018>V028	-	B-011	E046	V012>V017	-	B-040	E132	V039>V049	-
A-013	E069	V019>V028	-	B-012	E047	V012>V026	-	B-041	E134	V040>V041	-
A-014	E072	V020>V029	-	B-013	E049	V013>V018	-	B-042	E135	V040>V050	-
A-015	E076	V021>V029	-	B-014	E050	V013>V019	-	B-043	E137	V041>V051	-
A-016	E079	V022>V030	-	B-015	E052	V014>V020	-	B-044	E139	V042>V043	-
A-017	E083	V023>V030	-	B-016	E053	V014>V021	-	B-045	E140	V042>V052	-
A-018	E086	V024>V031	-	B-017	E055	V015>V022	-	B-046	E142	V043>V053	-
A-019	E090	V025>V031	-	B-018	E056	V015>V023	-	B-047	E144	V044>V045	-
A-020	E093	V026>V027	-	B-019	E058	V016>V024	-	B-048	E145	V044>V054	-
A-021	E096	V027>V037	-	B-020	E059	V016>V025	-	B-049	E147	V045>V055	-
A-022	E097	V027>V046	-	B-021	E061	V017>V018	-	B-050	E149	V046>V056	-
A-023	E098	V028>V038	-	B-022	E064	V017>V037	-	B-051	E151	V047>V048	B
A-024	E099	V028>V039	-	B-023	E067	V018>V038	-	B-052	E154	V049>V050	B
A-025	E100	V029>V040	-	B-024	E068	V019>V020	-	B-053	E157	V051>V052	B
A-026	E101	V029>V041	-	B-025	E071	V019>V039	-	B-054	E160	V053>V054	B
A-027	E102	V030>V042	-	B-026	E074	V020>V040	-	B-055	E163	V055>V056	B
A-028	E103	V030>V043	-	B-027	E075	V021>V022	-				
A-029	E104	V031>V044	-	B-028	E078	V021>V041	-				

BND B = one of the 15 mathematical boundary edges. A blank marker means interior edge.

DO NOT TRANSCRIBE THESE CHORDS TO LUMBER. PHYSICAL MEMBER LENGTH DEPENDS ON AN UNRELEASED CONNECTION, SETBACK, STOCK, MOISTURE, AND ASSEMBLY DATUM.

G3-203 / UNIQUE AXIS SCHEDULE

C node-center chords

This sheet completes the 165-edge canonical skeleton. The schedule is an identity and adjacency reference, not a lumber cut list.

CLASS	QTY	NODE-CENTER CHORD	CHORD FACTOR	FABRICATION STATUS
C	80	32.001477 in	0.412411489310	NOT A FINISHED CUT

PIECE	EDGE	START>END	BND	PIECE	EDGE	START>END	BND	PIECE	EDGE	START>END	BND
C-001	E008	V002>V007	-	C-028	E043	V011>V016	-	C-055	E120	V035>V053	-
C-002	E009	V002>V011	-	C-029	E044	V011>V025	-	C-056	E121	V035>V054	-
C-003	E012	V003>V007	-	C-030	E045	V011>V026	-	C-057	E122	V036>V045	-
C-004	E013	V003>V008	-	C-031	E063	V017>V032	-	C-058	E123	V036>V046	-
C-005	E016	V004>V008	-	C-032	E066	V018>V032	-	C-059	E124	V036>V055	-
C-006	E017	V004>V009	-	C-033	E070	V019>V033	-	C-060	E125	V036>V056	-
C-007	E020	V005>V009	-	C-034	E073	V020>V033	-	C-061	E128	V037>V057	-
C-008	E021	V005>V010	-	C-035	E077	V021>V034	-	C-062	E131	V038>V058	-
C-009	E023	V006>V010	-	C-036	E080	V022>V034	-	C-063	E133	V039>V058	-
C-010	E024	V006>V011	-	C-037	E084	V023>V035	-	C-064	E136	V040>V059	-
C-011	E026	V007>V012	-	C-038	E087	V024>V035	-	C-065	E138	V041>V059	-
C-012	E027	V007>V013	-	C-039	E091	V025>V036	-	C-066	E141	V042>V060	-
C-013	E028	V007>V017	-	C-040	E094	V026>V036	-	C-067	E143	V043>V060	-
C-014	E029	V007>V018	-	C-041	E106	V032>V037	-	C-068	E146	V044>V061	-
C-015	E030	V008>V013	-	C-042	E107	V032>V038	-	C-069	E148	V045>V061	-
C-016	E031	V008>V014	-	C-043	E108	V032>V047	-	C-070	E150	V046>V057	-
C-017	E032	V008>V019	-	C-044	E109	V032>V048	-	C-071	E152	V047>V057	B
C-018	E033	V008>V020	-	C-045	E110	V033>V039	-	C-072	E153	V048>V058	B
C-019	E034	V009>V014	-	C-046	E111	V033>V040	-	C-073	E155	V049>V058	B
C-020	E035	V009>V015	-	C-047	E112	V033>V049	-	C-074	E156	V050>V059	B
C-021	E036	V009>V021	-	C-048	E113	V033>V050	-	C-075	E158	V051>V059	B
C-022	E037	V009>V022	-	C-049	E114	V034>V041	-	C-076	E159	V052>V060	B
C-023	E038	V010>V015	-	C-050	E115	V034>V042	-	C-077	E161	V053>V060	B
C-024	E039	V010>V016	-	C-051	E116	V034>V051	-	C-078	E162	V054>V061	B
C-025	E040	V010>V023	-	C-052	E117	V034>V052	-	C-079	E164	V055>V061	B
C-026	E041	V010>V024	-	C-053	E118	V035>V043	-	C-080	E165	V056>V057	B
C-027	E042	V011>V012	-	C-054	E119	V035>V044	-				

BND B = boundary edge. All C entries remain node-center mathematical axes.

NO CUT END CONDITION IS IMPLIED. PLANAR FACE ANGLES ON P3-101 ARE ALSO NOT SAW, BEVEL, COMPOUND-MITER, OR JOINERY SETTINGS.

P3-101 / GROSS FACE SCHEDULE

Two mathematical triangle families


Each face is listed once from the canonical triangulated shell. Dimensions and angles describe the node-center plane only; no thickness, seam, frame duplication, kerf, joinery, skin, or doorway modification is included.

PENT / AAB


SCHEMATIC / NTS

HEX / BCC

SCHEMATIC / NTS

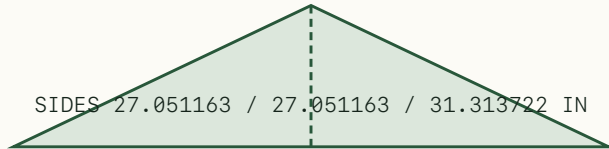

B-EDGE BASE 31.313722 IN / ALTITUDE TO B 22.059649 IN
GROSS FACE QTY 30 / NOT A PANEL CUT

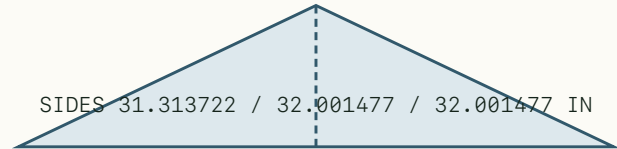

B-EDGE BASE 31.313722 IN / ALTITUDE TO B 27.909805 IN
GROSS FACE QTY 75 / NOT A PANEL CUT

FAMILY	QTY	B-EDGE BASE	ALTITUDE TO B	PLANAR INTERIOR ANGLES	AREA EACH
PENT / A-A-B	30	31.313722 in	22.059649 in	54.634730 / 54.634730 / 70.730541 DEG	345.384865 sq in
HEX / B-C-C	75	31.313722 in	27.909805 in	58.583165 / 60.708417 / 60.708417 DEG	436.979940 sq in

PIECE	FACE	VERTICES
PENT-001	F001	V001/V002/V006
PENT-002	F002	V001/V003/V002
PENT-003	F003	V001/V004/V003
PENT-004	F004	V001/V005/V004
PENT-005	F005	V001/V006/V005
PENT-006	F036	V012/V017/V027
PENT-007	F037	V012/V027/V026
PENT-008	F038	V013/V019/V028
PENT-009	F039	V013/V028/V018
PENT-010	F040	V014/V021/V029
PENT-011	F041	V014/V029/V020
PENT-012	F042	V015/V023/V030
PENT-013	F043	V015/V030/V022
PENT-014	F044	V016/V025/V031
PENT-015	F045	V016/V031/V024
PENT-016	F048	V017/V037/V027
PENT-017	F049	V018/V028/V038
PENT-018	F053	V019/V039/V028
PENT-019	F054	V020/V029/V040
PENT-020	F058	V021/V041/V029
PENT-021	F059	V022/V030/V042
PENT-022	F063	V023/V043/V030
PENT-023	F064	V024/V031/V044
PENT-024	F068	V025/V045/V031
PENT-025	F069	V026/V027/V046
PENT-026	F071	V027/V037/V046
PENT-027	F072	V028/V039/V038

PIECE	FACE	VERTICES
PENT-028	F073	V029/V041/V040
PENT-029	F074	V030/V043/V042
PENT-030	F075	V031/V045/V044
HEX-001	F006	V002/V003/V007
HEX-002	F007	V002/V007/V012
HEX-003	F008	V002/V011/V006
HEX-004	F009	V002/V012/V011
HEX-005	F010	V003/V004/V008
HEX-006	F011	V003/V008/V013
HEX-007	F012	V003/V013/V007
HEX-008	F013	V004/V005/V009
HEX-009	F014	V004/V009/V014
HEX-010	F015	V004/V014/V008
HEX-011	F016	V005/V006/V010
HEX-012	F017	V005/V010/V015
HEX-013	F018	V005/V015/V009
HEX-014	F019	V006/V011/V016
HEX-015	F020	V006/V016/V010
HEX-016	F021	V007/V013/V018
HEX-017	F022	V007/V017/V012
HEX-018	F023	V007/V018/V017
HEX-019	F024	V008/V014/V020
HEX-020	F025	V008/V019/V013
HEX-021	F026	V008/V020/V019
HEX-022	F027	V009/V015/V022
HEX-023	F028	V009/V021/V014

CONTINUED ON P3-102 / PLANAR ANGLES ARE NOT SAW OR JOINERY SETTINGS.

P3-102 / GROSS FACE SCHEDULE

Face inventory continuation

This sheet completes all 105 canonical face identities. Read with the B-edge base convention and gross family dimensions on P3-101; every entry remains node-center geometry only.

SHEET	PIECES LISTED	SHEET COUNT	STATUS
P3-101	PENT-001-PENT-030 / HEX-001-HEX-023	53	GROSS NODE-CENTER FACES
P3-102	HEX-024-HEX-075	52	GROSS NODE-CENTER FACES

PIECE	FACE	VERTICES	PIECE	FACE	VERTICES
HEX-024	F029	V009/V022/V021	HEX-050	F080	V033/V049/V039
HEX-025	F030	V010/V016/V024	HEX-051	F081	V033/V050/V049
HEX-026	F031	V010/V023/V015	HEX-052	F082	V034/V042/V052
HEX-027	F032	V010/V024/V023	HEX-053	F083	V034/V051/V041
HEX-028	F033	V011/V012/V026	HEX-054	F084	V034/V052/V051
HEX-029	F034	V011/V025/V016	HEX-055	F085	V035/V044/V054
HEX-030	F035	V011/V026/V025	HEX-056	F086	V035/V053/V043
HEX-031	F046	V017/V018/V032	HEX-057	F087	V035/V054/V053
HEX-032	F047	V017/V032/V037	HEX-058	F088	V036/V046/V056
HEX-033	F050	V018/V038/V032	HEX-059	F089	V036/V055/V045
HEX-034	F051	V019/V020/V033	HEX-060	F090	V036/V056/V055
HEX-035	F052	V019/V033/V039	HEX-061	F091	V037/V047/V057
HEX-036	F055	V020/V040/V033	HEX-062	F092	V037/V057/V046
HEX-037	F056	V021/V022/V034	HEX-063	F093	V038/V039/V058
HEX-038	F057	V021/V034/V041	HEX-064	F094	V038/V058/V048
HEX-039	F060	V022/V042/V034	HEX-065	F095	V039/V049/V058
HEX-040	F061	V023/V024/V035	HEX-066	F096	V040/V041/V059
HEX-041	F062	V023/V035/V043	HEX-067	F097	V040/V059/V050
HEX-042	F065	V024/V044/V035	HEX-068	F098	V041/V051/V059
HEX-043	F066	V025/V026/V036	HEX-069	F099	V042/V043/V060
HEX-044	F067	V025/V036/V045	HEX-070	F100	V042/V060/V052
HEX-045	F070	V026/V046/V036	HEX-071	F101	V043/V053/V060
HEX-046	F076	V032/V038/V048	HEX-072	F102	V044/V045/V061
HEX-047	F077	V032/V047/V037	HEX-073	F103	V044/V061/V054
HEX-048	F078	V032/V048/V047	HEX-074	F104	V045/V055/V061
HEX-049	F079	V033/V040/V050	HEX-075	F105	V046/V057/V056

GROSS FACES ARE NOT FINISHED PANELS OR MODULE CUTS. PLANAR INTERIOR ANGLES ARE NOT MITER, BEVEL, COMPOUND-SAW, OR JOINERY SETTINGS.

Schedule total: 30 PENT + 75 HEX = 105 faces. Doorway-piece allocation remains unresolved.

R3-101 / COUNT RECONCILIATION

165 unique axes and 315 face-edge incidences

These counts describe two different reference systems. They agree mathematically without turning the private-source panel method into a released fabrication schedule.

CANONICAL SKELETON

165

Unique node-center axes; each shared edge counted once

GROSS FACES

105

Triangular faces in one connected manifold disk

FACE-EDGE INCIDENCES

315

3 x 105; shared boundaries duplicate by face

$$315 = 3 \times 105 = 2(165) - 15$$

Face sides = twice every interior edge plus each of the 15 boundary edges once

CLASS	INDEPENDENT CHORD	ROUNDED SOURCE	RESIDUAL	INTERPRETATION
A	27.051163 in	27.062500 in	-0.011337 in	Reconciliation only; not tolerance
B	31.313722 in	31.312500 in	+0.001222 in	Reconciliation only; not tolerance
C	32.001477 in	32.000000 in	+0.001477 in	Reconciliation only; not tolerance

NO BLANKET +/-0.0015 IN CLAIM IS VALID. THE THREE RESIDUALS DIFFER, AND NONE ESTABLISHES MACHINING ACCURACY, FIT, OR FABRICATION TOLERANCE.

REFERENCE SYSTEM	COUNT	WHAT IS VERIFIED	WHAT IS WITHHELD
Independent skeleton	165	Topology, node coordinates, edge identities, chord classes	All physical member end conditions
Private-source panel method	315	Reported total matches 3 x 105 face sides	Doorway allocation and physical cut schedule
Gross face schedule	105	30 A-A-B and 75 B-C-C node-center triangles	Finished wood panels or modules

PRIVATE SOURCE CROSS-CHECK

12 ft 8 in · 5/8 3V dome / Golden Trillium Geodesics LLC / Trillium Domes / 2023. Private plan cross-check only. Original pages, artwork, prose, and proprietary shop layouts are not embedded or redistributed by this site.

The source reports 73 full hex panels, 30 pent panels, two right door half-panels, and two left door half-panels. Those doorway labels are not mapped to a verified physical cut package here.

R3-201 / RELEASE GATE

What Jantz can use now - and what must be resolved

Use the geometry to orient review, identify pieces, and write RFIs. Construction remains on hold until the physical systems below are designed, checked, and explicitly released.

SYSTEM	STATUS	REQUIRED RESOLUTION
Doorway	HOLD / DO NOT CUT	Clear opening, affected members, 3D cut datums, load path, threshold, and weather detailing are not resolved.
Platform	NO 3V DESIGN	The reviewed source deck uses metal hardware. No all-wood platform, anchorage, uplift path, or foundation design is released.
Structure + occupancy	CAPACITY NOT ESTABLISHED	Wind, snow, seismic, uplift, connection, foundation, egress, code, and site-specific review remain open.
Weather + acoustics	NOT DESIGNED OR TESTED	No complete drainage, flashing, membrane, durability, moisture-movement, or acoustic-performance system is issued.

RFI / PRE-FABRICATION CHECKLIST

- 01 Confirm site, jurisdiction, use, occupancy, egress, and governing loads.
- 02 Define actual outside dimensions, floor datum, headroom, and support geometry.
- 03 Resolve the non-planar 15-node boundary and any pony-wall or curb system.
- 04 Engineer member section, species, grade, moisture, buckling, and durability.
- 05 Engineer hubs/connections: material, layup, ports, setbacks, fasteners, retention, and capacity.
- 06 Define exact finished member datums, cut lengths, bevels, miters, tolerances, and labeling.
- 07 Engineer doorway clear opening, removed/altered parts, replacement load path, and threshold.
- 08 Engineer all-wood platform/foundation, bearing, uplift, anchorage, drainage, stairs, and guards.
- 09 Design enclosure layers, seams, flashing, membrane, ventilation, fire, and moisture movement.
- 10 Prototype and test assembly sequence, fit, weathering, structural behavior, and acoustics.

NEXT RELEASE GATE: ENGINEERED PHYSICAL CONNECTIONS + SITE LOADS + FOUNDATION/PLATFORM + DOORWAY LOAD PATH + WEATHER ENCLOSURE + PROTOTYPE/TEST EVIDENCE + EXPLICIT FABRICATION ISSUE.

RELEASE ITEM	CURRENT STATE
Geometry and topology	VERIFIED INDEPENDENTLY
Unique axis chord lengths	NODE-CENTER ONLY
Panel faces	GROSS GEOMETRY ONLY
Doorway / platform / joinery	DO NOT CUT / NO 3V DESIGN / NOT MODELED
Weather / acoustics / structure	NOT DESIGNED / NOT TESTED / NOT ENGINEERED
Fabrication	NOT RELEASED

MODEL DATA SHA-256 a767e6ed4024c13831a734de202a4f6c542d91ca7bee3301a3efa84768059ded

Canonical code: lib/geodesic3v.ts + lib/spec3v.ts. Export: scripts/export_3v_pdf_data.mjs.

Accessible interactive reference: <https://monroe-domes.vercel.app/3v>