

## Registrar usuarios

POST registrar adi • +

POST http://localhost:8080/api/auth/signup

Params Body \* Headers 1 Auth \* Vars >> JSON v Prettify Response Headers 12 Timeline Tests {} JSON 200 OK 2.93s 2.20KB ...

```
1 {
2   "username": "Admin Prueba",
3   "name": "Admin",
4   "surname": "Prueba",
5   "email": "admin.prueba@example.com",
6   "password": "Clave123!",
7   "role": 1
8 }
```

```
1 {
2   "token": "eyJhbGciOiJIUzI1NiJ9.eyJpZCI6MSwiaWF0IjoxNzgyMDIwNTkwLCJleHAiOiE3ODIwMjQxOTB9.czu9tr9NfX-2EhUAT5Ss6dR8RLpGIlMZ5tNnOhMSqsk",
3   "data": {
4     "id": 1,
5     "username": "Admin Prueba",
6     "name": "Admin",
7     "surname": "Prueba",
8     "email": "admin.prueba@example.com",
9     "blocked": false,
10    "role": {
11      "id": 1,
12      "name": "ADMIN",
13      "active": null,
14      "permissions": [
15        {
16          "id": 5,
17          "path": "/api/roles/{id}",
18          "method": "GET",
19          "title": null
20        },
21        {
22          "id": 21,
23          "path": "/api/finanzas/prestamos",
24          "method": "POST",
25          "title": null
26        }
27      ]
28    }
29  }
30 }
```

POST registrar adi • POST registrar u • +

POST http://localhost:8080/api/auth/signup

Params Body \* Headers 1 Auth \* Vars >> JSON v Prettify Response Headers 12 Timeline Tests {} JSON 200 OK 400ms 2.21KB ...

```
1 {
2   "username": "Usuario Normal",
3   "name": "Usuario",
4   "surname": "Normal",
5   "email": "usuario.normal@example.com",
6   "password": "Clave123!",
7   "role": 2
8 }
```

```
1 {
2   "token": "eyJhbGciOiJIUzI1NiJ9.eyJpZCI6MiwiaWF0IjoxNzgyMDIwNTkwLCJleHAiOiE3ODIwMjQxOTB9.yfrjZcQSTDu0oBCUd9gFBHbWzbtG47a0FrIhGNzx9A",
3   "data": {
4     "id": 2,
5     "username": "Usuario Normal",
6     "name": "Usuario",
7     "surname": "Normal",
8     "email": "usuario.normal@example.com",
9     "blocked": false,
10    "role": {
11      "id": 1,
12      "name": "ADMIN",
13      "active": null,
14      "permissions": [
15        {
16          "id": 5,
17          "path": "/api/roles/{id}",
18          "method": "GET",
19          "title": null
20        },
21        {
22          "id": 21,
23          "path": "/api/finanzas/prestamos",
24          "method": "POST",
25          "title": null
26        }
27      ]
28    }
29  }
30 }
```

## Endpoints Módulo 9.1

### 1) POST /api/finanzas/cuentas

The screenshot shows a REST client interface with a POST request to `http://localhost:8080/api/finanzas/cuentas`. The request body is a JSON object: `{ "alias": "Cuenta Principal", "moneda": "USD", "tipo": "AHORRO" }`. The response is a 201 Created status with a JSON body: `{ "id": 1, "alias": "Cuenta Principal", "moneda": "USD", "saldoBase": 0, "tipo": "AHORRO" }`. The status bar indicates "201 Created 465ms 80B".

```
POST http://localhost:8080/api/finanzas/cuentas

{
  "alias": "Cuenta Principal",
  "moneda": "USD",
  "tipo": "AHORRO"
}
```

```
{
  "id": 1,
  "alias": "Cuenta Principal",
  "moneda": "USD",
  "saldoBase": 0,
  "tipo": "AHORRO"
}
```

### 2) GET /api/finanzas/cuentas

The screenshot shows a REST client interface with a GET request to `http://localhost:8080/api/finanzas/cuentas`. The request uses Bearer Token authentication. The response is a 200 OK status with a JSON body containing an array of account data and pagination information. The status bar indicates "200 OK 41ms 248B".

```
GET http://localhost:8080/api/finanzas/cuentas
```

Token: [REDACTED]

```
{
  "data": [
    {
      "id": 1,
      "alias": "Cuenta Principal",
      "moneda": "USD",
      "saldoBase": 750.00,
      "tipo": "AHORRO"
    },
    {
      "id": 2,
      "alias": "Cuenta Secundaria",
      "moneda": "USD",
      "saldoBase": 250.00,
      "tipo": "CORRIENTE"
    }
  ],
  "pagination": {
    "page": 0,
    "pageSize": 10,
    "pageCount": 1,
    "total": 2
  }
}
```

### 3) GET /api/finanzas/categorias

The screenshot shows a REST client interface with a list of requests at the top. The selected request is a GET to `http://localhost:8080/api/finanzas/categorias`. The 'Auth' tab is active, showing a Bearer Token. The 'Response' tab displays the JSON data returned by the server.

**Request:** GET `http://localhost:8080/api/finanzas/categorias`

**Auth:** Bearer Token

**Response:**

```
1 {
2   "data": [
3     {
4       "id": 1,
5       "nombre": "Salario",
6       "tipo": "INGRESO",
7       "categoriaPadreId": null
8     },
9     {
10      "id": 3,
11      "nombre": "Transferencia entre cuentas",
12      "tipo": "EGRESO",
13      "categoriaPadreId": 2
14    },
15    {
16      "id": 2,
17      "nombre": "Transferencias",
18      "tipo": "EGRESO",
19      "categoriaPadreId": null
20    }
21  ],
22  "pagination": {
23    "page": 0,
24    "pageSize": 10,
25    "pageCount": 1,
26    "total": 3
27  }
28 }
```

#### 4) POST /api/finanzas/transferencias

The screenshot shows a REST client interface with a POST request to `http://localhost:8080/api/finanzas/transferencias`. The request body is a JSON object with the following fields:

```
1 {
2   "cuentaOrigenId": 1,
3   "cuentaDestinoId": 2,
4   "monto": 250.00,
5   "categoriaId": 2,
6   "descripcion": "Prueba de transferencia"
7 }
```

The response is a 201 Created status with a response time of 378ms and a body size of 683B. The response body is a JSON object with the following fields:

```
1 {
2   "transferenciaId": "b127c172-01b1-4dc8-a120-90c6f6694cfa",
3   "movimientoEgreso": {
4     "id": 1,
5     "monto": -250.00,
6     "monedaOriginal": "USD",
7     "tasaCambio": 1,
8     "fecha": [
9       2026,
10      6,
11      21,
12      0,
13      4,
14      18,
15      68203400
16    ],
17     "descripcion": "Prueba de transferencia",
18     "cuentaId": 1,
19     "cuentaAlias": "Cuenta Principal",
20     "categoriaId": 2,
21     "categoriaNombre": "Transferencias",
22     "transferenciaId": "b127c172-01b1-4dc8-a120-90c6f6694cfa"
23   },
24   "movimientoIngreso": {
25     "id": 2,
26     "monto": 250.00,
27     "monedaOriginal": "USD",
28     "tasaCambio": 1,

```

#### 5) GET /api/finanzas/movimientos

The screenshot shows a REST client interface with a GET request to `http://localhost:8080/api/finanzas/movimientos`. The request is authenticated with a Bearer Token. The response is a 200 OK status with a response time of 101ms and a body size of 672B. The response body is a JSON object with the following fields:

```
1 {
2   "data": [
3     {
4       "id": 1,
5       "monto": -250.00,
6       "monedaOriginal": "USD",
7       "tasaCambio": 1.000000,
8       "fecha": [
9         2026,
10        6,
11        21,
12        0,
13        4,
14        18,
15        68203000
16      ],
17       "descripcion": "Prueba de transferencia",
18       "cuentaId": 1,
19       "cuentaAlias": "Cuenta Principal",
20       "categoriaId": 2,
21       "categoriaNombre": "Transferencias",
22       "transferenciaId": "b127c172-01b1-4dc8-a120-90c6f6694cfa"
23     },
24     {
25       "id": 2,
26       "monto": 250.00,
27       "monedaOriginal": "USD",
28       "tasaCambio": 1.000000,

```

## Endpoints Módulo 9.2

### 1) GET /api/finanzas/portafolios

The screenshot shows the Postman interface for a POST request to `http://localhost:8080/api/finanzas/portafolios`. The request is authenticated with a Bearer Token. The response is a 201 Created status with a JSON body containing portfolio details.

```
POST http://localhost:8080/api/finanzas/portafolios
```

Token: `*****`

Response:

```
1 {
2   "id": 1,
3   "nombre": "Mi Portafolio Conservador",
4   "balanceTotal": 0,
5   "riesgoPerfil": "BAJO"
6 }
```

201 Created 90ms 84B

### 2) GET /api/finanzas/portafolios

The screenshot shows the Postman interface for a GET request to `http://localhost:8080/api/finanzas/portafolios`. The request is authenticated with a Bearer Token. The response is a 200 OK status with a JSON body containing a list of portfolios and pagination information.

```
GET http://localhost:8080/api/finanzas/portafolios
```

Token: `*****`

Response:

```
1 {
2   "data": [
3     {
4       "id": 1,
5       "nombre": "Mi Portafolio Conservador",
6       "balanceTotal": 0.00,
7       "riesgoPerfil": "BAJO"
8     }
9   ],
10  "pagination": {
11    "page": 0,
12    "pageSize": 10,
13    "pageCount": 1,
14    "total": 1
15  }
16 }
```

200 OK 78ms 160B

### 3) POST /api/finanzas/activos

The screenshot shows a Postman interface for a POST request to `http://localhost:8080/api/finanzas/activos`. The request body is a JSON object with the following fields: `simbolo: "AAPL"`, `mercado: "NASDAQ"`, `precioMercado: 195.50`, and `sector: "Tecnologia"`. The response is a 201 Created status with a JSON object containing: `id: 1`, `simbolo: "AAPL"`, `mercado: "NASDAQ"`, `precioMercado: 195.50`, and `sector: "Tecnologia"`. The status bar indicates "201 Created 108ms 90B".

```
POST http://localhost:8080/api/finanzas/activos
```

Body

```
1 {
2   "simbolo": "AAPL",
3   "mercado": "NASDAQ",
4   "precioMercado": 195.50,
5   "sector": "Tecnologia"
6 }
```

Response

```
1 {
2   "id": 1,
3   "simbolo": "AAPL",
4   "mercado": "NASDAQ",
5   "precioMercado": 195.50,
6   "sector": "Tecnologia"
7 }
```

201 Created 108ms 90B

### 4) GET /api/finanzas/activos

The screenshot shows a Postman interface for a GET request to `http://localhost:8080/api/finanzas/activos`. The request is authenticated using a Bearer Token. The response is a 200 OK status with a JSON object containing a list of assets and pagination information. The status bar indicates "200 OK 55ms 165B".

```
GET http://localhost:8080/api/finanzas/activos
```

Auth

Token

```
*****
```

Response

```
1 {
2   "data": [
3     {
4       "id": 1,
5       "simbolo": "AAPL",
6       "mercado": "NASDAQ",
7       "precioMercado": 195.5000,
8       "sector": "Tecnologia"
9     }
10  ],
11  "pagination": {
12    "page": 0,
13    "pageSize": 10,
14    "pageCount": 1,
15    "total": 1
16  }
17 }
```

200 OK 55ms 165B

## 5) POST /api/finanzas/inversiones

The screenshot shows a REST client interface with the following details:

- Method:** POST
- URL:** http://localhost:8080/api/finanzas/inversiones
- Body (JSON):**

```
1 {
2   "portafolioId": 1,
3   "activoId": 1,
4   "cantidad": 10
5 }
```
- Response (JSON):**

```
1 {
2   "id": 1,
3   "cantidad": 10,
4   "precioCompra": 195.5000,
5   "fecha": [
6     2026,
7     6,
8     21,
9     2,
10    42,
11    16,
12    888262000
13  ],
14   "estado": "ABIERTA",
15   "portafolioId": 1,
16   "portafolioNombre": "Mi Portafolio Conservador",
17   "activoId": 1,
18   "activoSimbolo": "AAPL"
19 }
```
- Status:** 201 Created
- Time:** 125ms
- Size:** 203B

## 6) GET /api/finanzas/portafolios/{id}/rendimiento

The screenshot shows a REST client interface with the following details:

- Method:** GET
- URL:** http://localhost:8080/api/finanzas/portafolios/1/rendimiento
- Auth:** Bearer Token (Token is masked with asterisks)
- Response (JSON):**

```
1 {
2   "portafolioId": 1,
3   "nombre": "Mi Portafolio Conservador",
4   "capitalInvertido": 1955.00,
5   "valorActual": 1955.00,
6   "gananciaPerdida": 0.00,
7   "porcentajeRendimiento": 0.00
8 }
```
- Status:** 200 OK
- Time:** 68ms
- Size:** 156B

## Endpoints Módulo 9.3

### 1) POST /api/finanzas/prestamos

The screenshot shows a REST client interface with the following details:

- Method:** POST
- URL:** http://localhost:8080/api/finanzas/prestamos
- Auth:** Bearer Token (Token field is redacted with asterisks)
- Response:**

```
1 {
2   "status": 403,
3   "message": "Acceso denegado: no tienes permisos para esta ruta: /api/finanzas/prestamos"
4 }
```

Response status: 403 Forbidden, 75ms, 102B.

The screenshot shows a REST client interface with the following details:

- Method:** POST
- URL:** http://localhost:8080/api/finanzas/prestamos
- Auth:** Bearer Token (Token field is redacted with asterisks)
- Response:**

```
1 {
2   "id": 2,
3   "capitalSolicitado": 10000,
4   "tasaInteresAnual": 12,
5   "plazoMeses": 6,
6   "estado": "APROBADO"
7 }
```

Response status: 201 Created, 78ms, 91B.



## 2) GET /api/finanzas/prestamos

The screenshot shows a REST client interface with the following details:

- URL:** GET http://localhost:8080/api/finanzas/prestamos
- Auth:** Bearer Token (Token is masked with asterisks)
- Response:** 200 OK, 75ms, 172B
- Response Body (JSON):**

```
1 {
2   "data": [
3     {
4       "id": 2,
5       "capitalSolicitado": 10000.00,
6       "tasaInteresAnual": 12.0000,
7       "plazoMeses": 6,
8       "estado": "APROBADO"
9     }
10  ],
11  "pagination": {
12    "page": 0,
13    "pageSize": 10,
14    "pageCount": 1,
15    "total": 1
16  }
17 }
```


## 3) GET /api/finanzas/prestamos/{id}/planes-pago

The screenshot shows a REST client interface with the following details:

- URL:** GET http://localhost:8080/api/finanzas/prestamos/2/planes-pago
- Auth:** Bearer Token (Token is masked with asterisks)
- Response:** 200 OK, 103ms, 891B
- Response Body (JSON):**

```
1 {
2   "data": [
3     {
4       "id": 2,
5       "numeroCuota": 1,
6       "montoCapital": 1625.48,
7       "montoInteres": 100.00,
8       "fechaVencimiento": [
9         2026,
10        6,
11        22
12      ],
13       "estado": "PENDIENTE",
14       "prestamoId": 2
15     },
16     {
17       "id": 3,
18       "numeroCuota": 2,
19       "montoCapital": 1641.73,
20       "montoInteres": 83.75,
21       "fechaVencimiento": [
22         2026,
23         7,
24         22
25       ],
26       "estado": "PENDIENTE",
27       "prestamoId": 2
28     }
29   ]
30 }
```

4) POST /api/finanzas/abonos

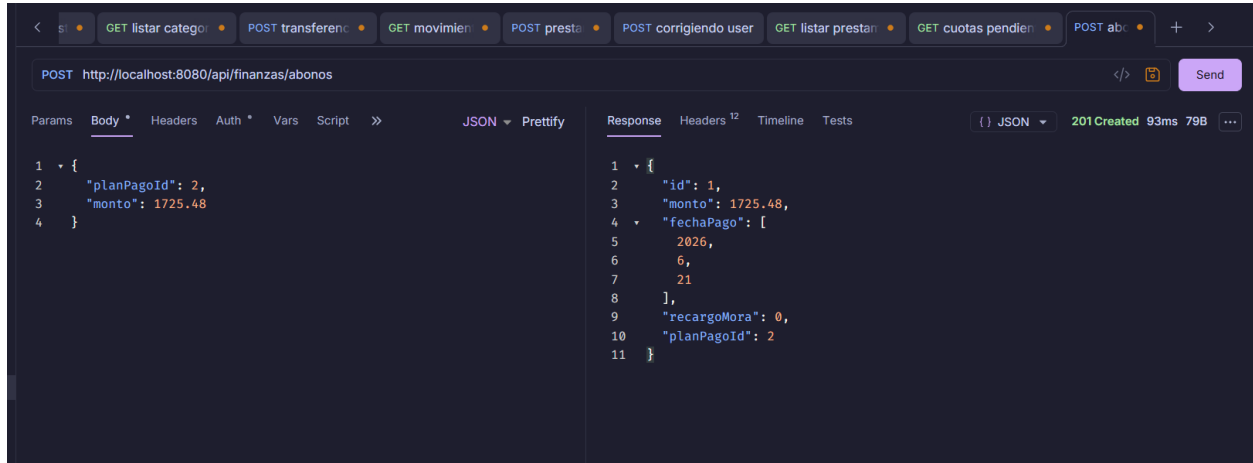

5) GET /api/finanzas/resumen-credito

