

LEARN PYTHON PROGRAMMING – BEGINNER TO MASTER

Section: 7. String and its Methods

Lecture: 76. Prefix and Suffix of a String

Section 1: Lecture Summary

This lecture focuses on Python string methods related to prefixes and suffixes. It introduces and explains six key string methods: `startswith()`, `endswith()`, `removeprefix()`, `removesuffix()`, `partition()`, and `rpartition()`. The `startswith()` and `endswith()` methods check if a string begins or ends with a specified substring, optionally within a specific range. The `removeprefix()` and `removesuffix()` methods remove a matching prefix or suffix from a string, returning a new string without modifying the original. The `partition()` and `rpartition()` methods split the string into a tuple of three parts based on the first occurrence of a separator from the left or right, respectively. Practical examples using Jupyter Notebook illustrate each method's usage with Python strings.

Section 2: Key Concepts and Explanations

- Prefix and Suffix Methods

- `startswith(prefix, start=0, end=len(string))`
 - Checks if the string starts with the given `prefix` substring.
 - Returns `True` or `False`.
 - Optional `start` and `end` parameters restrict the search within the given substring range.
- `endswith(suffix, start=0, end=len(string))`
 - Checks if the string ends with the given `suffix` substring.
 - Returns `True` or `False`.
 - Also supports optional `start` and `end` indices to limit the range.

- Removing Prefix and Suffix

- ``removeprefix(prefix)``

- If the string starts with ``prefix``, removes it and returns a new string without modifying the original.

- If prefix not found, returns the string unchanged.

- ``removesuffix(suffix)``

- Similarly, removes the given ``suffix`` from the end if present and returns a new string.

- Returns unchanged string if suffix is not present.

- Partitioning Strings

- ``partition(sep)``

- Splits the string into a tuple ``(before, sep, after)`` based on the **first** occurrence of separator ``sep`` from the **left** side.

- Includes the separator as the middle element of the tuple.

- If separator not found, returns ``(string, "", "")``.

- ``rpartition(sep)``

- Works like ``partition()``, but splits based on the **first** occurrence of separator from the **right** side.

- Comparison with ``split()``

- ``split()`` removes the separator and splits on every occurrence, returning a list of substrings.

- ``partition()`` and ``rpartition()`` split only once and retain the separator in the result, returning a tuple instead of a list.

Section 3: Example Code and Use Cases

Checking prefixes with startswith()

Checking suffixes with endswith()

Email suffix check example

Removing prefix from a string

Removing prefix that doesn't exist

Removing suffix from a string

Partitioning a string (left side)

Partitioning a string (right side)

```
s1 = 'python is very easy'
print(s1.startswith('python'))    # True
print(s1.startswith('is'))        # False
print(s1.startswith('is', 7))     # True (checks from index 7 onward)

print(s1.endswith('easy'))        # True

s2 = 'abcd@gmail.com'
print(s2.endswith('gmail.com'))   # True
print(s2.endswith('.com'))        # True
print(s2.endswith('yahoo.com'))   # False

s3 = 'python programming'
s4 = s3.removeprefix('py')
print(s4)    # 'thon programming'

s5 = s3.removeprefix('java')
print(s5)    # 'python programming' (unchanged)

s6 = s3.removesuffix('ing')
print(s6)    # 'python programm'

s7 = 'python is easy'
part = s7.partition('is')
print(part)  # ('python ', 'is', ' easy')

rpart = s7.rpartition('s')
print(rpart) # ('python is ea', 's', 'y')
```

Explanation:

- `startswith()` and `endswith()` return boolean indicating presence of prefix or suffix.

- ``removeprefix()`` and ``removesuffix()`` return new strings with the prefix/suffix removed if found.

- ``partition()`` and ``rpartition()`` split the string into a 3-tuple around the first occurrence of the separator from the left or right, useful when you need to isolate parts before and after a substring.

Section 4: Key Takeaways

- ``startswith()`` and ``endswith()`` help check if a string begins or ends with a specified substring, with optional range limits.

- ``removeprefix()`` and ``removesuffix()`` allow for safe removal of known prefixes or suffixes, returning new strings without altering the original.

- ``partition()`` and ``rpartition()`` split a string into three parts at the first occurrence of a separator from left or right respectively, and include the separator in the result.

- Unlike ``split()``, which removes separators and returns all substrings as a list, partition methods split only once and return a tuple including the separator.

- Mastering these string methods is fundamental for effective string manipulation and parsing in Python programs.

Lecture in Slides

Please Note: This document presents a curated selection of slides from the lecture; others have been excluded for conciseness.





Prefix & Suffix



Prefix & Suffix

String Methods

Prefix & Suffix

String Methods

Prefix & Suffix

String Methods

`startswith(prefix, start, end)`

Prefix & Suffix

String Methods

startswith(prefix , start , end)

S1Rossu@gmail.com

Prefix & Suffix

String Methods

startswith(prefix , start , end)

endswith(suffix , start , end)

S1Rossu@gmail.com

Prefix & Suffix

String Methods

startswith(prefix , start , end)

endswith(suffix , start , end)

removeprefix(prefix)

S1 R o s s u m @ g m a i l . c o m

Prefix & Suffix

String Methods

startswith(prefix , start , end)

endswith(suffix , start , end)

removeprefix(prefix)

removesuffix(suffix)

S1 R o s s u m @ g m a i l . c o m

Prefix & Suffix

String Methods

startswith(prefix , start , end)

endswith(suffix , start , end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

S1 R o s s u m @ g m a i l . c o m

Prefix & Suffix

String Methods

startswith(prefix , start , end)

endswith(suffix , start , end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

S1 R o s s u m @ g m a i l . c o m

Prefix & Suffix

String Methods

`startswith(prefix, start, end)`



`endswith(suffix, start, end)`



`removeprefix(prefix)`

`removesuffix(suffix)`

`partition(sep)`

`upartition(sep)`

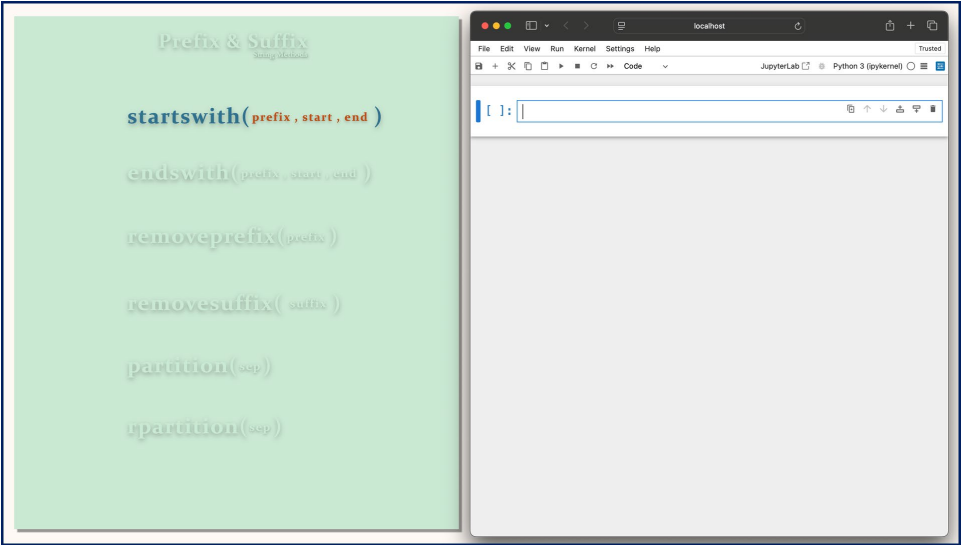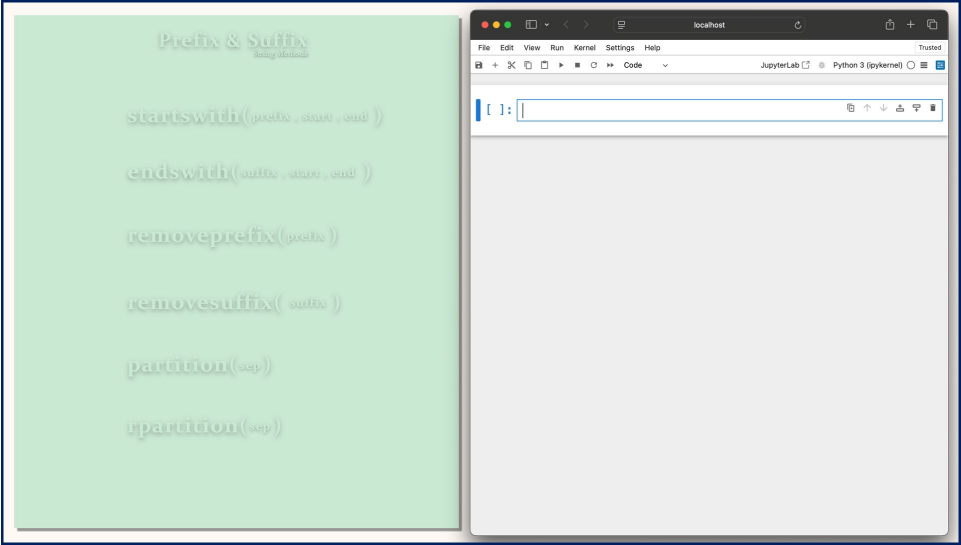

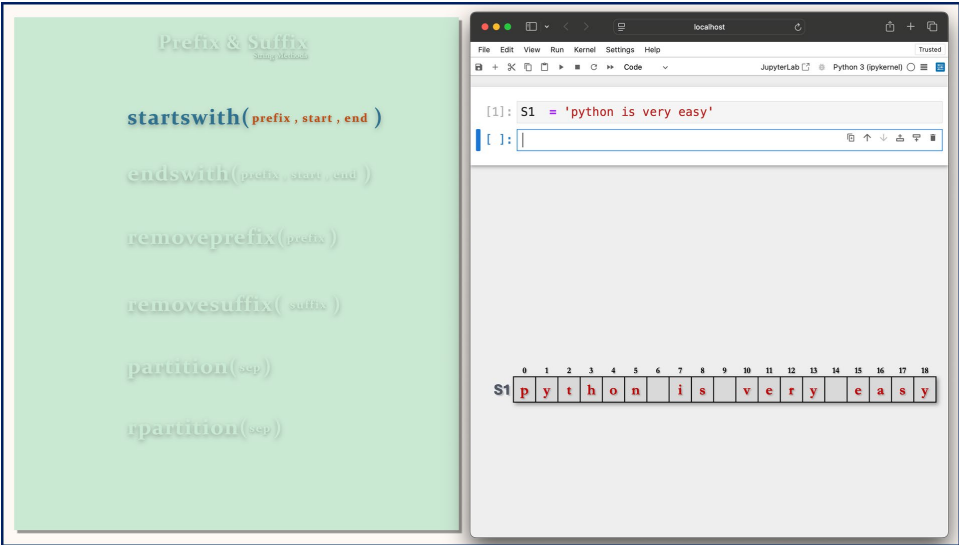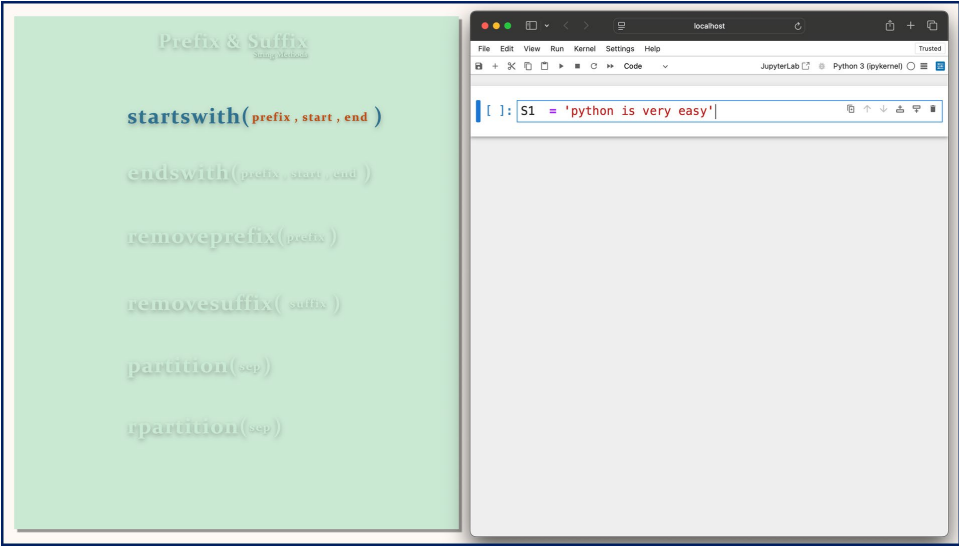

Prefix & Suffix

String Methods

startswith(prefix , start , end)

endswith(prefix , start , end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[1]: S1 = 'python is very easy'

[]:

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

p y t h o n i s v e r y e a s y

S1.startswith('python')

Prefix & Suffix

String Methods

startswith(prefix , start , end)

endswith(prefix , start , end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[1]: S1 = 'python is very easy'

[]: S1.startswith('python')

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

p y t h o n i s v e r y e a s y

S1.startswith('python')

Prefix & Suffix
String Methods

startswith(prefix, start, end)

endswith(prefix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[1]: S1 = 'python is very easy'

[2]: S1.startswith('python')

[2]: True

[]:

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

p y t h o n i s v e r y e a s y

S1.startswith('python')

Prefix & Suffix
String Methods

startswith(prefix, start, end)

endswith(prefix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[1]: S1 = 'python is very easy'

[]:

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

p y t h o n i s v e r y e a s y

S1.startswith('py')

Prefix & Suffix

String Methods

startswith(prefix , start , end)

endswith(prefix , start , end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

```
[1]: S1 = 'python is very easy'
[3]: S1.startswith( 'py' )
[3]: True
```

S1

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
p	y	t	h	o	n	i	s	v	e	r	y	e	a	s	y			

S1.startswith('py')

Prefix & Suffix

String Methods

startswith(prefix , start , end)

endswith(prefix , start , end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

```
[1]: S1 = 'python is very easy'
[4]: S1.startswith( 'is' )
[4]: False
```

S1

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
p	y	t	h	o	n	i	s	v	e	r	y	e	a	s	y			

S1.startswith('is')

Prefix & Suffix

String Methods

- `startswith(prefix, start, end)`
- `endswith(suffix, start, end)`
- `removeprefix(prefix)`
- `removesuffix(suffix)`
- `partition(sep)`
- `rpartition(sep)`

```
[1]: S1 = 'python is very easy'
```

```
[ ]:
```

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
S1	p	y	t	h	o	n	i	s		v	e	r	y		e	a	s	y

`S1.startswith('is', 7)`

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(prefix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

partition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (pykernel)

[1]: S1 = 'python is very easy'

[]: S1.startswith('is', 7)

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

p y t h o n i s v e r y e a s y

S1.startswith('is', 7)

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(prefix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

partition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (pykernel)

[1]: S1 = 'python is very easy'

[]:

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

p y t h o n i s v e r y e a s y

Prefix & Suffix

String Methods

- `startswith(prefix, start, end)`
- `endswith(suffix, start, end)`**
- `removeprefix(prefix)`
- `removesuffix(suffix)`
- `partition(sep)`
- `rpartition(sep)`

```
[1]: S1 = 'python is very easy'
```

```
[ ]:
```

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
S1	p	y	t	h	o	n	i	s	v	e	r	y	e	a	s	y			

Prefix & Suffix

String Methods

- `startswith(prefix, start, end)`
- `endswith(suffix, start, end)`**
- `removeprefix(prefix)`
- `removesuffix(suffix)`
- `partition(sep)`
- `rpartition(sep)`

```
[1]: S1 = 'python is very easy'
```

```
[ ]:
```

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
S1	p	y	t	h	o	n	i	s	v	e	r	y	e	a	s	y			

S1.endswith('easy')

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(suffix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[1]: S1 = 'python is very easy'

[]: S1.endswith('easy')

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

p y t h o n i s v e r y e a s y

S1.endswith('easy')

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(suffix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[1]: S1 = 'python is very easy'

[6]: S1.endswith('easy')

[6]: True



[]:

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

p y t h o n i s v e r y e a s y

S1.endswith('easy')

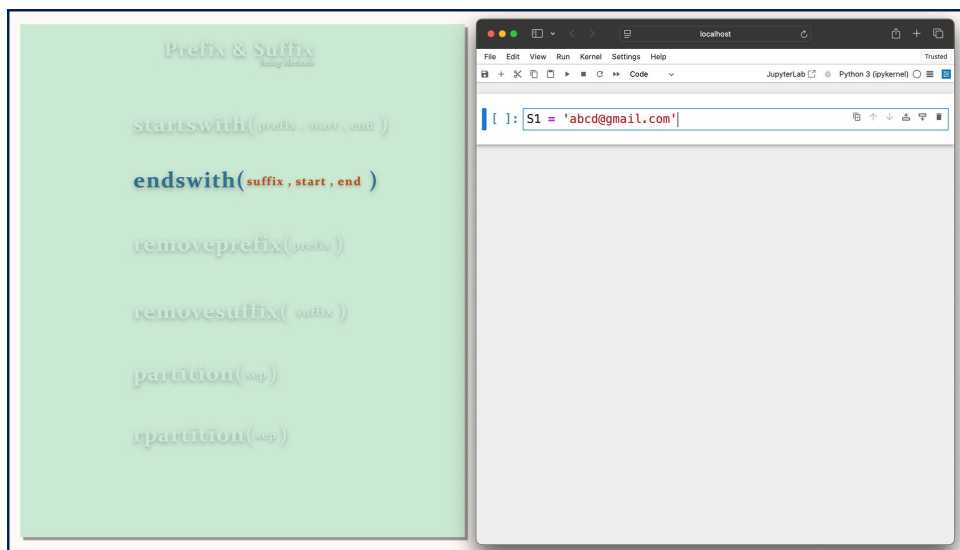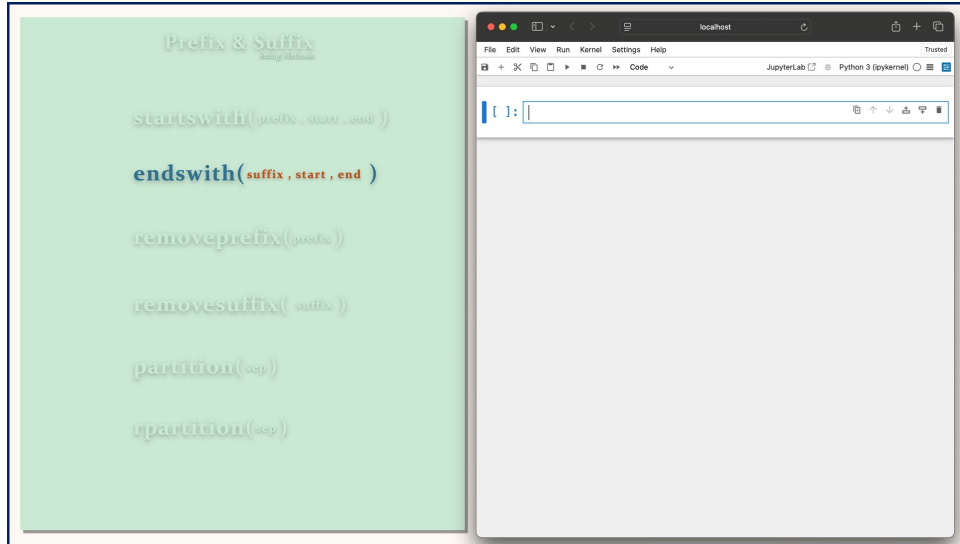

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(suffix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

partition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[7]: S1 = 'abcd@gmail.com'

[]:

S1

0	1	2	3	4	5	6	7	8	9	10	11	12	
a	b	c	d	@	g	m	a	i	l	.	c	o	m

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(suffix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

partition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[7]: S1 = 'abcd@gmail.com'

[]:

S1

0	1	2	3	4	5	6	7	8	9	10	11	12	
a	b	c	d	@	g	m	a	i	l	.	c	o	m

S1.endswith('gmail.com')

Prefix & Suffix

String Methods

- `startswith(prefix, start, end)`
- `endswith(suffix, start, end)`**
- `removeprefix(prefix)`
- `removesuffix(suffix)`
- `partition(sep)`
- `rpartition(sep)`

```
[7]: S1 = 'abcd@gmail.com'
```

```
[ ]: S1.endswith( 'gmail.com' )|
```

	0	1	2	3	4	5	6	7	8	9	10	11	12	
S1	a	b	c	d	@	g	m	a	i	l	.	c	o	m

`S1.endswith( 'gmail.com' )`

Prefix & Suffix

String Methods

startswith(*prefix* , *start* , *end*)

endswith(*suffix* , *start* , *end*)

removeprefix(*prefix*)

removesuffix(*suffix*)

partition(*sep*)

upartition(*sep*)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (pykernel)

[7]: S1 = 'abcd@gmail.com'

[8]: S1.endswith('gmail.com')

[8]: True

[]:

S1

0	1	2	3	4	5	6	7	8	9	10	11	12	
a	b	c	d	@	g	m	a	i	l	.	c	o	m

S1.endswith('gmail.com')

Prefix & Suffix

String Methods

startswith(*prefix* , *start* , *end*)

endswith(*prefix* , *start* , *end*)

removeprefix(*prefix*)

removesuffix(*suffix*)

partition(*sep*)

upartition(*sep*)



localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (pykernel)

[]:

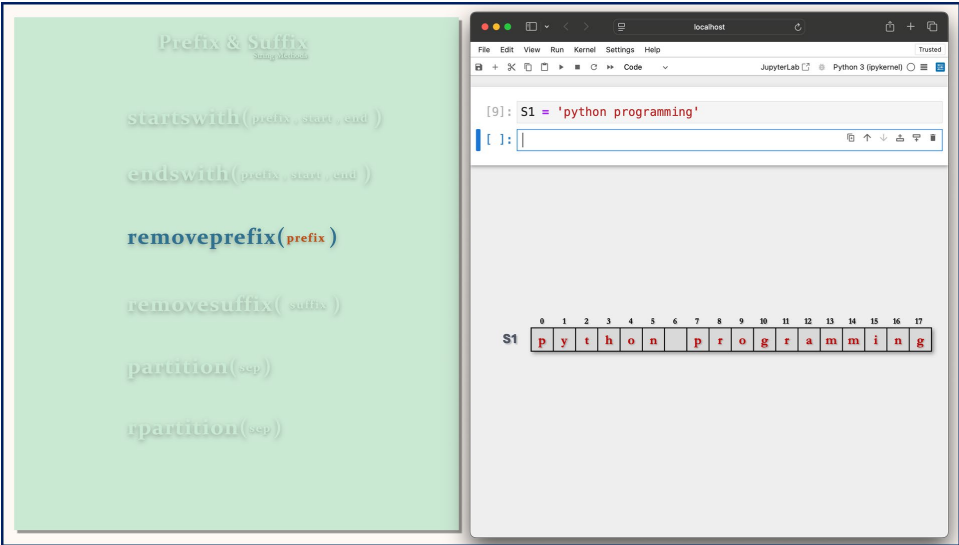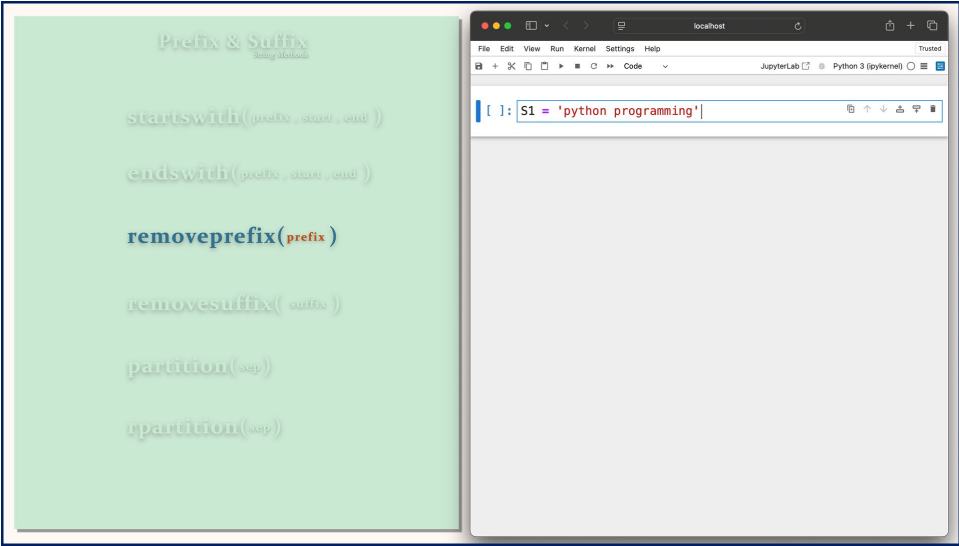

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(prefix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

partition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[9]: S1 = 'python programming'

[]:

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

p y t h o n p r o g r a m m i n g

S2 = S1.removeprefix('py')

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(prefix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

partition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[9]: S1 = 'python programming'

[]: S2 = S1.removeprefix('py')

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

p y t h o n p r o g r a m m i n g

S2 = S1.removeprefix('py')

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(prefix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[9]: S1 = 'python programming'

[10]: S2 = S1.removeprefix('py')

[]:

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

p y t h o n p r o g r a m m i n g

S2

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

t h o n p r o g r a m m i n g

S2 = S1.removeprefix('py')

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(prefix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[9]: S1 = 'python programming'

[10]: S2 = S1.removeprefix('py')

[11]: print(S2)

thon programming

[]:

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

p y t h o n p r o g r a m m i n g

S2

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

t h o n p r o g r a m m i n g

S2 = S1.removeprefix('py')

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(prefix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[1]: S1 = 'python programming'

[2]: S2 = S1.removeprefix('java')

[]:

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

p y t h o n p r o g r a m m i n g

S2

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

p y t h o n p r o g r a m m i n g

S2 = S1.removeprefix('java')

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(prefix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[1]: S1 = 'python programming'

[2]: S2 = S1.removeprefix('java')

[3]: print(S2)

python programming

[]:

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

p y t h o n p r o g r a m m i n g

S2

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

p y t h o n p r o g r a m m i n g

S2 = S1.removeprefix('java')

Prefix & Suffix

String Methods

`startswith(prefix, start, end)`

`endswith(suffix, start, end)`

`removeprefix(prefix)`

`removesuffix(suffix)`

`partition(sep)`

`upartition(sep)`

```
[1]: S1 = 'python programming'
```

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
S1	p	y	t	h	o	n		p	r	o	g	r	a	m	m	i	n	g

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(suffix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

partition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (pykernel)

[1]: S1 = 'python programming'

[]:

S1

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
p	y	t	h	o	n		p	r	o	g	r	a	m	m	i	n	g

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(suffix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

partition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (pykernel)

[1]: S1 = 'python programming'

[]:

S1

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
p	y	t	h	o	n		p	r	o	g	r	a	m	m	i	n	g

S2 = S1.removesuffix('ing')

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(prefix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[1]: S1 = 'python programming'

[]: S2 = S1.removesuffix('ing')

S1

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
p	y	t	h	o	n		p	r	o	g	r	a	m	m	i	n	g

S2 = S1.removesuffix('ing')

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(prefix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[1]: S1 = 'python programming'

[4]: S2 = S1.removesuffix('ing')

[]:

S1

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
p	y	t	h	o	n		p	r	o	g	r	a	m	m	i	n	g

S2

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14
p	y	t	h	o	n		p	r	o	g	r	a	m	m

S2 = S1.removesuffix('ing')

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(suffix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

partition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

```
[1]: S1 = 'python programming'
[4]: S2 = S1.removeprefix('ing')
[5]: print(S2)
python programm
```

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

S1

p y t h o n p r o g r a m m i n g

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14

S2

p y t h o n p r o g r a m m

S2 = S1.removeprefix('ing')

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(suffix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

partition(sep)



localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

```
[ ]:
```

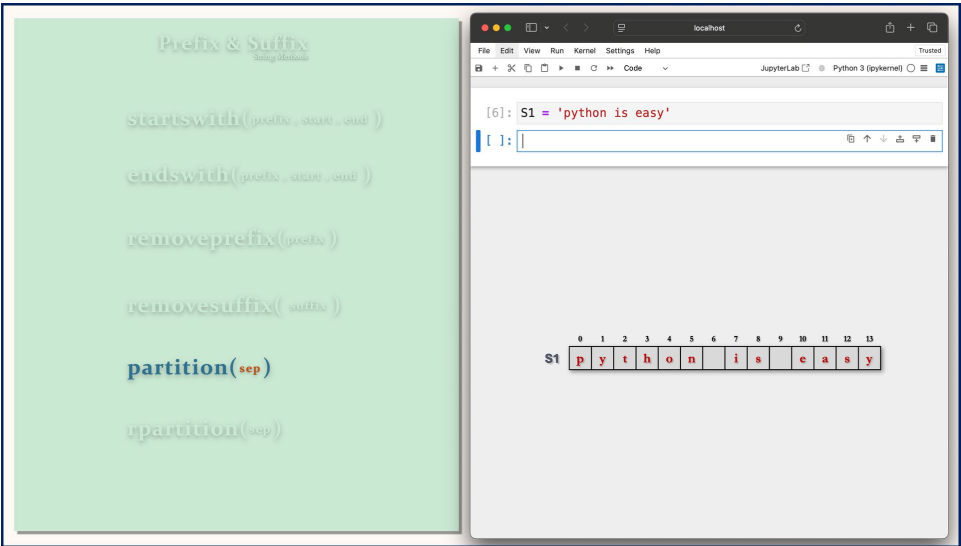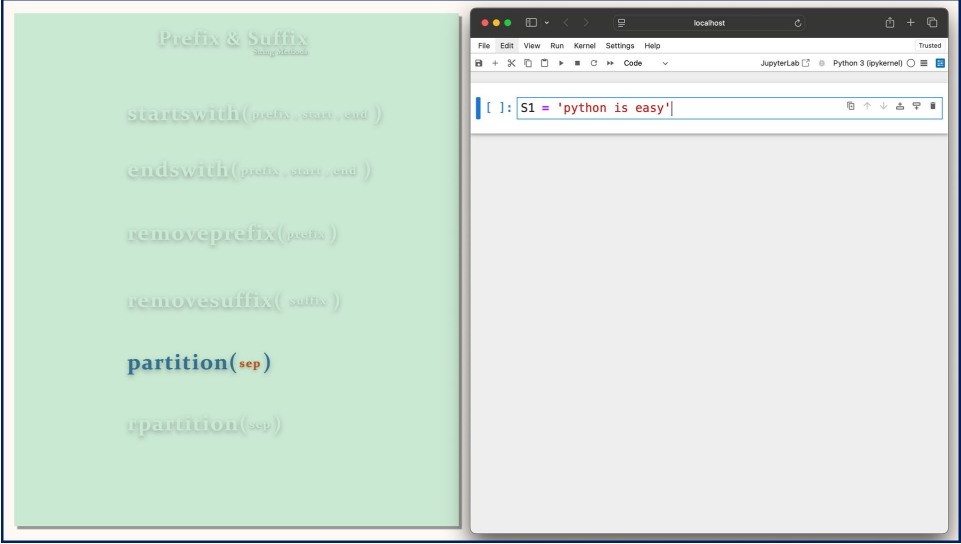

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(prefix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

partition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[6]: S1 = 'python is easy'

[]:

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13

p y t h o n i s e a s y

S2 = S1.partition('is')

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(prefix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

partition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[6]: S1 = 'python is easy'

[]: S2 = S1.partition('is')

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13

p y t h o n i s e a s y

S2 = S1.partition('is')

Prefix & Suffix

String Methods

- `startswith(prefix, start, end)`
- `endswith(prefix, start, end)`
- `removeprefix(prefix)`
- `removesuffix(suffix)`
- `partition(sep)`**
- `partition(sep)`

```
[6]: S1 = 'python is easy'
[7]: S2 = S1.partition( 'is' )
[ ]:
```

S1	0	1	2	3	4	5	6	7	8	9	10	11	12	13
	p	y	t	h	o	n		i	s		e	a	s	y

	0	1	2											
S2	p	y	t	h	o	n		i	s		e	a	s	y

S2 = S1.partition('is')

Prefix & Suffix

String Operations

startswith(prefix, start, end)

endswith(suffix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

partition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (pykernel)

[6]: S1 = 'python is easy'

[7]: S2 = S1.partition('is')

[8]: print(S2)

('python ', 'is', 'easy')

[]:

0 1 2 3 4 5 6 7 8 9 10 11 12 13

S1

p

y

t

h

o

n

i

s

e

a

s

y

0 1 2

S2

p

y

t

h

o

n

i

s

e

a

s

y

S2 = S1.partition('is')

Prefix & Suffix

String Operations

startswith(prefix, start, end)

endswith(suffix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

partition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (pykernel)

[6]: S1 = 'python is easy'

[]:

0 1 2 3 4 5 6 7 8 9 10 11 12 13

S1

p

y

t

h

o

n

i

s

e

a

s

y

Prefix & Suffix

String Methods

- `startswith(prefix, start, end)`
- `endswith(suffix, start, end)`
- `removeprefix(prefix)`
- `removesuffix(suffix)`
- `partition(sep)`
- `rpartition(sep)`**

```
[6]: S1 = 'python is easy'
```

```
[ ]:
```

	0	1	2	3	4	5	6	7	8	9	10	11	12	13
S1	p	y	t	h	o	n		i	s		e	a	s	y

Prefix & Suffix

String Methods

- `startswith(prefix, start, end)`
- `endswith(suffix, start, end)`
- `removeprefix(prefix)`
- `removesuffix(suffix)`
- `partition(sep)`
- `rpartition(sep)`**

```
[6]: S1 = 'python is easy'
```

```
[ ]:
```

	0	1	2	3	4	5	6	7	8	9	10	11	12	13
S1	p	y	t	h	o	n		i	s		e	a	s	y

`S2 = S1.rpartition('s')`

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(prefix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[6]: S1 = 'python is easy'

[]: S2 = S1.rpartition('s')

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13

p y t h o n i s e a s y

S2 = S1.rpartition('s')

Prefix & Suffix

String Methods

startswith(prefix, start, end)

endswith(prefix, start, end)

removeprefix(prefix)

removesuffix(suffix)

partition(sep)

rpartition(sep)

localhost

File Edit View Run Kernel Settings Help

Trusted

JupyterLab Python 3 (ipykernel)

[6]: S1 = 'python is easy'

[9]: S2 = S1.rpartition('s')

[]:

S1

0 1 2 3 4 5 6 7 8 9 10 11 12 13

p y t h o n i s e a s y

S2

0 1 2

p y t h o n i s e a s y

S2 = S1.rpartition('s')

Prefix & Suffix

String Methods

- `startswith(prefix, start, end)`
- `endswith(suffix, start, end)`
- `removeprefix(prefix)`
- `removesuffix(suffix)`
- `partition(sep)`
- `rpartition(sep)`

Prefix & Suffix

String Methods

- `startswith(prefix, start, end)`
- `endswith(suffix, start, end)`
- `removeprefix(prefix)`
- `removesuffix(suffix)`
- `partition(sep)`
- `rpartition(sep)`

Prefix & Suffix

String Methods

- `startswith(prefix, start, end)`
- `endswith(suffix, start, end)`
- `removeprefix(prefix)`
- `removesuffix(suffix)`
- `partition(sep)`
- `rpartition(sep)`

Prefix & Suffix

String Methods

- `startswith(prefix, start, end)`
- `endswith(suffix, start, end)`
- `removeprefix(prefix)`
- `removesuffix(suffix)`
- `partition(sep)`
- `rpartition(sep)`

Prefix & Suffix

String Methods

- `startswith(prefix, start, end)`
- `endswith(suffix, start, end)`
- `removeprefix(prefix)`
- `removesuffix(suffix)`
- `partition(sep)`
- `rpartition(sep)`

Prefix & Suffix

String Methods

- `startswith(prefix, start, end)`
- `endswith(suffix, start, end)`
- `removeprefix(prefix)`
- `removesuffix(suffix)`
- `partition(sep)`
- `rpartition(sep)`

Prefix & Suffix

String Methods

- `startswith(prefix, start, end)`
- `endswith(suffix, start, end)`
- `removeprefix(prefix)`
- `removesuffix(suffix)`
- `partition(sep)`
- `rpartition(sep)`

The screenshot shows a JupyterLab window with a code cell containing the following Python code:

```
[6]: S1 = 'python is easy'
[9]: S2 = S1.rpartition('s')
[10]: print( S2 )
('python is ea', 's', 'y')
```

Below the code cell, the result of the `print` statement is displayed as a diagram. The string `S1 = 'python is easy'` is shown with indices 0 through 13 above each character. The string `S2` is shown as a sequence of three boxes: `['python is ea', 's', 'y']`. The first box contains the string `python is ea`, the second box contains the string `s`, and the third box contains the string `y`. The indices 0, 1, and 2 are shown above the first, second, and third boxes respectively.

At the bottom of the image, a red box contains the text `S2 = S1.rpartition('s')`.