

Name :- Sandesh Arun Mohite

Roll_No :- 23

Division :- T.Y(AIML)-A

✓ Part-1: Multiclass Classification using Logistic Regression

Experiment Objective

To understand and implement **Logistic Regression for Multiclass Classification** using a **simple manually created dataset**.

Example Use Case

Predict **Student Performance Level** (Low, Medium, High) based on:

- Study Hours
- Attendance Percentage

✓ Step 1: Import Required Libraries

```
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt

from sklearn.model_selection import train_test_split
from sklearn.linear_model import LogisticRegression
from sklearn.metrics import accuracy_score, classification_report
```

✓ Step 2: Create a Simple Multiclass Dataset

Target Variable:

- 0 → Low Performance
- 1 → Medium Performance
- 2 → High Performance

```
data = {
    'Study_Hours': [1,2,3,4,5,6,7,8,9,10],
    'Attendance': [50,55,60,65,70,75,80,85,90,95],
    'Performance': [0,0,0,1,1,1,2,2,2,2]
}

df = pd.DataFrame(data)
df
```

	Study_Hours	Attendance	Performance
0	1	50	0
1	2	55	0
2	3	60	0
3	4	65	1
4	5	70	1
5	6	75	1
6	7	80	2
7	8	85	2
8	9	90	2
9	10	95	2

Next steps: [Generate code with df](#) [New interactive sheet](#)

Step 3: Explore the Dataset

```
df.shape
```

```
(10, 3)
```

```
df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 10 entries, 0 to 9
Data columns (total 3 columns):
#   Column      Non-Null Count  Dtype
---  ---
0   Study_Hours  10 non-null     int64
1   Attendance   10 non-null     int64
2   Performance  10 non-null     int64
dtypes: int64(3)
memory usage: 372.0 bytes
```

```
df.describe()
```

	Study_Hours	Attendance	Performance
count	10.00000	10.000000	10.000000
mean	5.50000	72.500000	1.100000
std	3.02765	15.138252	0.875595
min	1.00000	50.000000	0.000000
25%	3.25000	61.250000	0.250000
50%	5.50000	72.500000	1.000000
75%	7.75000	83.750000	2.000000
max	10.00000	95.000000	2.000000

Step 4: Split Features and Target

```
X = df[['Study_Hours', 'Attendance']]
y = df['Performance']
```

Step 5: Train-Test Split

```
X_train, X_test, y_train, y_test = train_test_split(
    X, y, test_size=0.2, random_state=42
)
```

Step 6: Create and Train Logistic Regression Model

```
model = LogisticRegression(multi_class='multinomial', solver='lbfgs', max_iter=1000)
model.fit(X_train, y_train)
```

```
/usr/local/lib/python3.13/dist-packages/sklearn/linear_model/_logistic.py:1247: FutureWarning: 'multi_class' was deprecated in v
warnings.warn(
```

```
LogisticRegression
LogisticRegression(max_iter=1000, multi_class='multinomial')
```

Step 7: Model Prediction and Evaluation

```
y_pred = model.predict(X_test)

print("Accuracy:", accuracy_score(y_test, y_pred))
print("Classification Report:\n", classification_report(y_test, y_pred))
```


```
Accuracy: 1.0
Classification Report:
              precision    recall  f1-score   support

     0           1.00        1.00        1.00         1
     2           1.00        1.00        1.00         1

   accuracy           1.00
  macro avg           1.00
 weighted avg           1.00
```

Step 8: Visualization

```
plt.scatter(df['Study_Hours'], df['Attendance'], c=df['Performance'], cmap='viridis')
plt.xlabel('Study Hours')
plt.ylabel('Attendance')
plt.title('Multiclass Data Distribution')
plt.colorbar(label='Performance Class')
plt.show()
```

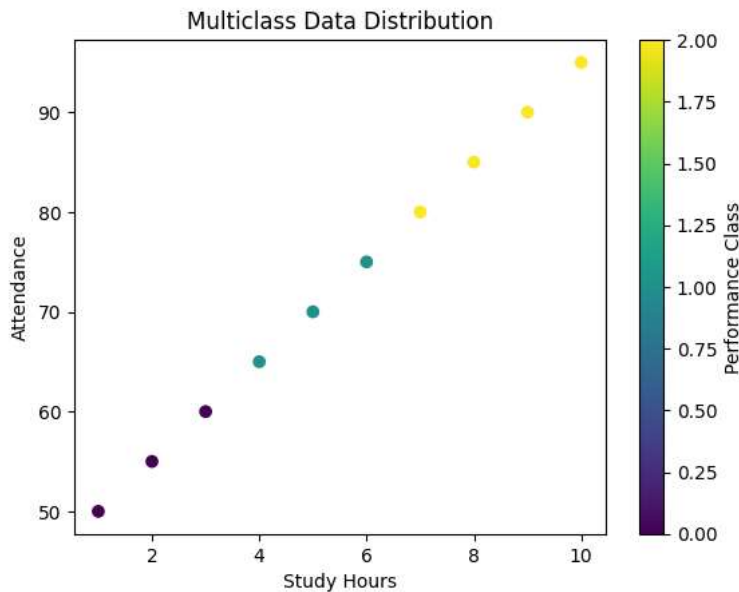

Step 9: Prediction Using User Input

```
study_hours = float(input("Enter study hours: "))
attendance = float(input("Enter attendance percentage: "))

new_data = [[study_hours, attendance]]
prediction = model.predict(new_data)

labels = {0: 'Low', 1: 'Medium', 2: 'High'}
print("Predicted Performance Level:", labels[prediction[0]])
```

Enter study hours: 15
Enter attendance percentage: 80
Predicted Performance Level: High
/usr/local/lib/python3.13/dist-packages/sklearn/utils/validation.py:2739: UserWarning: X does not have valid feature names, but warnings.warn(

Conclusion

Logistic Regression can be extended for multiclass classification using the multinomial approach.


✓ Part-2: Multiclass Classification using Logistic Regression (Iris Dataset)

Problem Statement


The Iris dataset contains measurements of flowers (sepal length, sepal width, petal length, petal width). The task is to classify a flower into one of three species:

- Setosa
- Versicolor
- Virginica


This is a **multiclass classification problem** solved using **Logistic Regression (Softmax)**.

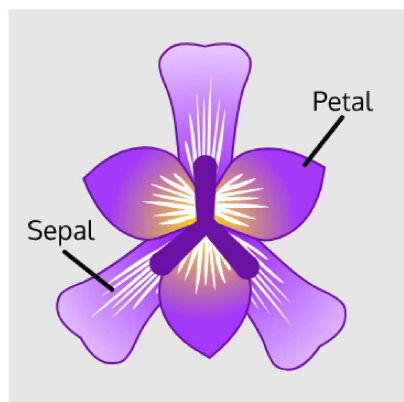

Iris Versicolor

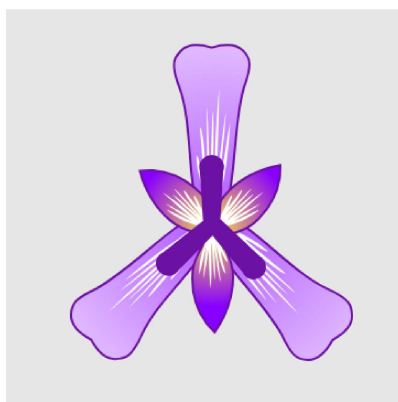

Iris Setosa

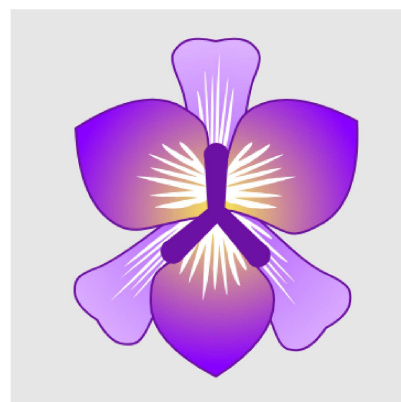

Iris Virginica

iris setosa

petal

sepal

iris versicolor

petal

sepal

iris virginica

petal

sepal

```
# Import required libraries
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt

from sklearn.datasets import load_iris
from sklearn.model_selection import train_test_split
from sklearn.linear_model import LogisticRegression
from sklearn.metrics import accuracy_score, classification_report, confusion_matrix
```

Step 1: Load the Iris Dataset

The Iris dataset is a built-in dataset available in scikit-learn.

```
# Load dataset
iris = load_iris()

# Create DataFrame
df = pd.DataFrame(iris.data, columns=iris.feature_names)
df['species'] = iris.target

df.head()
```

	sepal length (cm)	sepal width (cm)	petal length (cm)	petal width (cm)	species
0	5.1	3.5	1.4	0.2	0
1	4.9	3.0	1.4	0.2	0
2	4.7	3.2	1.3	0.2	0
3	4.6	3.1	1.5	0.2	0
4	5.0	3.6	1.4	0.2	0

Next steps: [Generate code with df](#) [New interactive sheet](#)

Step 2: Dataset Information

```
df.shape
```

```
(150, 5)
```

```
df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 150 entries, 0 to 149
Data columns (total 5 columns):
#   Column                Non-Null Count  Dtype
---  ---
0   sepal length (cm)      150 non-null   float64
1   sepal width (cm)       150 non-null   float64
2   petal length (cm)      150 non-null   float64
3   petal width (cm)       150 non-null   float64
4   species                150 non-null   int64
dtypes: float64(4), int64(1)
memory usage: 6.0 KB
```

```
df.describe()
```

	sepal length (cm)	sepal width (cm)	petal length (cm)	petal width (cm)	species
count	150.000000	150.000000	150.000000	150.000000	150.000000
mean	5.843333	3.057333	3.758000	1.199333	1.000000
std	0.828066	0.435866	1.765298	0.762238	0.819232
min	4.300000	2.000000	1.000000	0.100000	0.000000
25%	5.100000	2.800000	1.600000	0.300000	0.000000
50%	5.800000	3.000000	4.350000	1.300000	1.000000
75%	6.400000	3.300000	5.100000	1.800000	2.000000
max	7.900000	4.400000	6.900000	2.500000	2.000000

Step 3: Define Features and Target

```
X = df.iloc[:, :-1] # all feature columns
y = df['species']    # target column
```

Step 4: Train-Test Split

```
X_train, X_test, y_train, y_test = train_test_split(
    X, y, test_size=0.2, random_state=42
)
```

Step 5: Train Logistic Regression Model (Multiclass)

```
model = LogisticRegression(multi_class='multinomial', max_iter=200)
model.fit(X_train, y_train)
```

```
/usr/local/lib/python3.13/dist-packages/sklearn/linear_model/_logistic.py:1247: FutureWarning: 'multi_class' was deprecated in v
warnings.warn(
```

```
LogisticRegression
LogisticRegression(max_iter=200, multi_class='multinomial')
```

Step 6: Model Evaluation

```
y_pred = model.predict(X_test)

print("Accuracy:", accuracy_score(y_test, y_pred))
print("\nConfusion Matrix:\n", confusion_matrix(y_test, y_pred))
print("\nClassification Report:\n", classification_report(y_test, y_pred))
```

```
Accuracy: 1.0
```

```
Confusion Matrix:
[[10  0  0]
```

```
[ 0  9  0]
[ 0  0 11]]
```

```
Classification Report:
              precision    recall  f1-score   support

     0             1.00      1.00      1.00        10
     1             1.00      1.00      1.00         9
     2             1.00      1.00      1.00        11


 accuracy              1.00      1.00      1.00        30
 macro avg              1.00      1.00      1.00        30
 weighted avg           1.00      1.00      1.00        30
```

Step 7: Visualization of Multiclass Data Distribution

```
# Feature names for visualization
x_feature = 'sepal length (cm)'
y_feature = 'petal length (cm)'

# Plot each class separately
for class_value in range(3):
    plt.scatter(
        X.loc[y == class_value, x_feature],
        X.loc[y == class_value, y_feature],
        label=iris.target_names[class_value]
    )

# Labels and title
plt.xlabel("Sepal Length (cm)")
plt.ylabel("Petal Length (cm)")
plt.title("Multiclass Data Distribution (Iris Dataset)")
plt.legend()
plt.show()
```

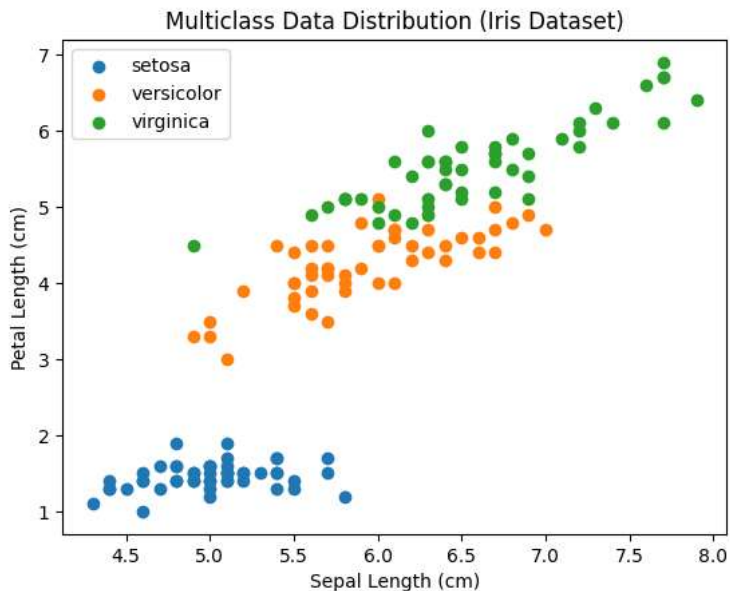


```
# Feature names
x_feature = 'sepal width (cm)'
y_feature = 'petal width (cm)'

# Plot data for each class
for class_value in range(3):
    plt.scatter(
        X.loc[y == class_value, x_feature],
        X.loc[y == class_value, y_feature],
        label=iris.target_names[class_value]
    )

# Plot formatting
```

```
plt.xlabel("Sepal Width (cm)")
plt.ylabel("Petal Width (cm)")
plt.title("Multiclass Data Distribution: Sepal Width vs Petal Width")
plt.legend()
plt.show()
```

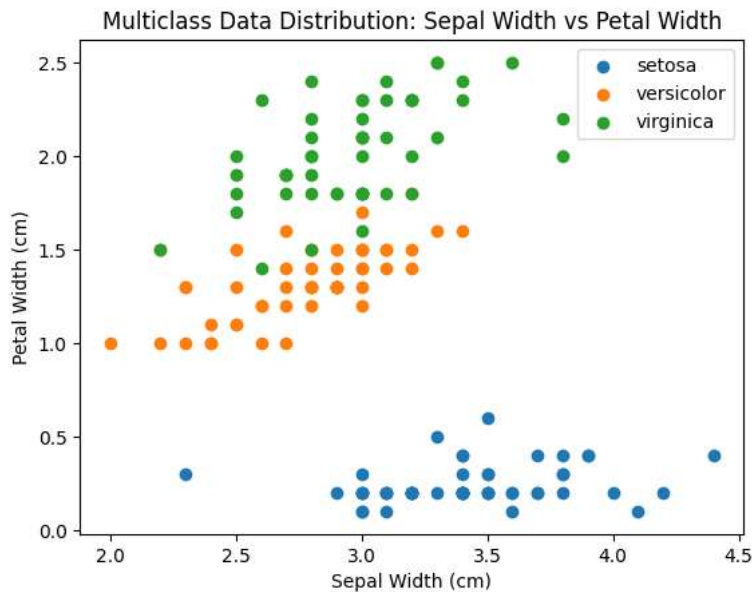

Step 8: Prediction Using User Input

```
# Take user input
sepal_length = float(input("Enter Sepal Length:4.3 to 7.9 cm"))
sepal_width = float(input("Enter Sepal Width:2.0 to 4.4 cm "))
petal_length = float(input("Enter Petal Length:1.0 to 6.9 cm "))
petal_width = float(input("Enter Petal Width:0.1 to 2.5 cm "))

# Create input array
new_flower = [[sepal_length, sepal_width, petal_length, petal_width]]

# Predict
prediction = model.predict(new_flower)

# Output result
print("Predicted Species:", iris.target_names[prediction[0]])
```

```
Enter Sepal Length:4.3 to 7.9 cm5.0
Enter Sepal Width:2.0 to 4.4 cm 3.0
Enter Petal Length:1.0 to 6.9 cm 2.0
Enter Petal Width:0.1 to 2.5 cm 2.0
Predicted Species: setosa
/usr/local/lib/python3.13/dist-packages/sklearn/utils/validation.py:2739: UserWarning: X does not have valid feature names, but
warnings.warn(
```

```
import pickle
```

```
pickle.dump(model,open('MModel.pkl','wb'))
```

Flask Code

Save this file with 'app.py'

```
from flask import Flask, render_template, request
import pickle
import numpy as np

app = Flask(__name__)

# Load Trained Model
```

```

# Load trained model
model = pickle.load(open("MModel.pkl", "rb"))

@app.route('/')
def home():
    return render_template("index.html")

@app.route('/predict', methods=['POST'])
def predict():

    # Read input values
    sepal_length = float(request.form['sepal_length'])
    sepal_width = float(request.form['sepal_width'])
    petal_length = float(request.form['petal_length'])
    petal_width = float(request.form['petal_width'])

    # Prediction
    prediction = model.predict([[sepal_length,
                                sepal_width,
                                petal_length,
                                petal_width]])

    # Convert class number into species name
    if prediction[0] == 0:
        flower = "Iris Setosa"

    elif prediction[0] == 1:
        flower = "Iris Versicolor"

    else:
        flower = "Iris Virginica"

    return render_template(
        "index.html",
        prediction_text=f"Predicted Species : {flower}"
    )

if __name__ == "__main__":
    app.run(debug=True)

```

```

* Serving Flask app '__main__'
* Debug mode: on
INFO:werkzeug:WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server inst
* Running on http://127.0.0.1:5000
INFO:werkzeug:Press CTRL+C to quit
INFO:werkzeug: * Restarting with watchdog (inotify)

```

HTML Code

Save this file with 'index.html'

```

<!DOCTYPE html>
<html lang="en">

<head>

<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">

<title>Iris Flower Species Predictor</title>

<style>

*{
    margin:0;
    padding:0;
    box-sizing:border-box;
    font-family:Arial, Helvetica, sans-serif;
}

body{

    background:#eef5ff;
    display:flex;

```

```
        justify-content:center;
        align-items:center;
        height:100vh;
    }

    .container{

        width:480px;
        background:white;
        padding:35px;
        border-radius:15px;
        box-shadow:0px 10px 25px rgba(0,0,0,.2);
    }

    h1{

        text-align:center;
        color:#1565c0;
    }

    h3{

        text-align:center;
        color:#555;
        margin-top:8px;
        margin-bottom:25px;
    }

    label{

        font-weight:bold;
        display:block;
        margin-top:12px;
        margin-bottom:6px;
    }

    input{

        width:100%;
        padding:12px;
        border:1px solid #ccc;
        border-radius:8px;
        font-size:16px;
    }

    button{

        width:100%;
        margin-top:25px;
        padding:13px;
        background:#1565c0;
        color:white;
        border:none;
        border-radius:8px;
        font-size:18px;
        cursor:pointer;
        transition:.3s;
    }

    button:hover{

        background:#0d47a1;
    }

    .result{

        margin-top:25px;
        background:#e8f5e9;
        padding:18px;
```

```

border-radius:8px;
text-align:center;
color:green;
font-size:22px;
font-weight:bold;
}

footer{

text-align:center;
margin-top:20px;
color:#777;
font-size:13px;
}

</style>

</head>

<body>

<div class="container">

<h1>Iris Flower Predictor</h1>

<h3>Multiclass Classification using Logistic Regression</h3>

<form action="/predict" method="POST">

<label>Sepal Length (cm)</label>

<input
type="number"
name="sepal_length"
step="0.1"
placeholder="Enter Sepal Length:4.3 to 7.9 cm"
required>

<label>Sepal Width (cm)</label>

<input
type="number"
name="sepal_width"
step="0.1"
placeholder="Enter Sepal Width:2.0 to 4.4 cm"
required>

<label>Petal Length (cm)</label>

<input
type="number"
name="petal_length"
step="0.1"
placeholder="Enter Petal Length:1.0 to 6.9 cm"
required>

<label>Petal Width (cm)</label>

<input
type="number"
name="petal_width"
step="0.1"
placeholder="Enter Petal Width:0.1 to 2.5 cm"
required>

<button type="submit">

Predict Flower Species

</button>

</form>

{% if prediction_text %}

<div class="result">

```

```
{{ prediction_text }}
```

```
</div>
```

```
{% endif %}
```

```
<footer>
```

By Dr. Sachin Balawant Takmare

```
</footer>
```