

Hide menu

Week 5: Neural Networks

Ungraded Plugin: 5.1

Overview of Neural Networks9 min

Ungraded Plugin: 5.2

Perceptron9 min

Practice Assignment: 5.2

Perceptron Self-Check QuizSubmitted

Ungraded Plugin: 5.3

Perceptron Network6 min

Practice Assignment: 5.3

Perceptron Network Self-Check QuizSubmitted

Ungraded Plugin: 5.4

Activation Function6 min

Practice Assignment: 5.4

Activation Function Self-Check QuizSubmitted

Ungraded Plugin: 5.5

Neural Network12 min

Practice Assignment: 5.5

Neural Network Self-Check Quiz3h

Ungraded Plugin: 5.6

Gradient Descent16 min

Practice Assignment: 5.6

Gradient Descent Self-Check Quiz3h

Ungraded Plugin: 5.7

Backpropagation Algorithm14 min

Practice Assignment: 5.7

Backpropagation Algorithm Self-Check Quiz3h

Ungraded Plugin: 5.8

Example Applications8 min

Practice Assignment: 5.8

Example Applications Self-Check Quiz3h

Ungraded Plugin: 5.9

When to Use Machine Learning?5 min

Practice Assignment: 5.9

When to Use Machine Learning? Self-Check Quiz3h

Discussion Prompt: Week 5 Neural Networks10 min

Week 5 Quiz

Post-Course Survey

Your grade: 100%

Your latest: 100% • Your highest: 100% • Your lowest: 100%

Next item →

5.4 Activation Function Self-Check Quiz


1. Which of the following functions can effectively be used to learn versatile neural networks? (Select all that apply)

1 / 1 point

☒ Sigmoid function

Ready to review what you've learned before starting the assignment? I'm here to help.

Activation, a

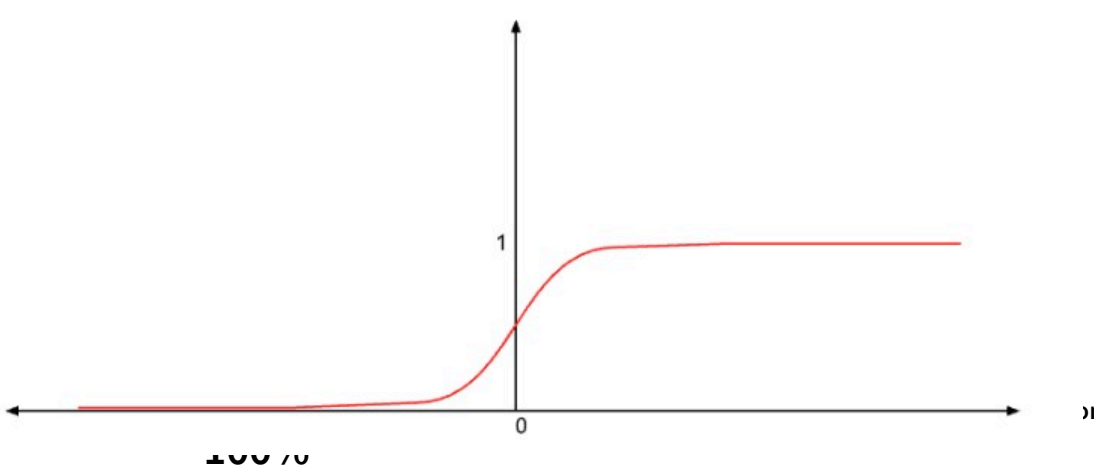

Try again


See feedback

Correct

The Sigmoid function is an example that has already been covered in the lecture. The Tanh function is similar to the Sigmoid function, with the only difference being the range, which, in this case, is [-1, 1]. Lastly, ReLU (Rectified Linear Unit) is one of the most popular activation functions. It behaves similarly to the Step function in the negative X-axis. However, in the positive direction, the activation changes linearly with a change in weight, making it superior to the step function, which can only form linear classifiers when composed with itself and is thus insufficient.

☒ ReLU function

Activation, a

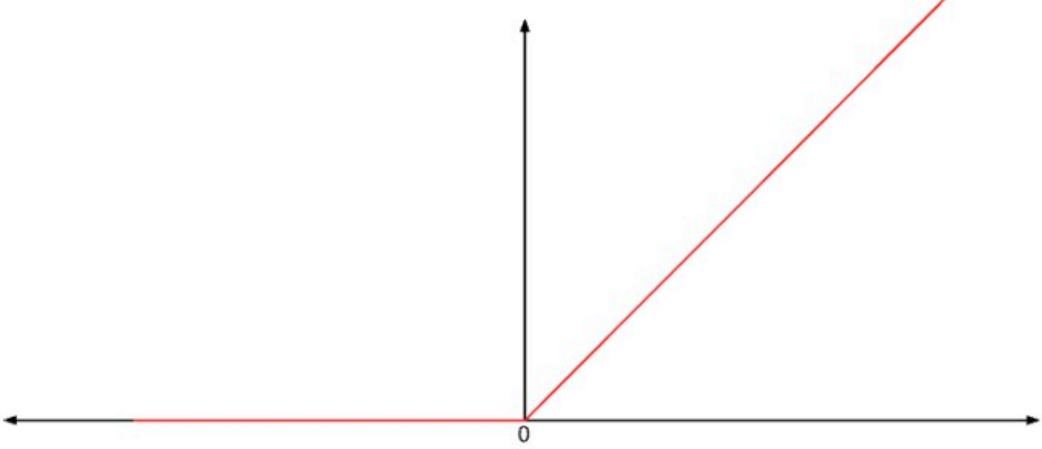


Correct

The Sigmoid function is an example that has already been covered in the lecture. The Tanh function is similar to the Sigmoid function, with the only difference being the range, which, in this case, is [-1, 1]. Lastly, ReLU (Rectified Linear Unit) is one of the most popular activation functions. It behaves similarly to the Step function in the negative X-axis. However, in the positive direction, the activation changes linearly with a change in weight, making it superior to the step function, which can only form linear classifiers when composed with itself and is thus insufficient.

☒ Tanh function

Activation, a

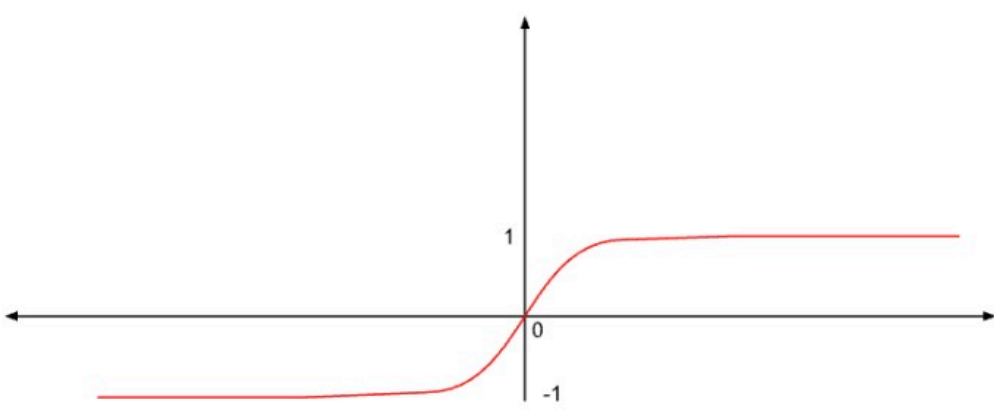

Correct

The Sigmoid function is an example that has already been covered in the lecture. The Tanh function is similar to the Sigmoid function, with the only difference being the range, which, in this case, is [-1, 1]. Lastly, ReLU (Rectified Linear Unit) is one of the most popular activation functions. It behaves similarly to the Step function in the negative X-axis. However, in the positive direction, the activation changes linearly with a change in weight, making it superior to the step function, which can only form linear classifiers when composed with itself and is thus insufficient.

☐ Step function

Activation, a

