

CodioProjectFileEditFindViewToolsEducationHelpNode ve..Project I..Configur..

completion.py x Terminal

```
1 import os
2 import openai
3 import secret
4 openai.api_key=secret.api_key
5
6 # WRITE YOUR CODE HERE
7 prompts ="Write a tagline for an ice cream shop"
8 response = openai.Completion.create(model="text-davinci-002",
9                                     prompt=prompts)
10
11 print(response['choices'][0]['text'].strip())
```

Guide x

CollapseIntro to GPT-3

<>⚙️☰

Completion.create Method

To generate a response to a prompt, we use the `openai.Completion.create` method. Note that we have already imported the `openai` package.

```
prompts ="Write a tagline for an ice cream shop"
response = openai.Completion.create(model="text-davinci-002",
                                    prompt=prompts)

print(response['choices'][0]['text'].strip())
```


Copy the code above into the file on the left and click the button below to run the code file.

TRY IT!

Notice how the method takes two keyword arguments. The **model keyword argument** is mandatory and the prompt is specified using the **prompt keyword argument**.

Remove highlighting

There are many additional optional keyword arguments that can be specified in our API call. You can get a sense of these settings using the right-hand pane of the OpenAI playground. Open the playground (the link opens in a new tab). Clicking on **View code** on the upper right will translate the sliders and text boxes into code.

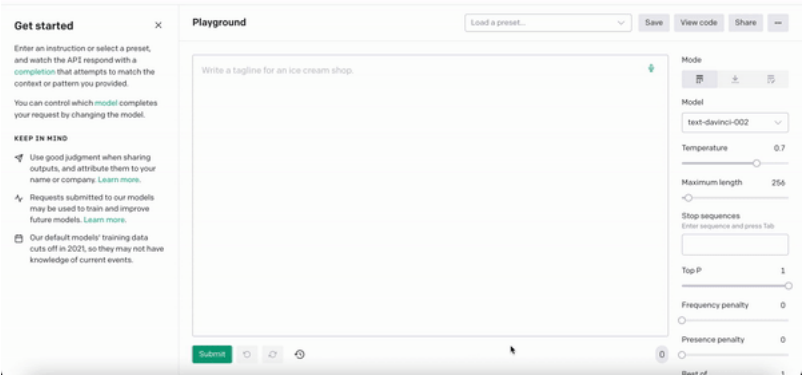

Here is an example of an API call using more keyword arguments:

```
import os
import openai

openai.api_key = os.getenv("OPENAI_API_KEY")

response = openai.Completion.create(
    model="text-davinci-002",
    prompt="",
    temperature=0.7,
    max_tokens=256,
    top_p=1,
    frequency_penalty=0,
    presence_penalty=0
)
```

We will cover what each of these keyword arguments does throughout this assignment.

Which of the following are mandatory arguments when using the `openai.Completion.create` method? Select all that apply.

☐ temperature

☐ top_p

☐ prompt

☐ model

`openai.Completion.create()` needs at minimum two arguments. The model to be used to generate your response and the prompt to respond to.

Check It!

Next

100% (2:1)

https://codio.com/sandipan-dey/api-parameters/tree/completion.py

1/1