

```
INFO:root:iteration: 60, auc: 0.8629648166106522
INFO:root:iteration: 70, auc: 0.8628564639876382
```

In [22]

```
In [22]: y_true, y_hat = predict(resnet9, valid_dataloader)
```

```
In [23]: predictions = pd.DataFrame(
    list(
        zip(
            valid_labels.reshape(-1),
            np.vstack(y_hat).reshape(-1),
            valid_images
        )
    ),
    columns=['true', 'pred', 'files'])
predictions.head(3)
```


	true	pred	files
0	0	1.648061	../input/train/5dc9c900ff3533d512aa93b854a5c41...
1	0	-1.332653	../input/train/384f7783106687b54964bb2cf0bc4ce...
2	0	-1.901093	../input/train/49cbf5796cee171d8dc0633ca908f9f...

In [24]

```
In [24]: max_charts = 60
def imshow(files, w=2, h=2, cols=12):
    rows = len(files) // cols + 1
    images = [Image.open(f) for f in files]
    plt.figure(figsize = (cols * w, rows * h))
    plt.tight_layout()
    for chart, img in enumerate(images, 1):
        ax = plt.subplot(rows, cols, chart)
        ax.imshow(np.array(img))
        ax.axis('off')
```

In [25]

```
In [25]: files = predictions[predictions['true']==1].sort_values('pred')['files'].values[:max_charts]
         implot(files)
```

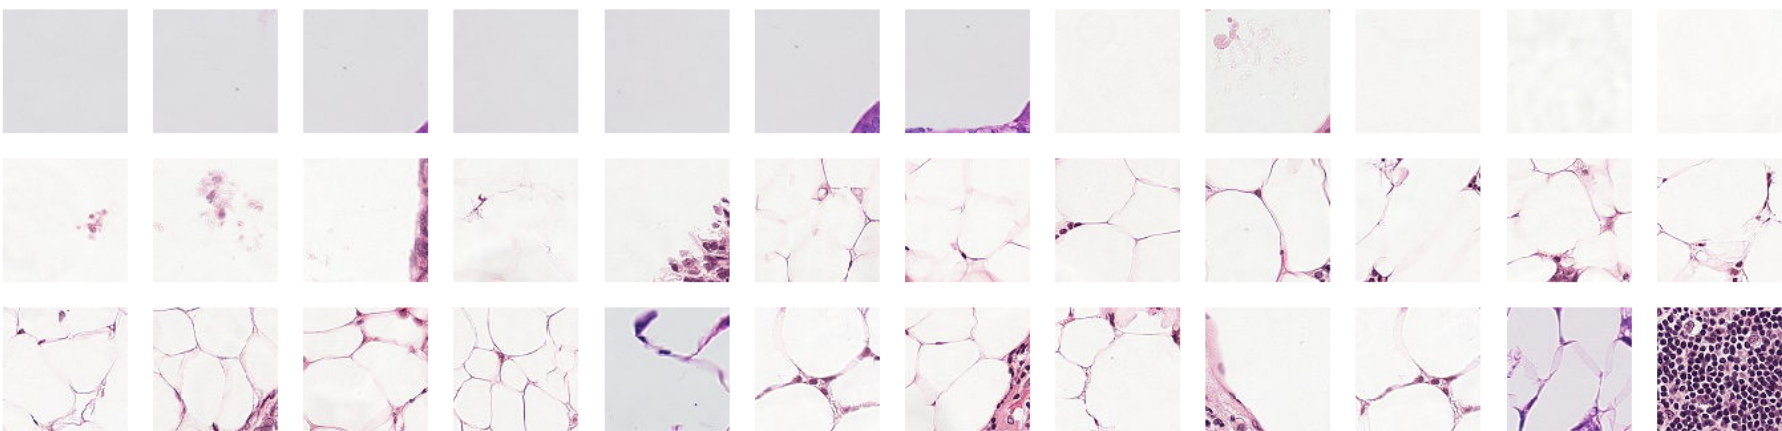

This Notebook has been released under the Apache 2.0 open source license.

Data
1 input and 0 output



Logs

322.9 second run - successful



Comments

0 comments.

