


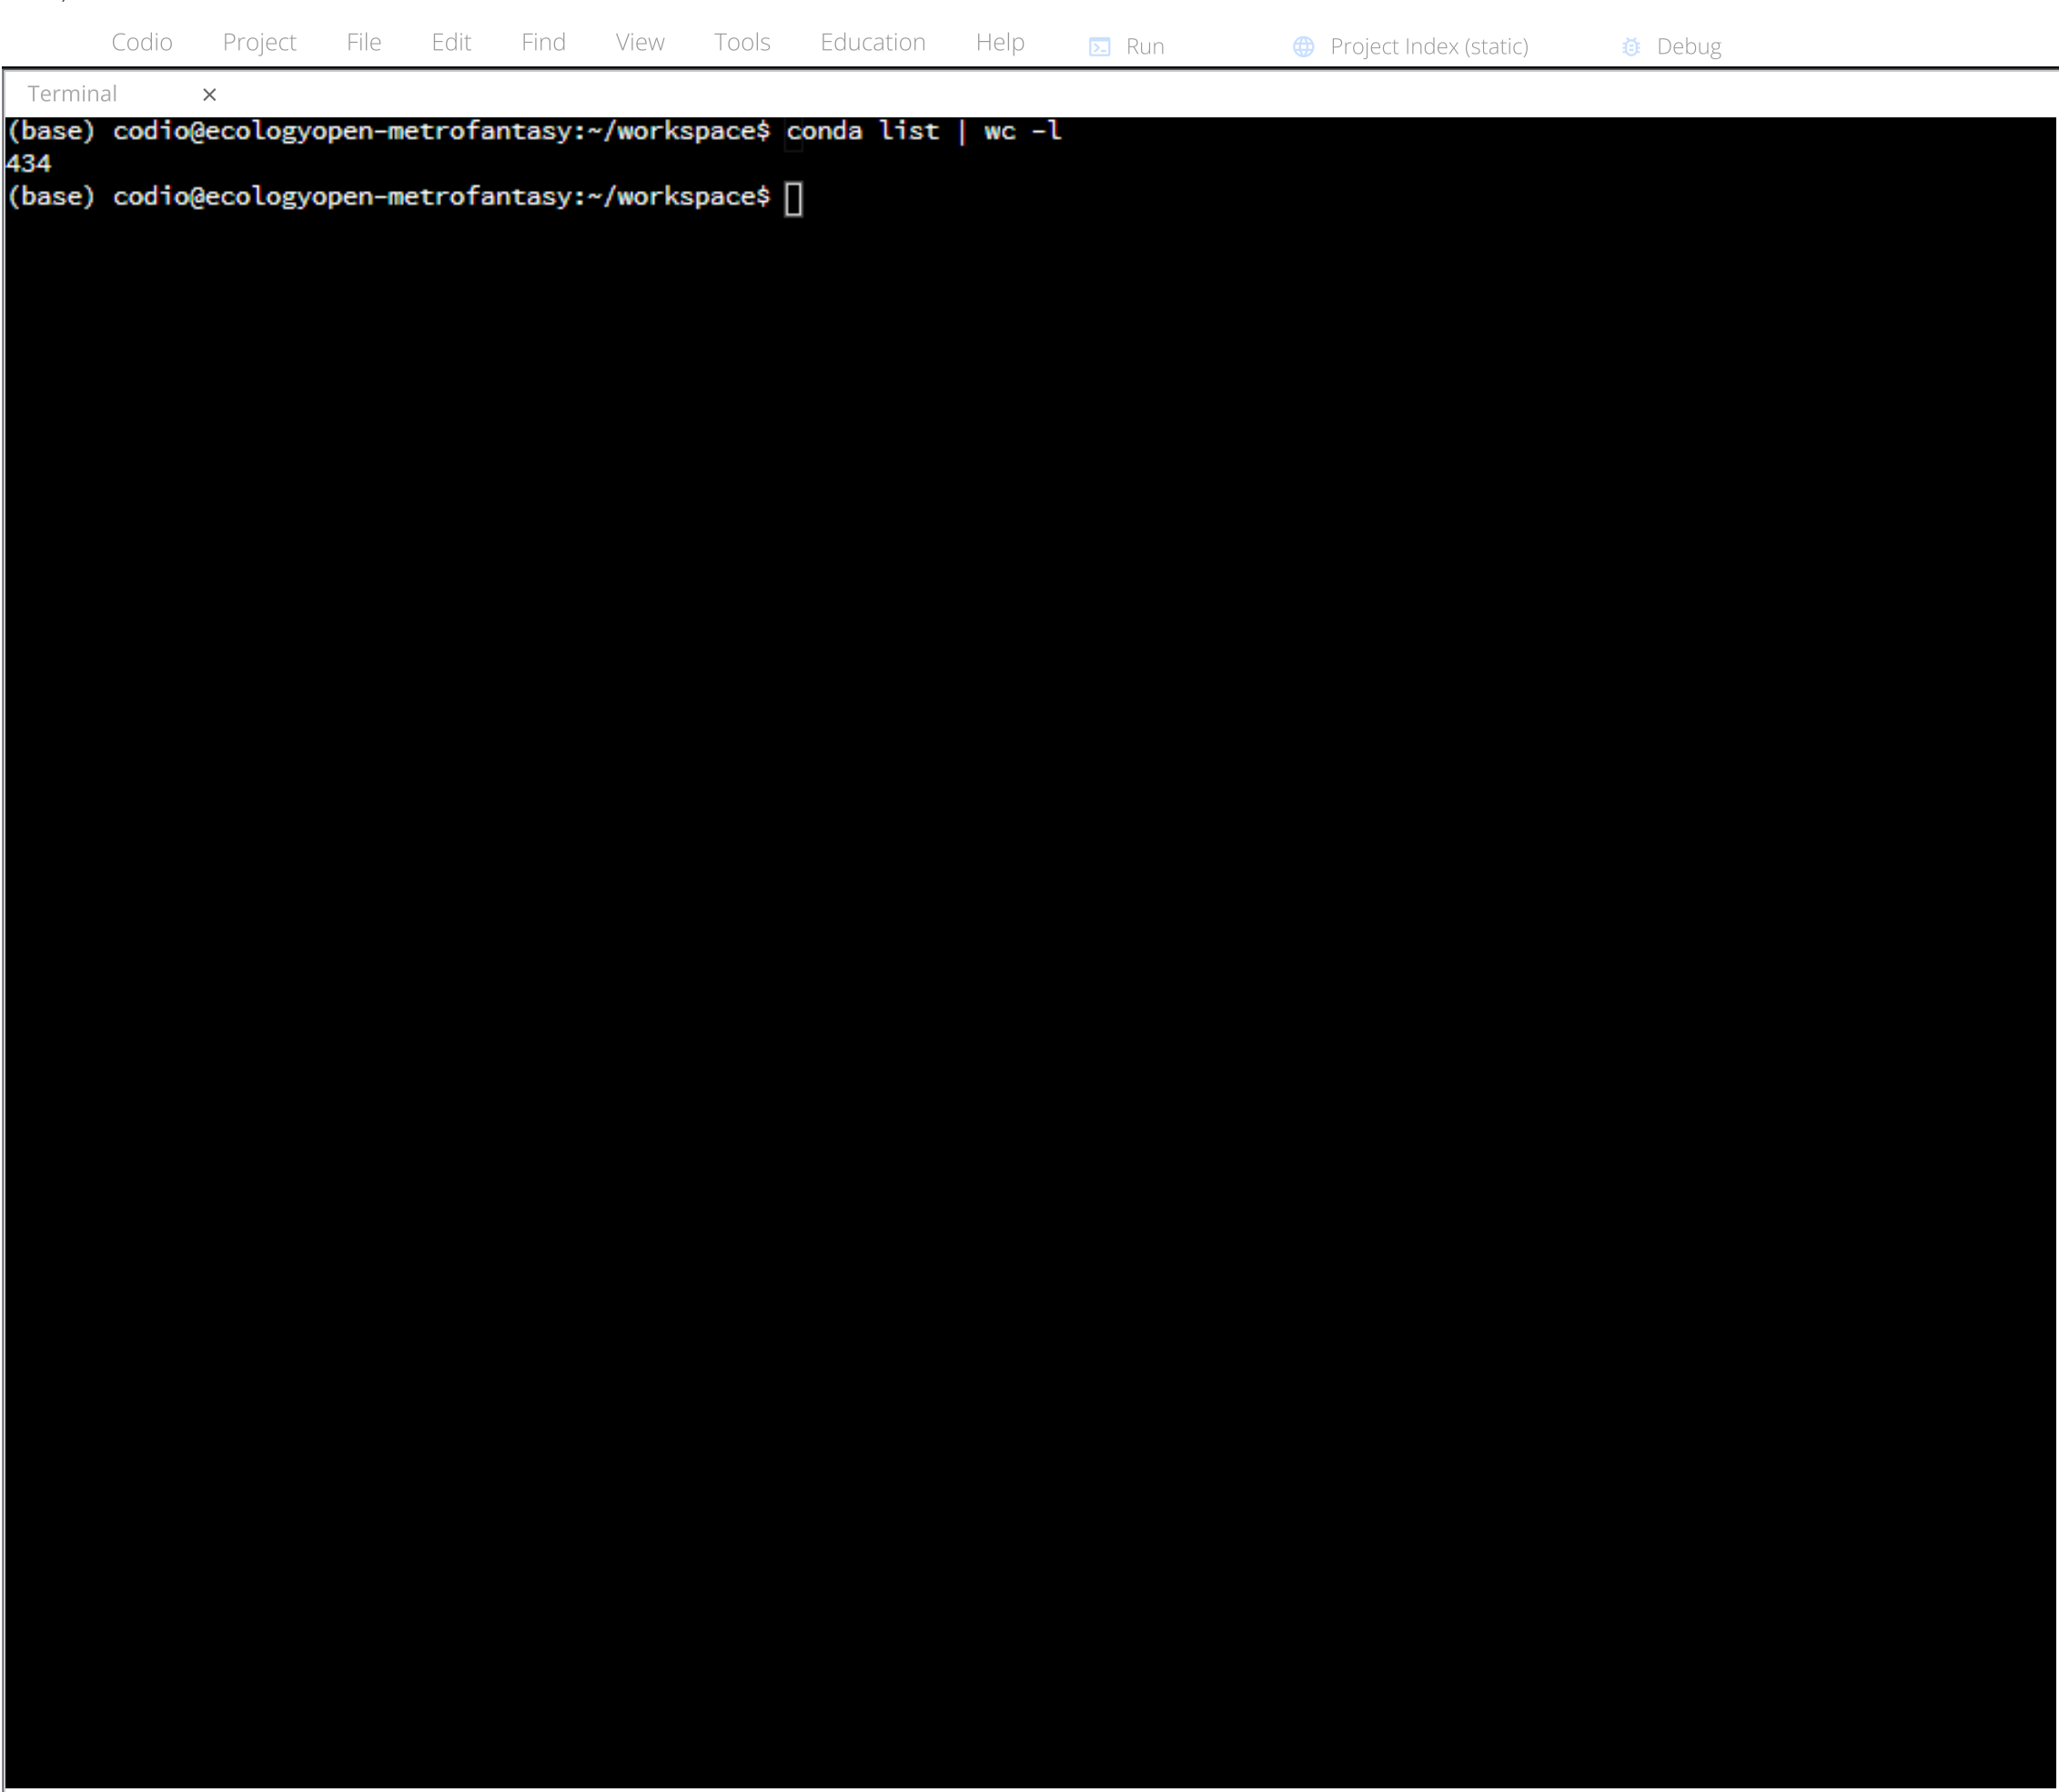

CodeProjectFileEditFindViewToolsEducationHelpRunProject Index (panel)Debug

7/25/23, 10:47 AM

GuideCollapse

Removing Packages

Removing a Package

As the title implies, the `remove` command is used to remove a package from a virtual environment. Let's activate our `learning-conda` virtual environment.

```
conda activate learning-conda
```

Instead of listing all of the installed packages in the environment, let's count them. The `wc` command counts words. Since the `list` command prints columns for name, version, and build channel, we do not want to count words. Instead we want to count lines, which can be done with the `-l` flag. Call the `list` command and pipe (`|`) its output to `wc` so it can count the lines. At the time of writing, there were 109 lines in total. Your numbers maybe different if dependencies changed with new version numbers.

```
conda list | wc -l
```

Now remove the `requests` library from the virtual environment.

```
conda remove requests
```

Count the lines one more time. You should now see 99 lines in total. Your number may be different.

```
conda list | wc -l
```

Using the `remove` command not only removes `requests` but it also removes the dependencies as well.

Try these variations:

- Remove the `requests` package from the `remove-example` virtual environment. You do not need to change environments to do this. Use the `--name` flag to specify the environment from which the package should be removed.

```
conda remove --name remove-example requests
```

We can verify the remove by listing the packages from the `remove-example` environment. The `requests` package is no longer listed.

```
conda list --name remove-example
```

- Remove the `python-twitter` package from the `remove-example` environment.

```
conda remove python-twitter --name remove-example
```

▼ Why is there an error?

You should see the following error:

```
PackagesNotFoundError: The following packages are missing from the - python-twitter
```

Remember, the `python-twitter` package is not found in the Anaconda repository. Since it had to be installed with `pip`, you must uninstall it with the same tool. Since you are using `pip` you need to deactivate your current environment and activate `remove-example` before removing the package.

```
conda deactivate
conda activate remove-example
pip uninstall python-twitter
```

Removing Multiple Packages

You can also remove more than one package at a time. You will still use the `remove` command but list out the packages you want to remove by separating them with a space.

```
conda remove matplotlib scipy
```

Try this variation:

- Remove all of the packages from an environment. The `--all` flag tells Conda to remove all of the packages. Use the `--name` flag to specify `remove-example` environment.

```
conda remove --all --name remove-example
```

Now list all of the installed packages for the `remove-example` virtual environment.

```
conda list --name remove-example
```

▼ Why is there an error?

Listing the contents of the `remove-example` environment should produce the following error:

```
EnvironmentLocationNotFound: Not a conda environment: /home/codio/a
```

Removing all of the packages from an environment is the same as removing the environment itself.

Reading Question

Select all of the true statements about removing packages with Conda. **Hint**, there is more than one correct answer.

☐ Packages installed with `pip` must be removed with `pip`.

☐ You can remove more than one package with a single command.

☐ Using the `--all` flag when removing packages leaves an empty virtual environment.

☐ You can remove packages from another virtual environment.

The correct answers are:

- You can remove more than one package with a single command.
- You can remove packages from another virtual environment.
- You can use Conda to remove packages installed with `pip`.

Using the `--all` flag when removing packages will also remove the virtual environment as well.

Check All

Next