

Bin 2d plane into hexagons.

Usage

```
stat_binhex(mapping = NULL, data = NULL, geom = "hex", position = "identity", bins = 30,  
  na.rm = FALSE, ...)
```

Arguments

bins

numeric vector specifying number of bins in both x and y directions. Set to 30 by default.

na.rm

If **FALSE** (the default), removes missing values with a warning. If **TRUE** silently removes missing values.

mapping

The aesthetic mapping, usually constructed with `aes` or `aes_string`. Only needs to be set at the layer level if you are overriding the plot defaults.

data

A layer specific dataset - only needed if you want to override the plot defaults.

geom

The geometric object to use display the data

position

The position adjustment to use for overlapping points on this layer

...

other arguments passed on to `layer`. This can include aesthetics whose values you want to set, not map. See `layer` for more details.

Description

Bin 2d plane into hexagons.


Aesthetics

`stat_binhex` understands the following aesthetics (required aesthetics are in bold):


- **x**
- **y**
- **fill**

Examples


```
d <- ggplot(diamonds, aes(carat, price))  
d + stat_binhex()
```

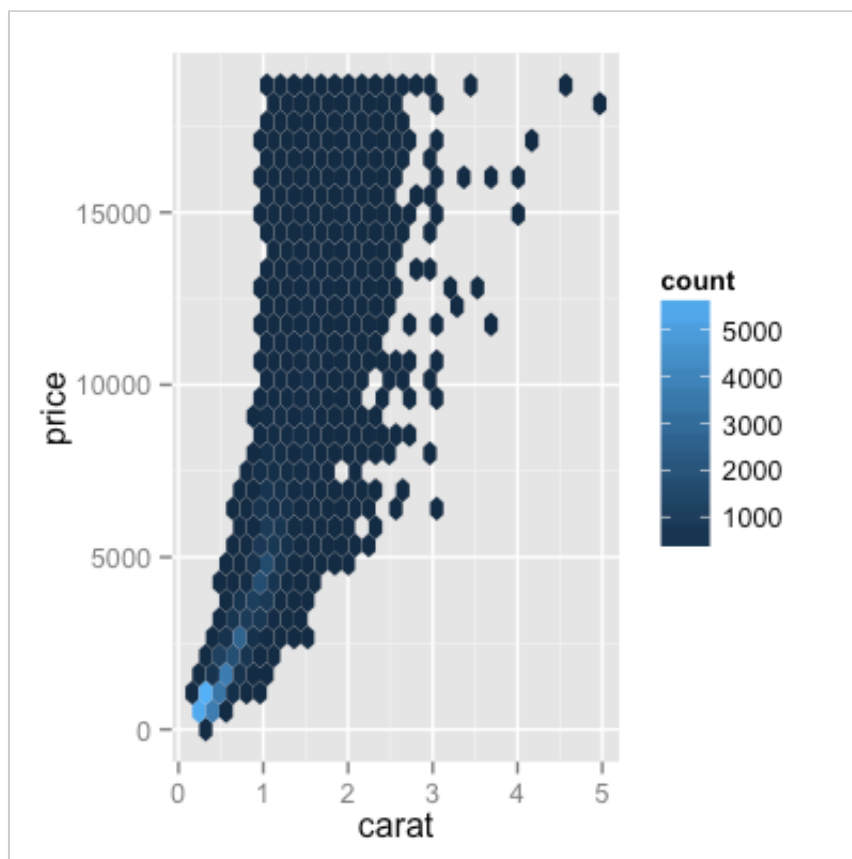


```
d + geom_hex()
```

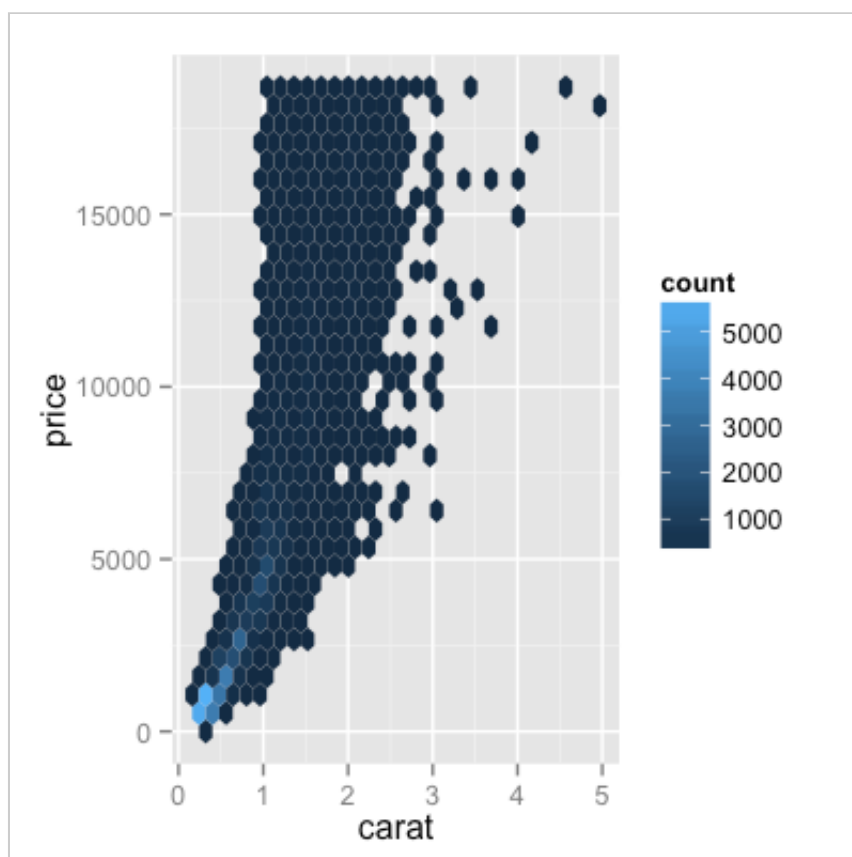


```
# You can control the size of the bins by specifying the number of  
# bins in each direction:  
d + stat_binhex(bins = 10)
```

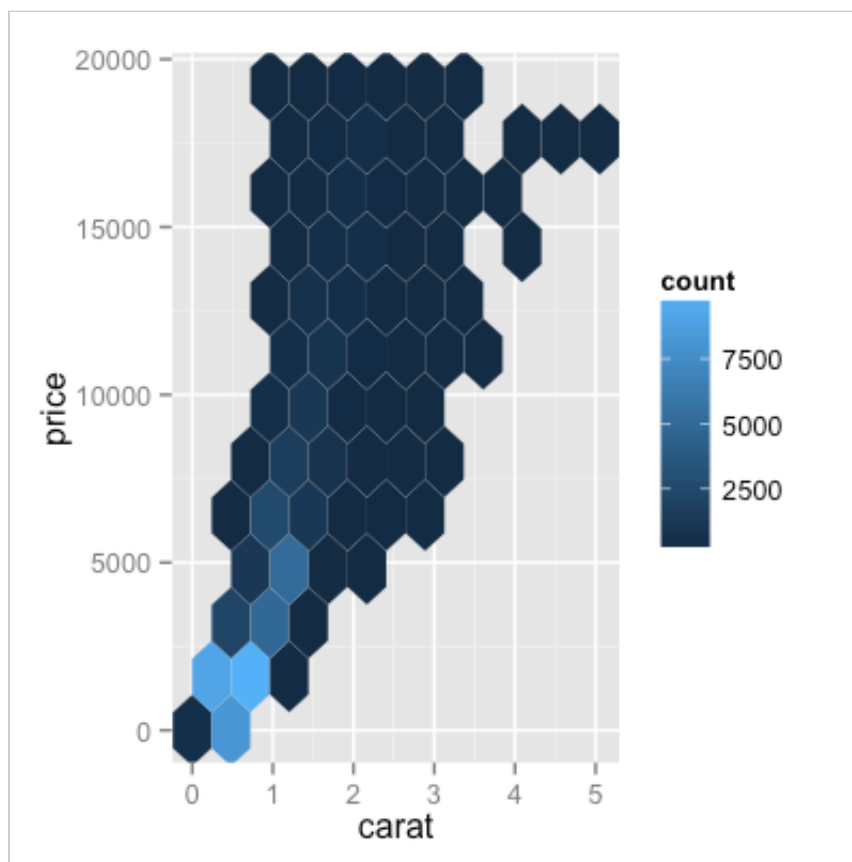


```
d + stat_binhex(bins = 30)
```

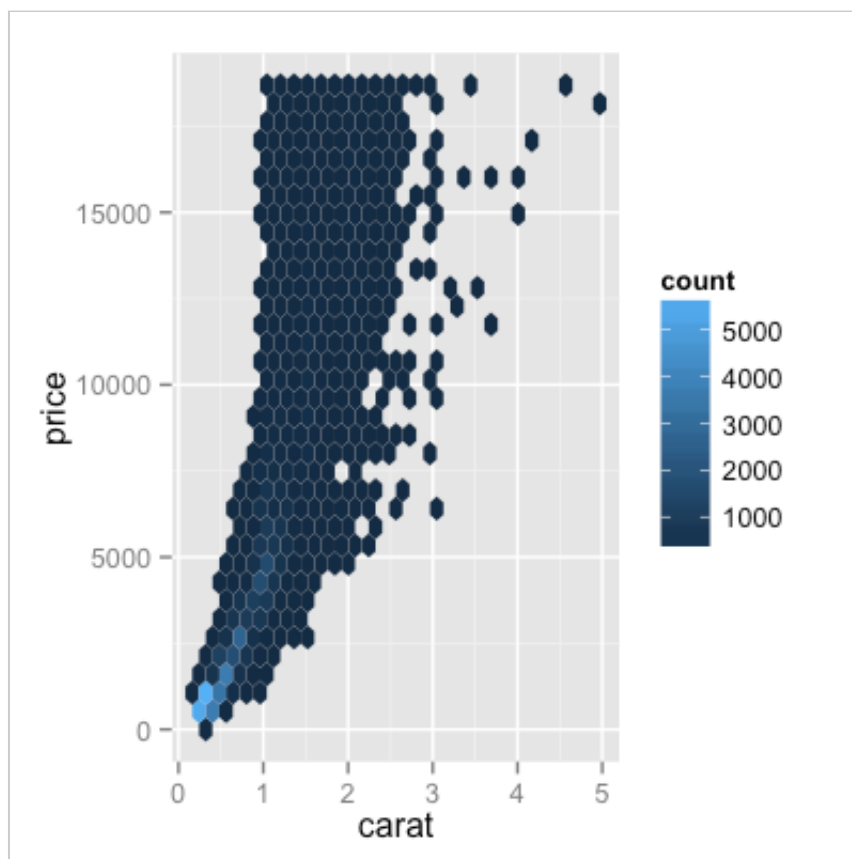

```
# Or by specifying the width of the bins
d + stat_binhex(binwidth = c(1, 1000))
```

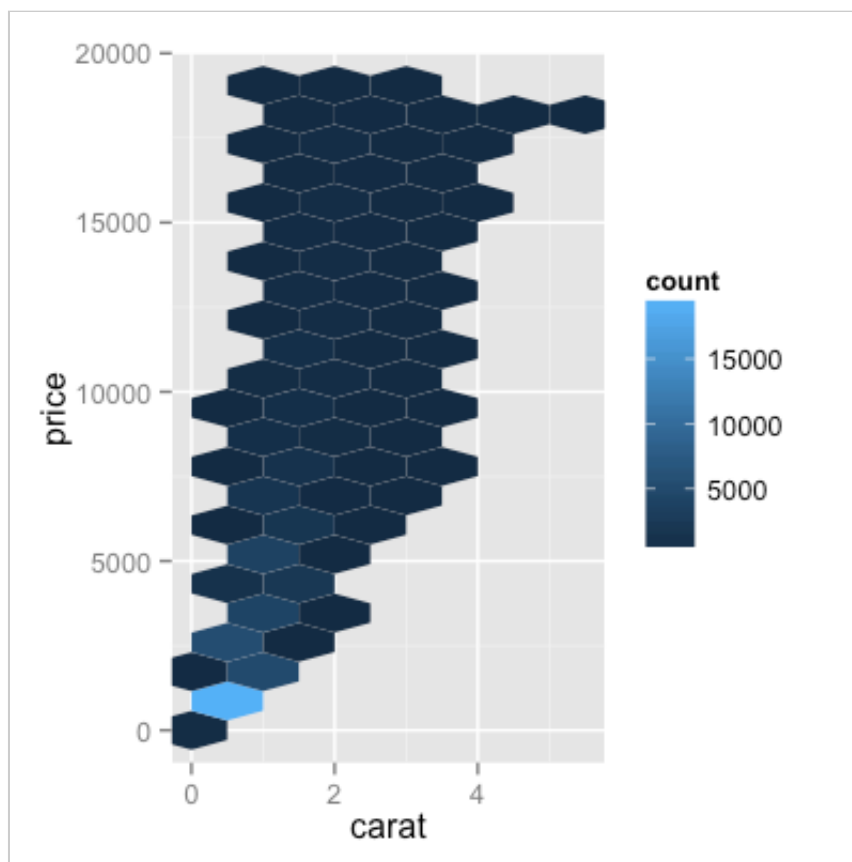


```
d + stat_binhex(binwidth = c(.1, 500))
```

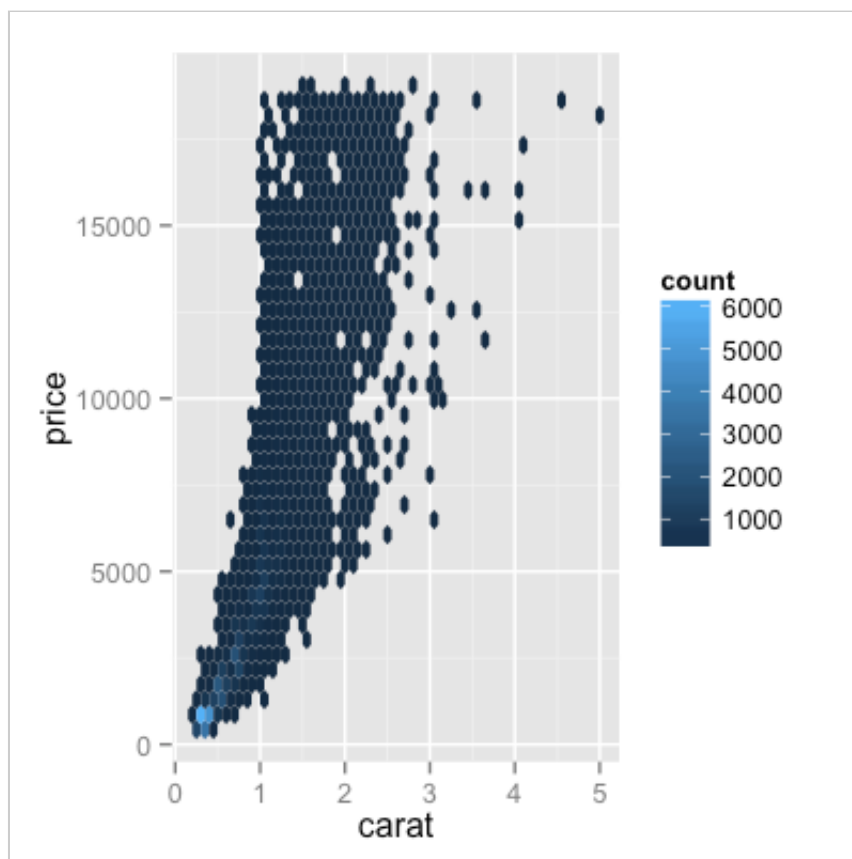

```
# With qplot
qplot(x, y, data = diamonds, geom="hex", xlim = c(4, 10), ylim = c(4, 10))
```

Warning message:


Removed 478 rows containing missing values (stat_hexbin).

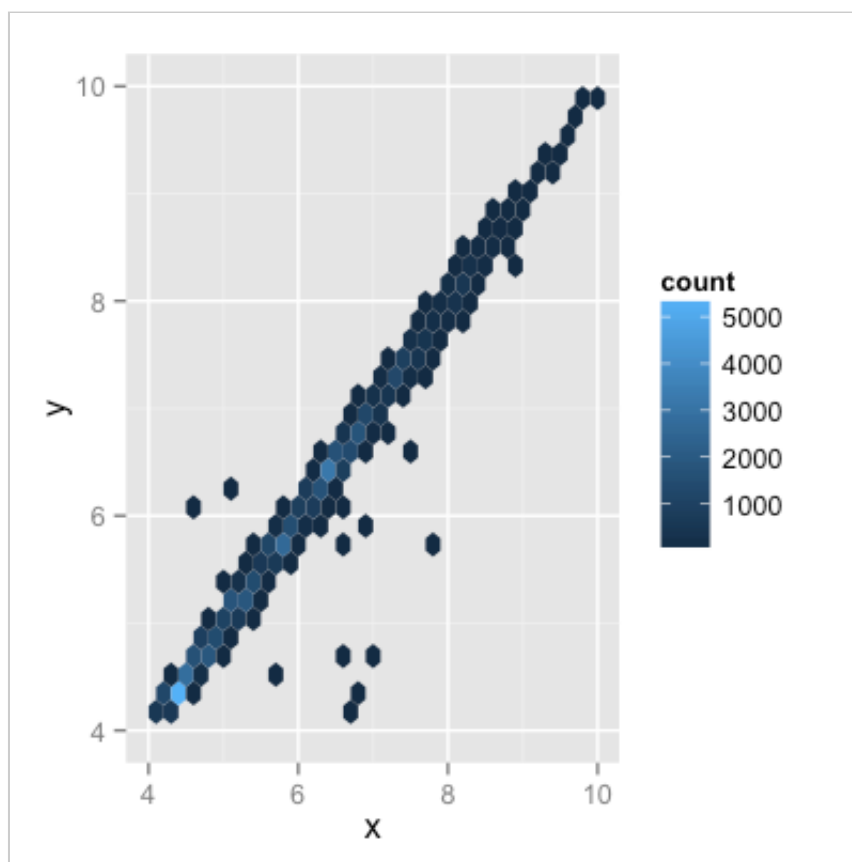

```
qplot(x, y, data = diamonds, geom="hex", xlim = c(4, 10), ylim = c(4, 10),  
      binwidth = c(0.1, 0.1))
```

Warning message:

Removed 478 rows containing missing values (stat_hexbin).

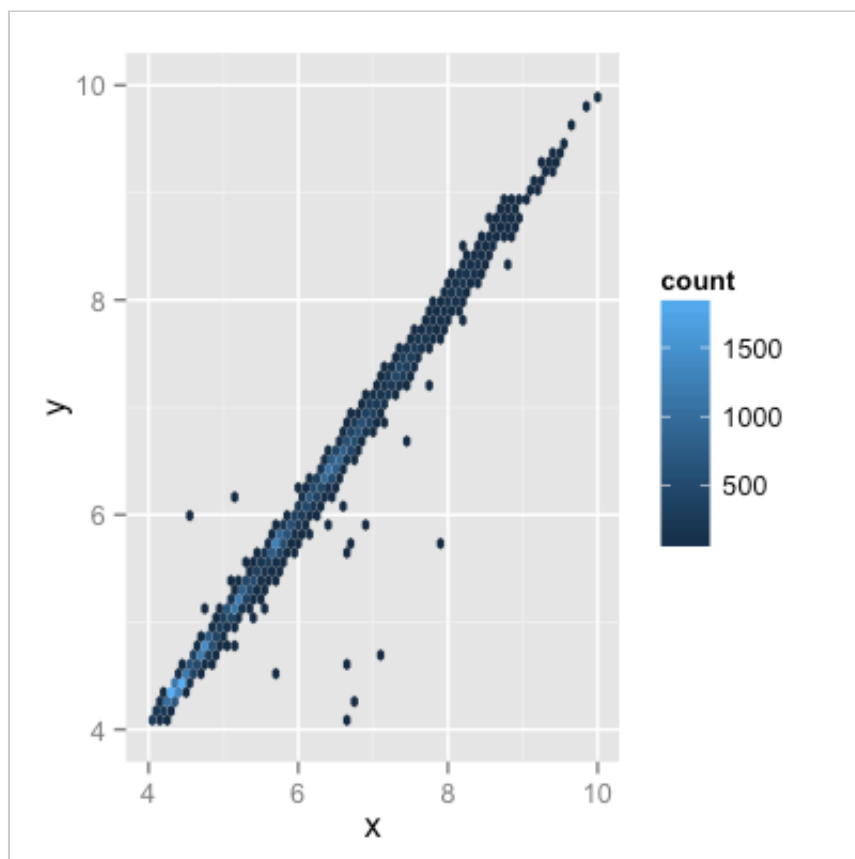

See also

[stat_bin2d](#) for rectangular binning

What do you think of the documentation? [Please let me know by filling out this short online survey.](#)

[Back to top](#)

Built by [staticdocs](#). Styled with [bootstrap](#).