

← Back

3.5 Mean-Shift Segmentation Self-Check Quiz

Practice Assignment (3h)

Hide menu

Week 3: Image Segmentation

Ungraded Plugin: 3.1

Overview of Image Segmentation

4 min

Ungraded Plugin: 3.2

Segmentation by Humans

9 min

Practice Assignment: 3.2

Segmentation by Humans Self-Check Quiz

Submitted

Ungraded Plugin: 3.3

Segmentation as Clustering

5 min

Practice Assignment: 3.3

Segmentation as Clustering Self-Check Quiz

Submitted

Ungraded Plugin: 3.4 k-Means Segmentation

k-Means Segmentation Self-Check Quiz

Submitted

Ungraded Plugin: 3.5

Mean-Shift Segmentation

10 min

Practice Assignment: 3.5

Mean-Shift Segmentation Self-Check Quiz

Submitted

Ungraded Plugin: 3.6

Graph-Based Segmentation

10 min

Practice Assignment: 3.6

Graph-Based Segmentation Self-Check Quiz

3h

Week 3 Quiz

Your grade: 100%

Your latest: 100% • Your highest: 100% • Your lowest: 100% • Your average: 100%

Next item →

3.5 Mean-Shift Segmentation Self-Check Quiz

1. Which of the following options is considered for increasing the number of clusters in the Mean-shift segmentation algorithm?

1 / 1 point

☐ Increase the window size (WxH)

☒ Decrease the window size (WxH) to review what you've learned before starting the assignment? I'm here to help.

Correct

Help me practice

Let's chat

Decreasing the window size usually reduces the number of mean-shifts for each pixel, so there is a better chance that some of the pixels end up in a new cluster different from the existing cluster.

Assignment details

Submitted

Attempts

1 / 3 attempts

2. Consider a k-means clustering with $k=4$ clusters and $W=8$. Are the final clusters of both approaches the same?


☐ True

☐ False

☒ Need more information

Correct

In the case of mean-shift, there are 4 distinct clusters. However, in k-means clustering, the initial centroids determine the final cluster configuration, which may differ from the mean-shift clusters.

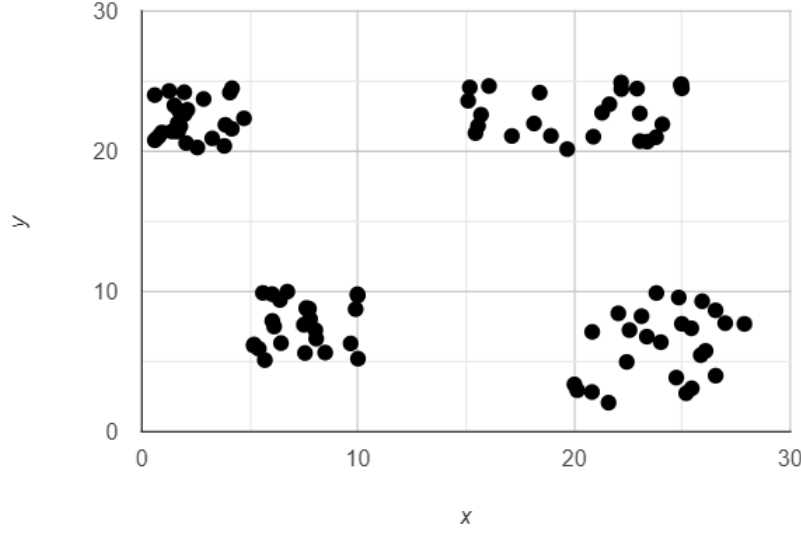

new submission

See feedback