


We're updating the default styles for Matplotlib 2.0

Learn what to expect in the [new updates](#)

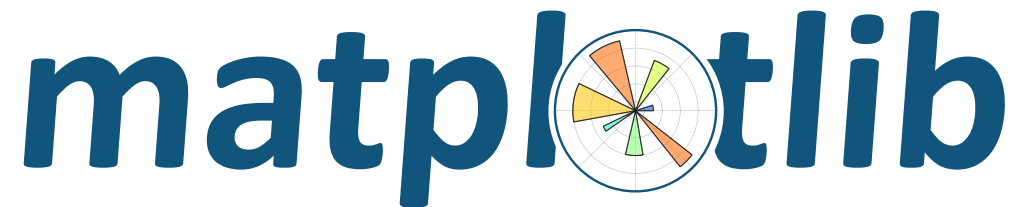

Fork me on GitHub

[home](#) | [examples](#) | [gallery](#) | [pyplot](#) | [docs](#) » [Toolkits](#) » [mplot3d](#) »

[previous](#) | [next](#) | [modules](#) | [index](#)

mplot3d tutorial

Contents

- [mplot3d tutorial](#)
 - [Getting started](#)
 - [Line plots](#)
 - [Scatter plots](#)
 - [Wireframe plots](#)
 - [Surface plots](#)
 - [Tri-Surface plots](#)
 - [Contour plots](#)
 - [Filled contour plots](#)
 - [Polygon plots](#)
 - [Bar plots](#)
 - [Quiver](#)
 - [2D plots in 3D](#)
 - [Text](#)
 - [Subplotting](#)

Depsy 100th percentile

Travis-CI: build passing

Table Of Contents

mplot3d tutorial

- [Getting started](#)
- [Line plots](#)
- [Scatter plots](#)
- [Wireframe plots](#)
- [Surface plots](#)
- [Tri-Surface plots](#)
- [Contour plots](#)
- [Filled contour plots](#)
- [Polygon plots](#)
- [Bar plots](#)
- [Quiver](#)
- [2D plots in 3D](#)
- [Text](#)
- [Subplotting](#)

Getting started

An Axes3D object is created just like any other axes using the `projection='3d'` keyword. Create a new `matplotlib.figure.Figure` and add a new axes to it of type Axes3D:

```
import matplotlib.pyplot as plt
from mpl_toolkits.mplot3d import Axes3D
fig = plt.figure()
ax = fig.add_subplot(111, projection='3d')
```

New in version 1.0.0: This approach is the preferred method of creating a 3D axes.

Note

Prior to version 1.0.0, the method of creating a 3D axes was different. For those using older versions of matplotlib, change `ax = fig.add_subplot(111, projection='3d')` to `ax = Axes3D(fig)`.

Line plots

`Axes3D.plot(xs, ys, *args, **kwargs)`

Plot 2D or 3D data.

Argument	Description
<code>xs, ys</code>	x, y coordinates of vertices
<code>zs</code>	z value(s), either one for all points or one for each point.
<code>zdir</code>	Which direction to use as z ('x', 'y' or 'z') when plotting a 2D set.

Other arguments are passed on to `plot()`

([Source code](#), [png](#), [hires.png](#), [pdf](#))

Related Topics

Documentation overview


- [Toolkits](#)
 - [mplot3d](#)
 - Previous: [mplot3d](#)
 - Next: [mplot3d API](#)

This Page

Show Source

Quick search

Enter search terms or a module, class or function name.

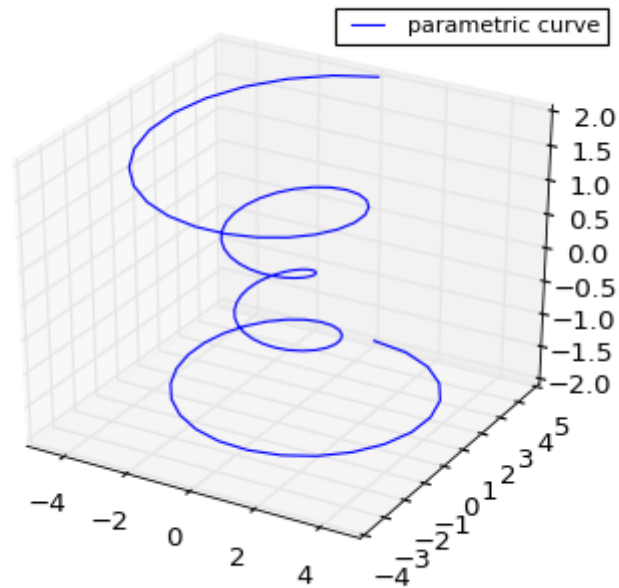

Scatter plots

`Axes3D.scatter(xs, ys, zs=0, zdir='z', s=20, c='b', depthshade=True, *args, **kwargs)`

Create a scatter plot.

Argument	Description
<code>xs, ys</code>	Positions of data points.
<code>zs</code>	Either an array of the same length as <code>xs</code> and <code>ys</code> or a single value to place all points in the same plane. Default is 0.
<code>zdir</code>	Which direction to use as <code>z</code> ('x', 'y' or 'z') when plotting a 2D set.
<code>s</code>	Size in points ² . It is a scalar or an array of the same length as <code>x</code> and <code>y</code> .
<code>c</code>	A color. <code>c</code> can be a single color format string, or a sequence of color specifications of length <i>N</i> , or a sequence of <i>N</i> numbers to be mapped to colors using the <i>cmap</i> and <i>norm</i> specified via <i>kwargs</i> (see below). Note that <code>c</code> should not be a single numeric RGB or RGBA sequence because


that is indistinguishable from an array of values to be colormapped. *c* can be a 2-D array in which the rows are RGB or RGBA, however.

<i>depthshade</i>	Whether or not to shade the scatter markers to give the appearance of depth. Default is <i>True</i> .
-------------------	---

Keyword arguments are passed on to `scatter()`.

Returns a `Patch3DCollection`

([Source code](#), [png](#), [hires.png](#), [pdf](#))

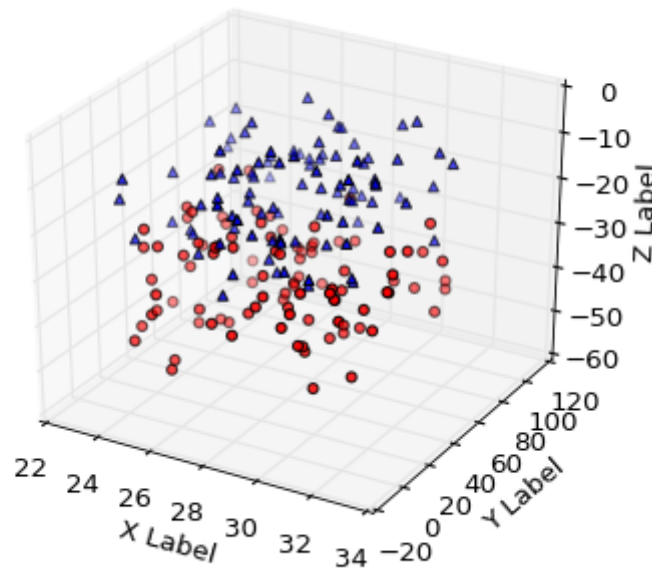

Wireframe plots

`Axes3D.plot_wireframe(X, Y, Z, *args, **kwargs)`

Plot a 3D wireframe.

The `rstride` and `cstride` kwargs set the stride used to sample the input data to generate the graph. If either is 0 the input data is not sampled along this direction producing a 3D line


plot rather than a wireframe plot.

Argument	Description
X, Y, Z	Data values as 2D arrays
<i>rstride</i>	Array row stride (step size), defaults to 1
<i>cstride</i>	Array column stride (step size), defaults to 1

Keyword arguments are passed on to [LineCollection](#).

Returns a [Line3DCollection](#)

([Source code](#), [png](#), [hires.png](#), [pdf](#))

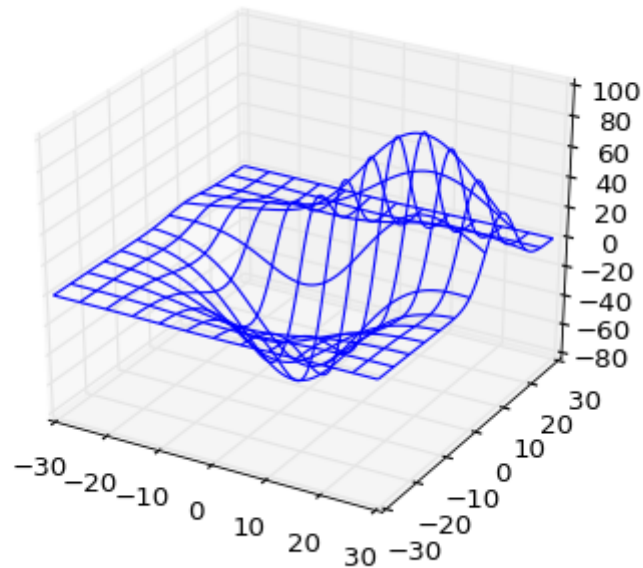

Surface plots

`Axes3D.plot_surface(X, Y, Z, *args, **kwargs)`

Create a surface plot.


By default it will be colored in shades of a solid color, but it also supports color mapping by supplying the *cmap* argument.

The *rstride* and *cstride* kwargs set the stride used to sample the input data to generate the graph. If 1k by 1k arrays are passed in the default values for the strides will result in a 100x100 grid being plotted.


Argument	Description
<i>X, Y, Z</i>	Data values as 2D arrays
<i>rstride</i>	Array row stride (step size), defaults to 10
<i>cstride</i>	Array column stride (step size), defaults to 10
<i>color</i>	Color of the surface patches
<i>cmap</i>	A colormap for the surface patches.
<i>facecolors</i>	Face colors for the individual patches
<i>norm</i>	An instance of Normalize to map values to colors
<i>vmin</i>	Minimum value to map
<i>vmax</i>	Maximum value to map
<i>shade</i>	Whether to shade the facecolors

Other arguments are passed on to [Poly3DCollection](#)


([Source code](#), [png](#), [hires.png](#), [pdf](#))

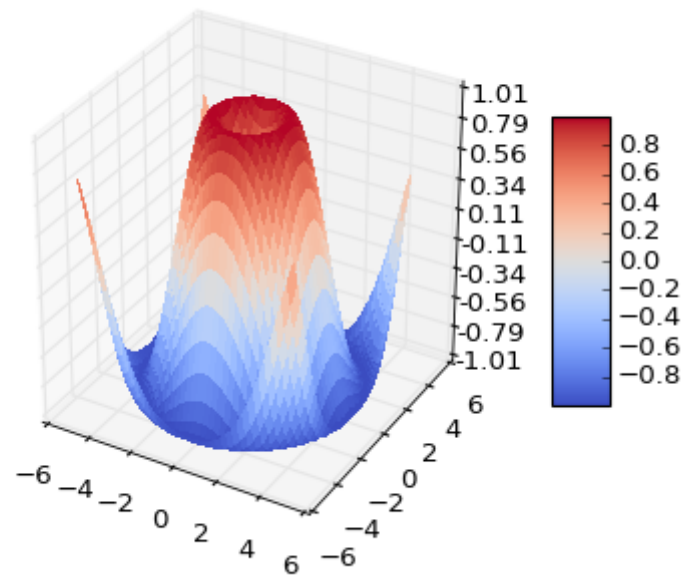

([Source code](#), [png](#), [hires.png](#), [pdf](#))

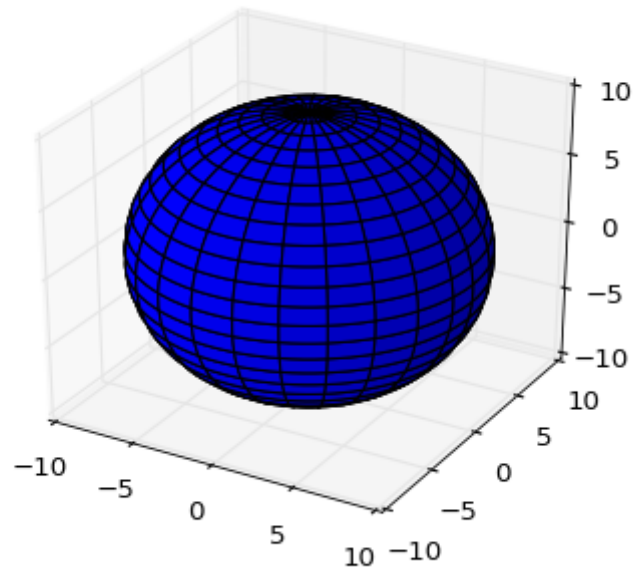

([Source code](#), [png](#), [hires.png](#), [pdf](#))

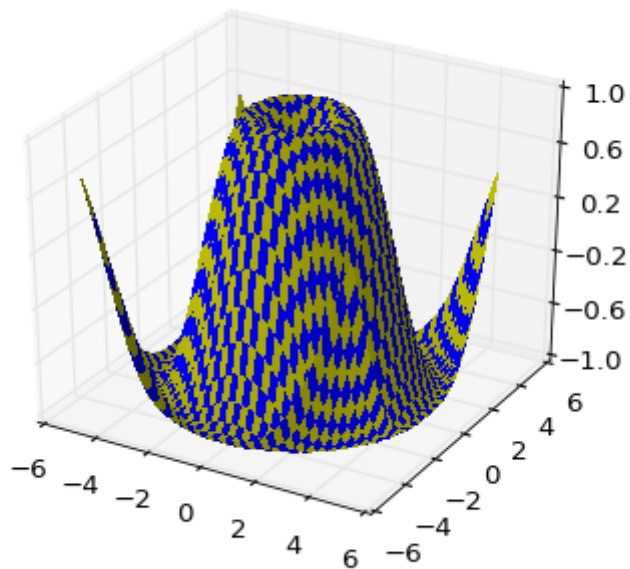

Tri-Surface plots

`Axes3D.plot_trisurf(*args, **kwargs)`

Argument	Description
<code>X, Y, Z</code>	Data values as 1D arrays
<code>color</code>	Color of the surface patches
<code>cmap</code>	A colormap for the surface patches.
<code>norm</code>	An instance of <code>Normalize</code> to map values to colors
<code>vmin</code>	Minimum value to map
<code>vmax</code>	Maximum value to map
<code>shade</code>	Whether to shade the facecolors

The (optional) triangulation can be specified in one of two ways; either:

```
plot_trisurf(triangulation, ...)
```

where triangulation is a [Triangulation](#) object, or:

```
plot_trisurf(X, Y, ...)  
plot_trisurf(X, Y, triangles, ...)  
plot_trisurf(X, Y, triangles=triangles, ...)
```

in which case a Triangulation object will be created. See [Triangulation](#) for a explanation of these possibilities.

The remaining arguments are:


```
plot_trisurf(..., Z)
```

where Z is the array of values to contour, one per point in the triangulation.


Other arguments are passed on to [Poly3DCollection](#)

Examples:


([Source code](#), [png](#), [hires.png](#), [pdf](#))

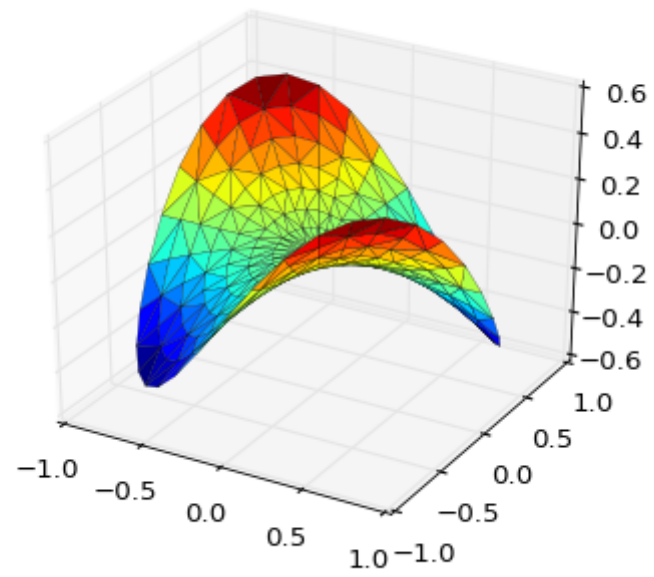

([Source code](#))

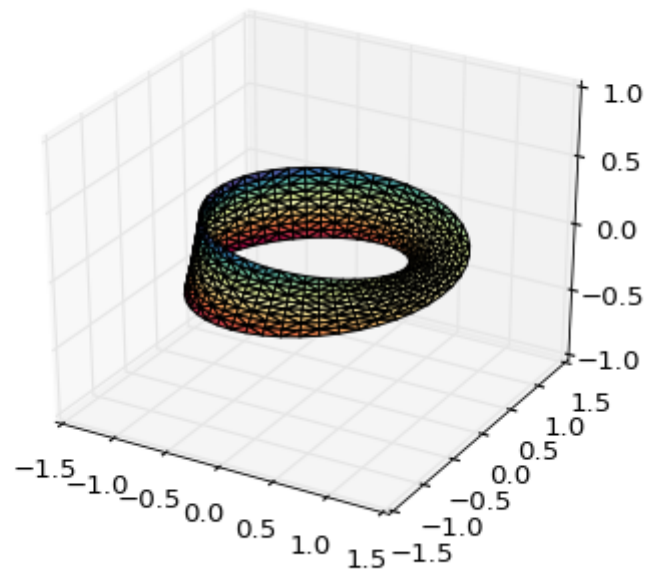


([png](#), [hires.png](#), [pdf](#))

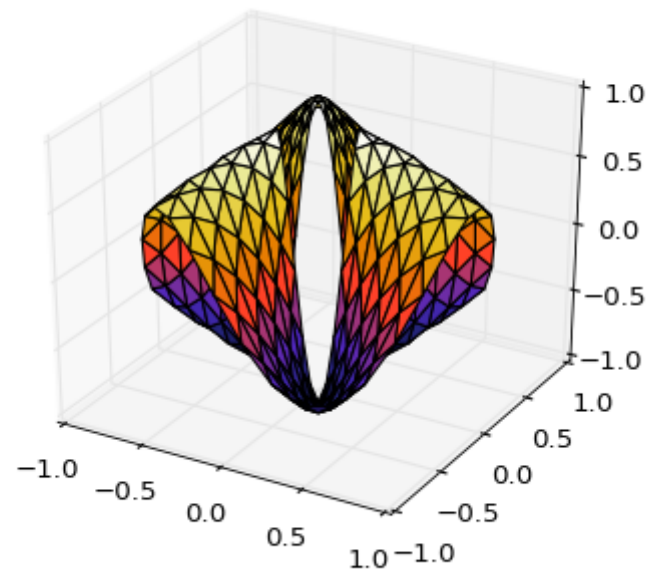

([png](#), [hires.png](#), [pdf](#))

New in version 1.2.0: This plotting function was added for the v1.2.0 release.

([Source code](#), [png](#), [hires.png](#), [pdf](#))

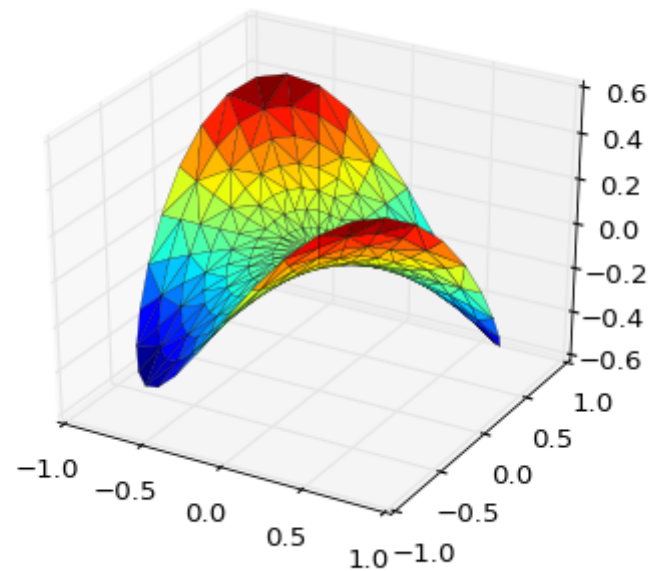

Contour plots

`Axes3D.contour(X, Y, Z, *args, **kwargs)`


Create a 3D contour plot.

Argument	Description
X, Y,	Data values as numpy.arrays
Z	
<i>extend3d</i>	Whether to extend contour in 3D (default: False)
<i>stride</i>	Stride (step size) for extending contour
<i>zdir</i>	The direction to use: x, y or z (default)
<i>offset</i>	If specified plot a projection of the contour lines on this position in plane normal to zdir


The positional and other keyword arguments are passed on to `contour()`

Returns a [contour](#)


([Source code](#), [png](#), [hires.png](#), [pdf](#))

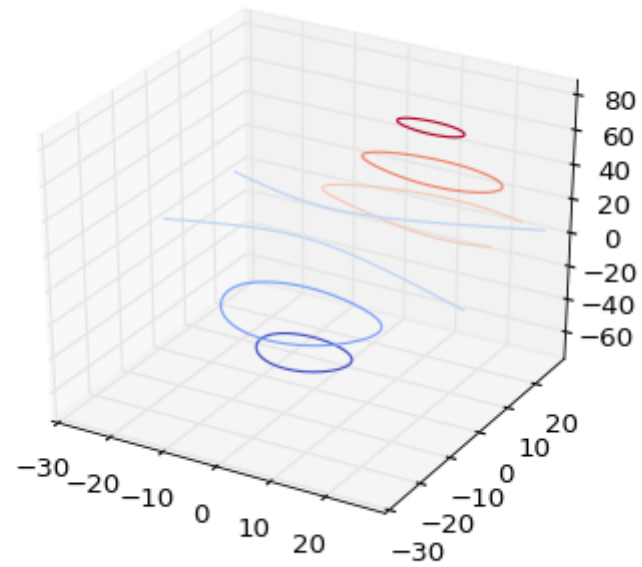

([Source code](#), [png](#), [hires.png](#), [pdf](#))

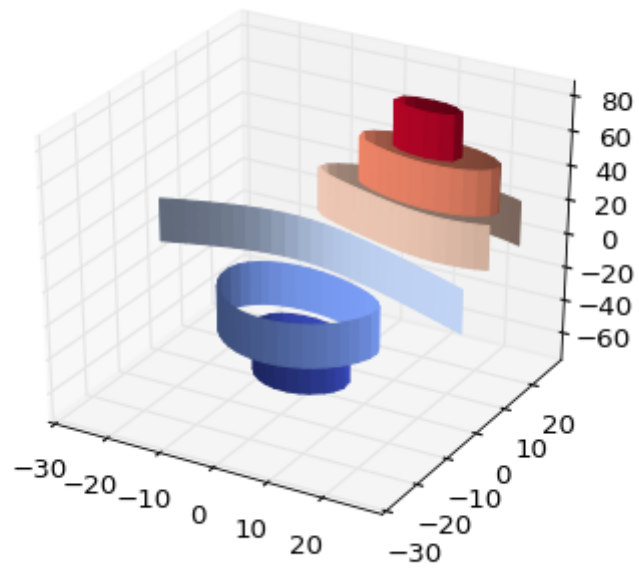

([Source code](#), [png](#), [hires.png](#), [pdf](#))

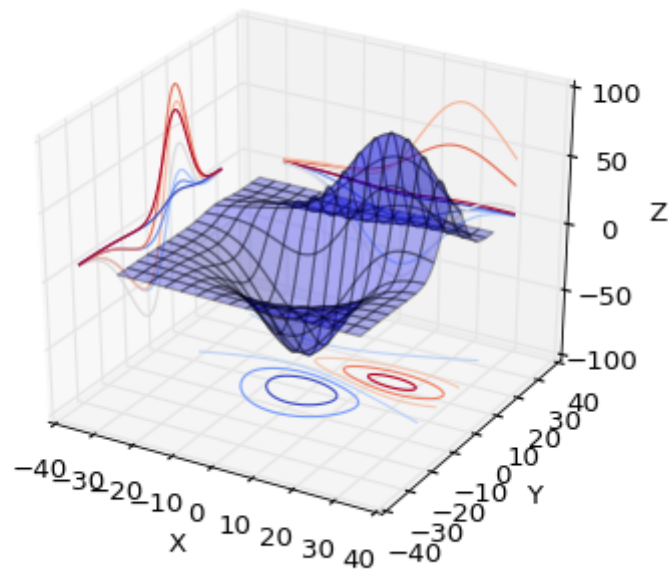

Filled contour plots

`Axes3D.contourf(X, Y, Z, *args, **kwargs)`

Create a 3D contourf plot.


Argument	Description
X, Y,	Data values as numpy.arrays
Z	
<i>zdir</i>	The direction to use: x, y or z (default)
<i>offset</i>	If specified plot a projection of the filled contour on this position in plane normal to <i>zdir</i>

The positional and keyword arguments are passed on to `contourf()`


Returns a `contourf`

Changed in version 1.1.0: The *zdir* and *offset* kwargs were added.

([Source code](#), [png](#), [hires.png](#), [pdf](#))

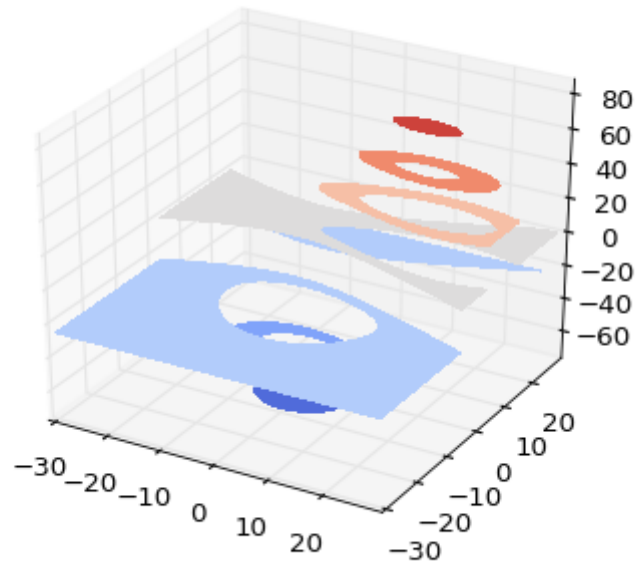

([Source code](#), [png](#), [hires.png](#), [pdf](#))

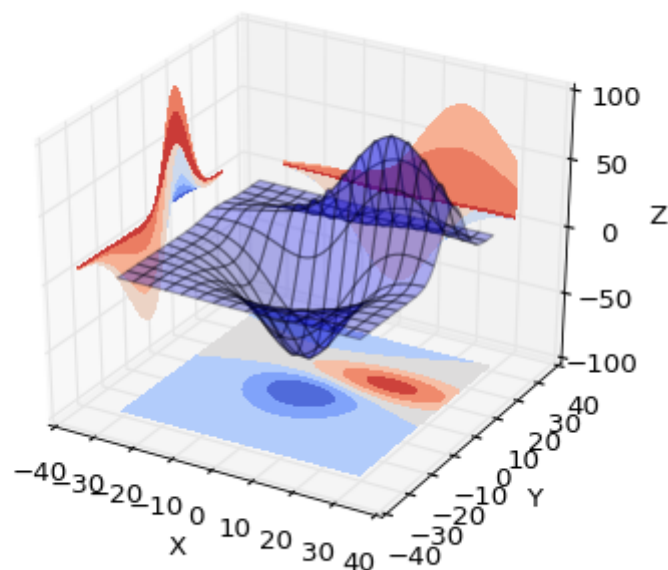

New in version 1.1.0: The feature demoed in the second `contourf3d` example was enabled as a result of a bugfix for version 1.1.0.

Polygon plots

```
Axes3D.add_collection3d(col, zs=0, zdir='z')
```


Add a 3D collection object to the plot.

2D collection types are converted to a 3D version by modifying the object and adding z coordinate information.

Supported are:

- PolyCollection
- LineCollection
- PatchCollection

([Source code](#), [png](#), [hires.png](#), [pdf](#))

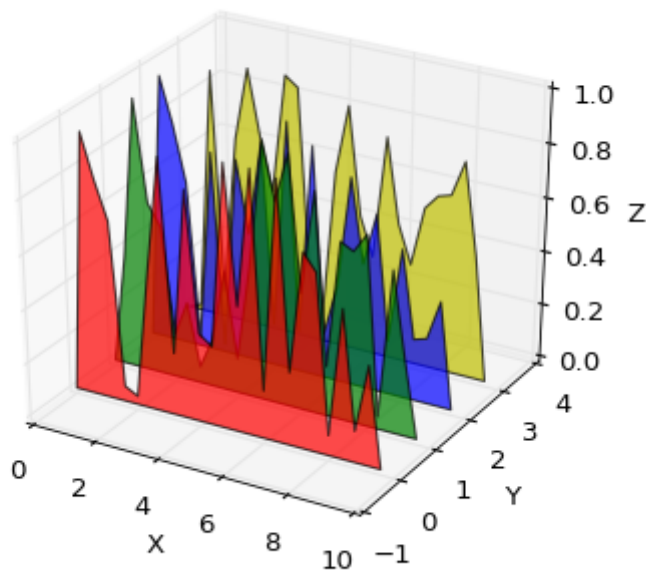

Bar plots

`Axes3D.bar(left, height, zs=0, zdir='z', *args, **kwargs)`


Add 2D bar(s).

Argument	Description
<i>left</i>	The x coordinates of the left sides of the bars.
<i>height</i>	The height of the bars.
<i>zs</i>	Z coordinate of bars, if one value is specified they will all be placed at the same z.
<i>zdir</i>	Which direction to use as z ('x', 'y' or 'z') when plotting a 2D set.

Keyword arguments are passed onto `bar()`.

Returns a `Patch3DCollection`

([Source code](#), [png](#), [hires.png](#), [pdf](#))

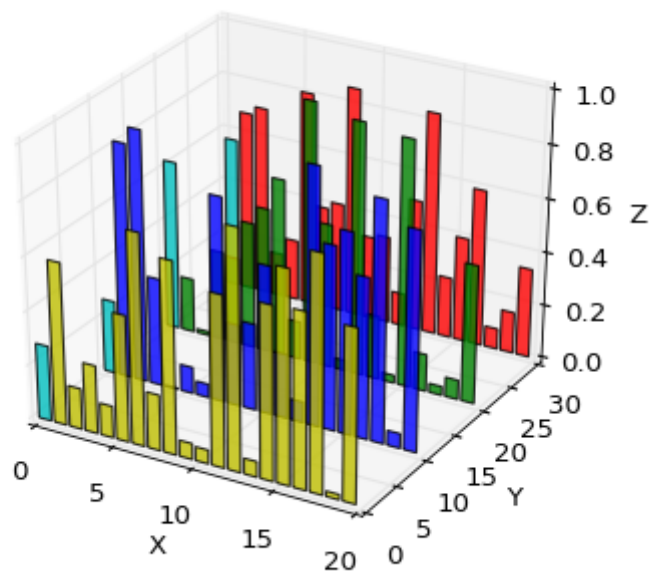

Quiver

`Axes3D.quiver(*args, **kwargs)`

Plot a 3D field of arrows.

call signatures:

```
quiver(X, Y, Z, U, V, W, **kwargs)
```

Arguments:

X, Y, Z:

The x, y and z coordinates of the arrow locations (default is tip of arrow; see *pivot* kwarg)

U , V , W :

The x, y and z components of the arrow vectors

The arguments could be array-like or scalars, so long as they can be broadcast together. The arguments can also be masked arrays. If an element in any of argument is masked, then that corresponding quiver element will not be plotted.

Keyword arguments:

length: [1.0 | float]

The length of each quiver, default to 1.0, the unit is the same with the axes

arrow_length_ratio: [0.3 | float]


The ratio of the arrow head with respect to the quiver, default to 0.3

pivot: ['tail' | 'middle' | 'tip']

The part of the arrow that is at the grid point; the arrow rotates about this point, hence the name *pivot*.


Any additional keyword arguments are delegated to [LineCollection](#)

([Source code](#), [png](#), [hires.png](#), [pdf](#))

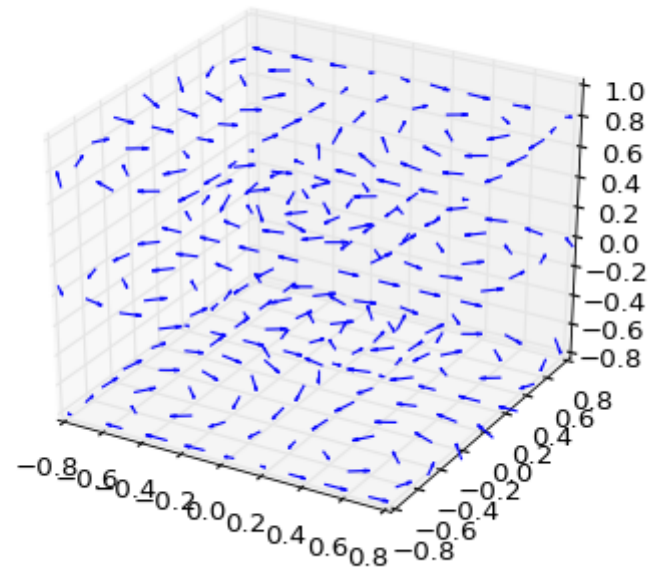

2D plots in 3D

([Source code](#), [png](#), [hires.png](#), [pdf](#))

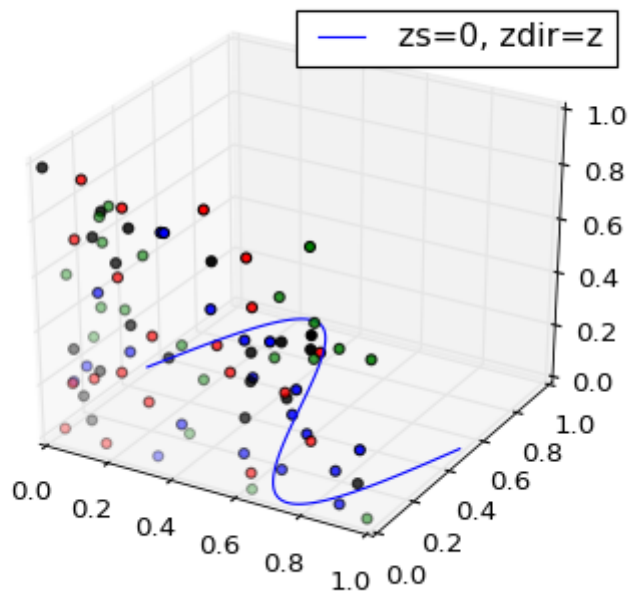


Text

`Axes3D.text(x, y, z, s, zdir=None, **kwargs)`

Add text to the plot. `kwargs` will be passed on to `Axes.text`, except for the `zdir` keyword, which sets the direction to be used as the `z` direction.

([Source code](#), [png](#), [hires.png](#), [pdf](#))

2D Text


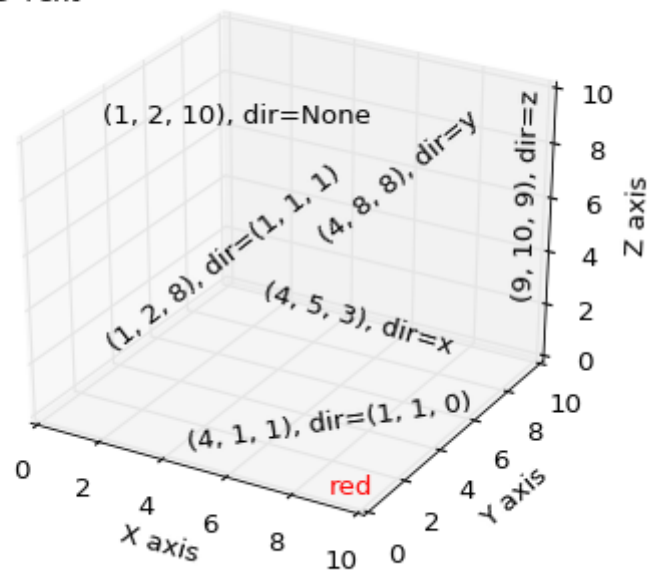


Subplotting

Having multiple 3D plots in a single figure is the same as it is for 2D plots. Also, you can have both 2D and 3D plots in the same figure.

New in version 1.0.0: Subplotting 3D plots was added in v1.0.0. Earlier version can not do this.

([Source code](#), [png](#), [hires.png](#), [pdf](#))

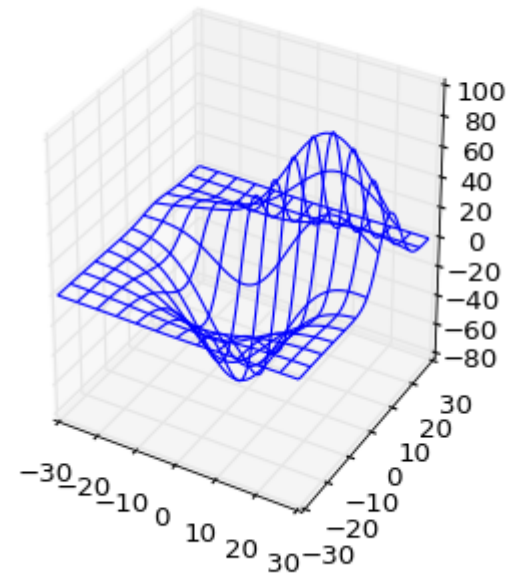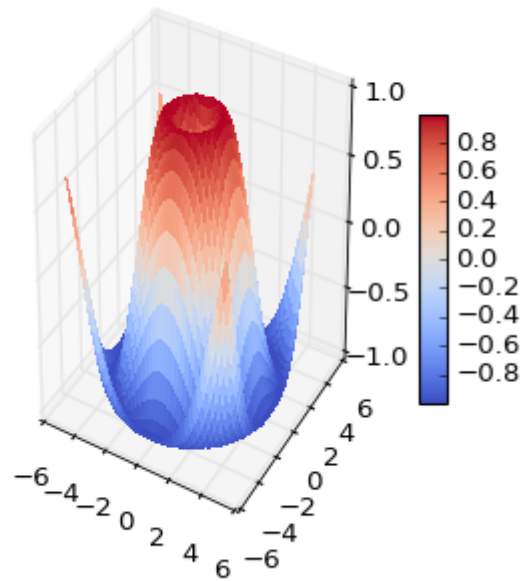

([Source code](#), [png](#), [hires.png](#), [pdf](#))

A tale of 2 subplots

