Architecture Diagram — Actual Implementation

Multi-Agent Workflow (single routing decision)

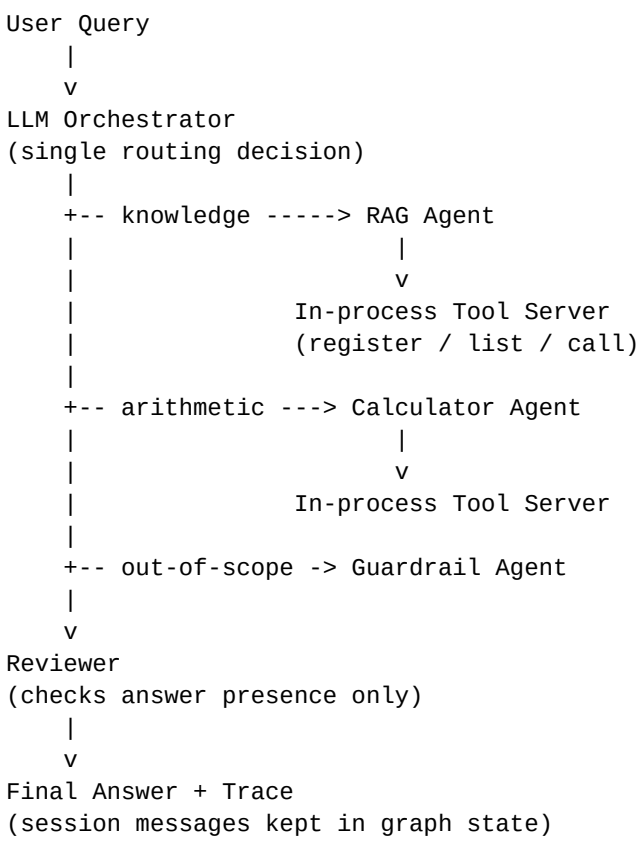

What the code actually does

• The graph starts at the Orchestrator. There is no Agent Gateway.

• The Orchestrator makes one routing decision (USE_RAG / USE_CALC / REFUSE). There is no multi-step Plan-Act-Observe loop.

• The tool server is an ordinary Python class (MCPToolServer) that registers tools, lists them, and sanitizes responses. It is not a separate MCP process.

• RAG and Calculator agents call this in-process class. The Guardrail returns a refusal without calling a tool.

• The Reviewer only checks that a non-empty answer was produced. It does not perform a semantic entailment or grounding check.

• Session messages and the step trace are stored in the LangGraph state.