




Llama_r0 random L31: power per Laplacian mode

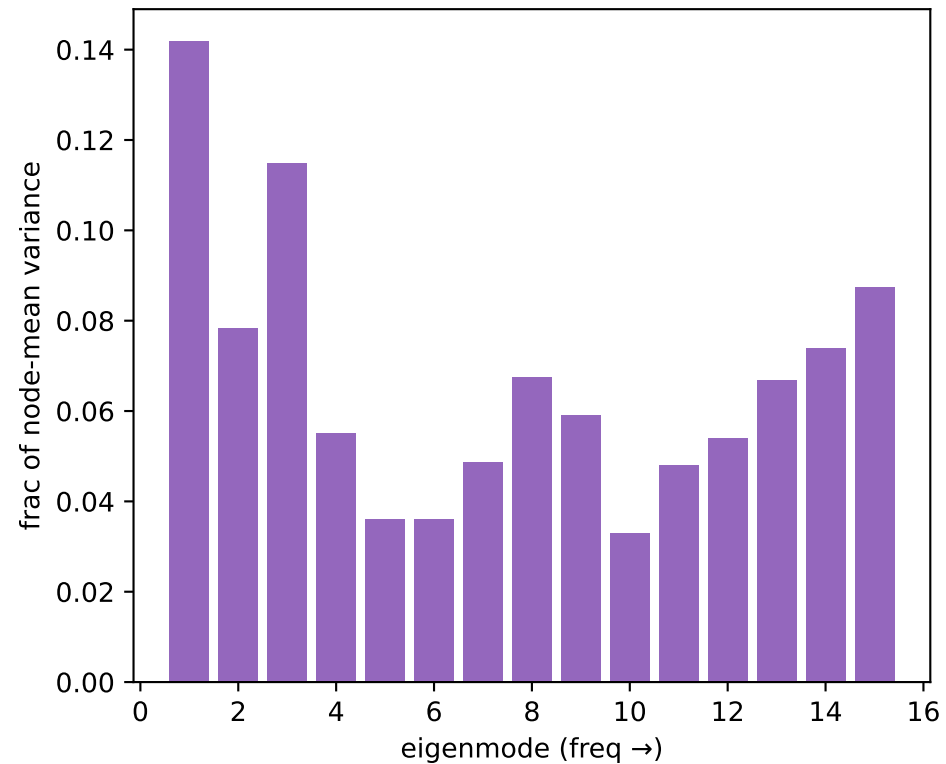

cumulative variance vs #modes

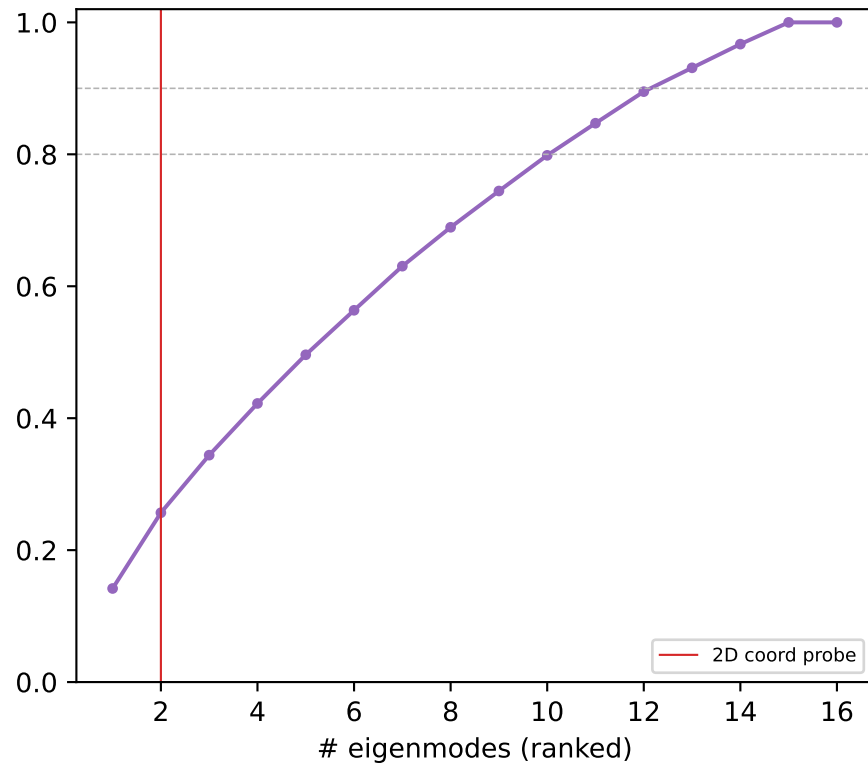


power: eigenmode x layer

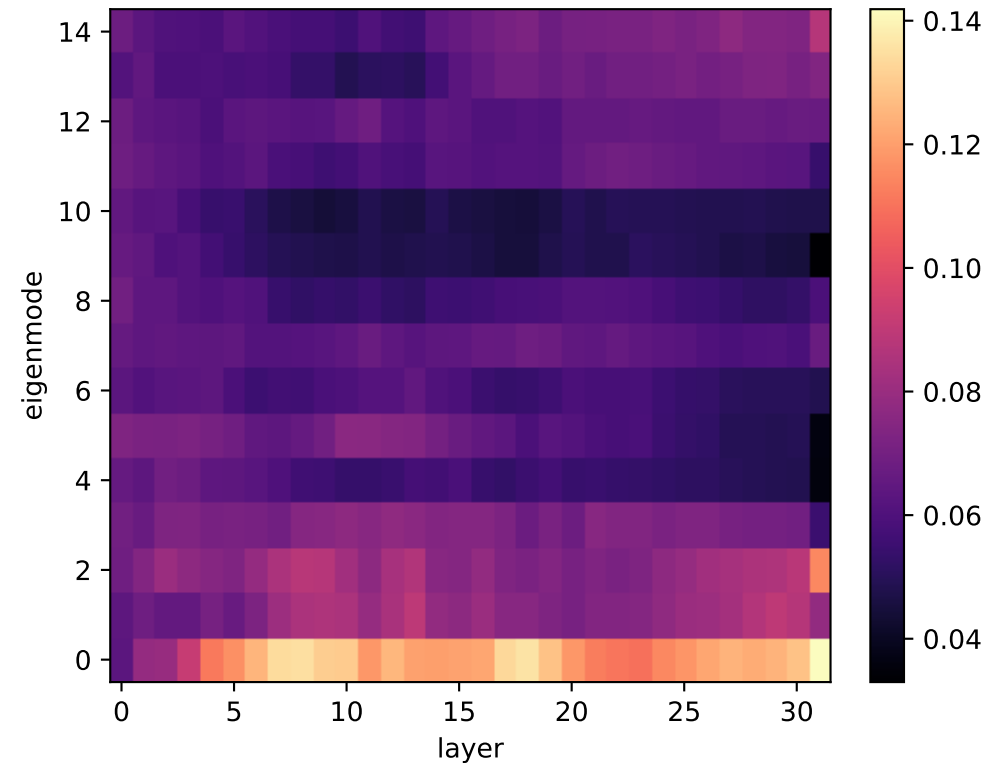


Llama_r0 random: Laplacian eigenmode DIVIDERS (% = variance share at L31)


mode 1 $\lambda=0.85$ (14%)

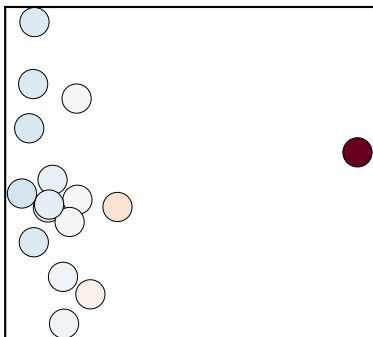


mode 2 $\lambda=1.46$ (8%)

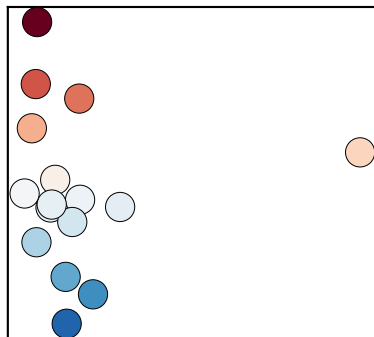


mode 3 $\lambda=1.59$ (11%)

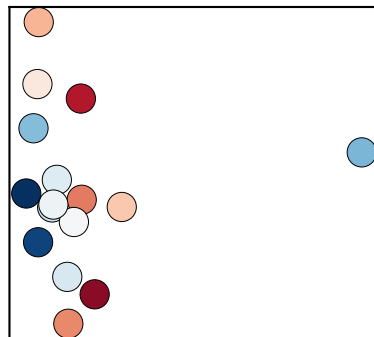


mode 4 $\lambda=2.27$ (6%)

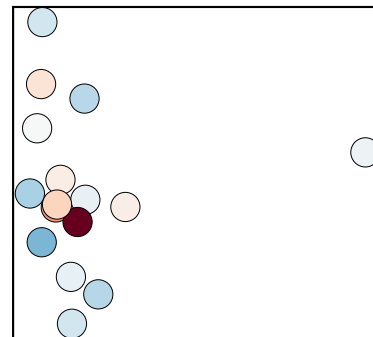


mode 5 $\lambda=2.55$ (4%)

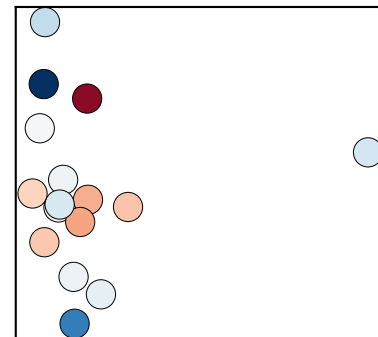


mode 6 $\lambda=2.94$ (4%)

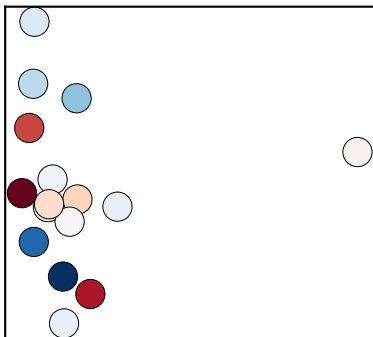


mode 7 $\lambda=3.15$ (5%)

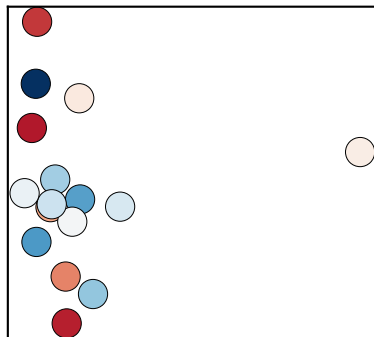


mode 8 $\lambda=3.74$ (7%)

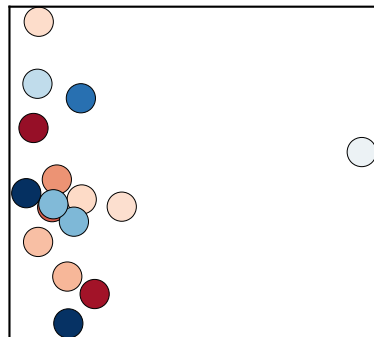


mode 9 $\lambda=4.01$ (6%)

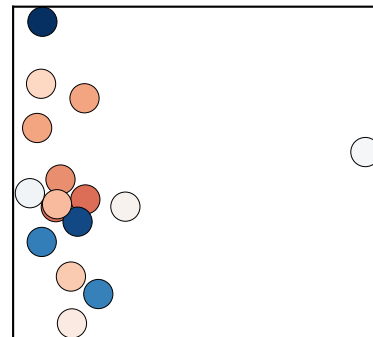


mode 10 $\lambda=4.91$ (3%)

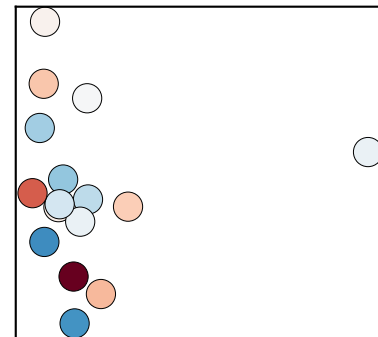


mode 11 $\lambda=5.53$ (5%)

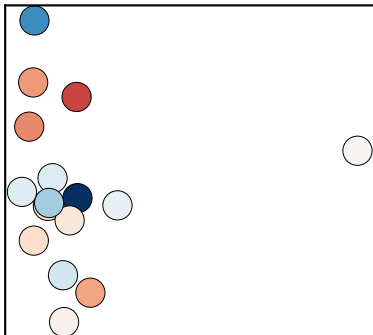


mode 12 $\lambda=5.99$ (5%)

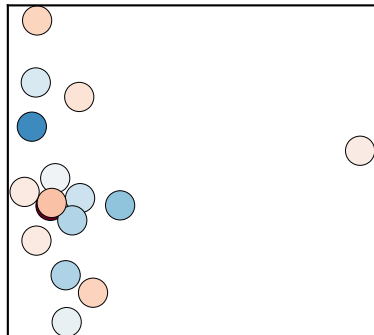


mode 13 $\lambda=7.53$ (7%)

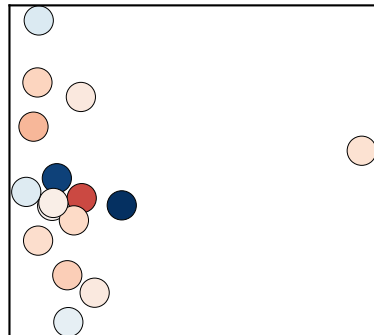

mode 14 $\lambda=8.34$ (7%)

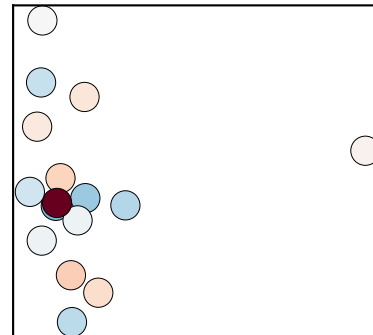


mode 15 $\lambda=9.14$ (9%)

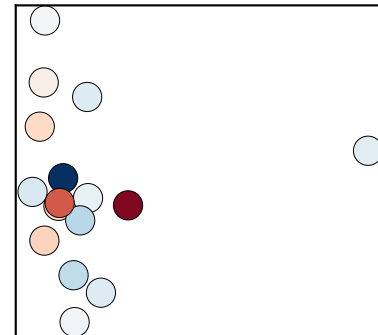


Llama_r0 random: named-cut basis (left) & model's own top axes (right)


named cuts, greedy orthogonal (cumulative Σ)

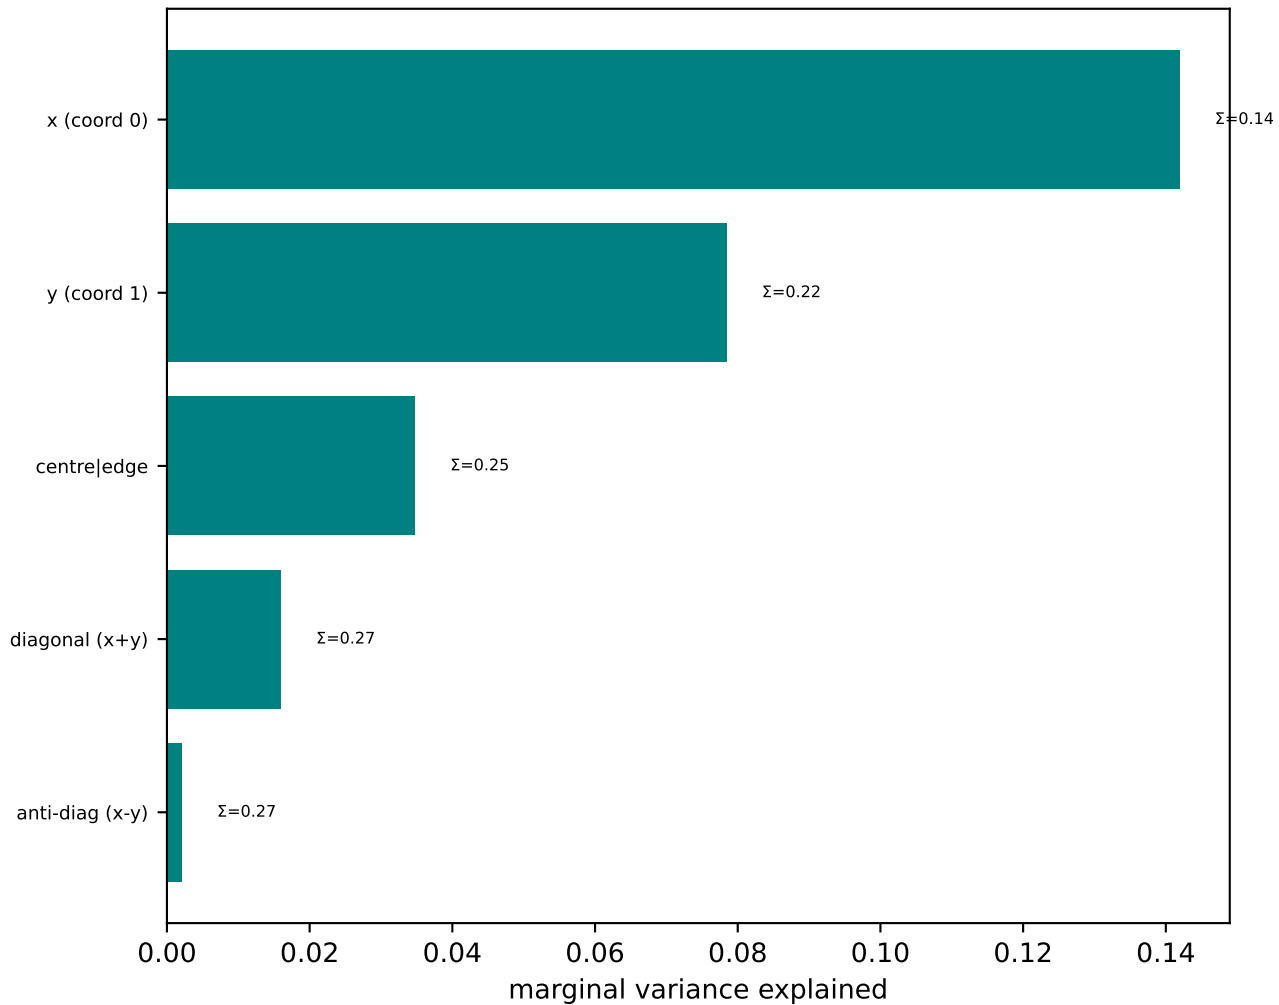


PC0 (23%)
 $\approx$ centre|edge

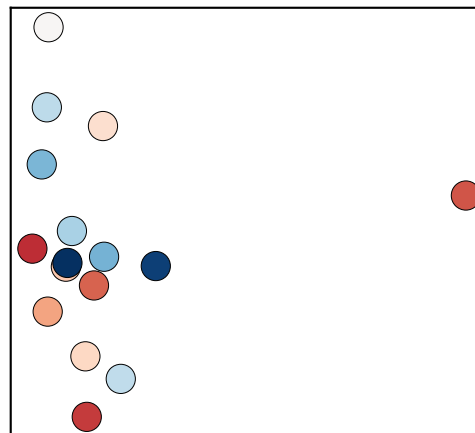

PC2 (9%)
 $\approx$ y (coord 1)

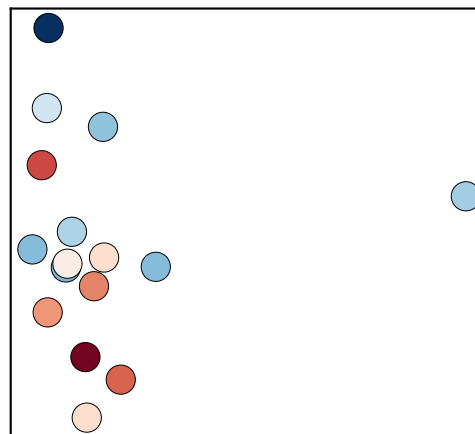

PC1 (18%)
 $\approx$ x (coord 0)

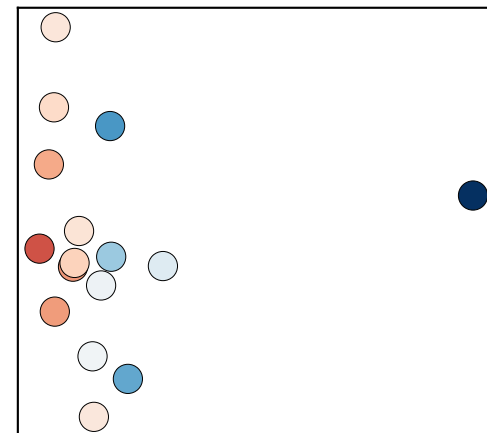

PC3 (8%)
 $\approx$ diagonal (x+y)

