

POOLED leave-one-node-out R^2 — both directions (top: A→B, bottom: B→A; ridge top-6 PC, $\alpha=1000$; best-cell node-shuffle null, 200 perms)

best-cell null -0.22 ± 0.22 , $p=0.005$




best-cell null -0.22 ± 0.19 , $p=0.005$

best-cell null -0.36 ± 0.24 , $p=0.005$

predict Llama from Gemma (max 0.44)

predict Qwen from Gemma (max 0.35)

predict Qwen from Llama (max 0.36)

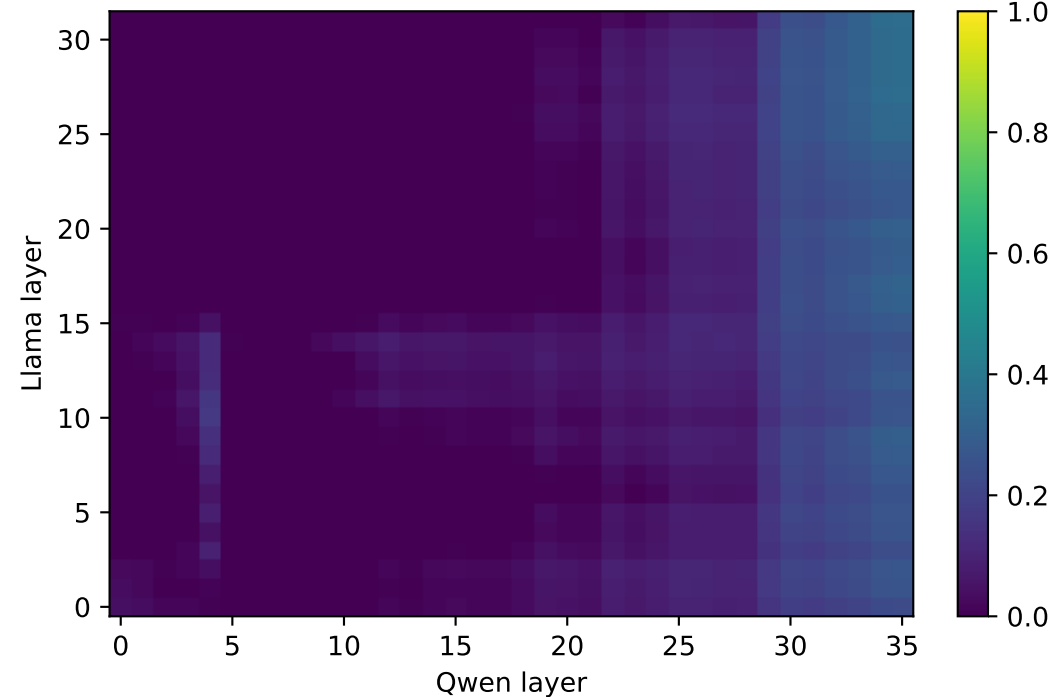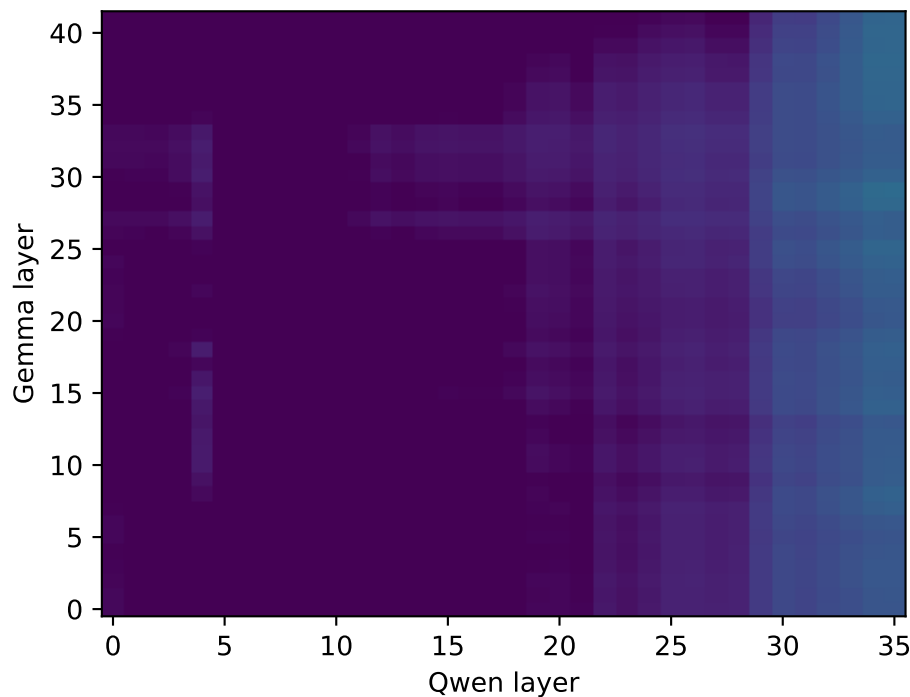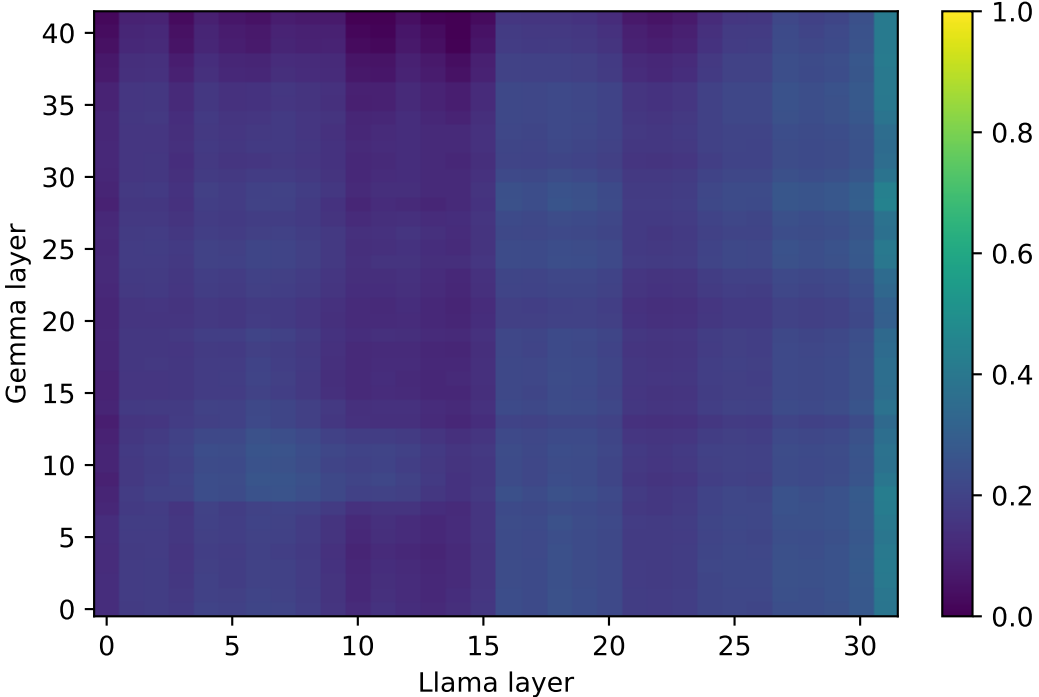

best-cell null -0.34 ± 0.20 , $p=0.005$




best-cell null -0.41 ± 0.22 , $p=0.010$

best-cell null -0.40 ± 0.35 , $p=0.005$


predict Gemma from Llama (max 0.31)

predict Gemma from Qwen (max 0.35)


predict Llama from Qwen (max 0.47)

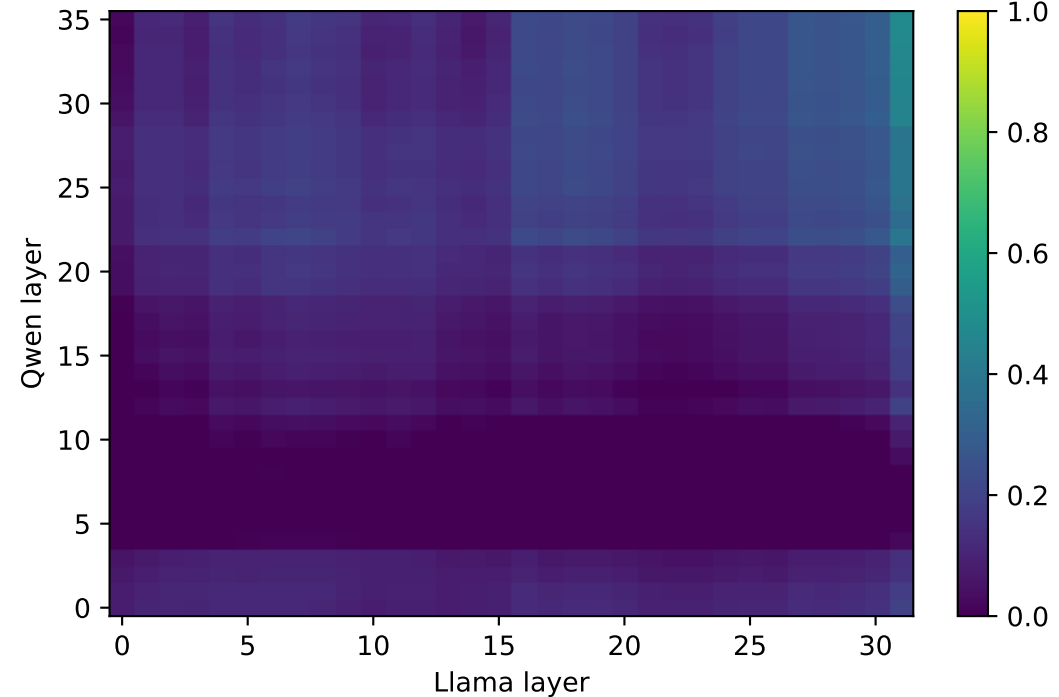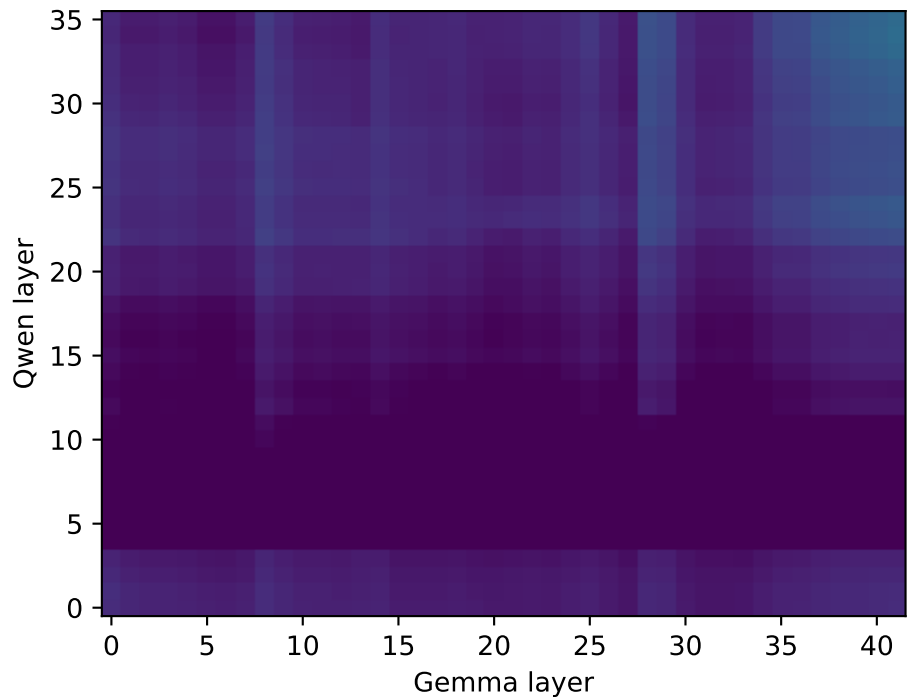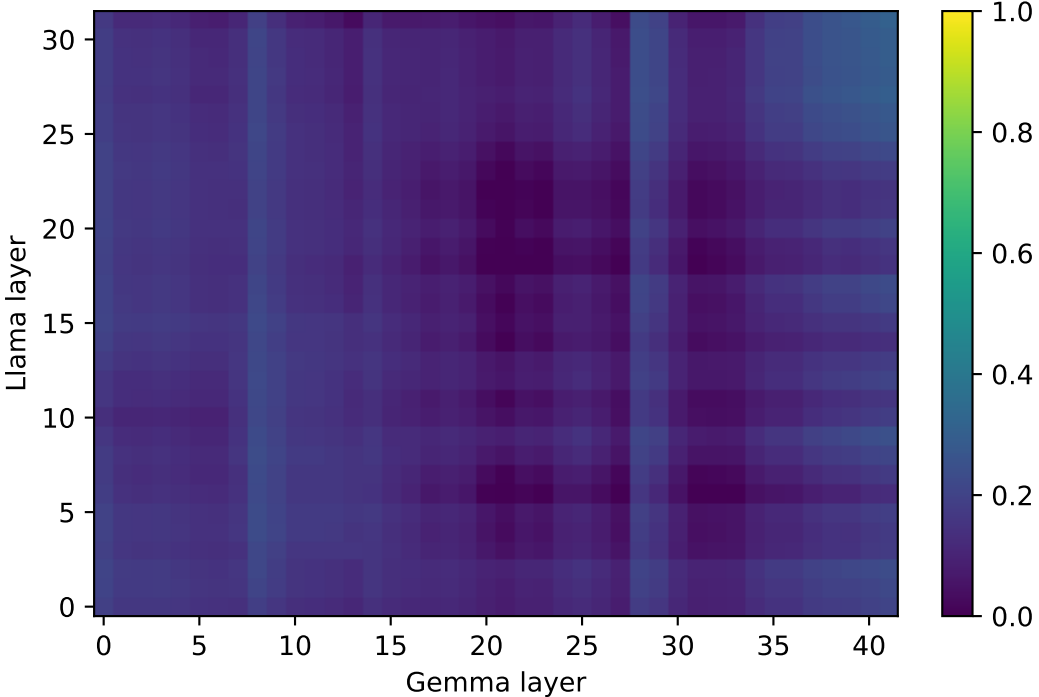


[days] HELD-OUT node 0 @ (1.0, 0.0) — per-node R² layer×layer, both directions (red=well predicted, blue=worse than centroid)

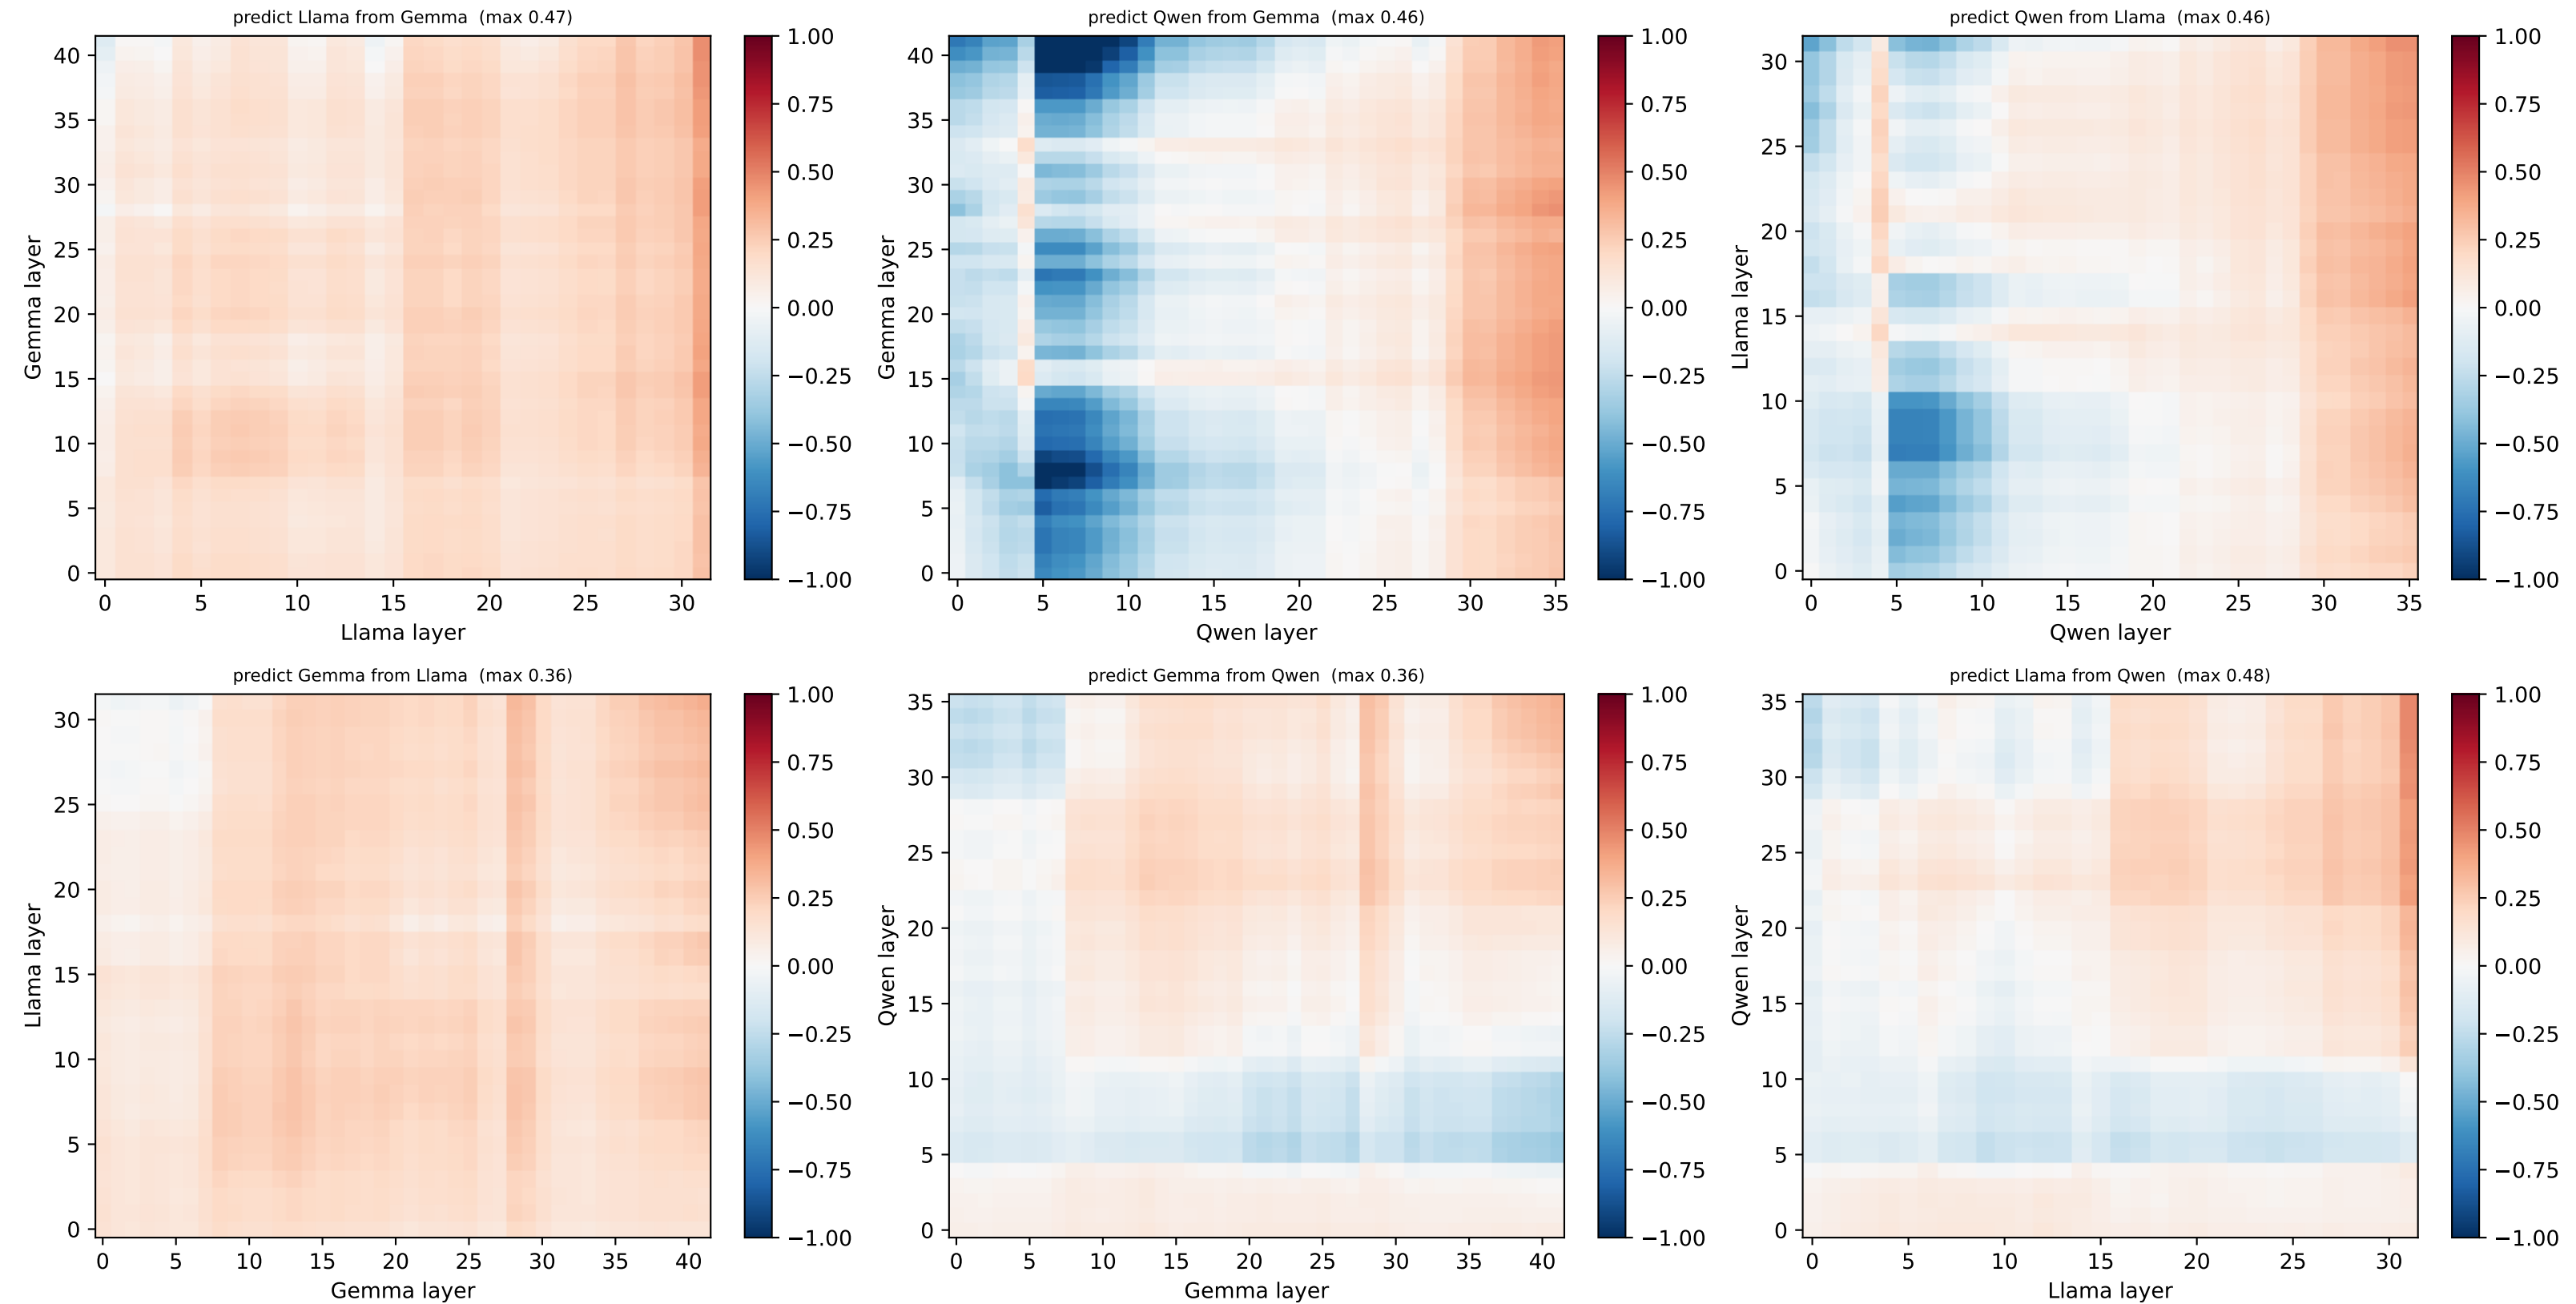


[days] HELD-OUT node 1 @ (0.62, 0.78) — per-node R^2 layer×layer, both directions (red=well predicted, blue=worse than centroid)

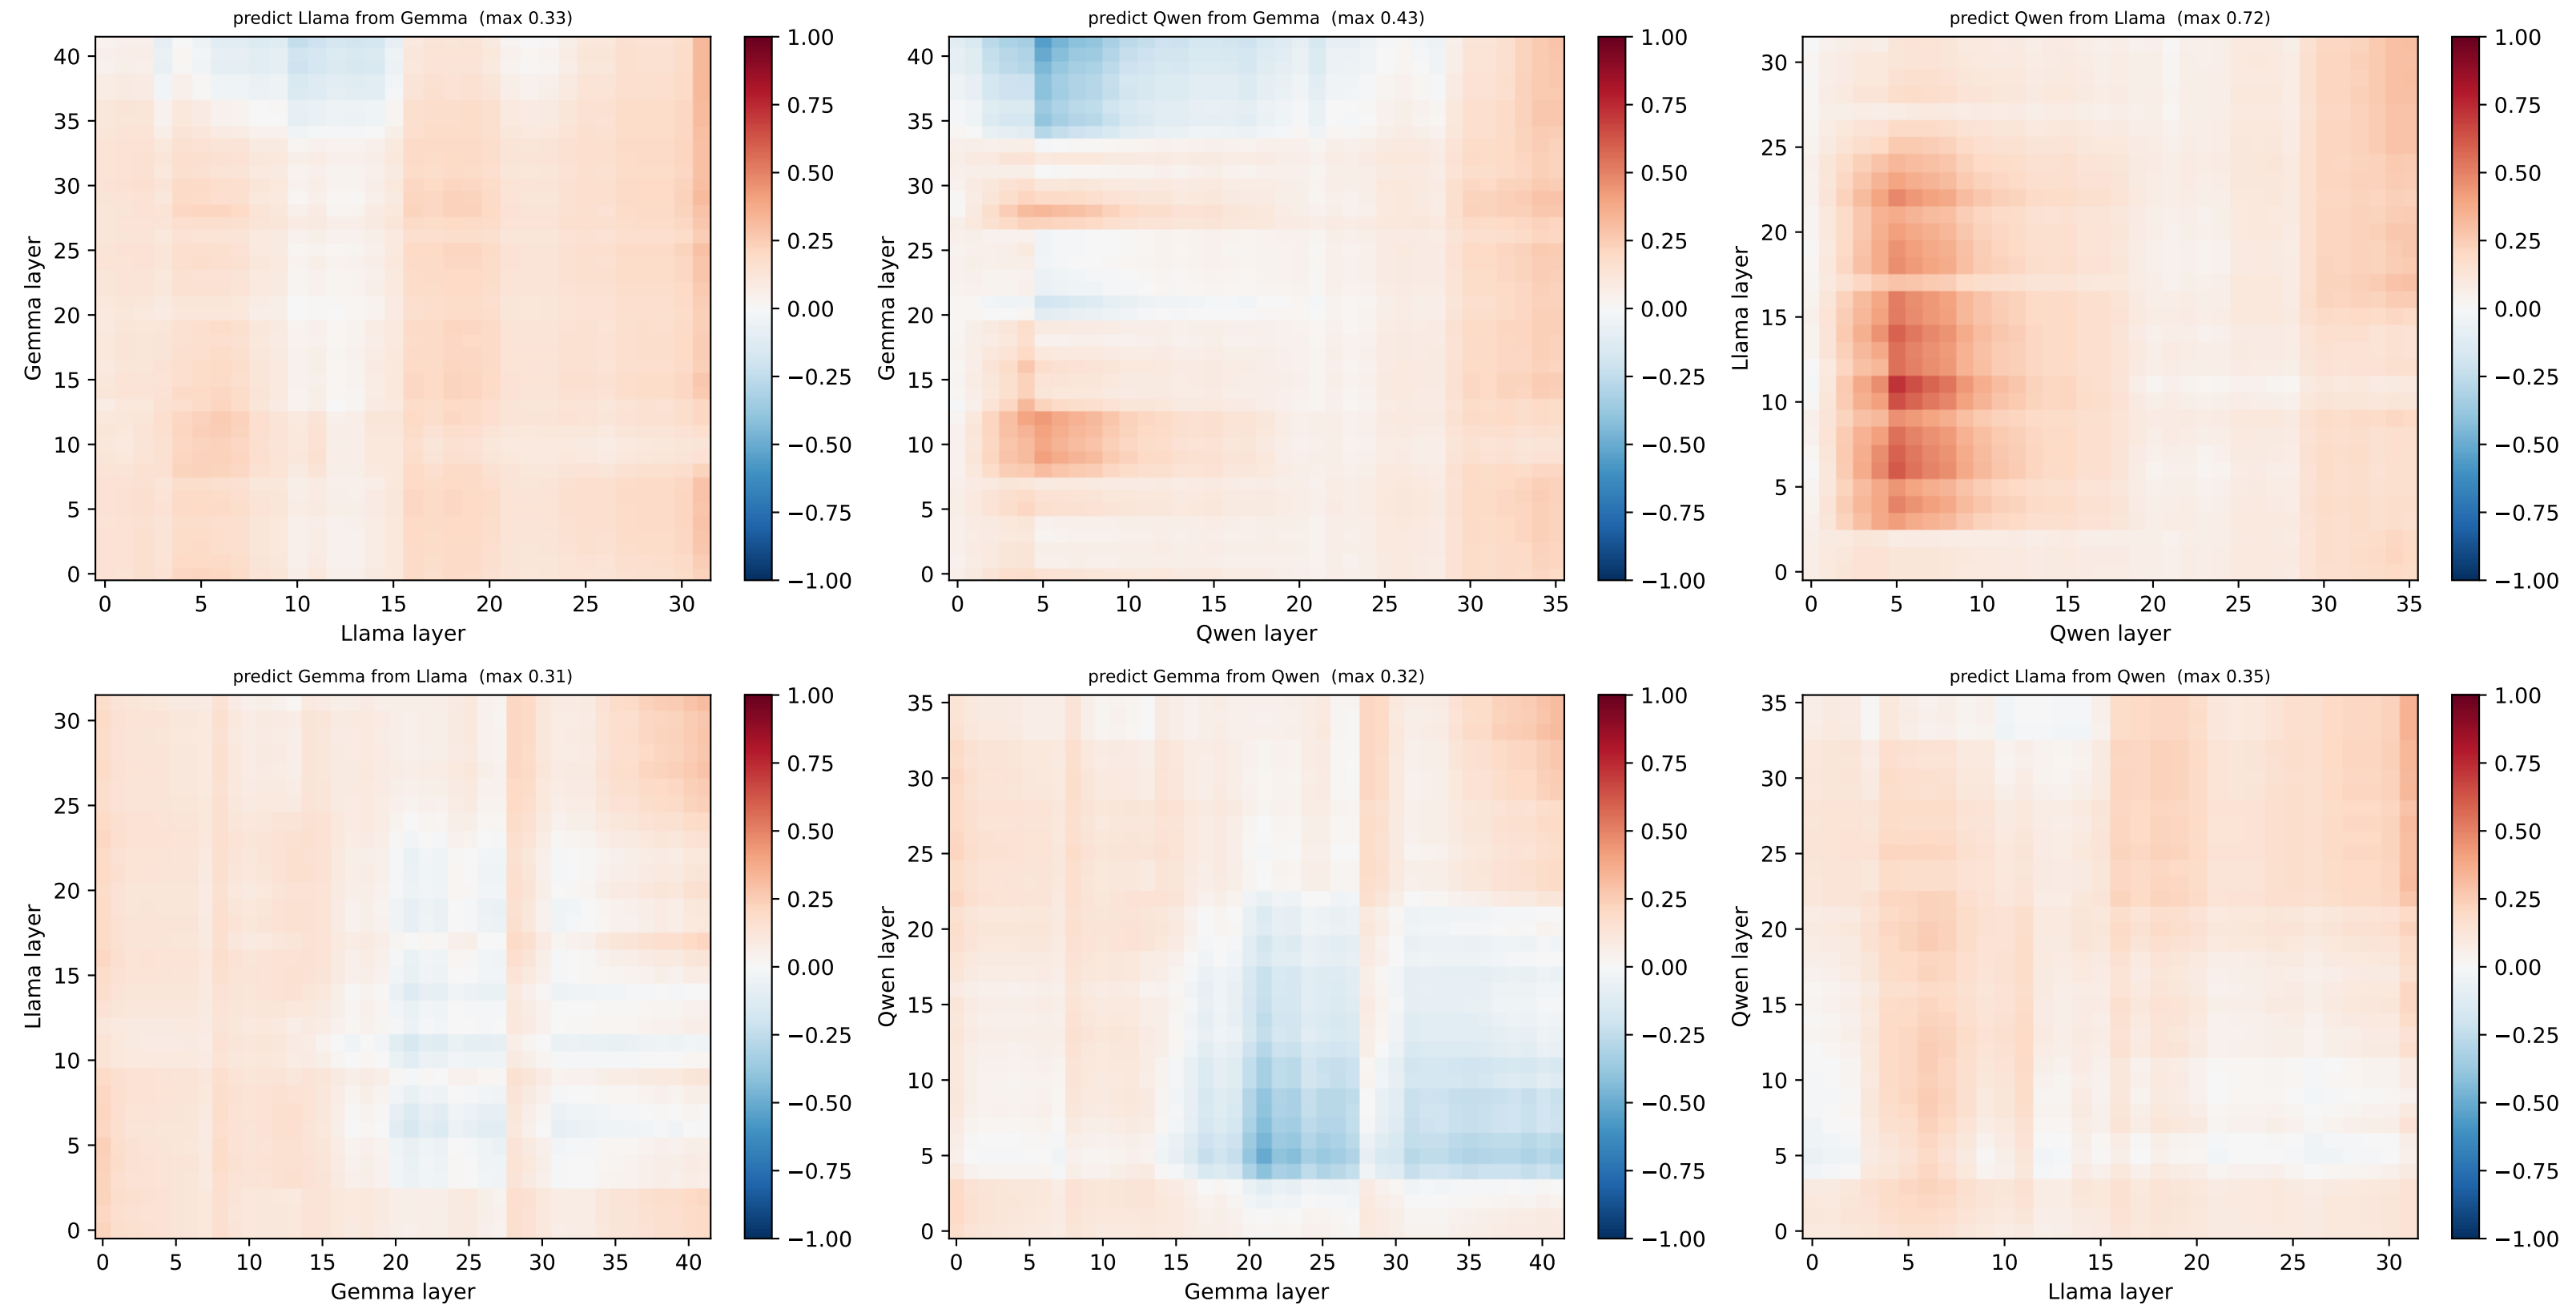


[days] HELD-OUT node 2 @ (-0.22, 0.97) — per-node R^2 layer×layer, both directions (red=well predicted, blue=worse than centroid)

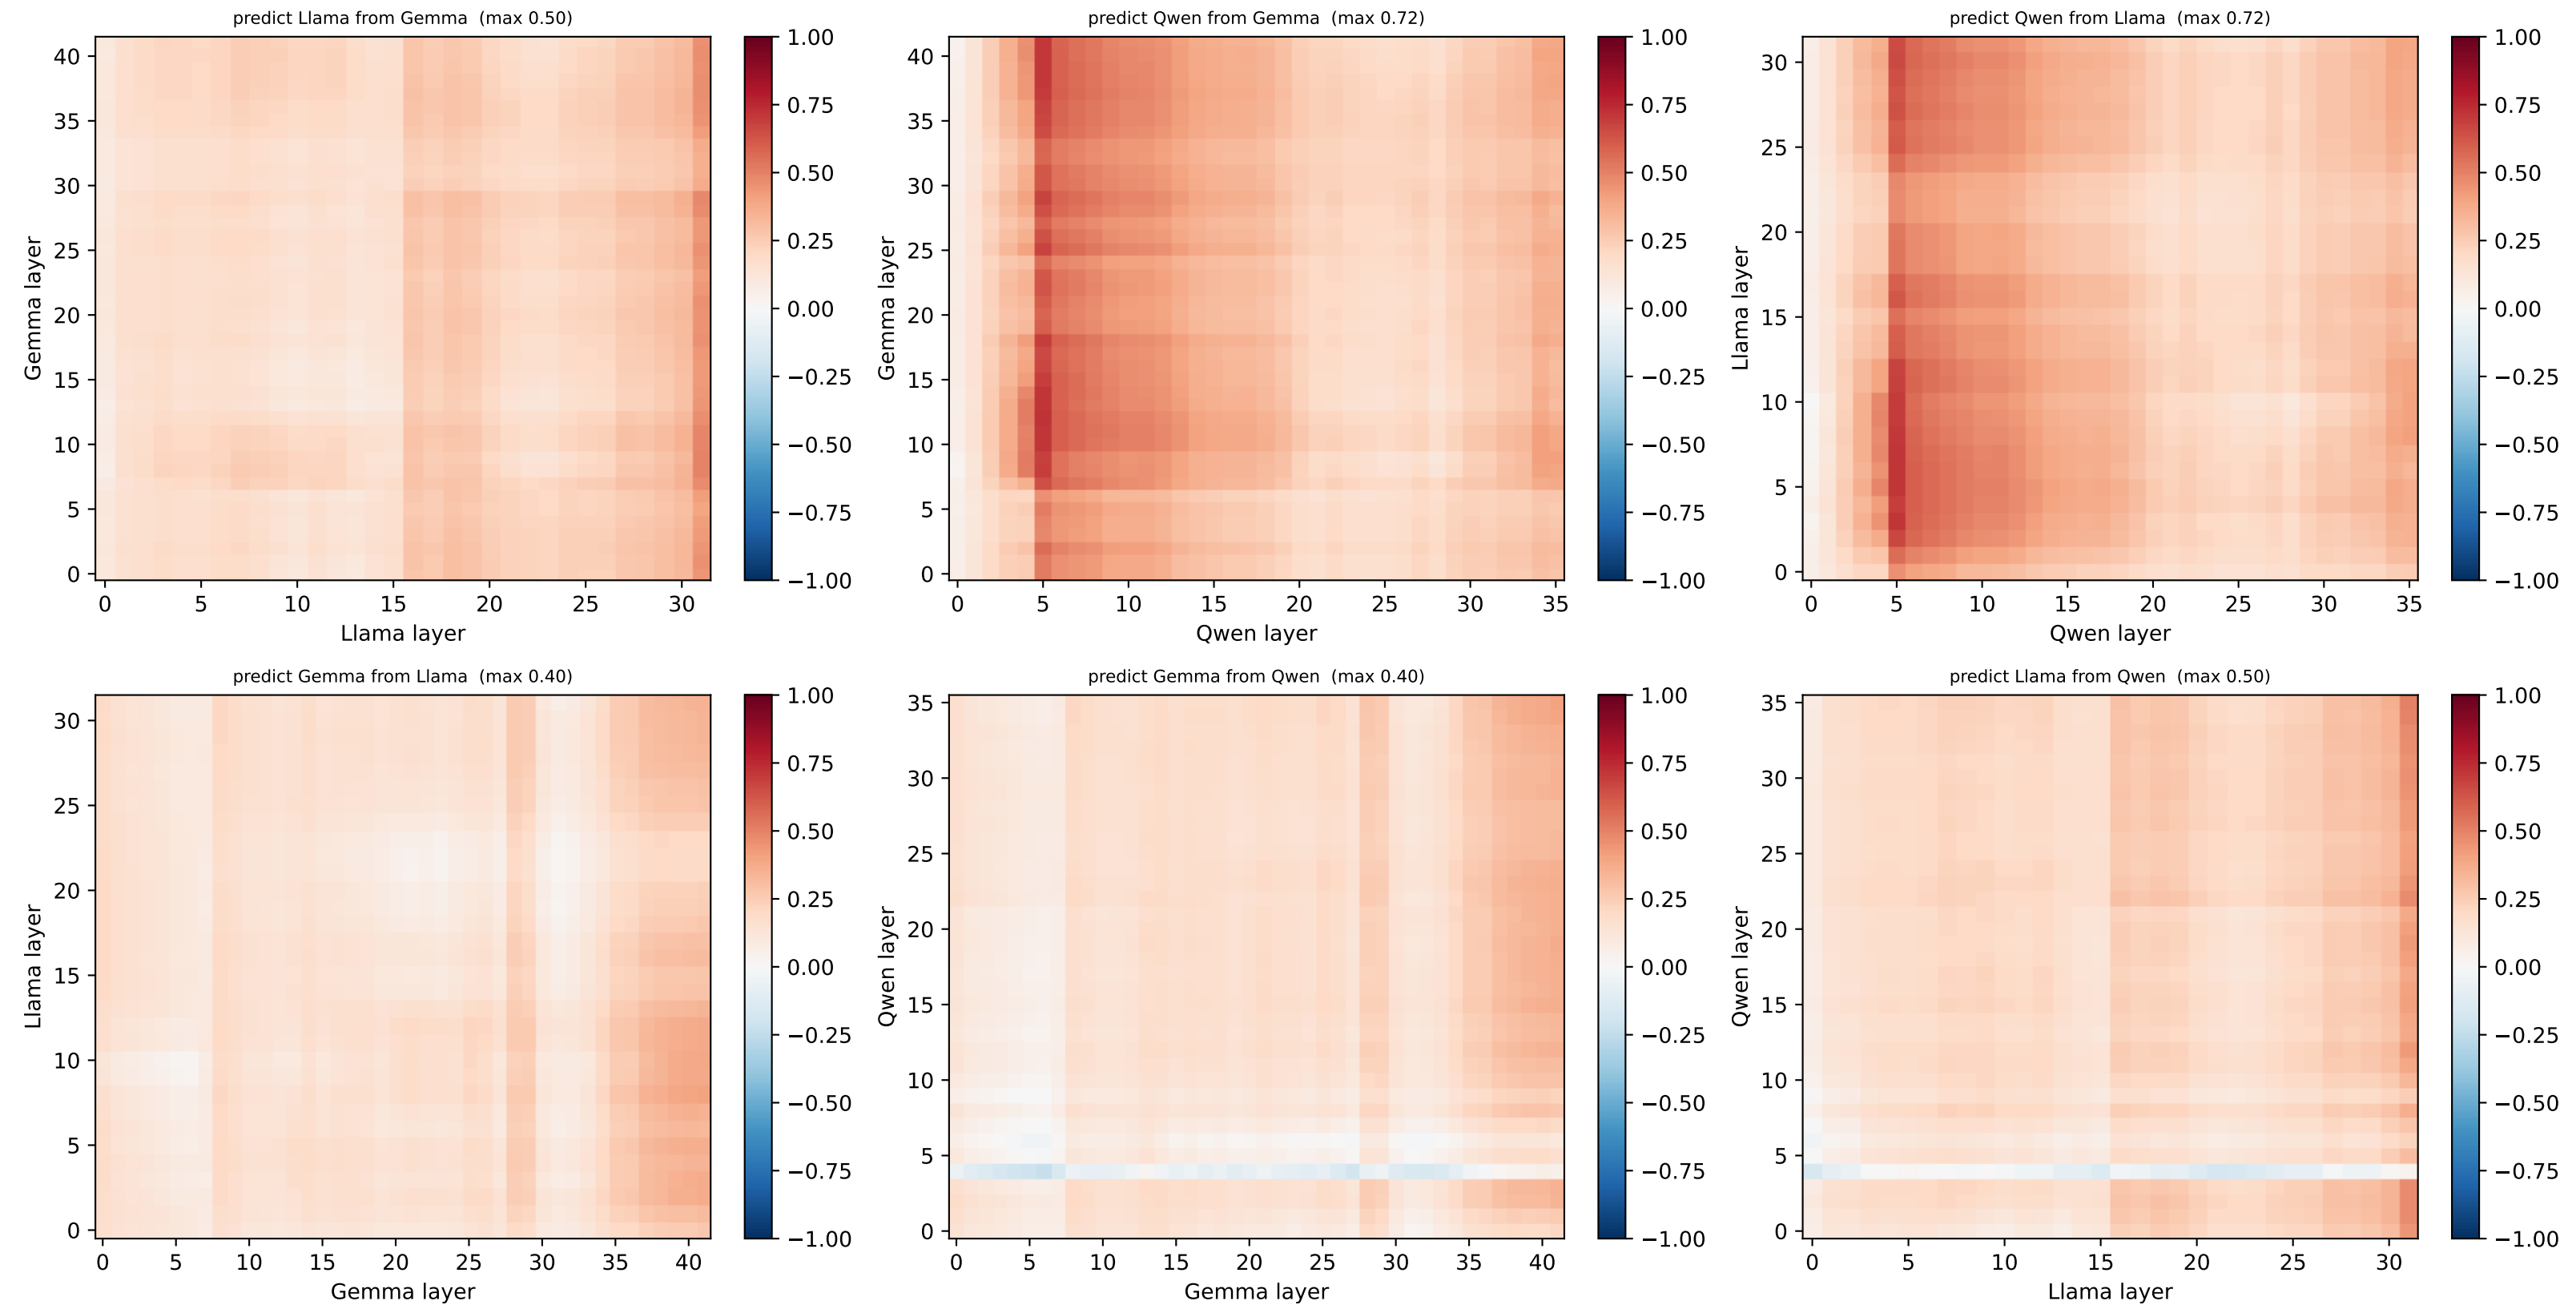


[days] HELD-OUT node 3 @ (-0.9, 0.43) — per-node R^2 layer×layer, both directions (red=well predicted, blue=worse than centroid)

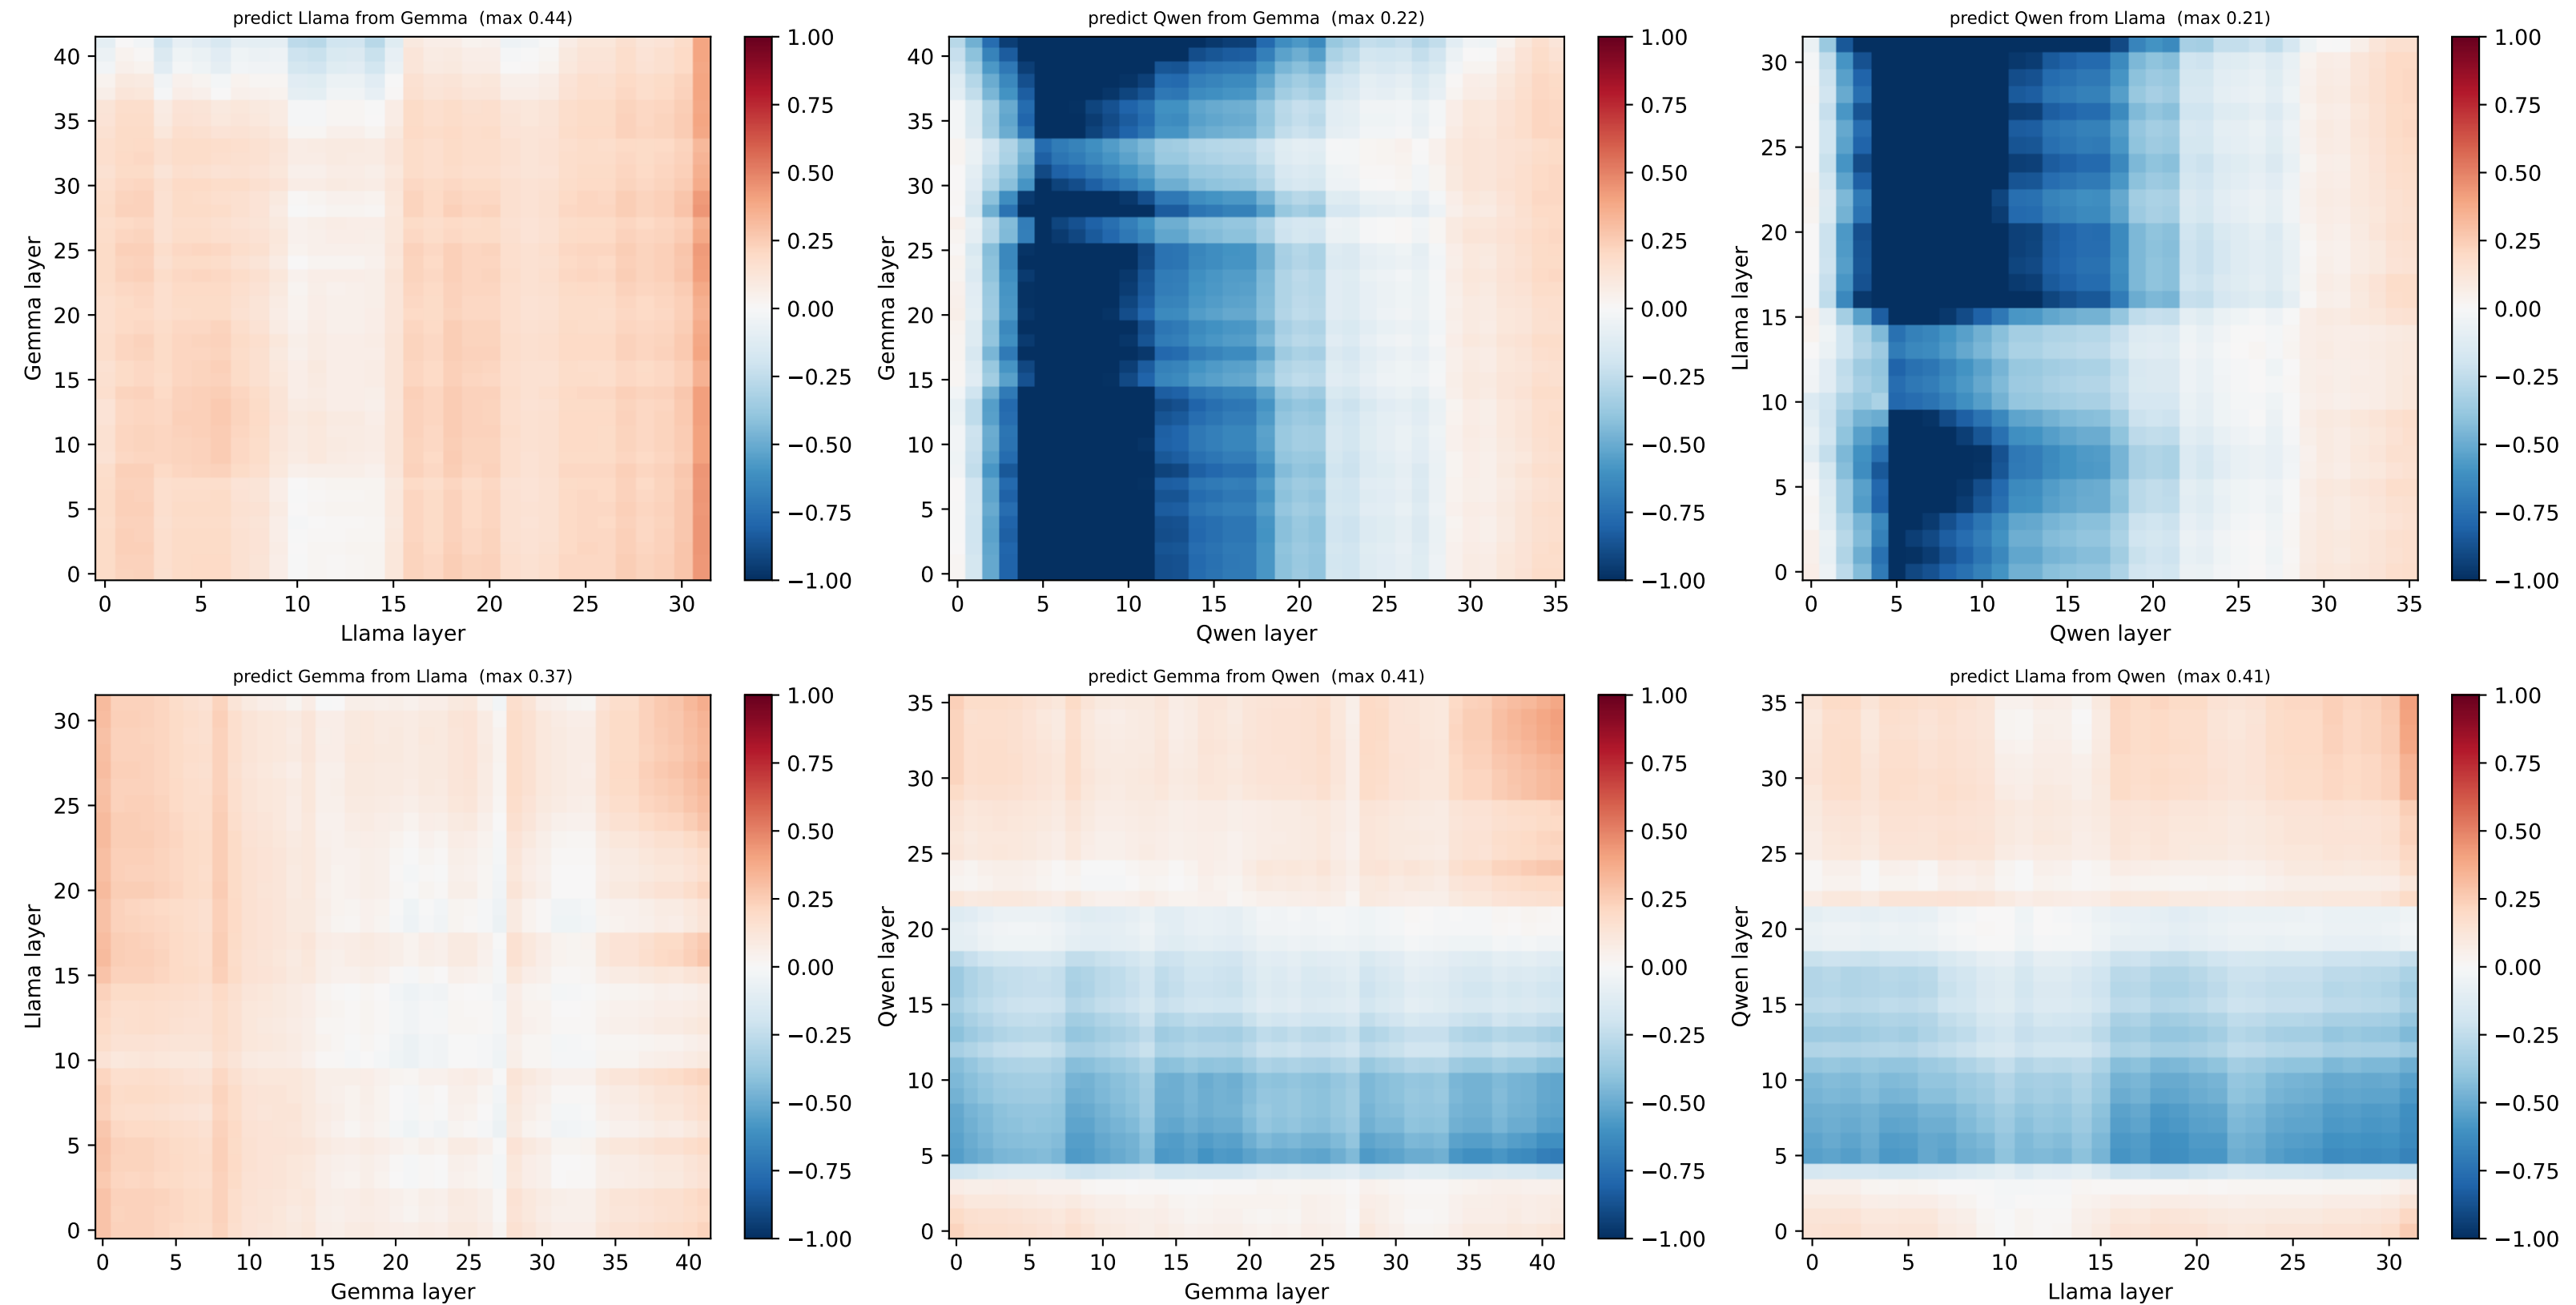

[days] HELD-OUT node 4 @ (-0.9, -0.43) — per-node R^2 layer×layer, both directions (red=well predicted, blue=worse than centroid)

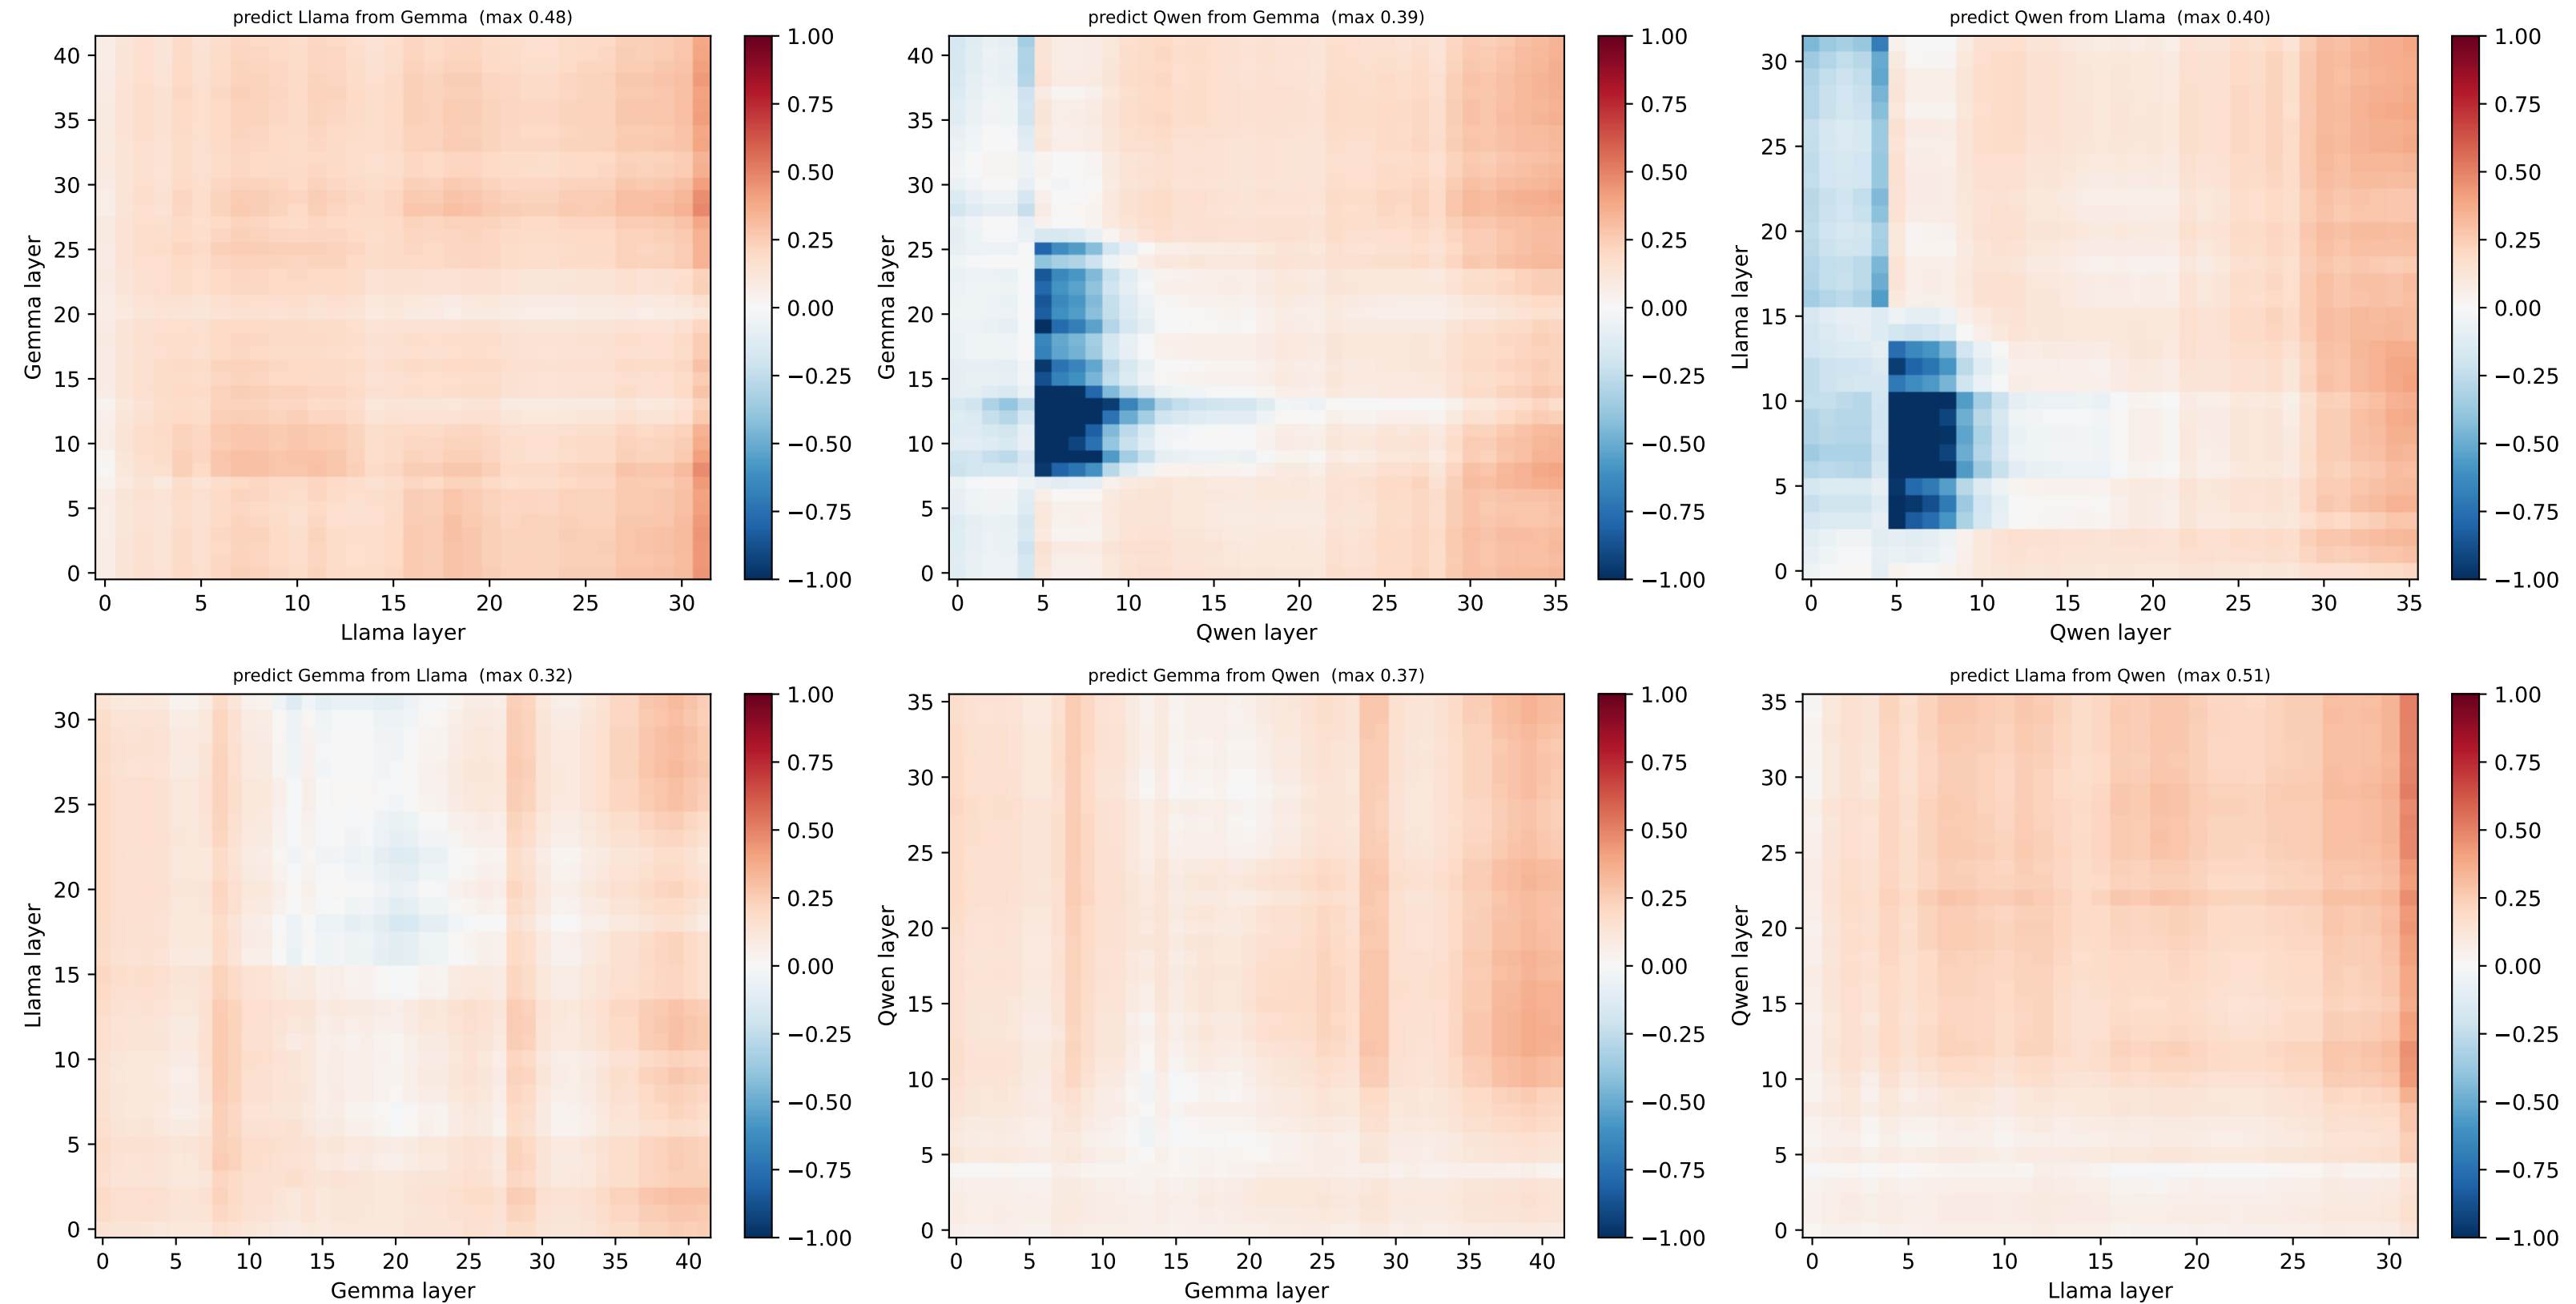

[days] HELD-OUT node 5 @ (-0.22, -0.97) — per-node R^2 layer×layer, both directions (red=well predicted, blue=worse than centroid)

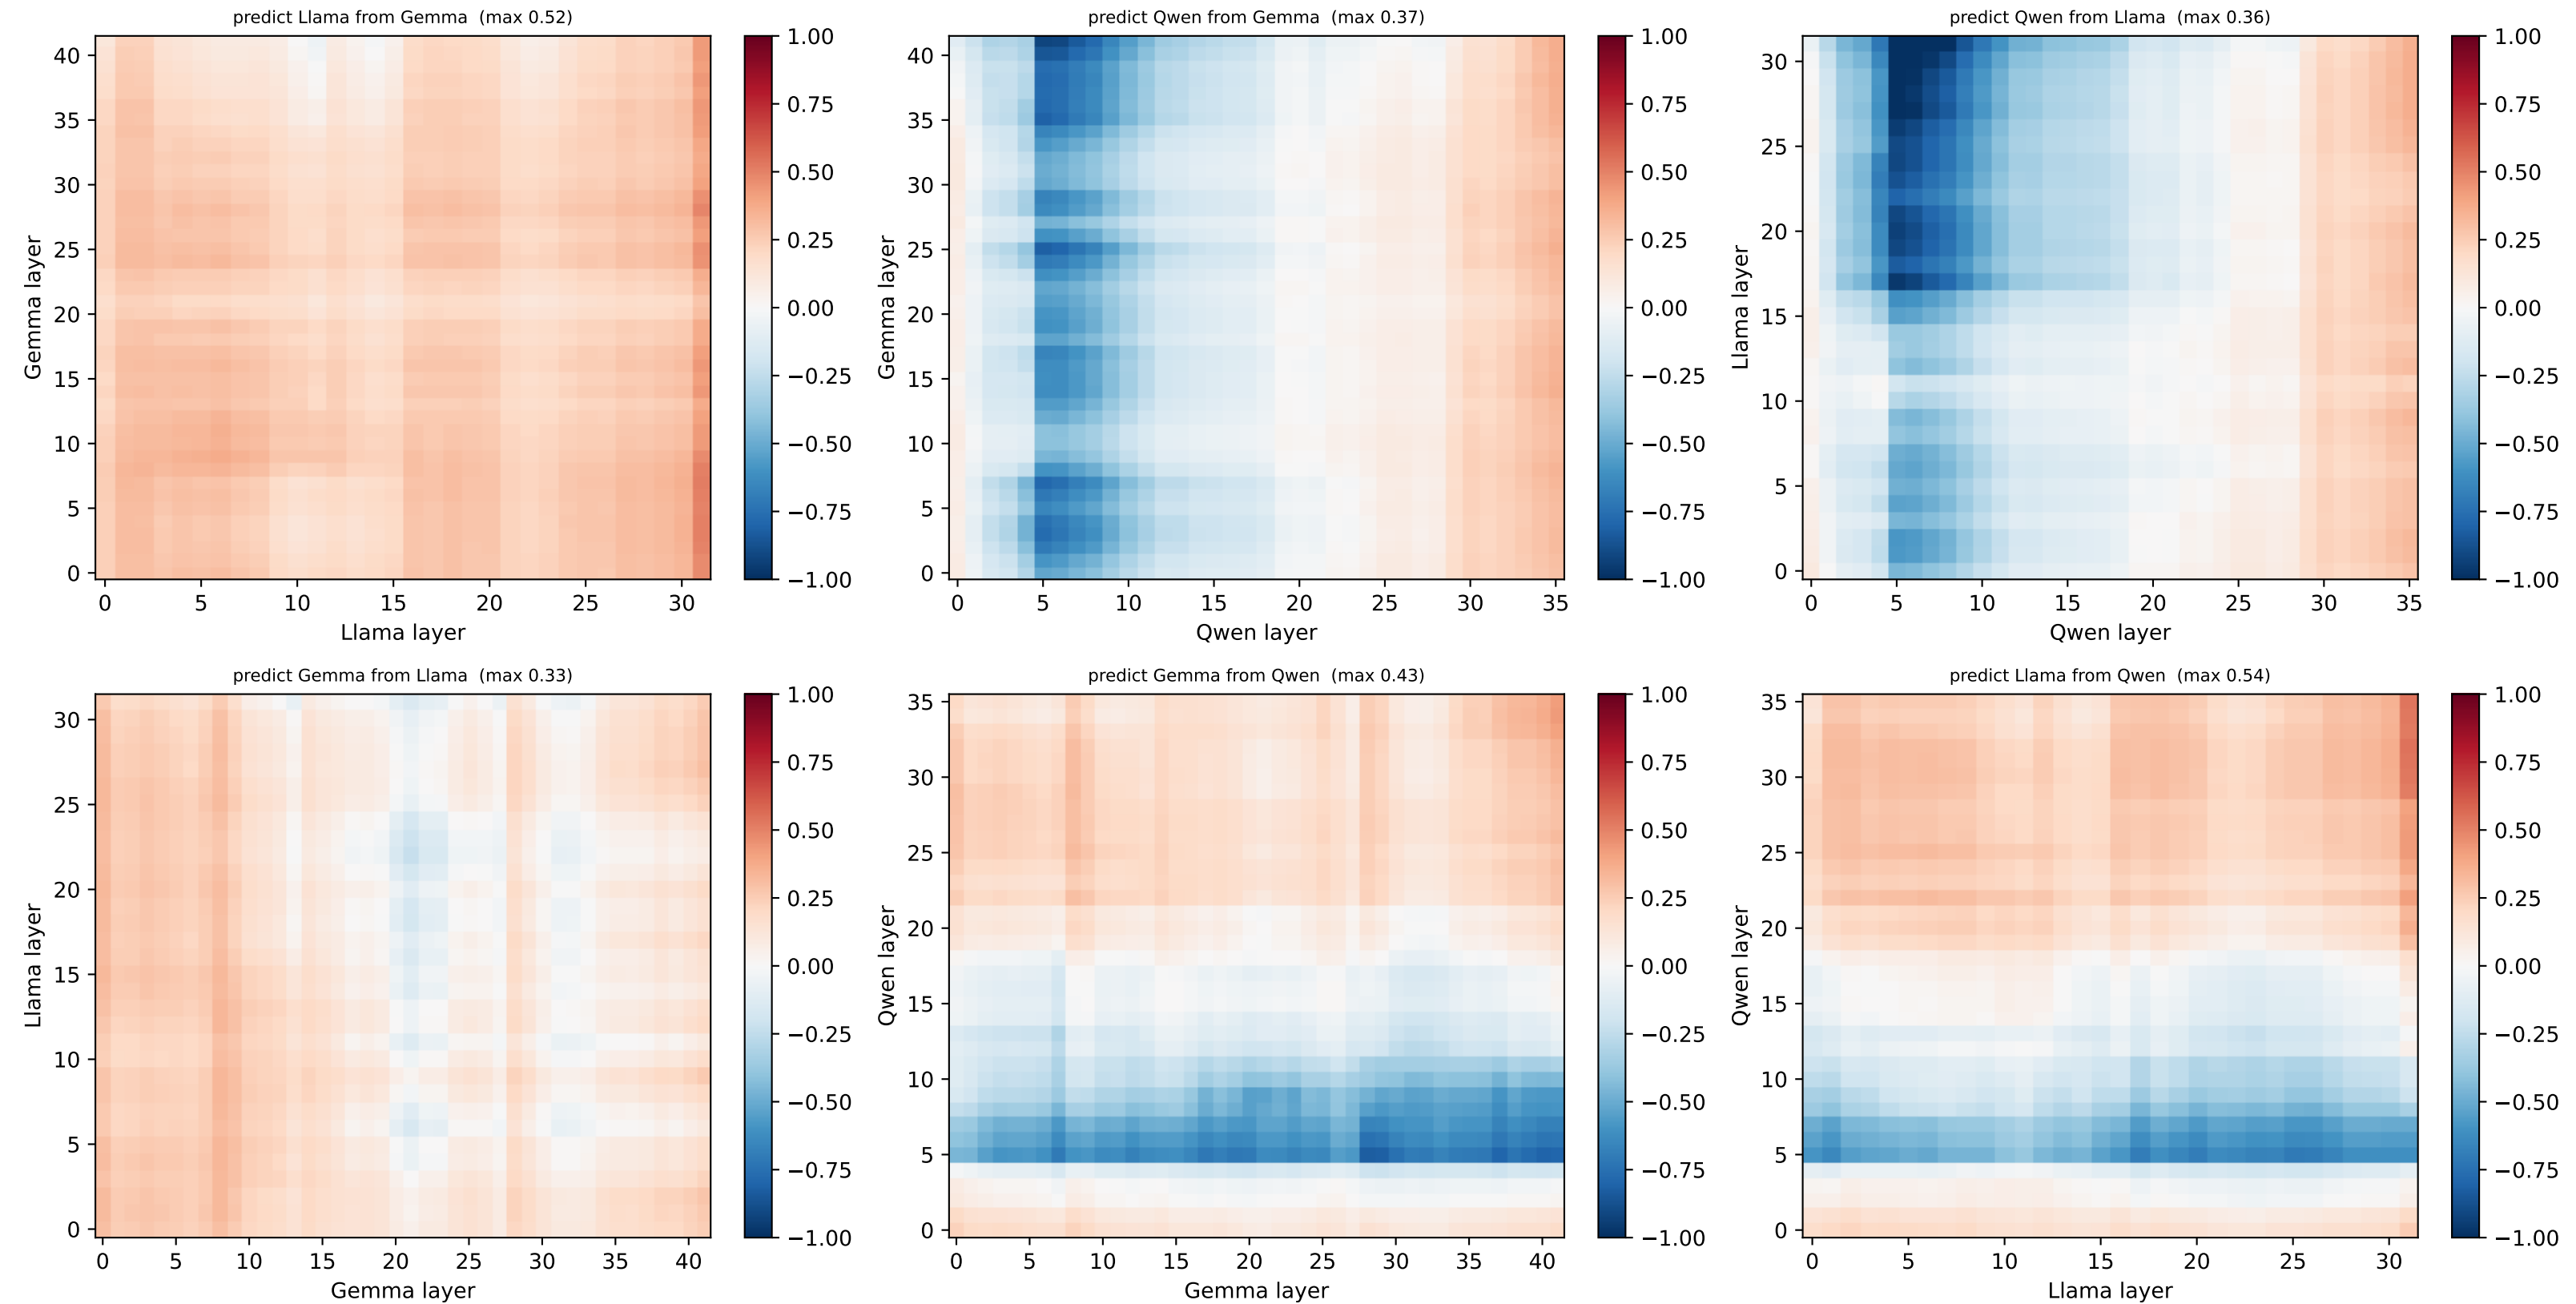

[days] HELD-OUT node 6 @ (0.62, -0.78) — per-node R² layer×layer, both directions (red=well predicted, blue=worse than centroid)

