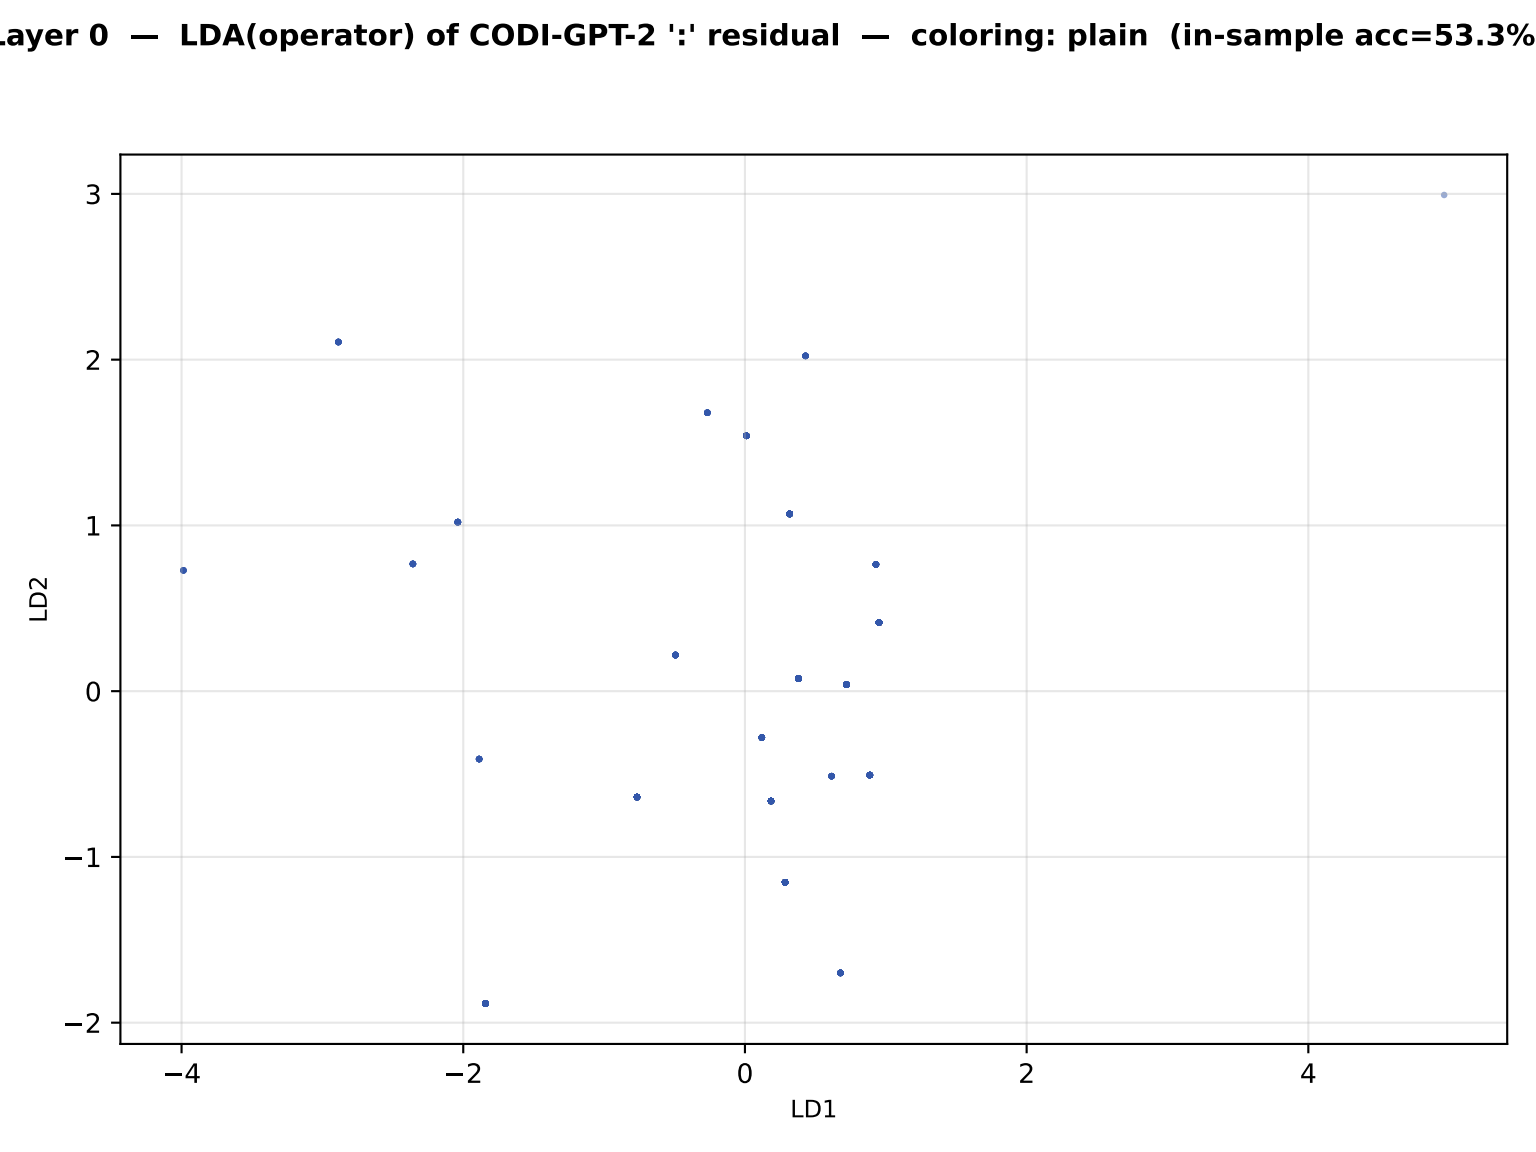
Layer 0 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: plain (in-sample acc=53.3%
LD2
LD1
3
2
1
0
−1
−2
−4
−2
0
2
4

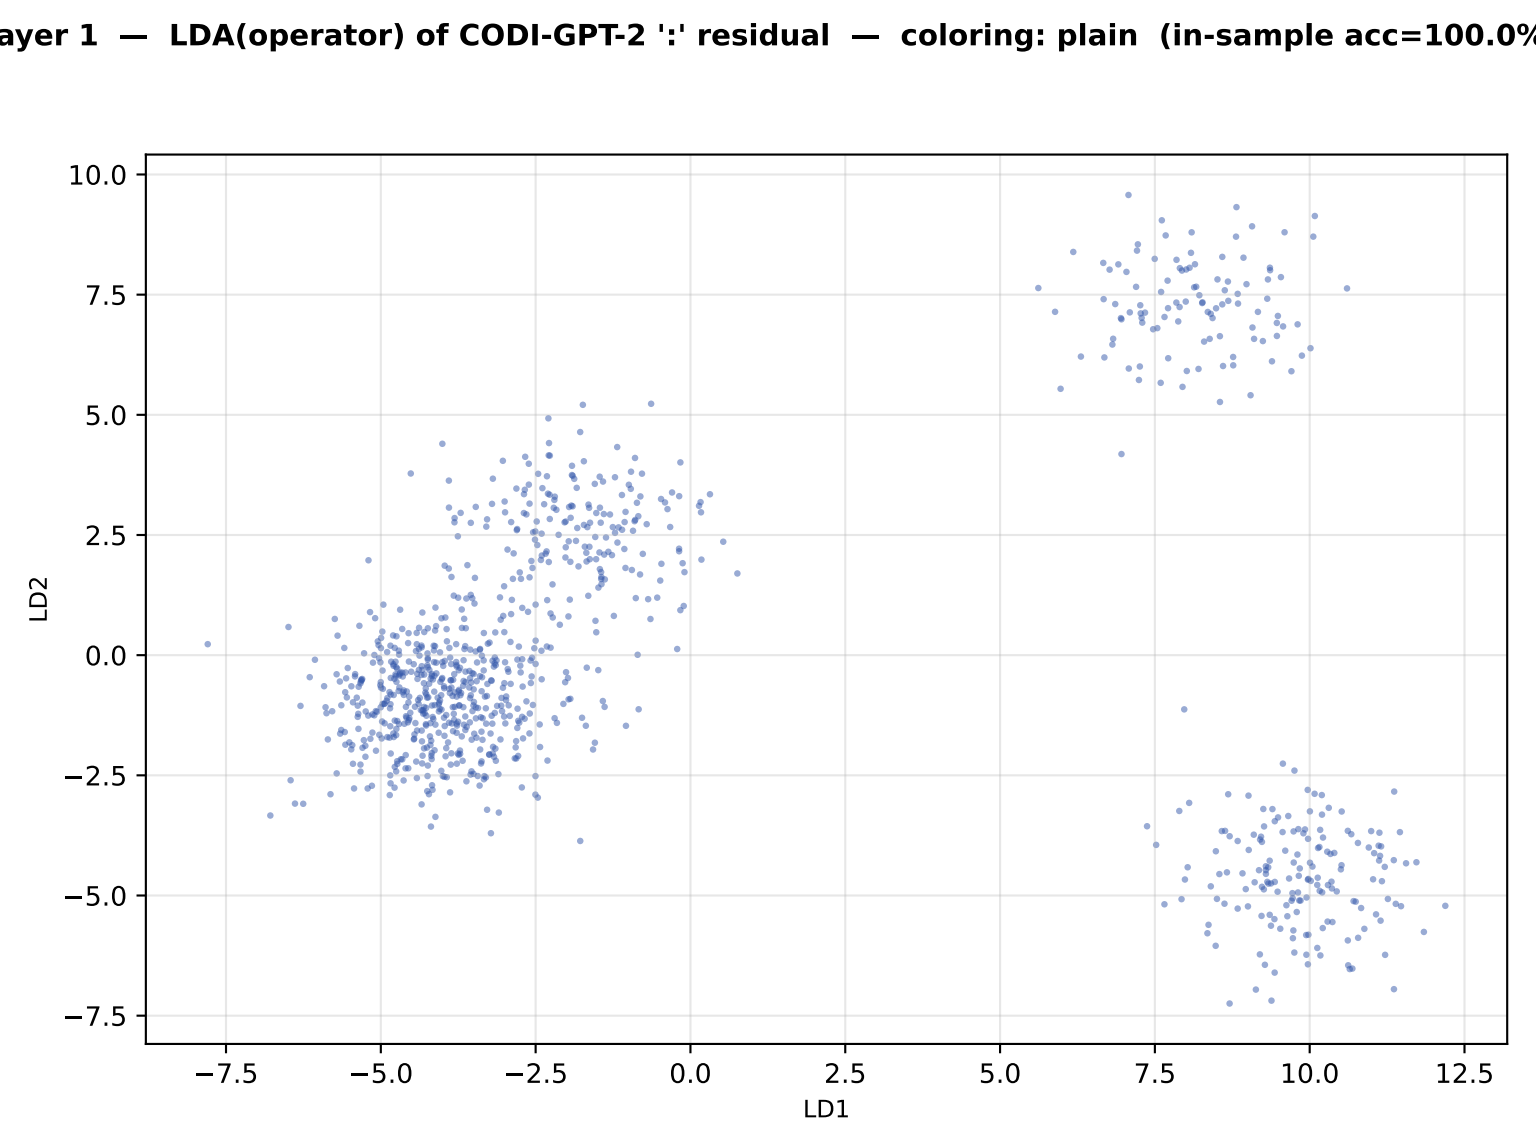
ayer 1 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: plain (in-sample acc=100.0%
10.0
7.5
5.0
2.5
0.0
−2.5
−5.0
−7.5
LD2
−7.5
−5.0
−2.5
0.0
2.5
5.0
7.5
10.0
12.5
LD1

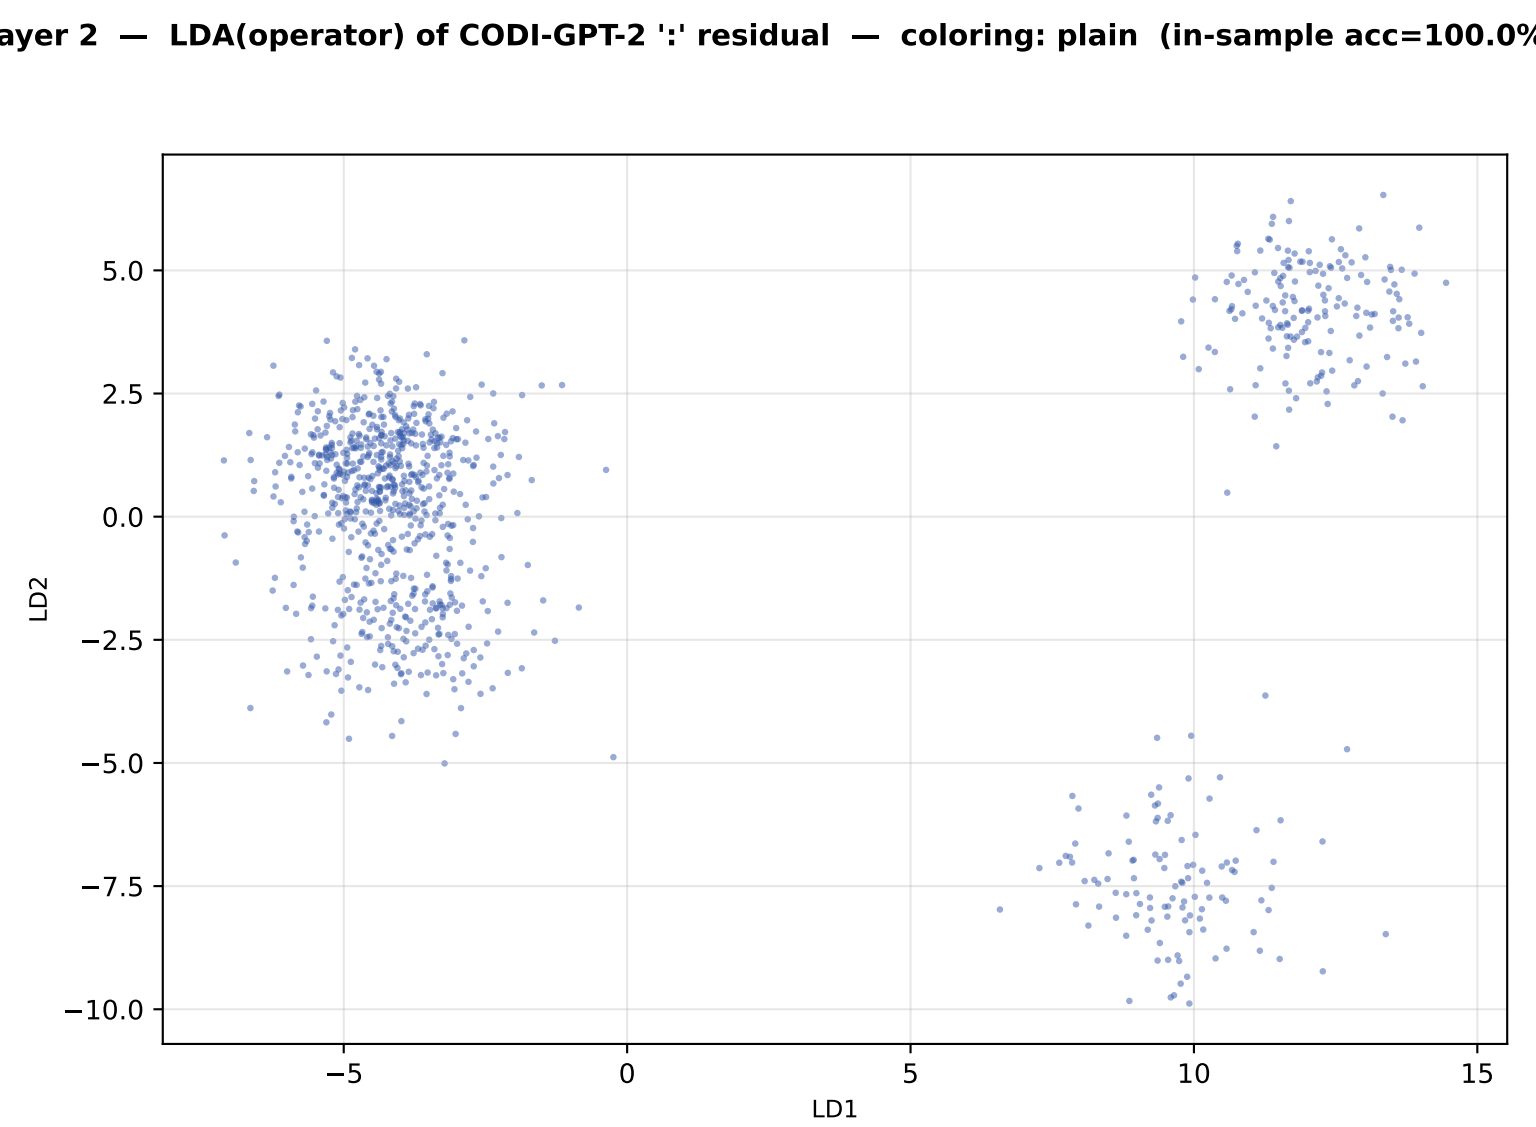
ayer 2 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: plain (in-sample acc=100.0%
5.0
2.5
0.0
−2.5
−5.0
−7.5
−10.0
LD2
−5
0
5
10
15
LD1

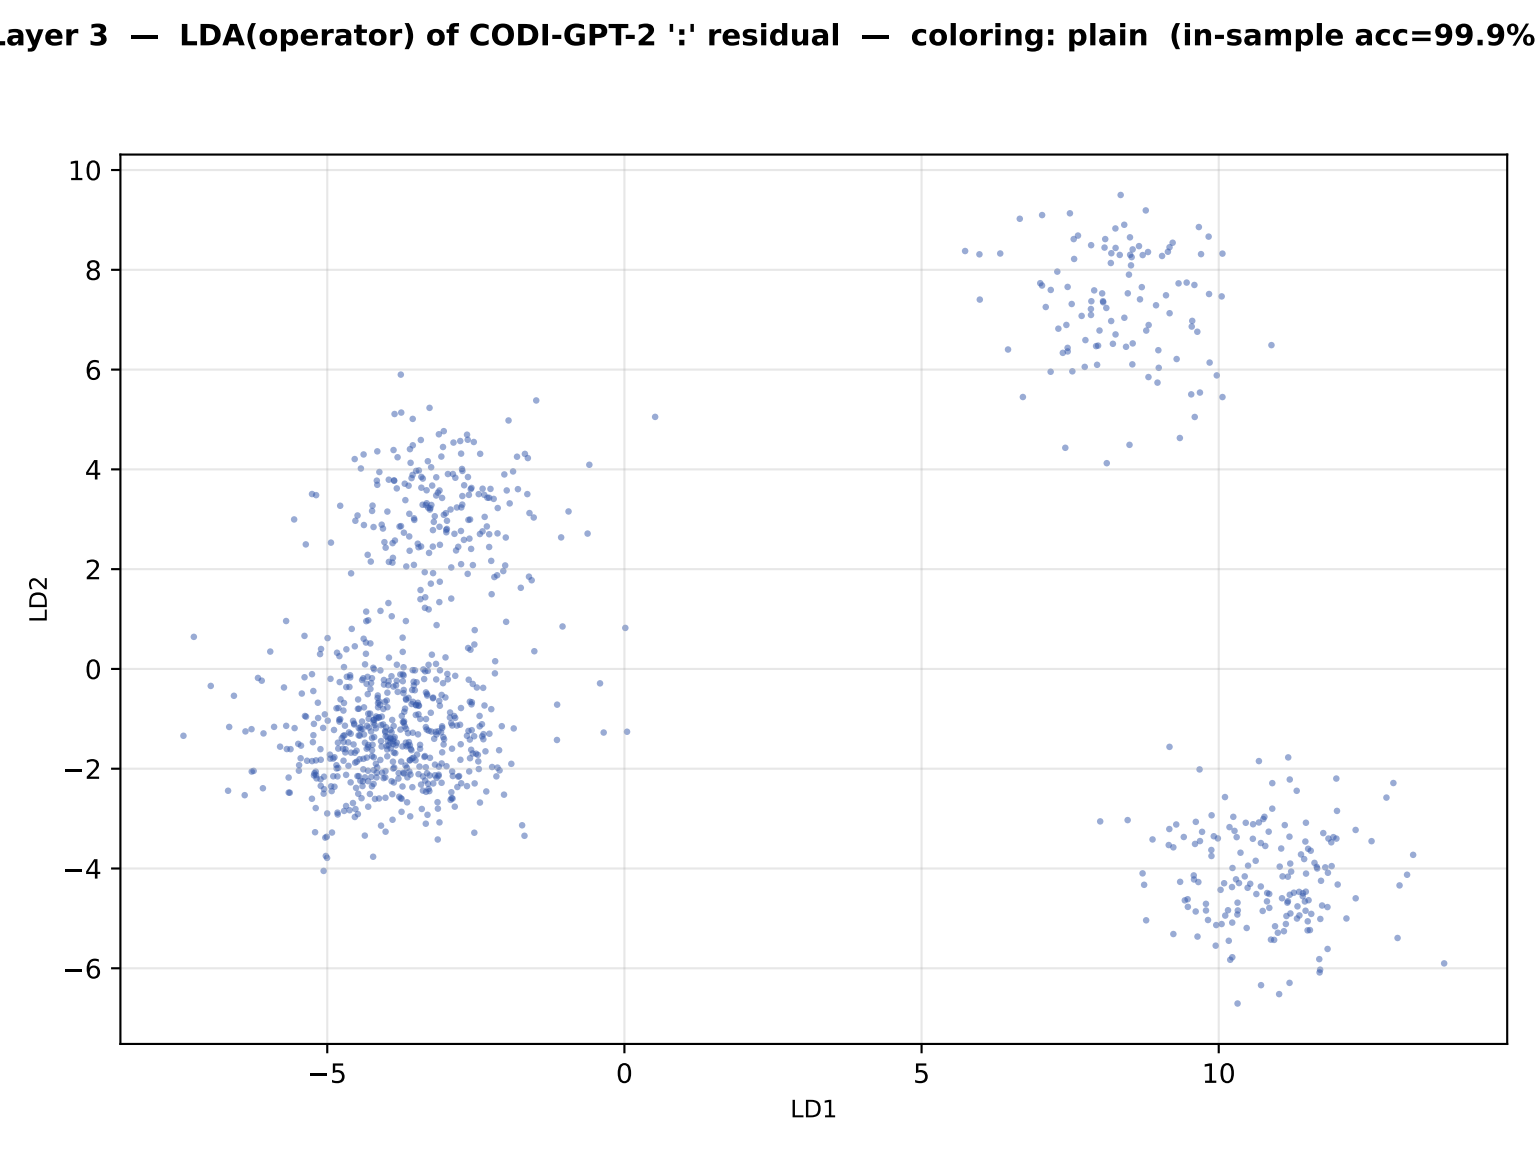
Layer 3 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: plain (in-sample acc=99.9%
LD2
LD1
10
8
6
4
2
0
−2
−4
−6
−5
0
5
10

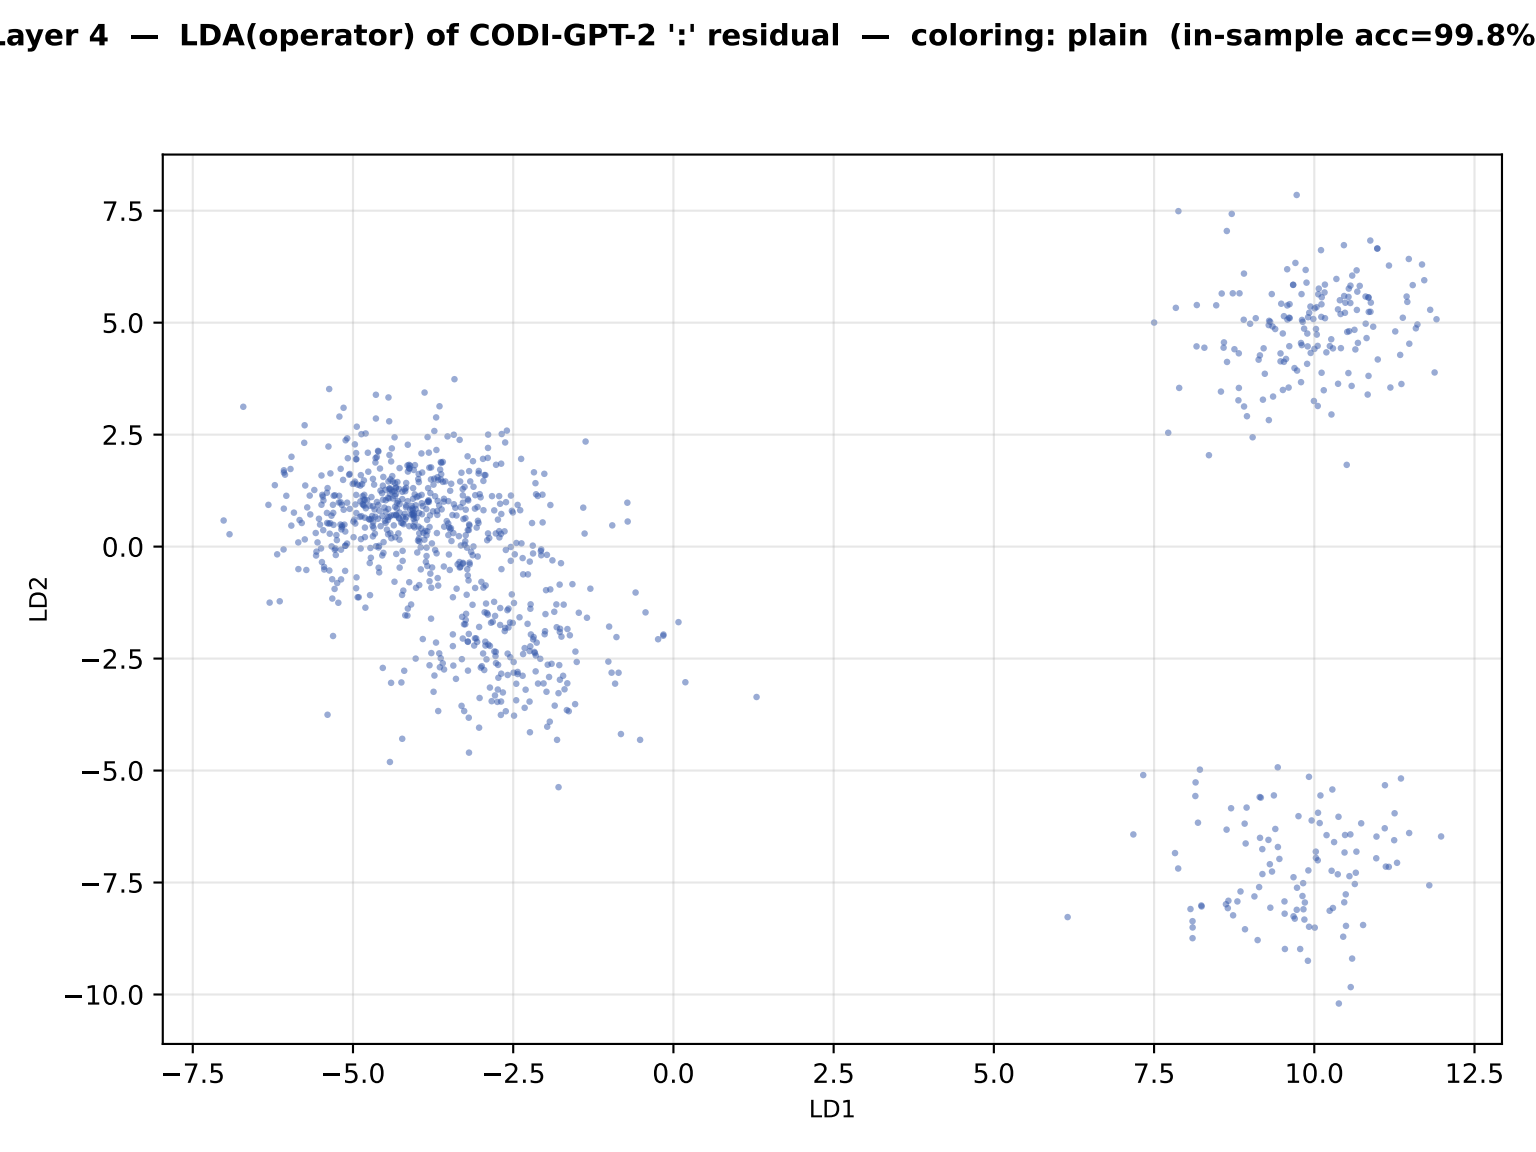
Layer 4 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: plain (in-sample acc=99.8%
7.5
5.0
2.5
0.0
−2.5
−5.0
−7.5
−10.0
LD2
−7.5
−5.0
−2.5
0.0
2.5
5.0
7.5
10.0
12.5
LD1

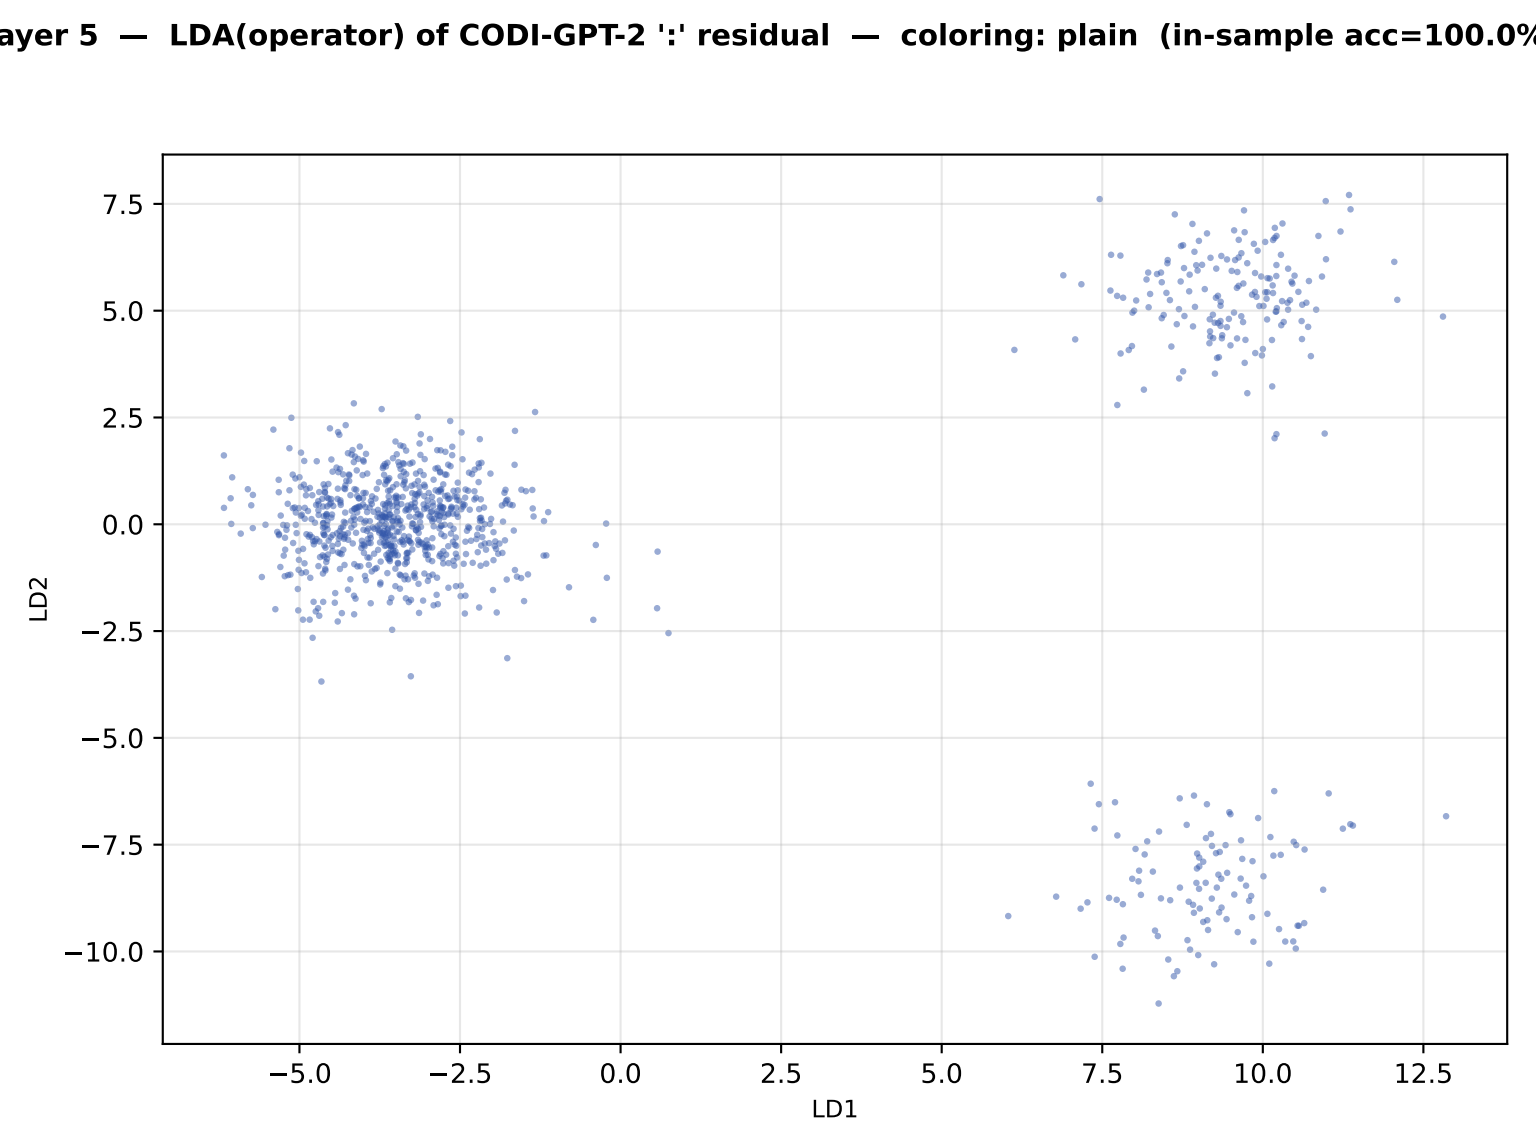
ayer 5 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: plain (in-sample acc=100.0%
7.5
5.0
2.5
0.0
−2.5
−5.0
−7.5
−10.0
LD2
−5.0
−2.5
0.0
2.5
5.0
7.5
10.0
12.5
LD1

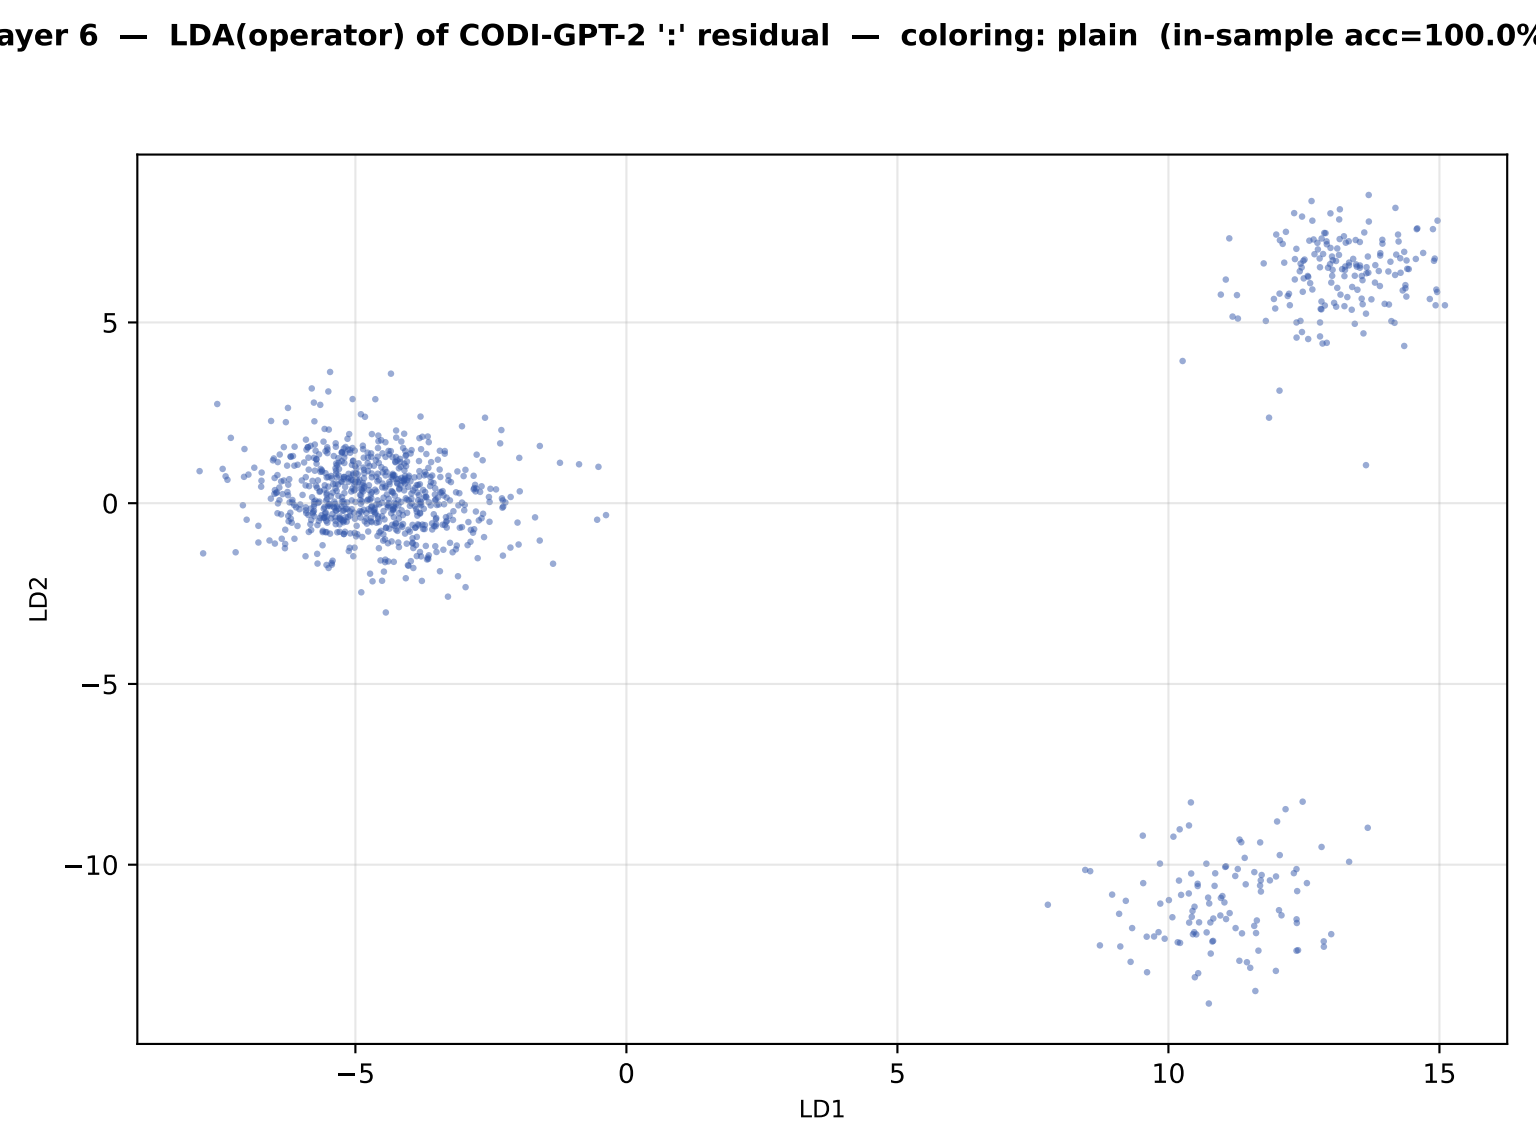
ayer 6 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: plain (in-sample acc=100.0%
5
0
−5
−10
LD2
−5
0
5
10
15
LD1

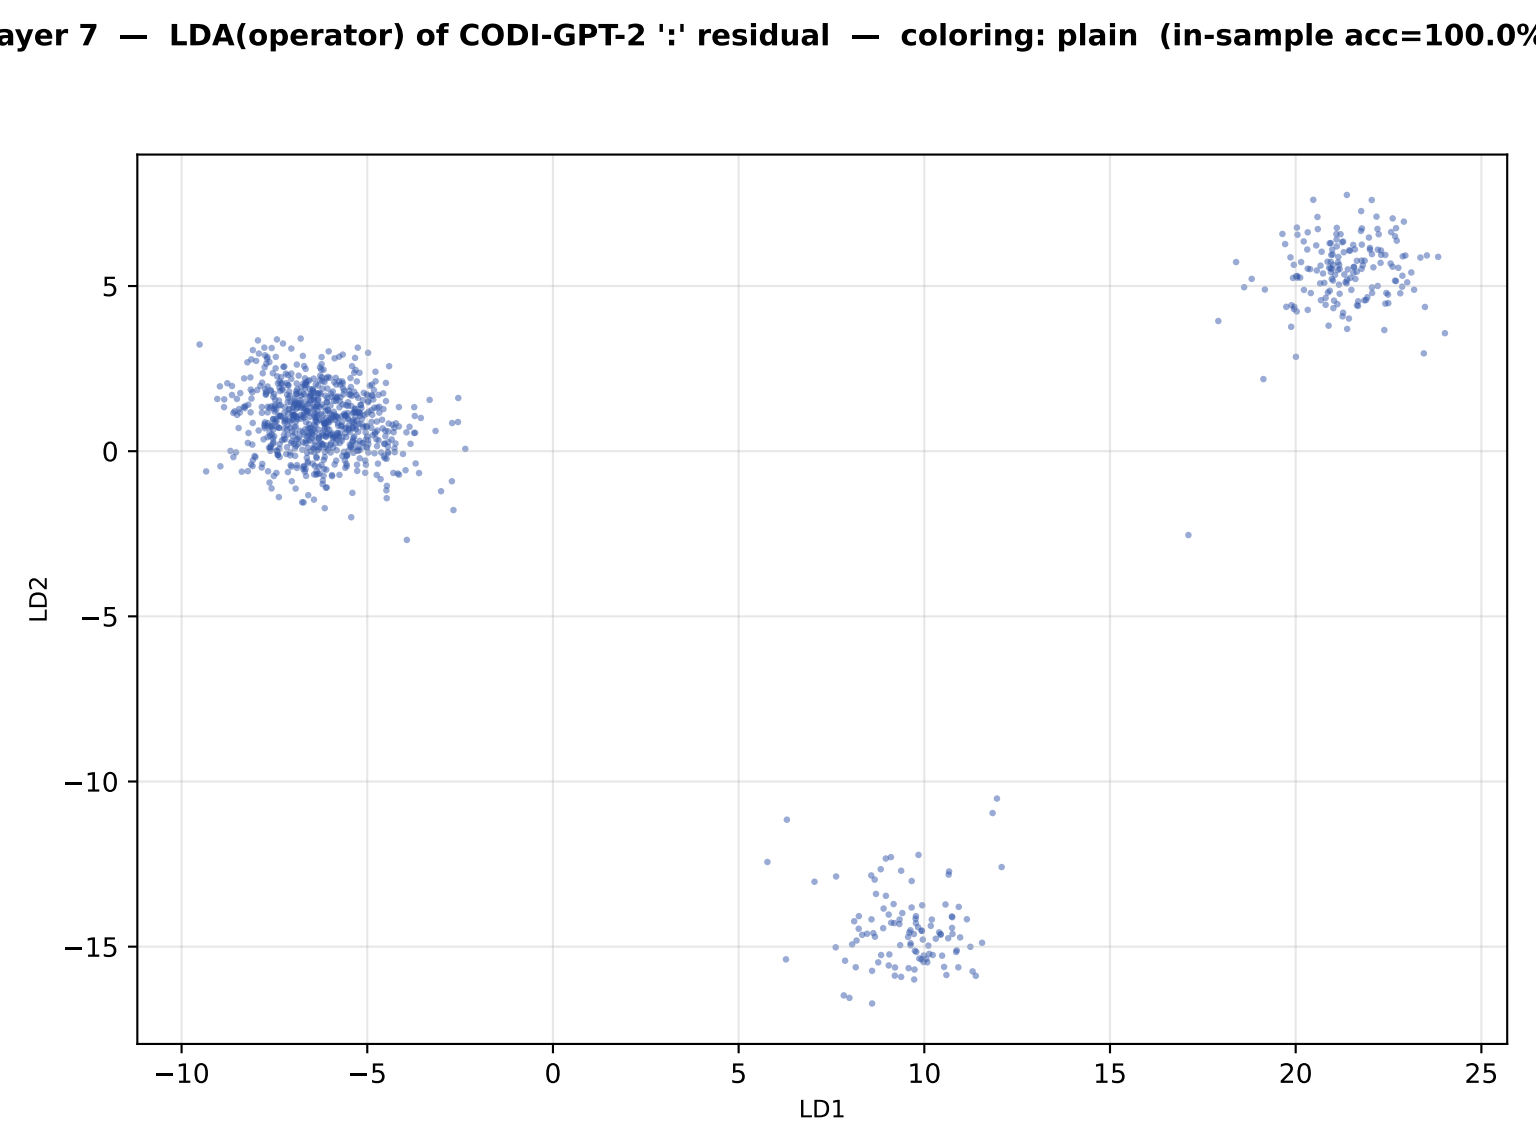
ayer 7 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: plain (in-sample acc=100.0%
LD2
LD1
5
0
−5
−10
−15
−10
−5
0
5
10
15
20
25

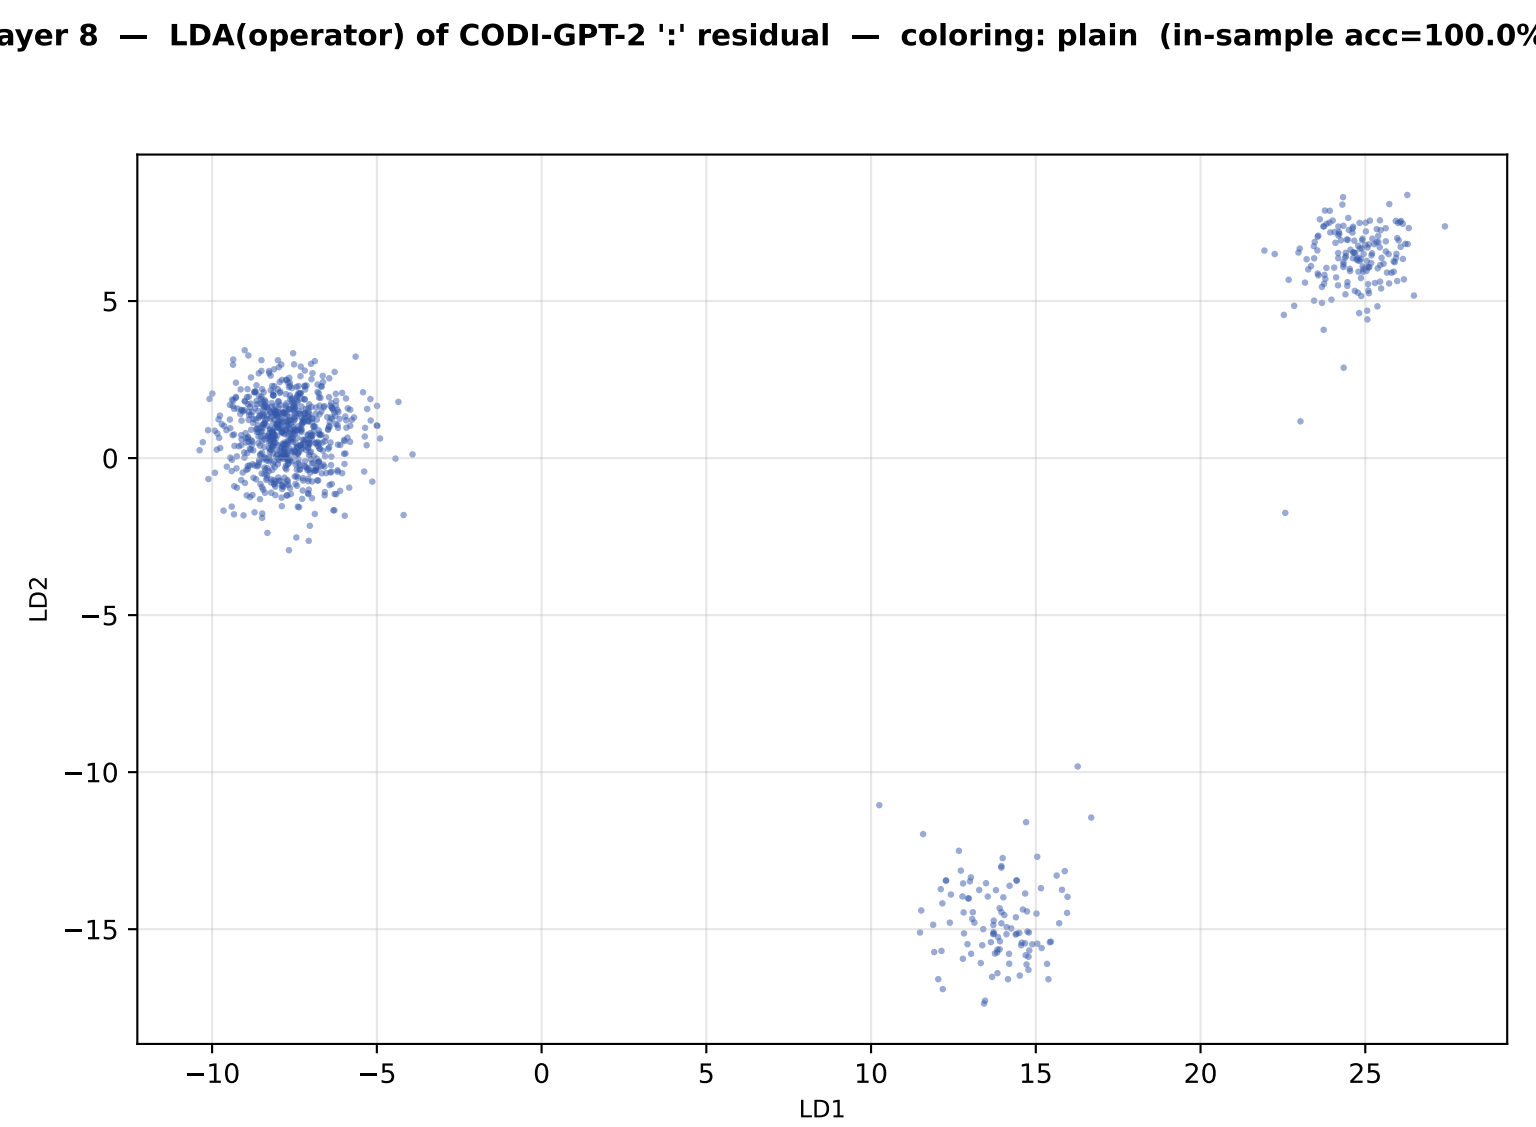
ayer 8 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: plain (in-sample acc=100.0%
LD2
LD1
5
0
−5
−10
−15
−10
−5
0
5
10
15
20
25

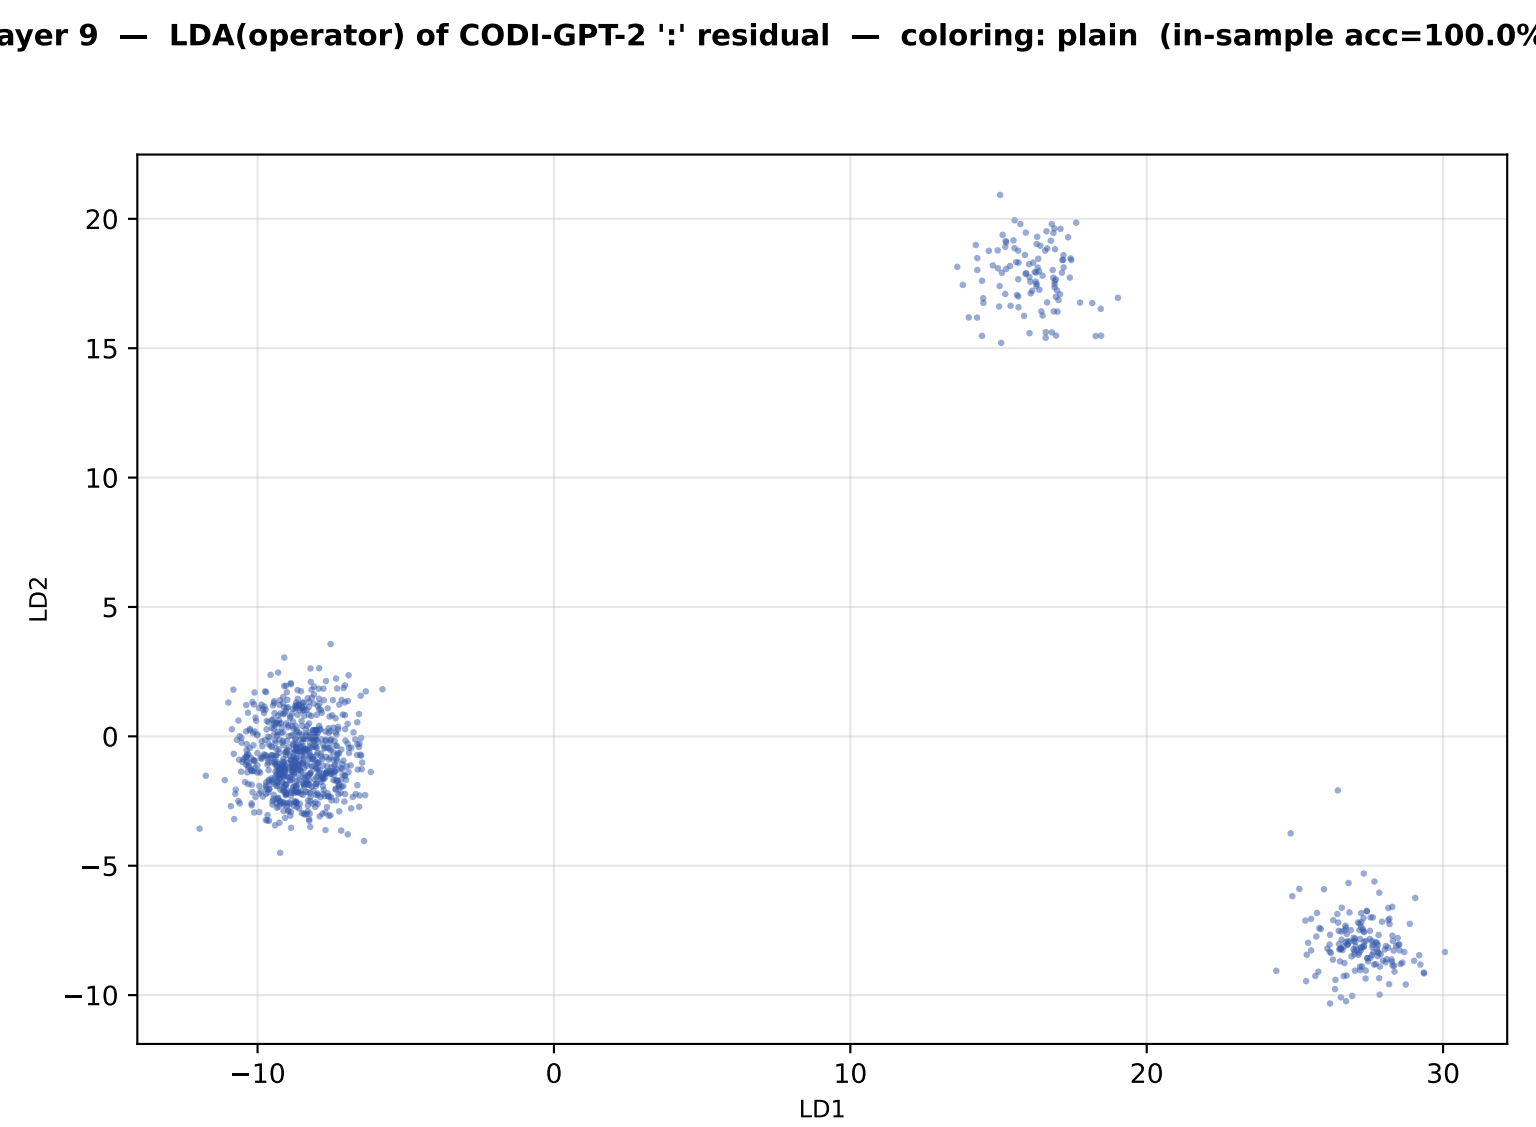
ayer 9 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: plain (in-sample acc=100.0%
LD2
LD1
20
15
10
5
0
−5
−10
−10
0
10
20
30

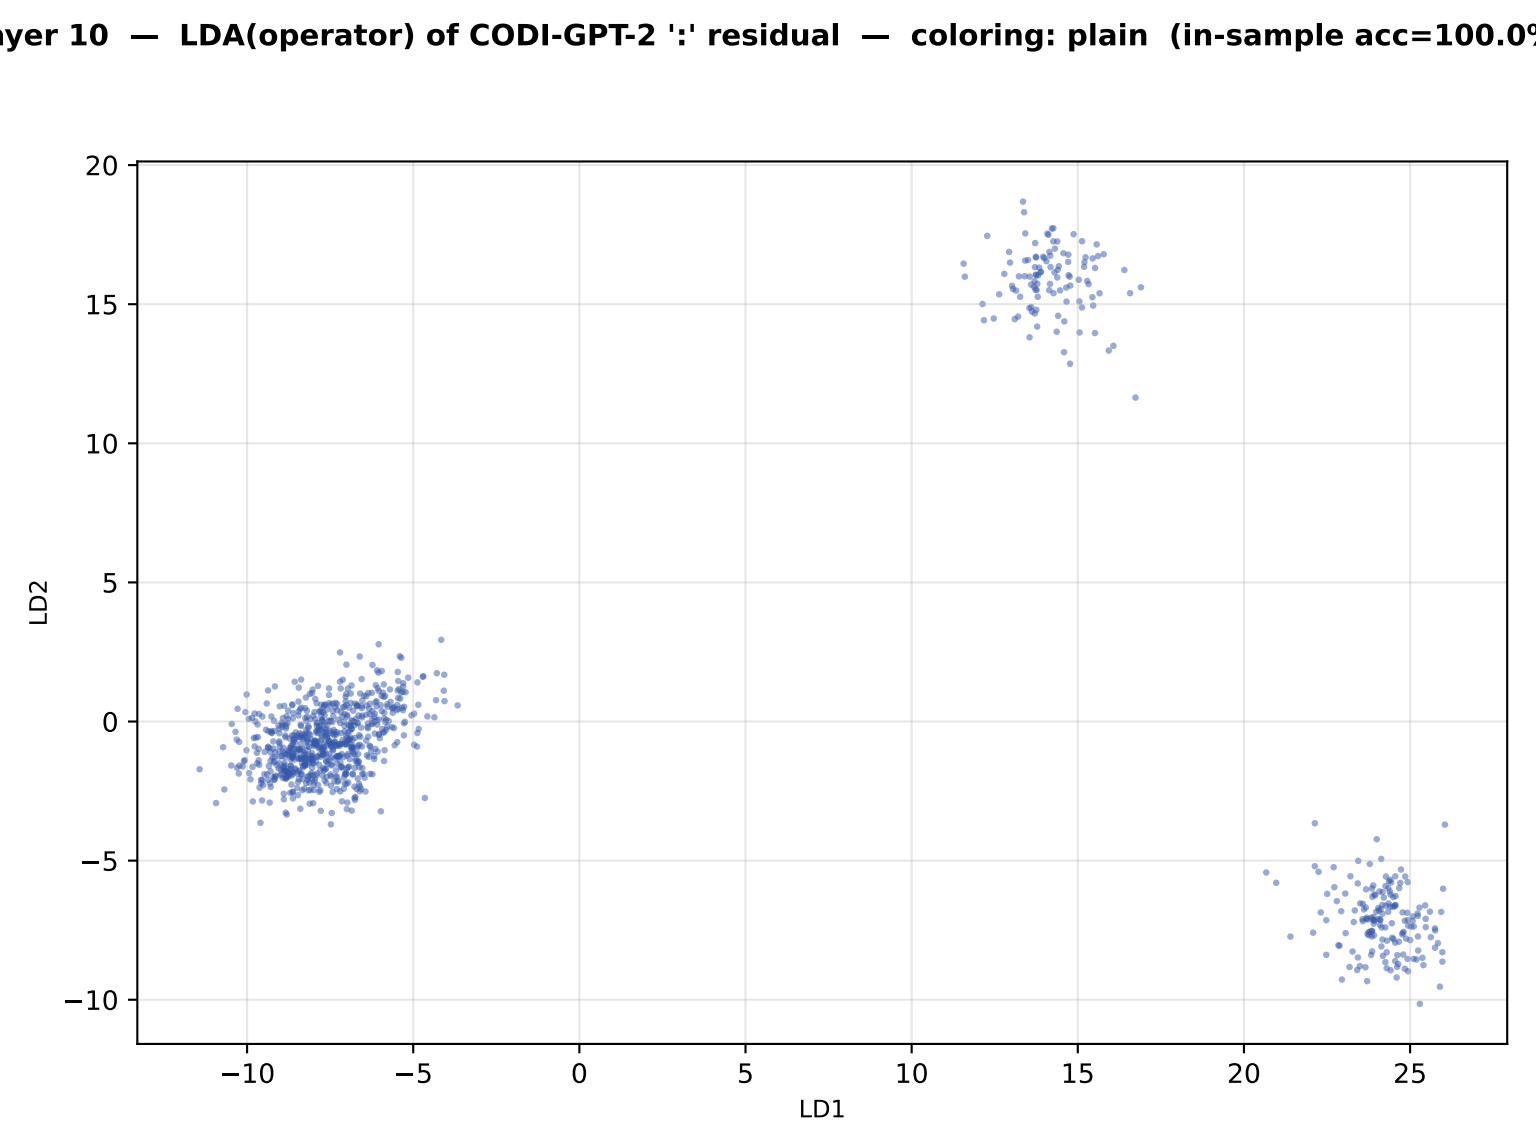
yer 10 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: plain (in-sample acc=100.0%
LD2
LD1
20
15
10
5
0
−5
−10
−10
−5
0
5
10
15
20
25

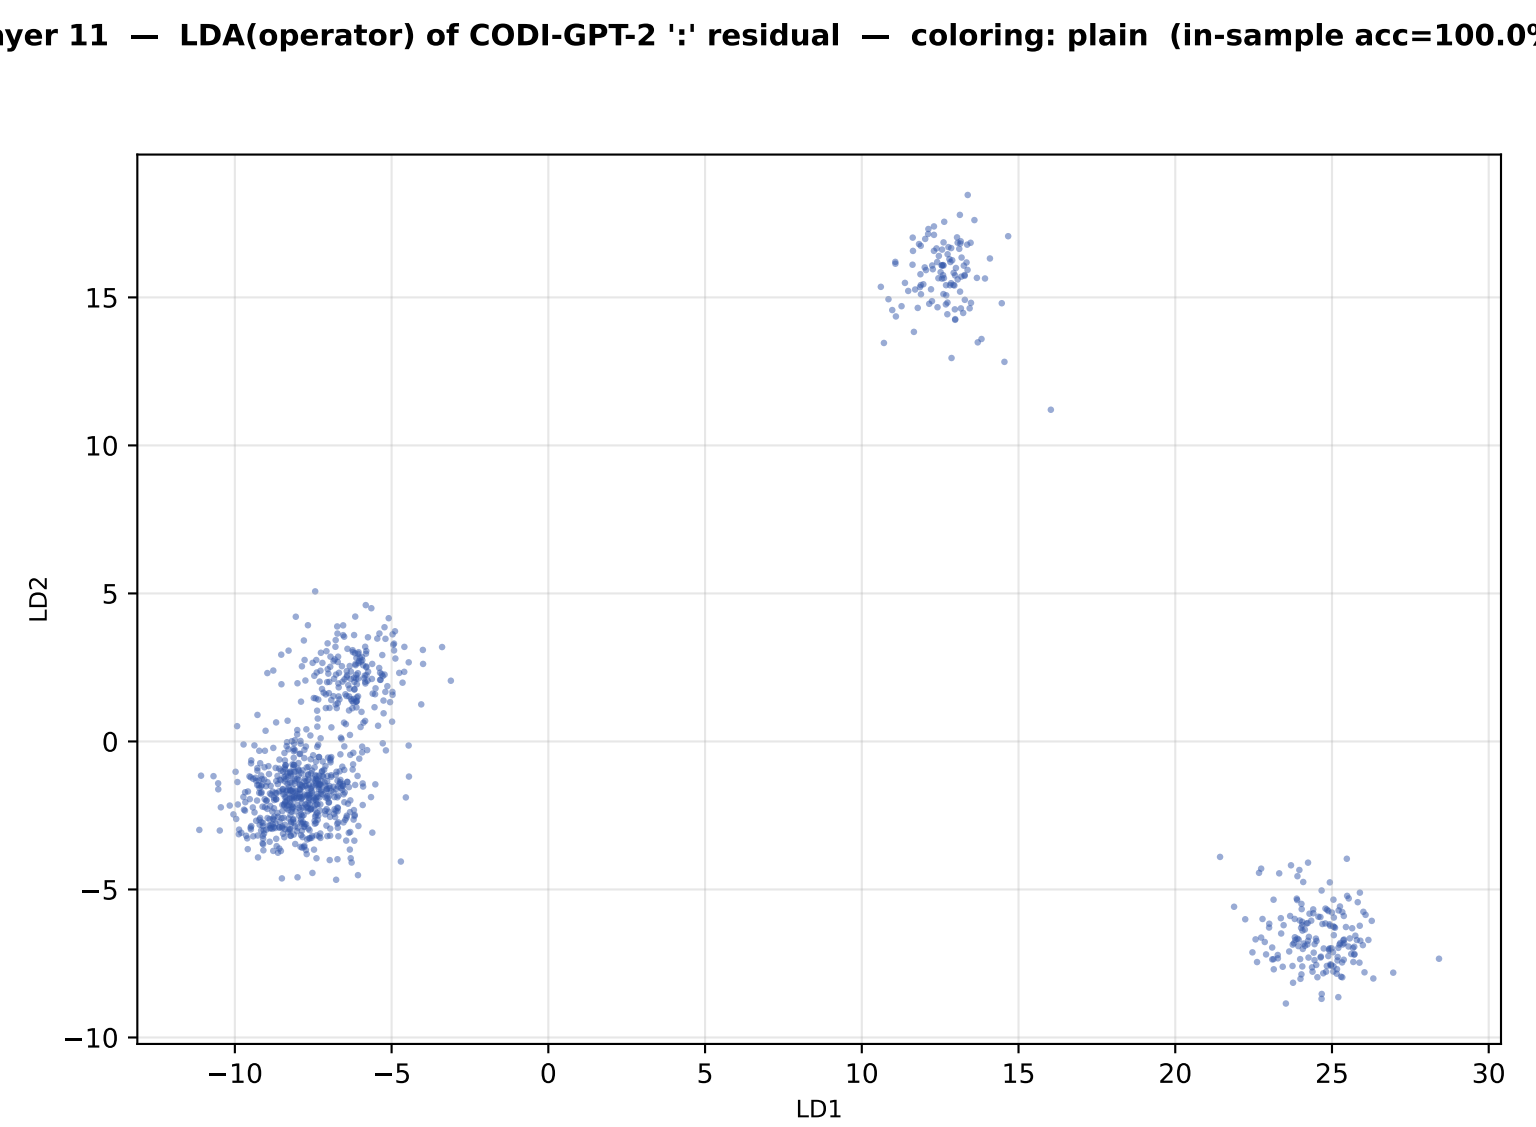
yer 11 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: plain (in-sample acc=100.0%
LD2
LD1
15
10
5
0
−5
−10
−10
−5
0
5
10
15
20
25
30

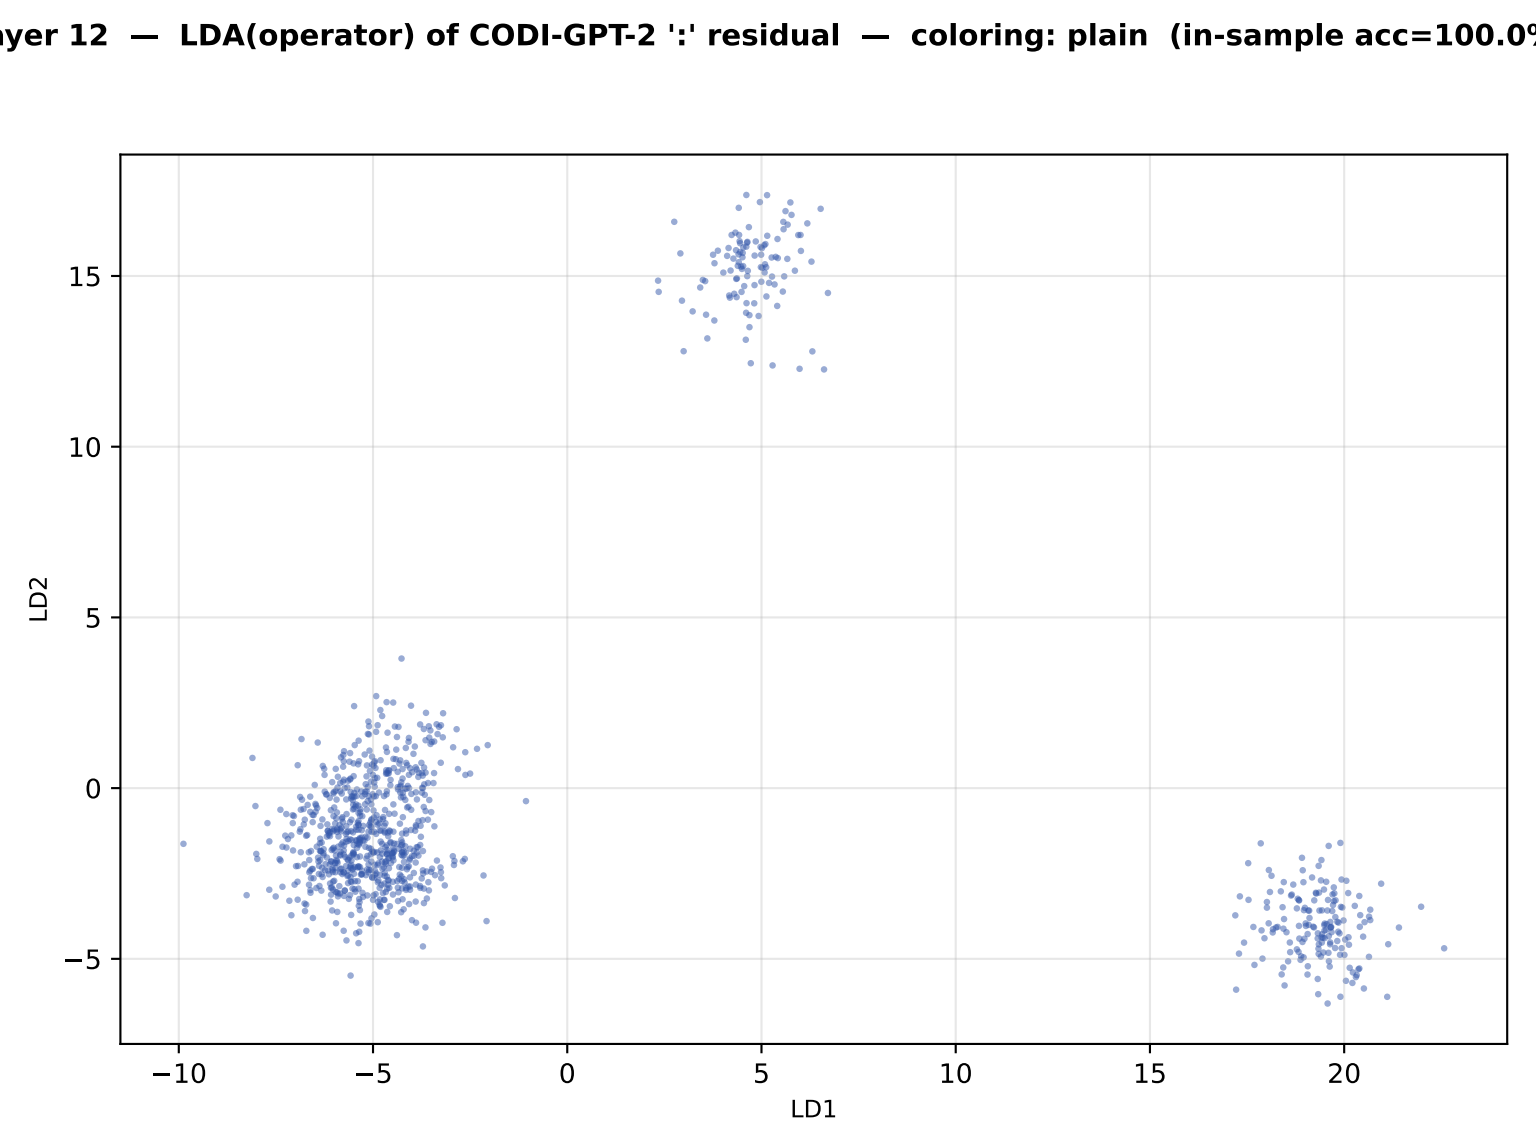
yer 12 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: plain (in-sample acc=100.0%
LD2
LD1
15
10
5
0
−5
−10
−5
0
5
10
15
20

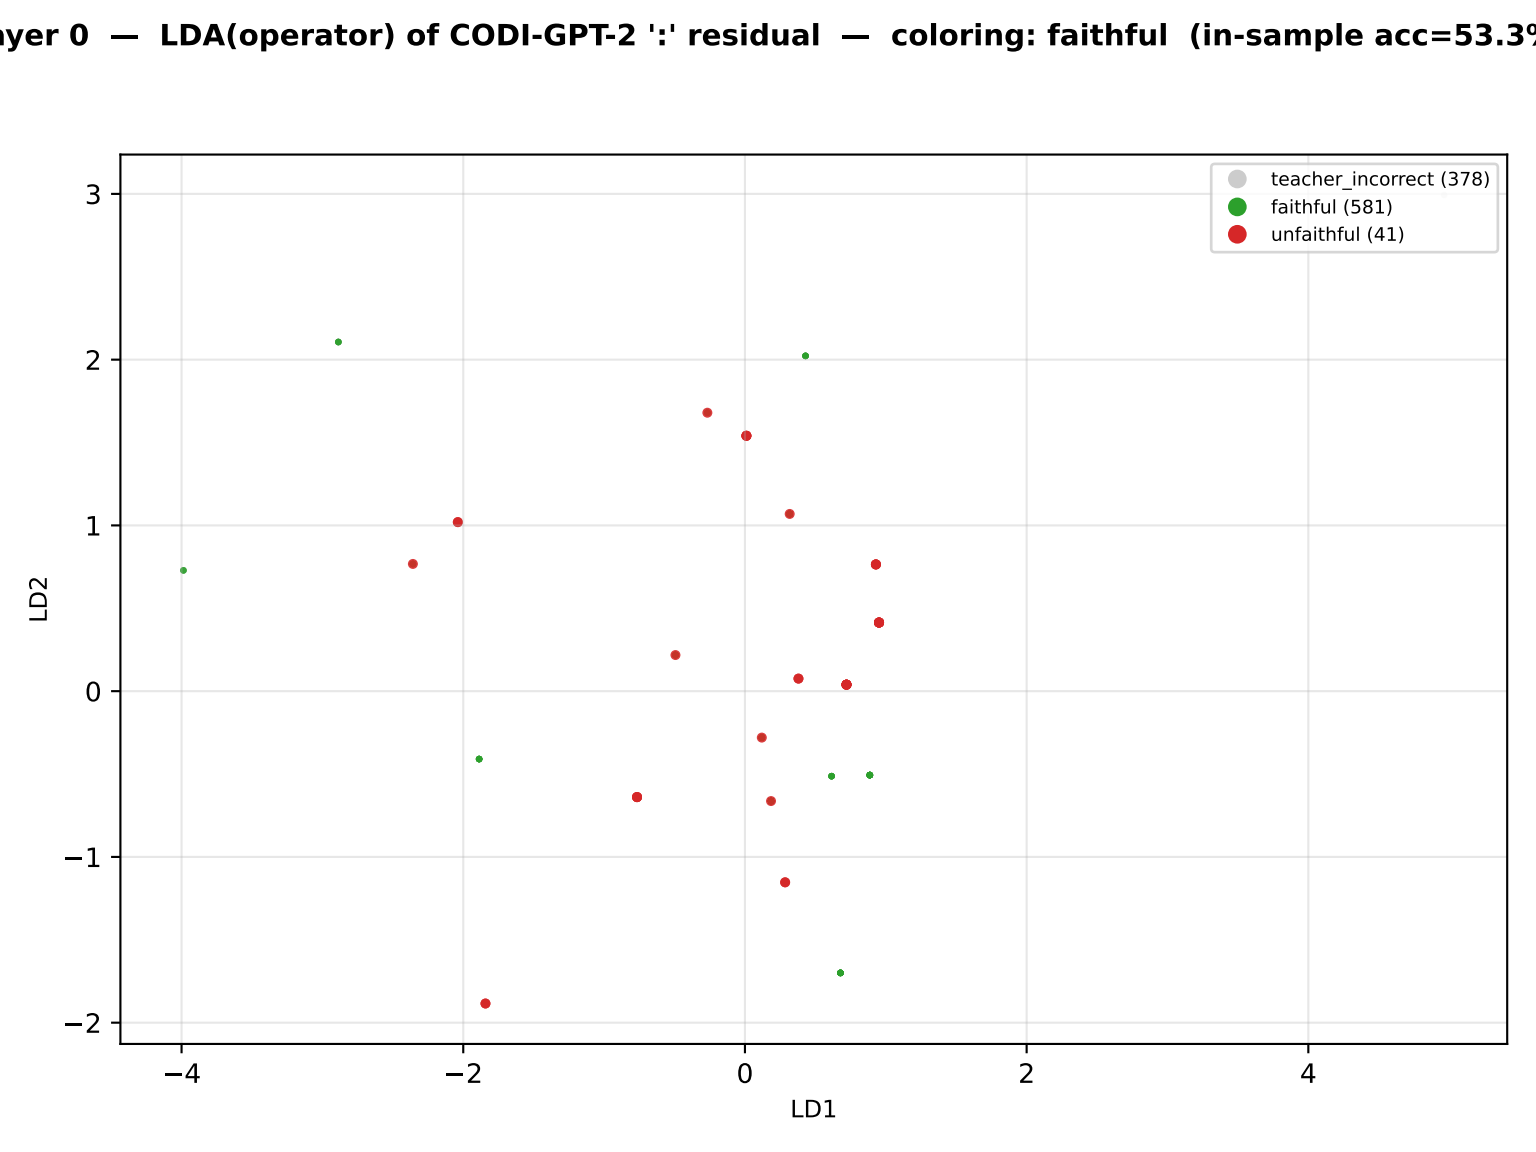
yer 0 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: faithful (in-sample acc=53.3%
teacher_incorrect (378)
faithful (581)
unfaithful (41)
LD2
LD1
3
2
1
0
−1
−2
−4
−2
0
2
4

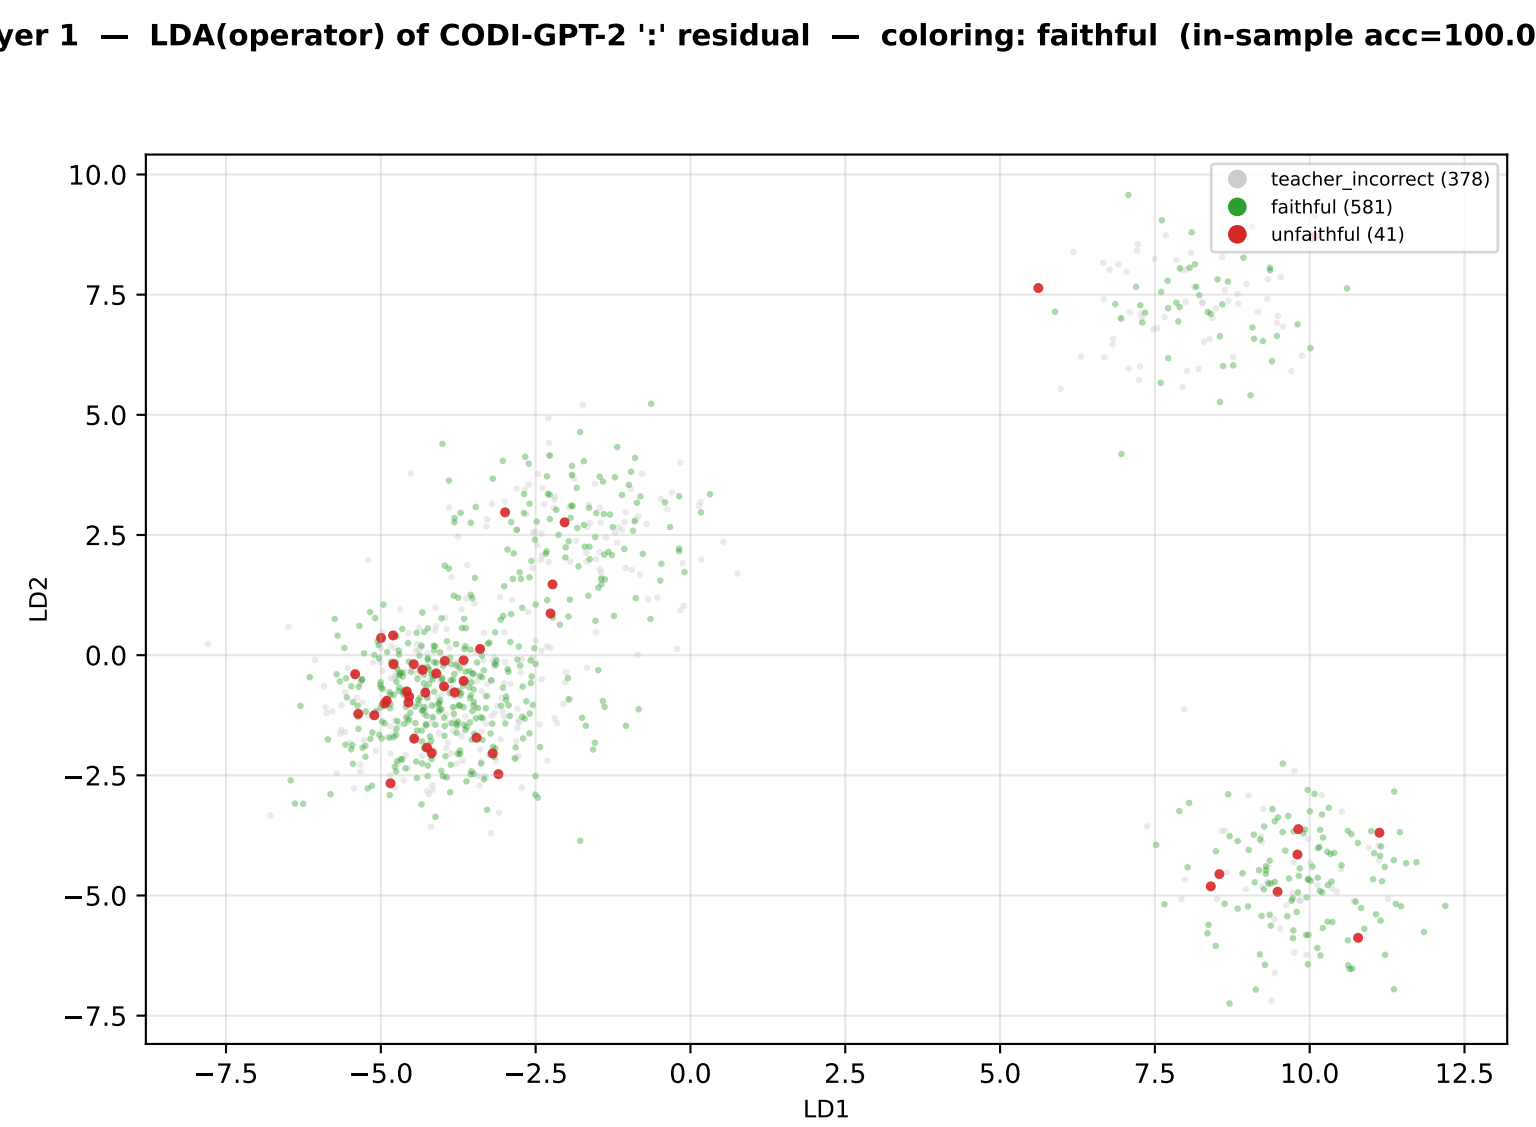
yer 1 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: faithful (in-sample acc=100.0
teacher_incorrect (378)
faithful (581)
unfaithful (41)
LD2
LD1
10.0
7.5
5.0
2.5
0.0
−2.5
−5.0
−7.5
−7.5
−5.0
−2.5
0.0
2.5
5.0
7.5
10.0
12.5

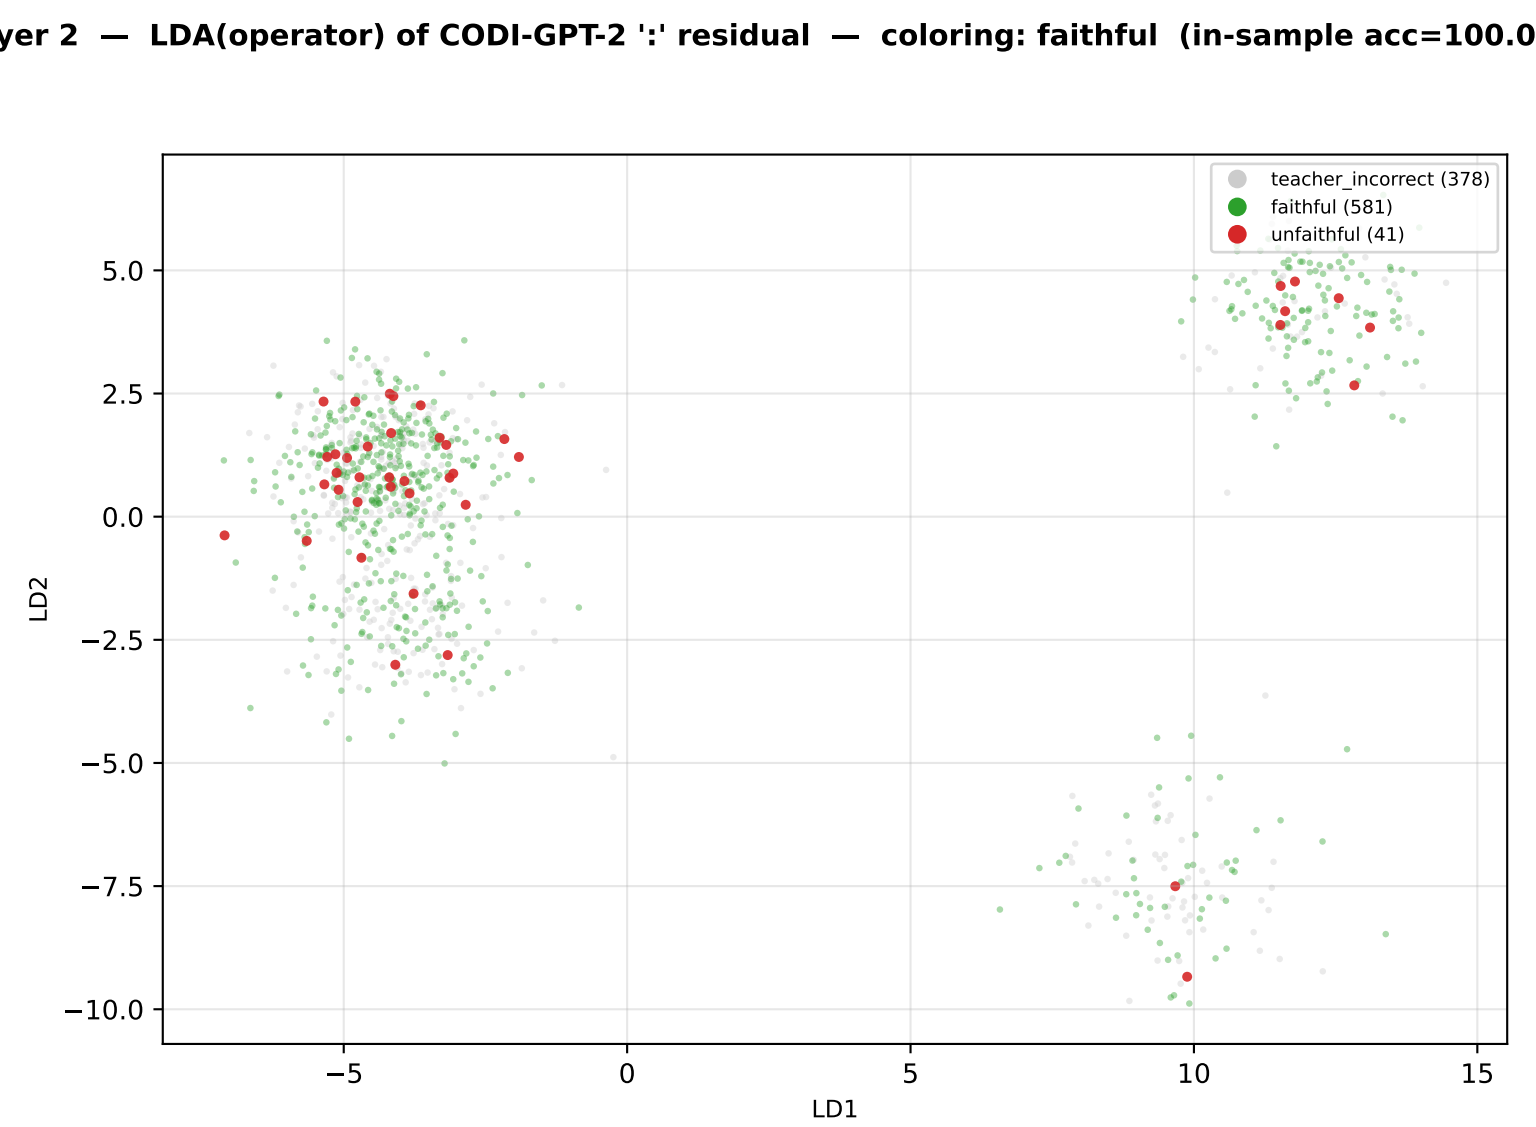
yer 2 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: faithful (in-sample acc=100.0
teacher_incorrect (378)
faithful (581)
unfaithful (41)
5.0
2.5
0.0
−2.5
−5.0
−7.5
−10.0
LD2
−5
0
5
10
15
LD1

yer 3 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: faithful (in-sample acc=99.9%

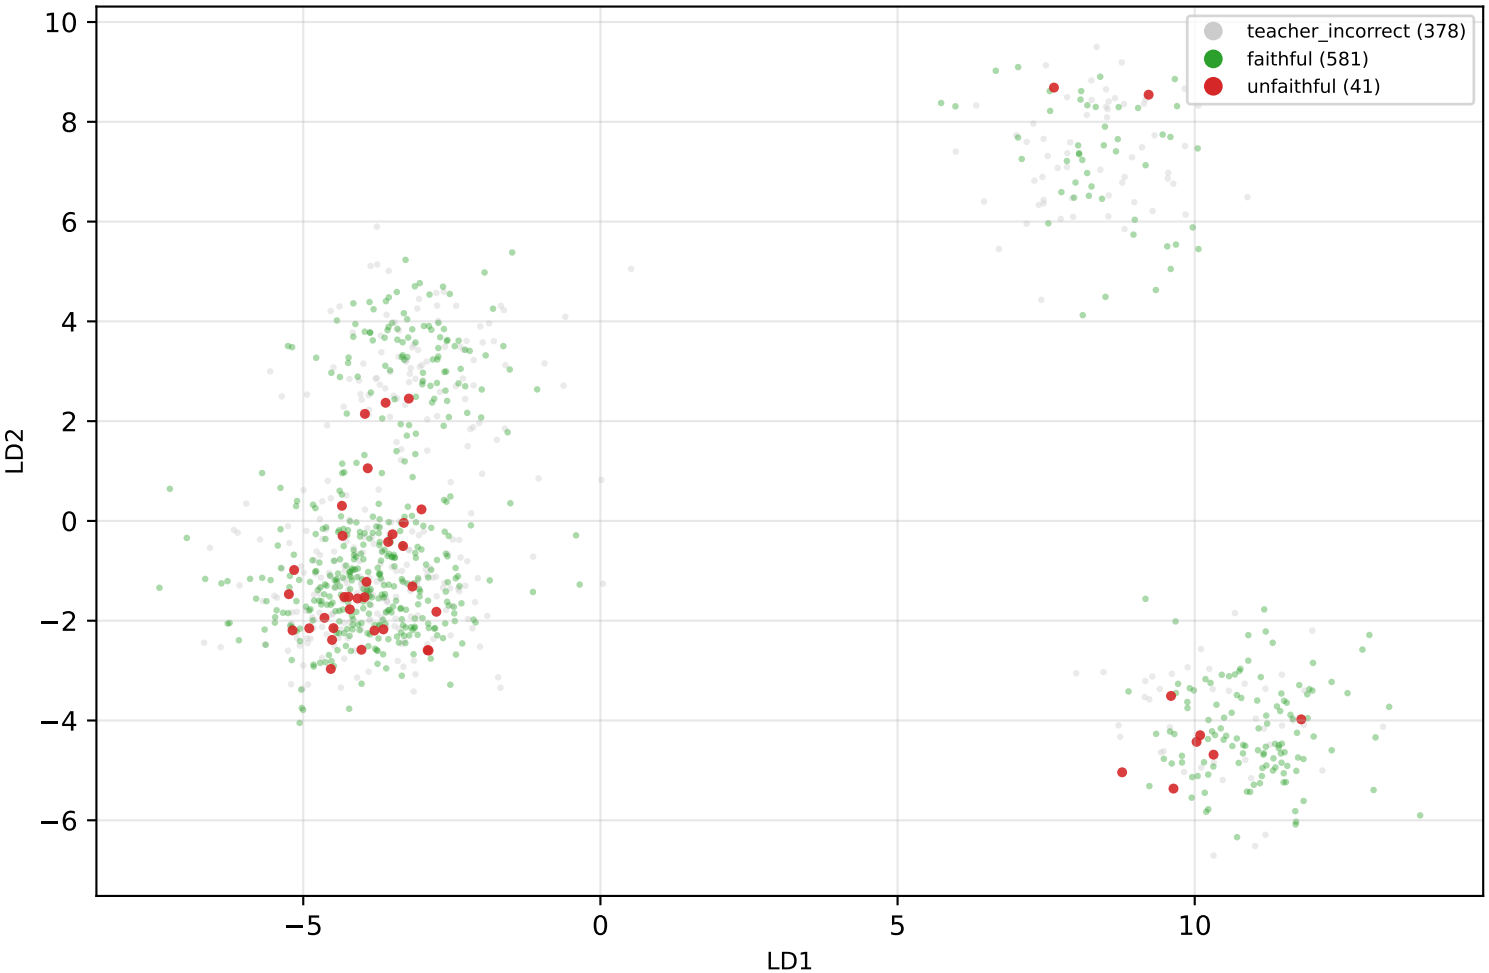

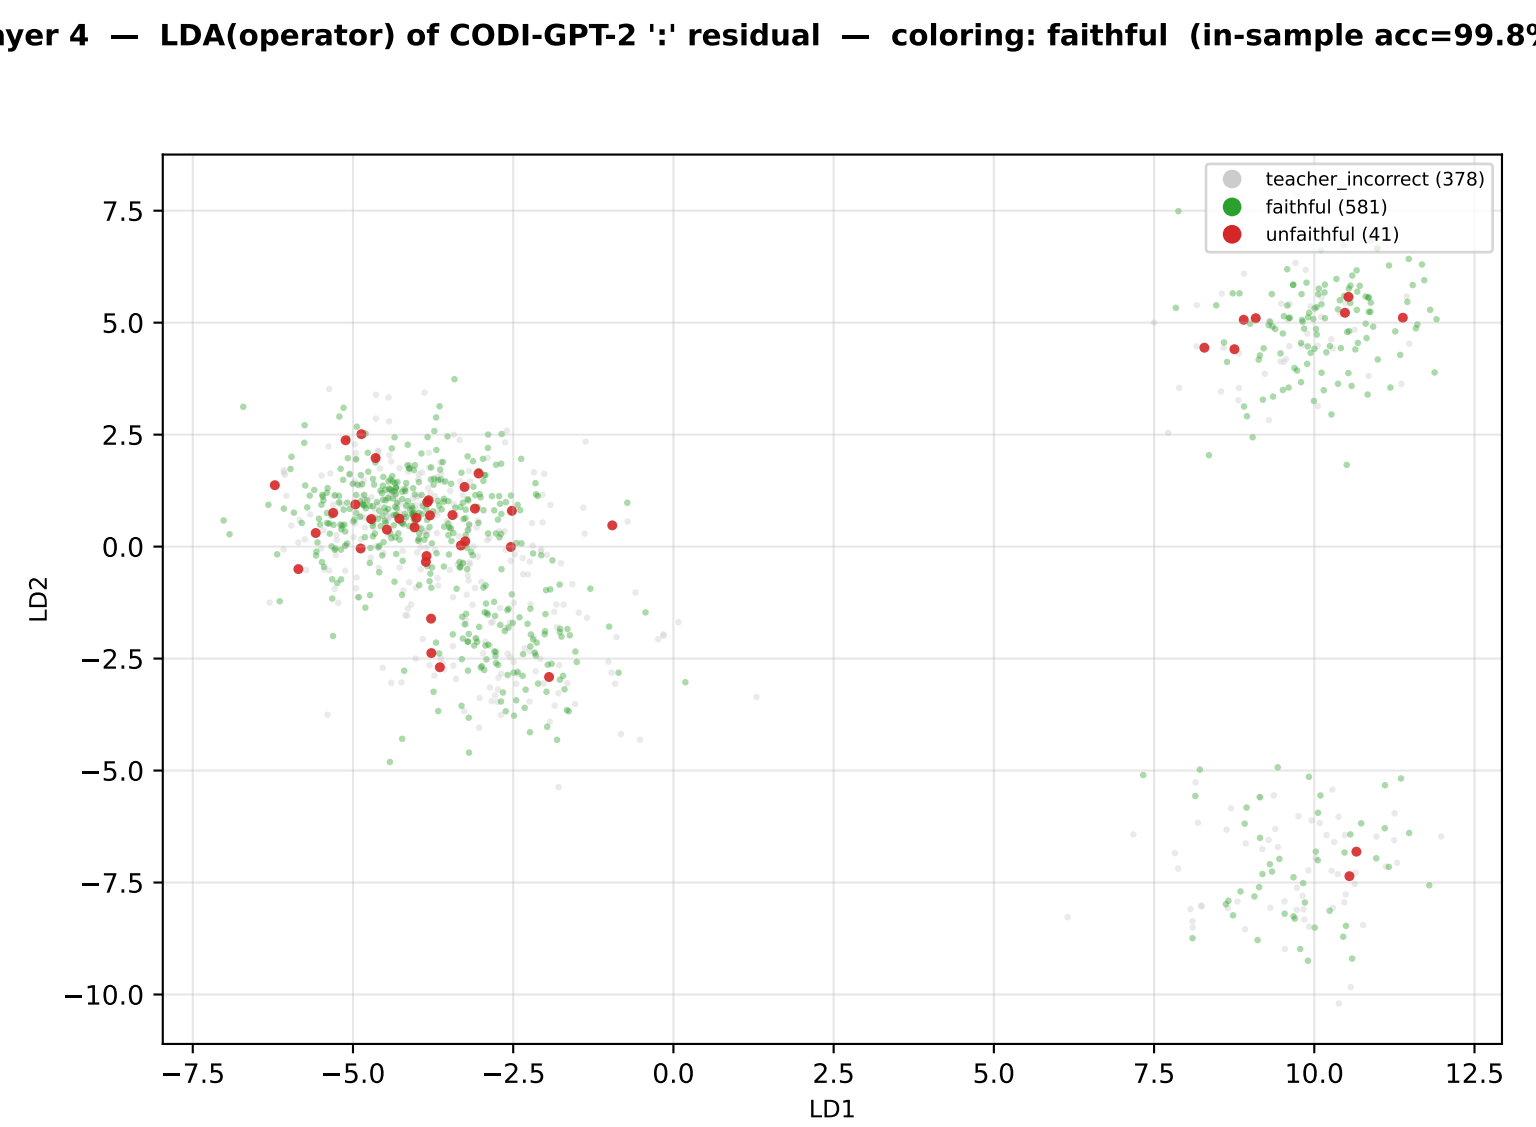
yer 4 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: faithful (in-sample acc=99.8%
teacher_incorrect (378)
faithful (581)
unfaithful (41)
LD2
LD1
7.5
5.0
2.5
0.0
−2.5
−5.0
−7.5
−10.0
−7.5
−5.0
−2.5
0.0
2.5
5.0
7.5
10.0
12.5

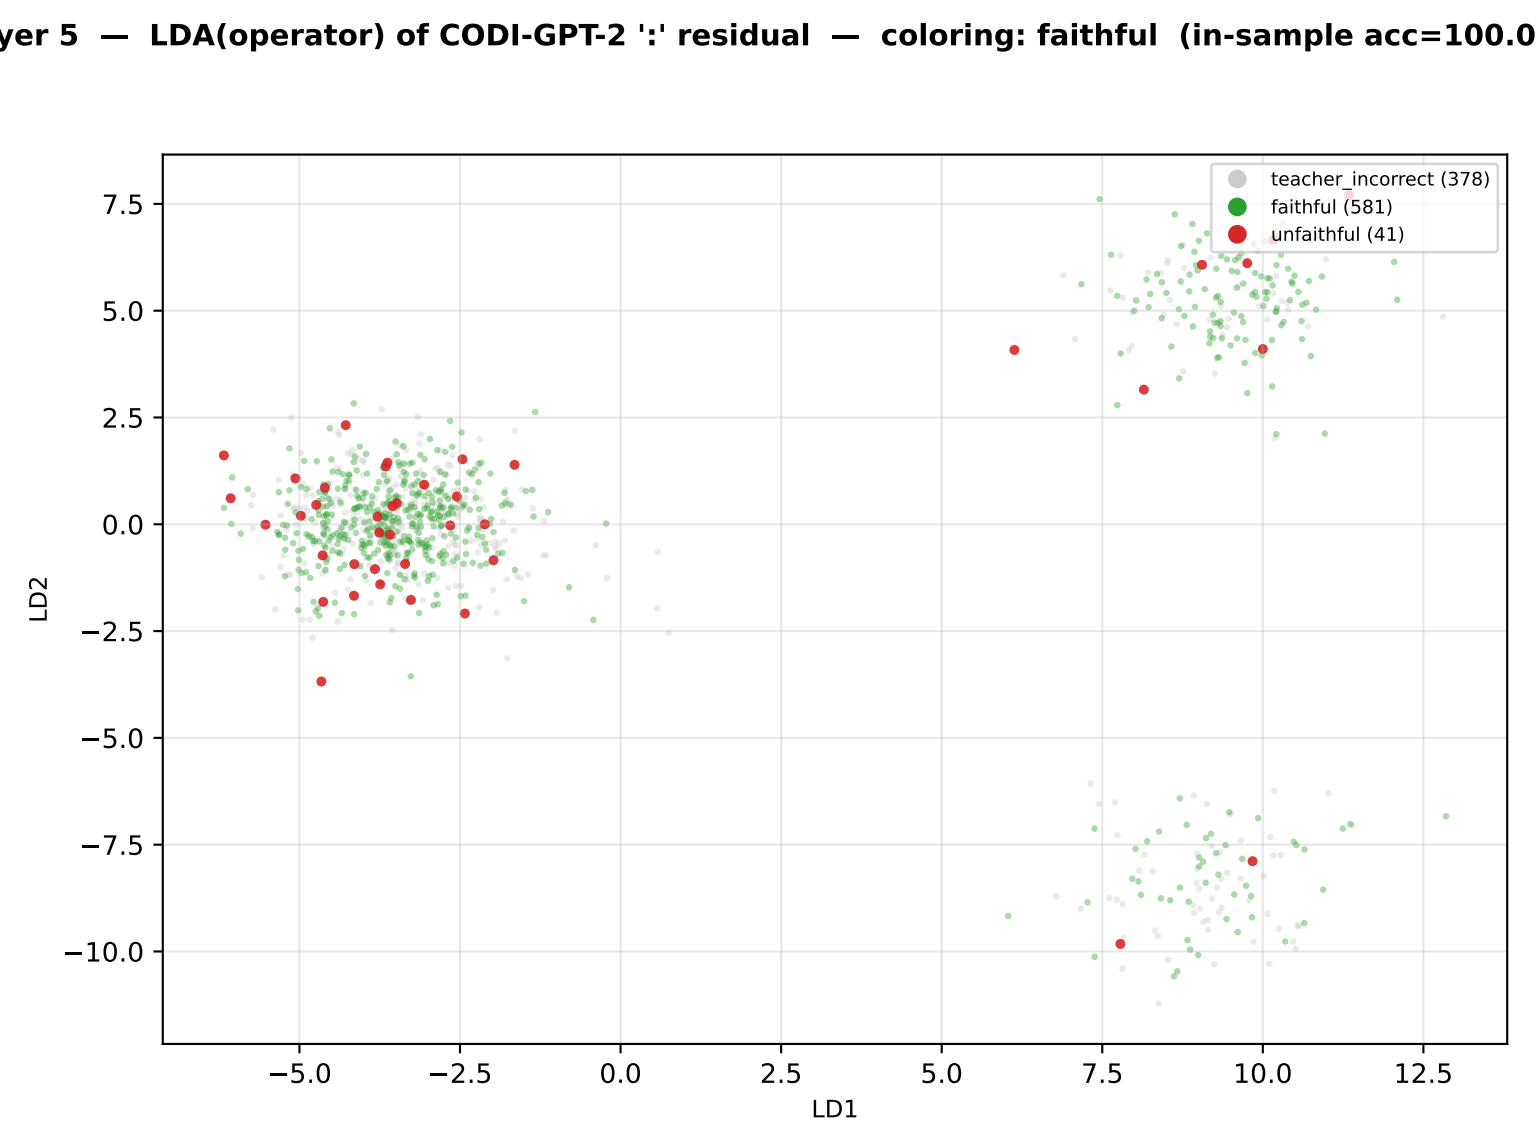
yer 5 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: faithful (in-sample acc=100.0
teacher_incorrect (378)
faithful (581)
unfaithful (41)
LD2
LD1
7.5
5.0
2.5
0.0
−2.5
−5.0
−7.5
−10.0
−5.0
−2.5
0.0
2.5
5.0
7.5
10.0
12.5

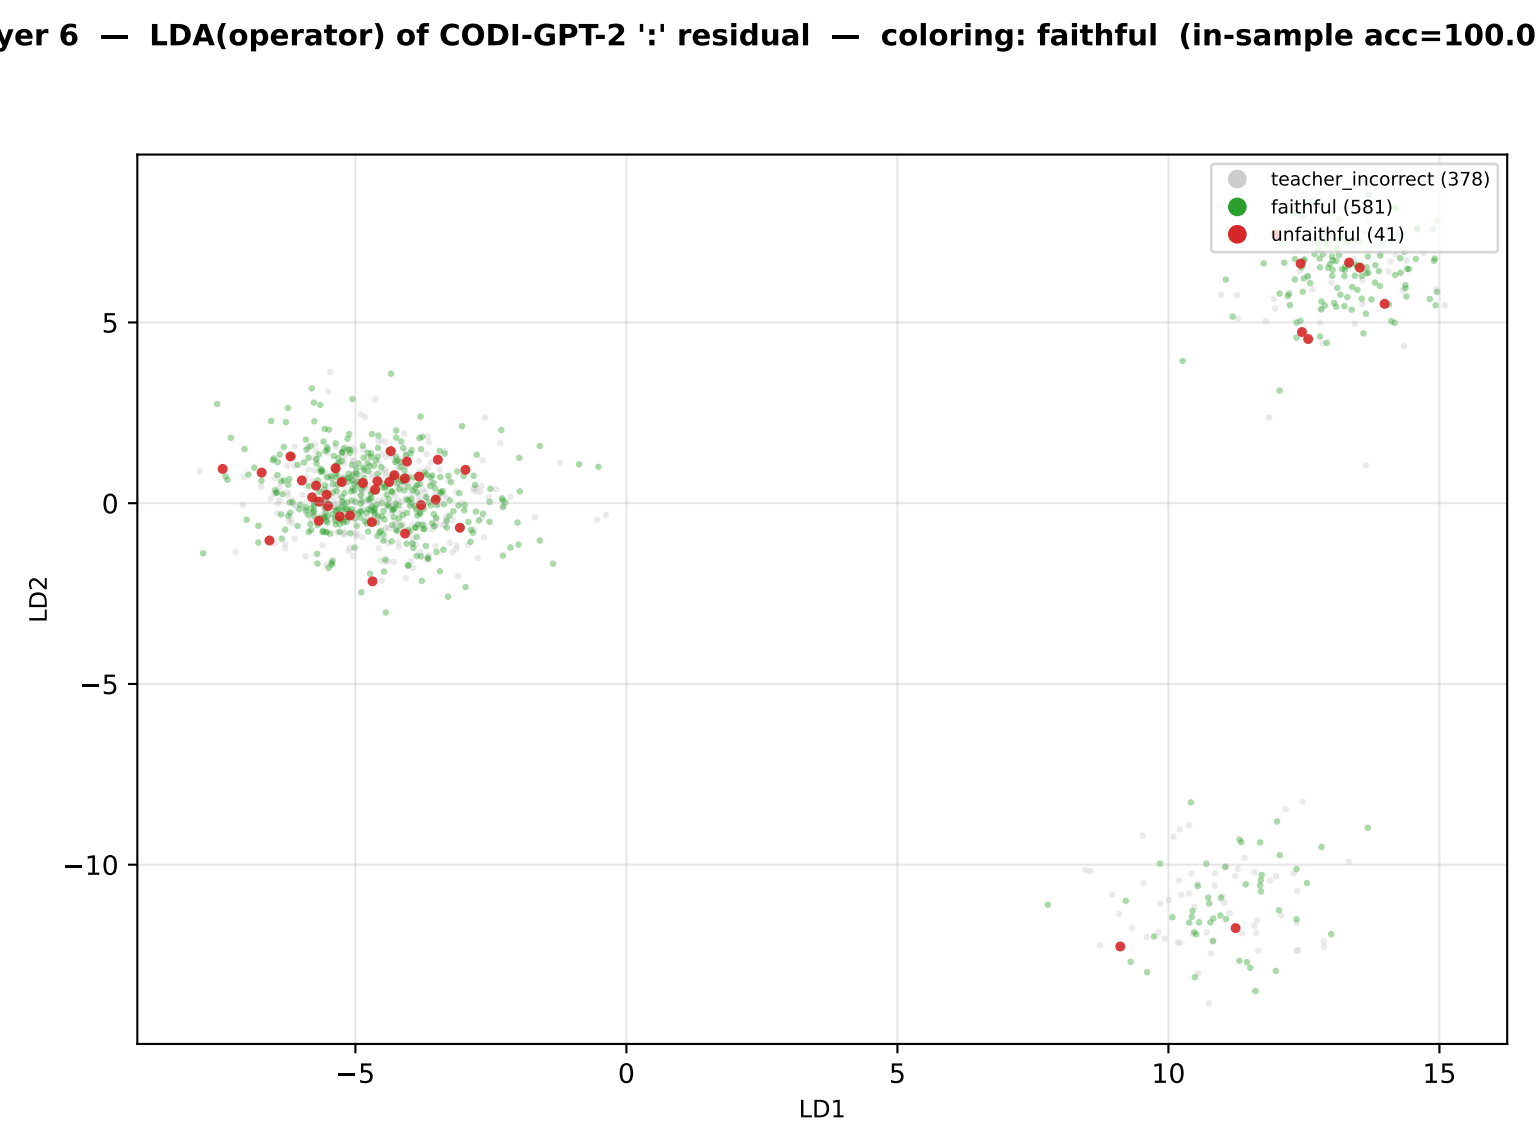
yer 6 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: faithful (in-sample acc=100.0
teacher_incorrect (378)
faithful (581)
unfaithful (41)
LD2
LD1
5
0
−5
−10
−5
0
5
10
15

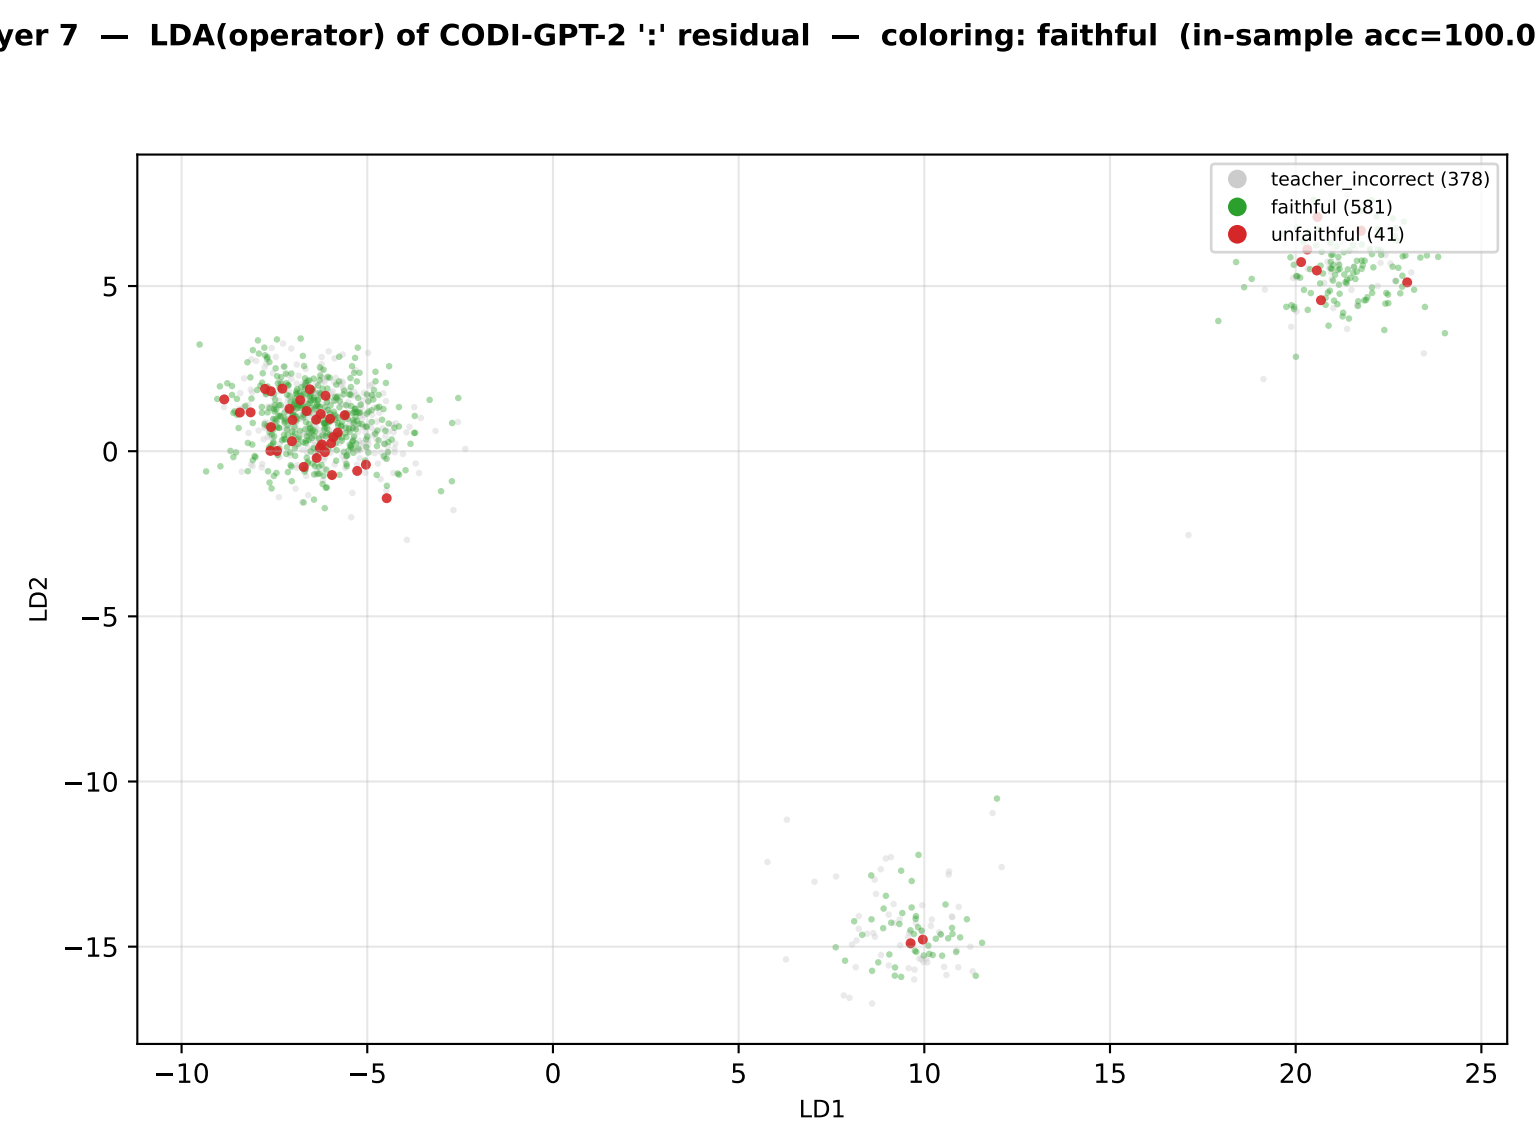
yer 7 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: faithful (in-sample acc=100.0
teacher_incorrect (378)
faithful (581)
unfaithful (41)
LD2
LD1
5
0
−5
−10
−15
−10
−5
0
5
10
15
20
25

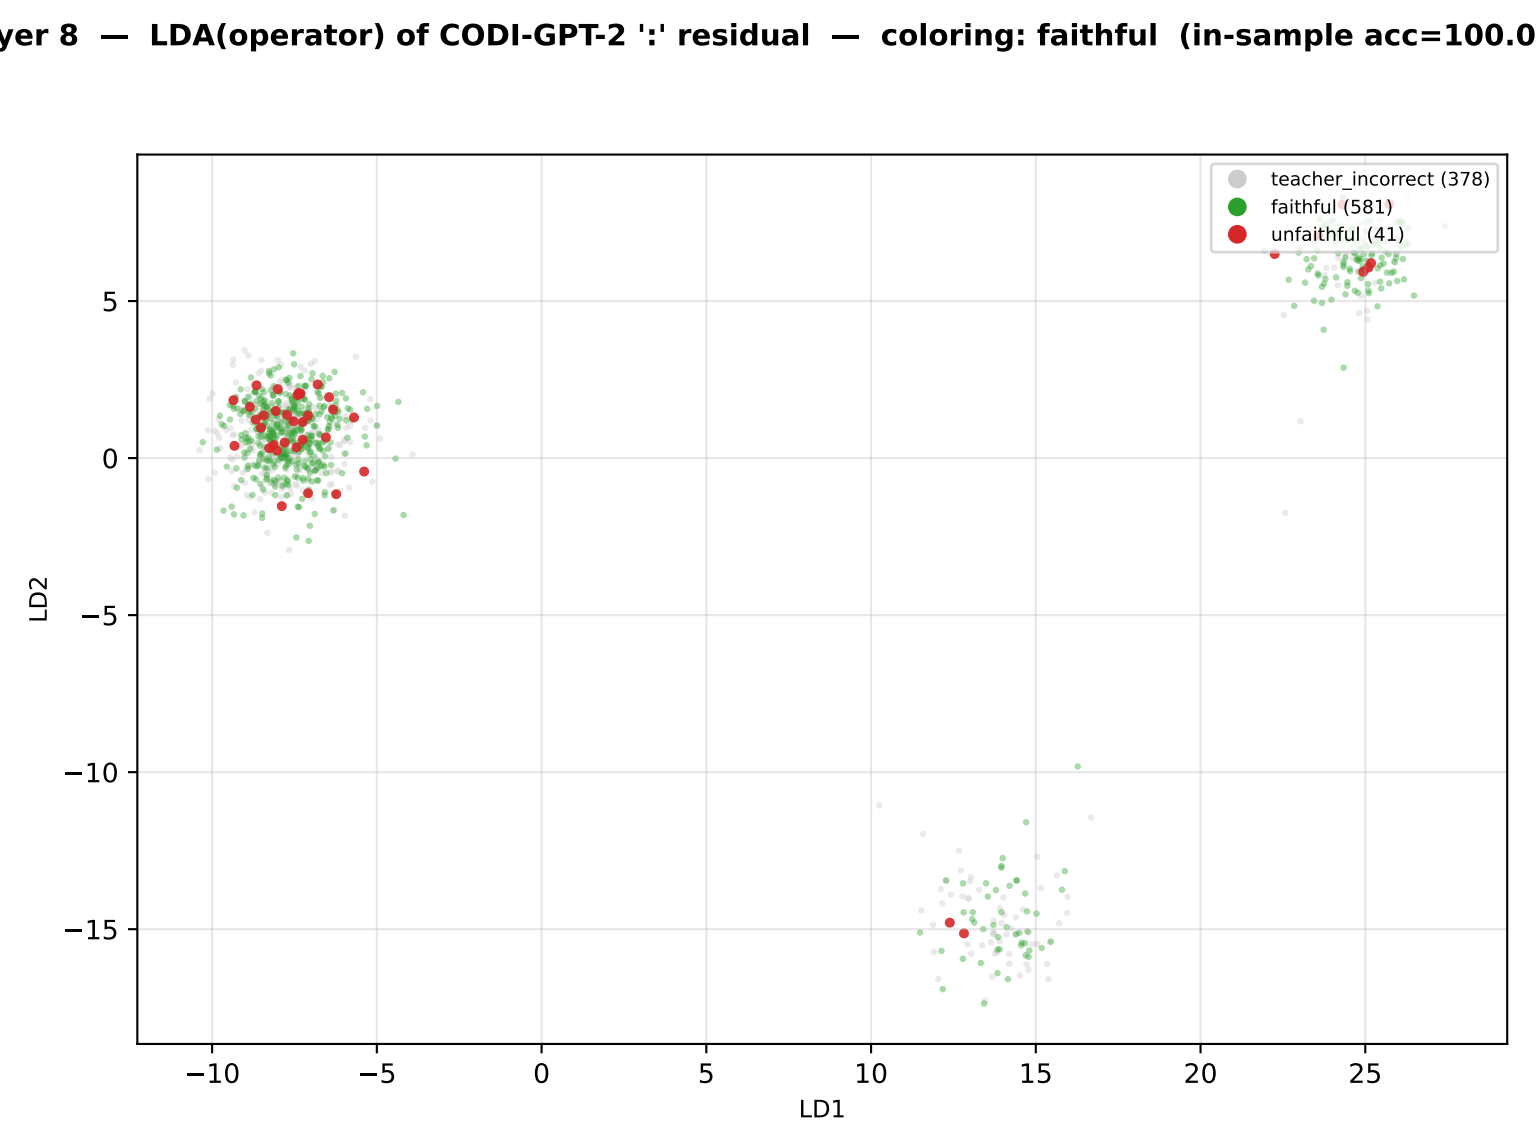
yer 8 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: faithful (in-sample acc=100.0
teacher_incorrect (378)
faithful (581)
unfaithful (41)
LD2
LD1
5
0
−5
−10
−15
−10
−5
0
5
10
15
20
25

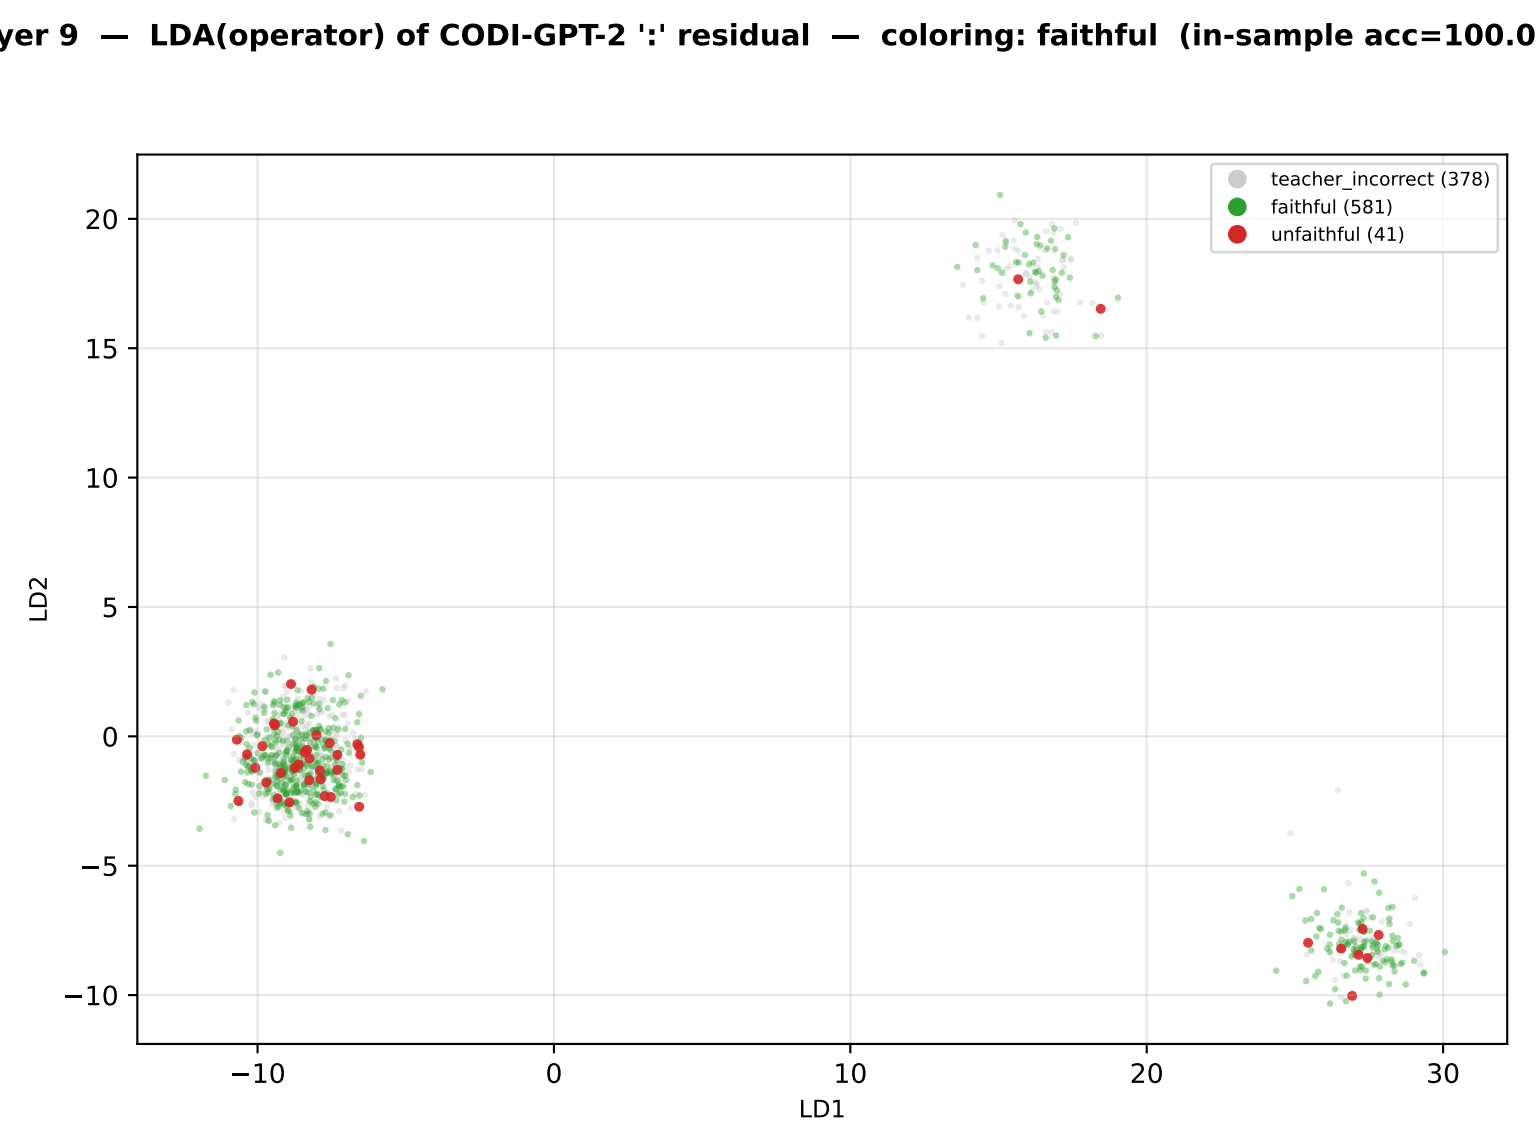
yer 9 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: faithful (in-sample acc=100.0
teacher_incorrect (378)
faithful (581)
unfaithful (41)
LD2
LD1
20
15
10
5
0
−5
−10
−10
0
10
20
30

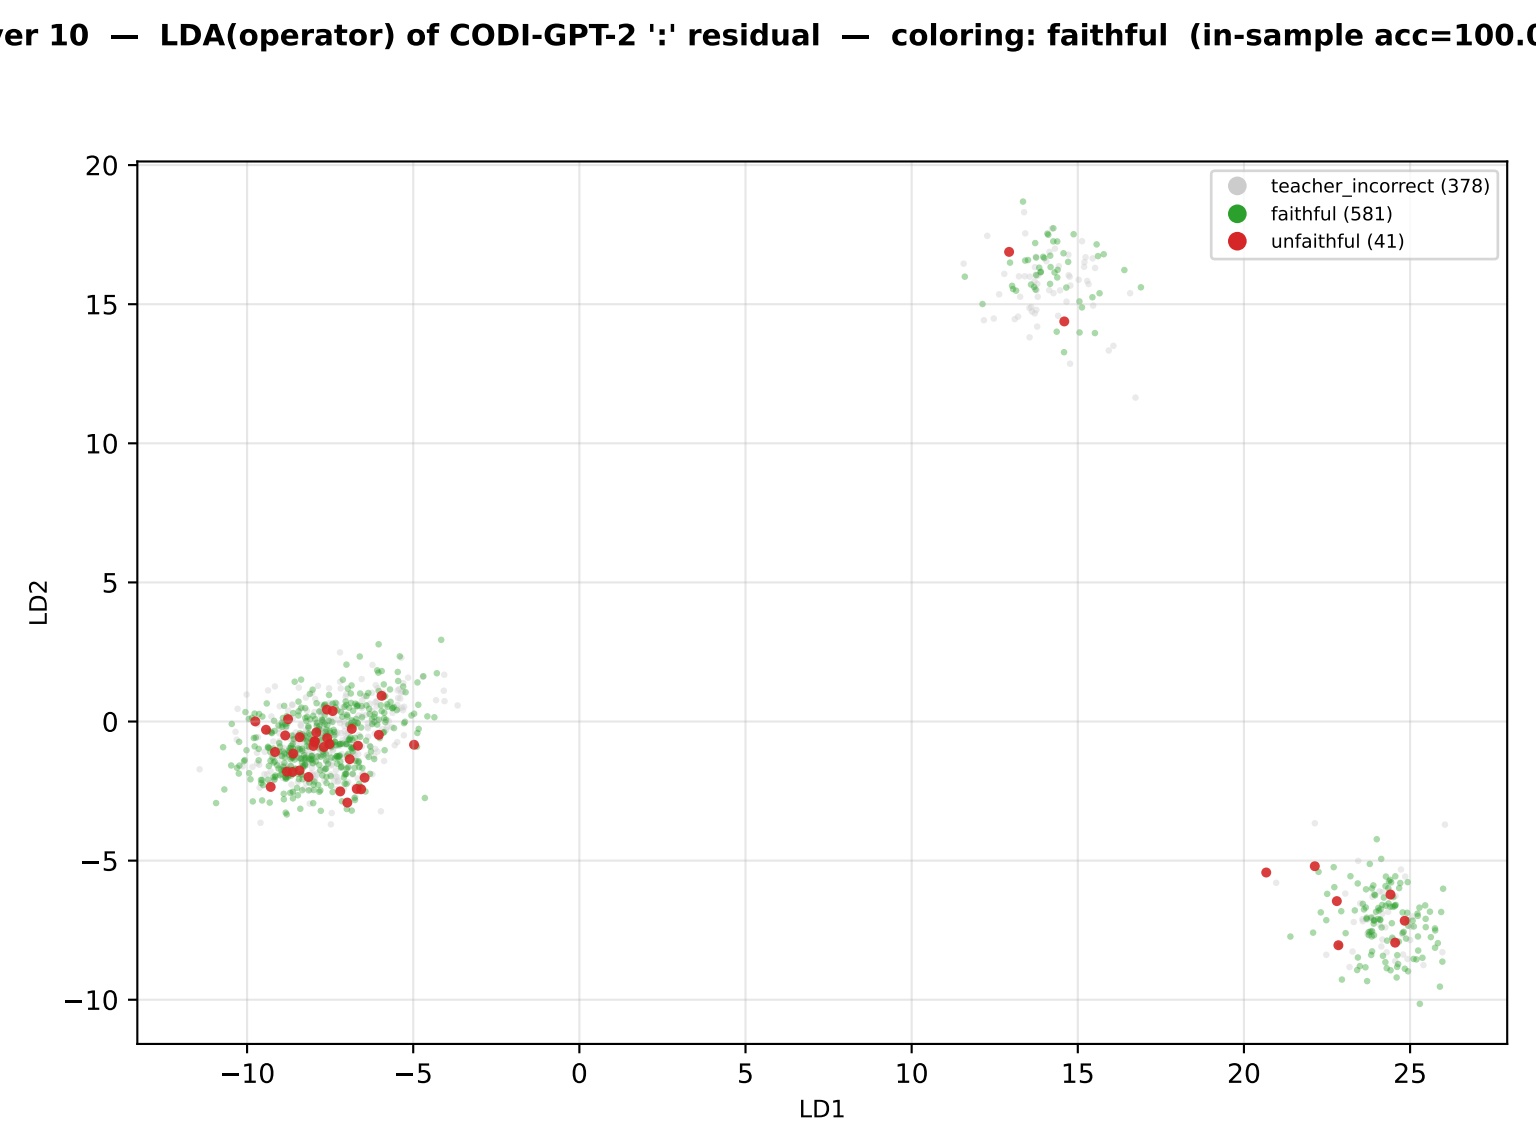
ver 10 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: faithful (in-sample acc=100.0
teacher_incorrect (378)
faithful (581)
unfaithful (41)
LD2
LD1
20
15
10
5
0
−5
−10
−10
−5
0
5
10
15
20
25

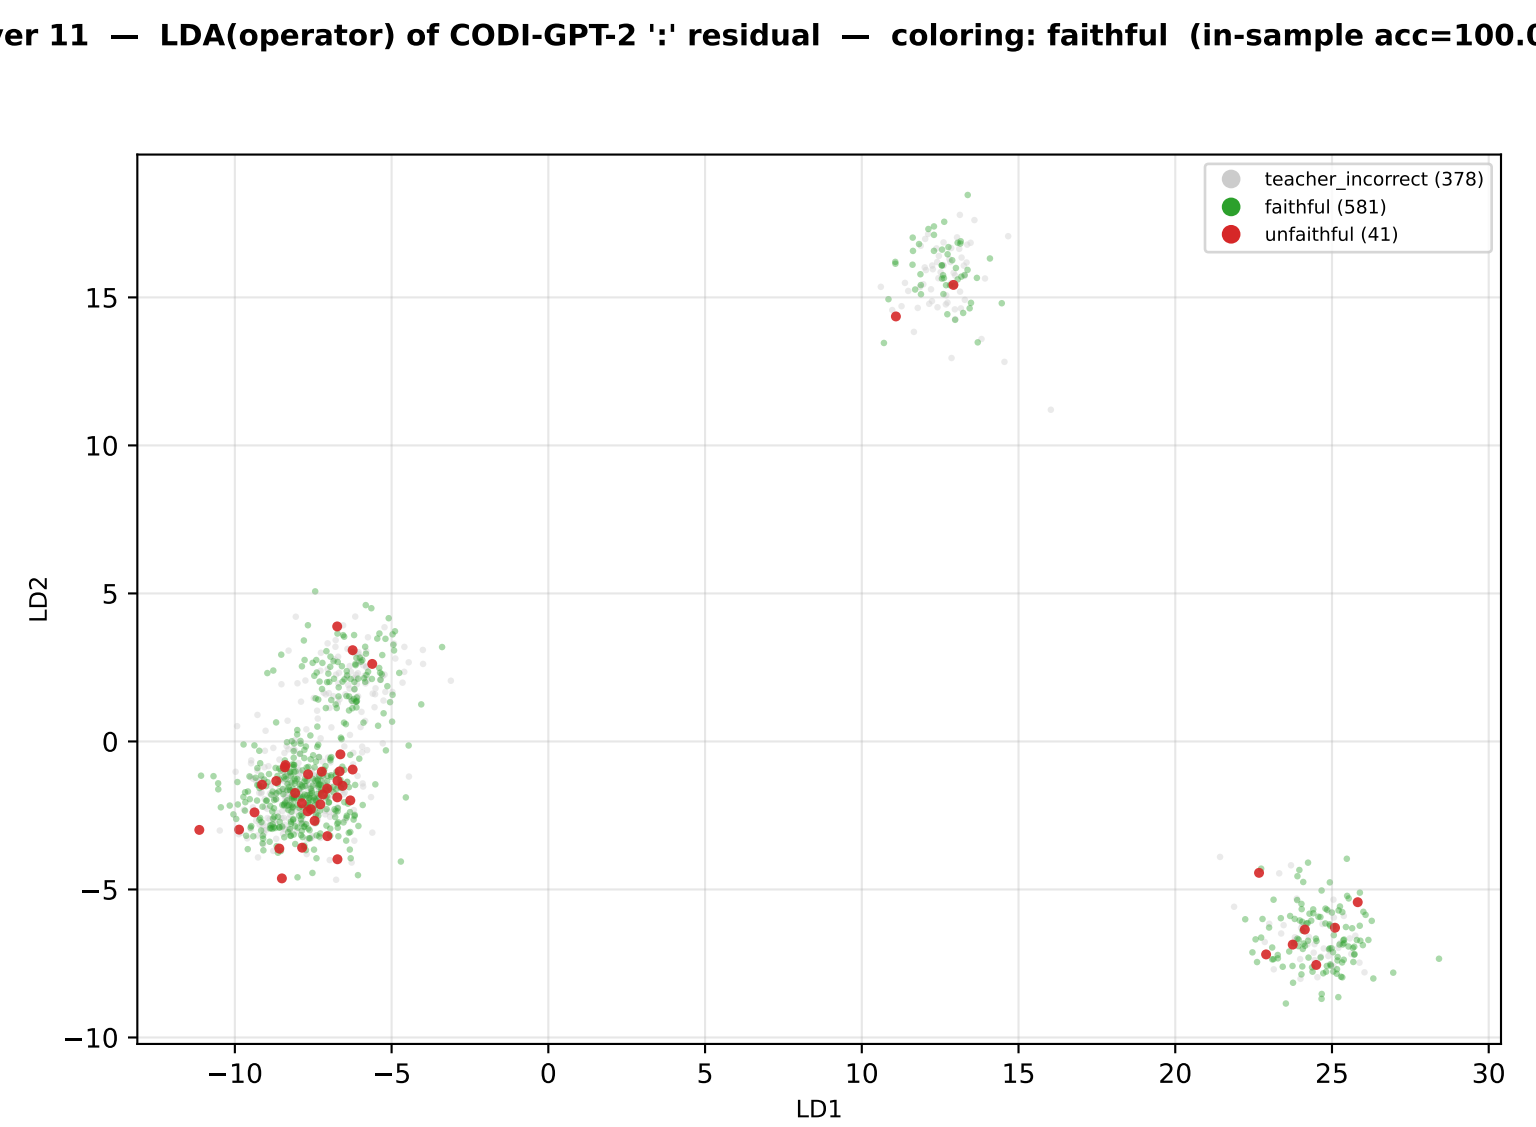
ver 11 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: faithful (in-sample acc=100.0
teacher_incorrect (378)
faithful (581)
unfaithful (41)
LD2
LD1
15
10
5
0
−5
−10
−10
−5
0
5
10
15
20
25
30

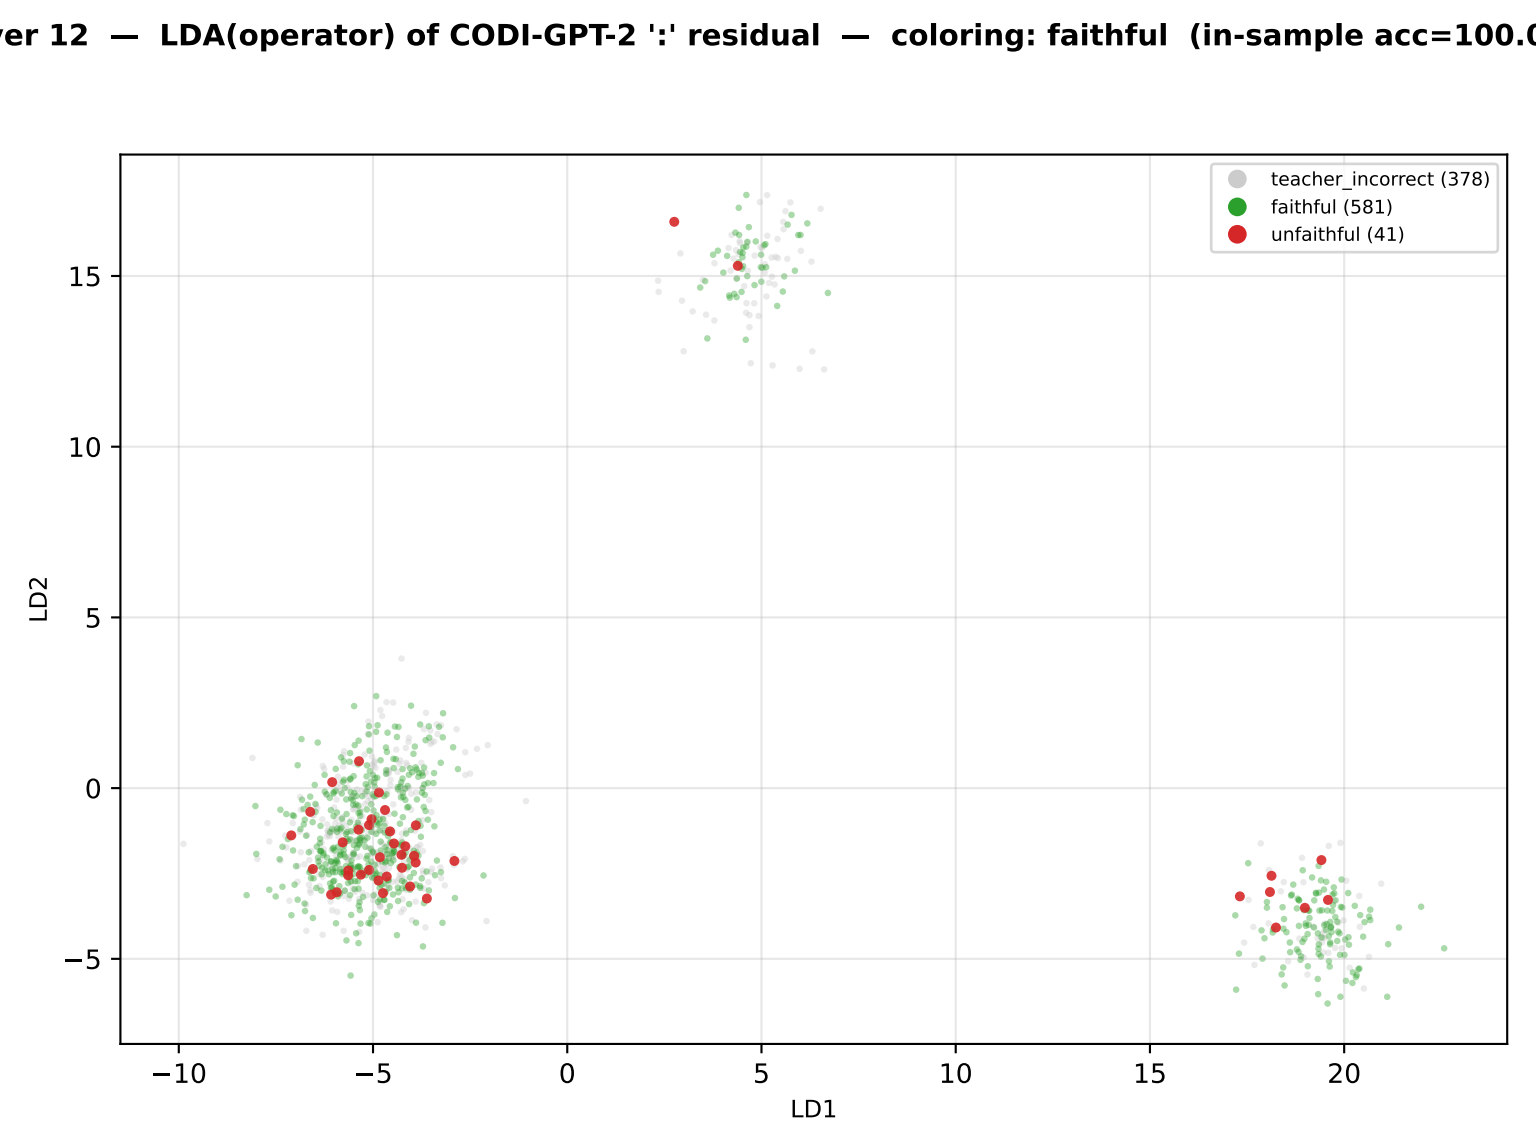
ver 12 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: faithful (in-sample acc=100.0
teacher_incorrect (378)
faithful (581)
unfaithful (41)
LD2
LD1
15
10
5
0
−5
−10
−5
0
5
10
15
20

r 0 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: problem_type (in-sample acc=53

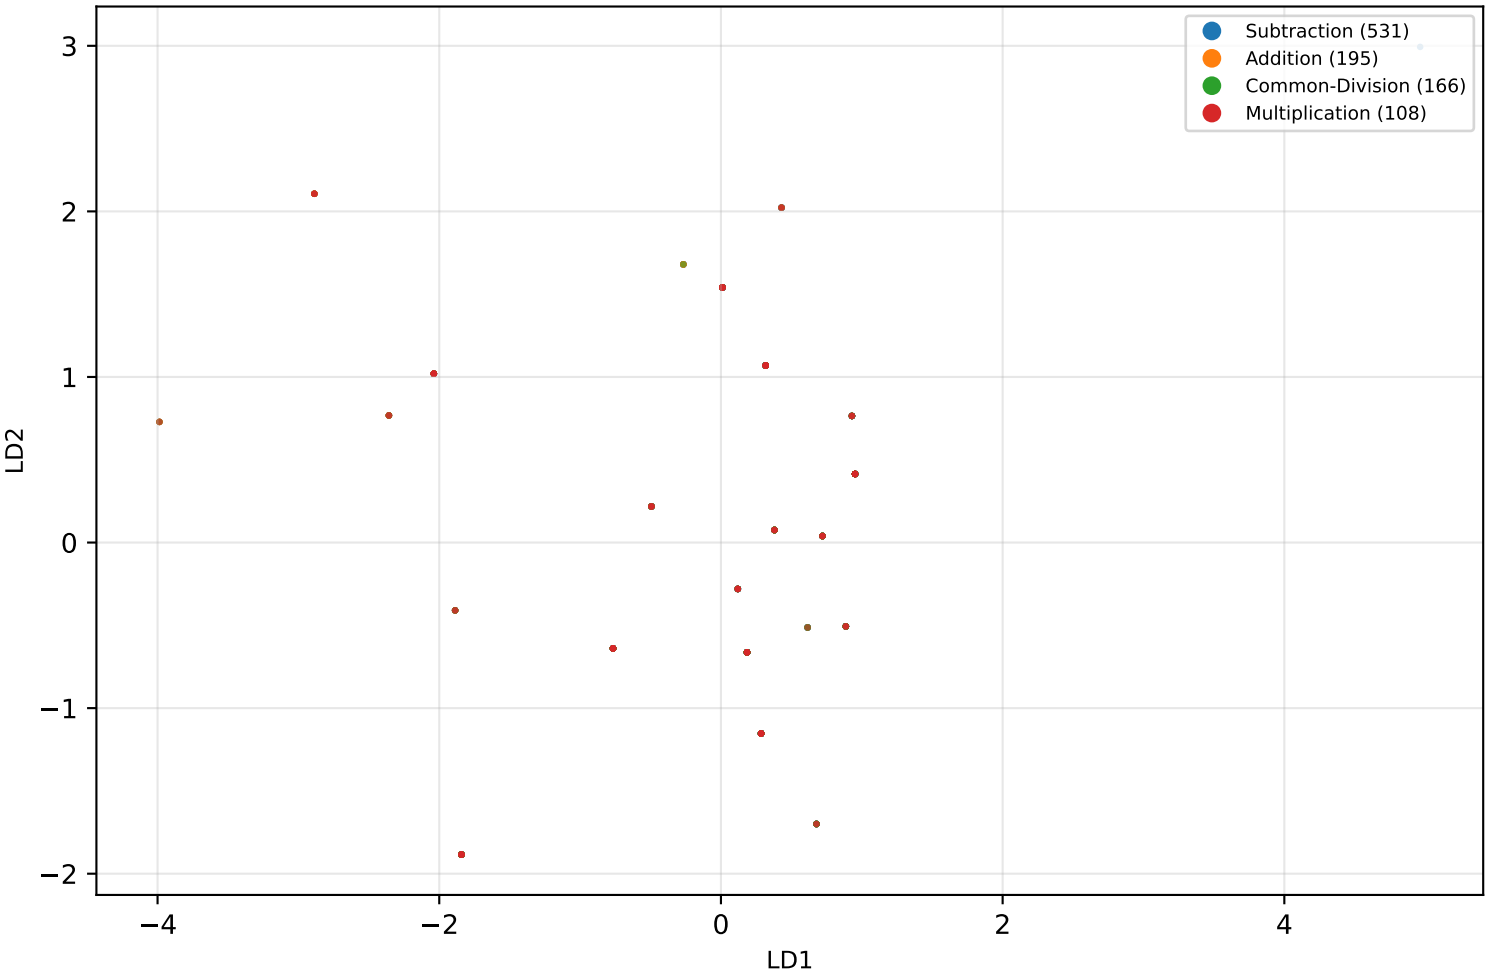

1 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: problem_type (in-sample acc=10

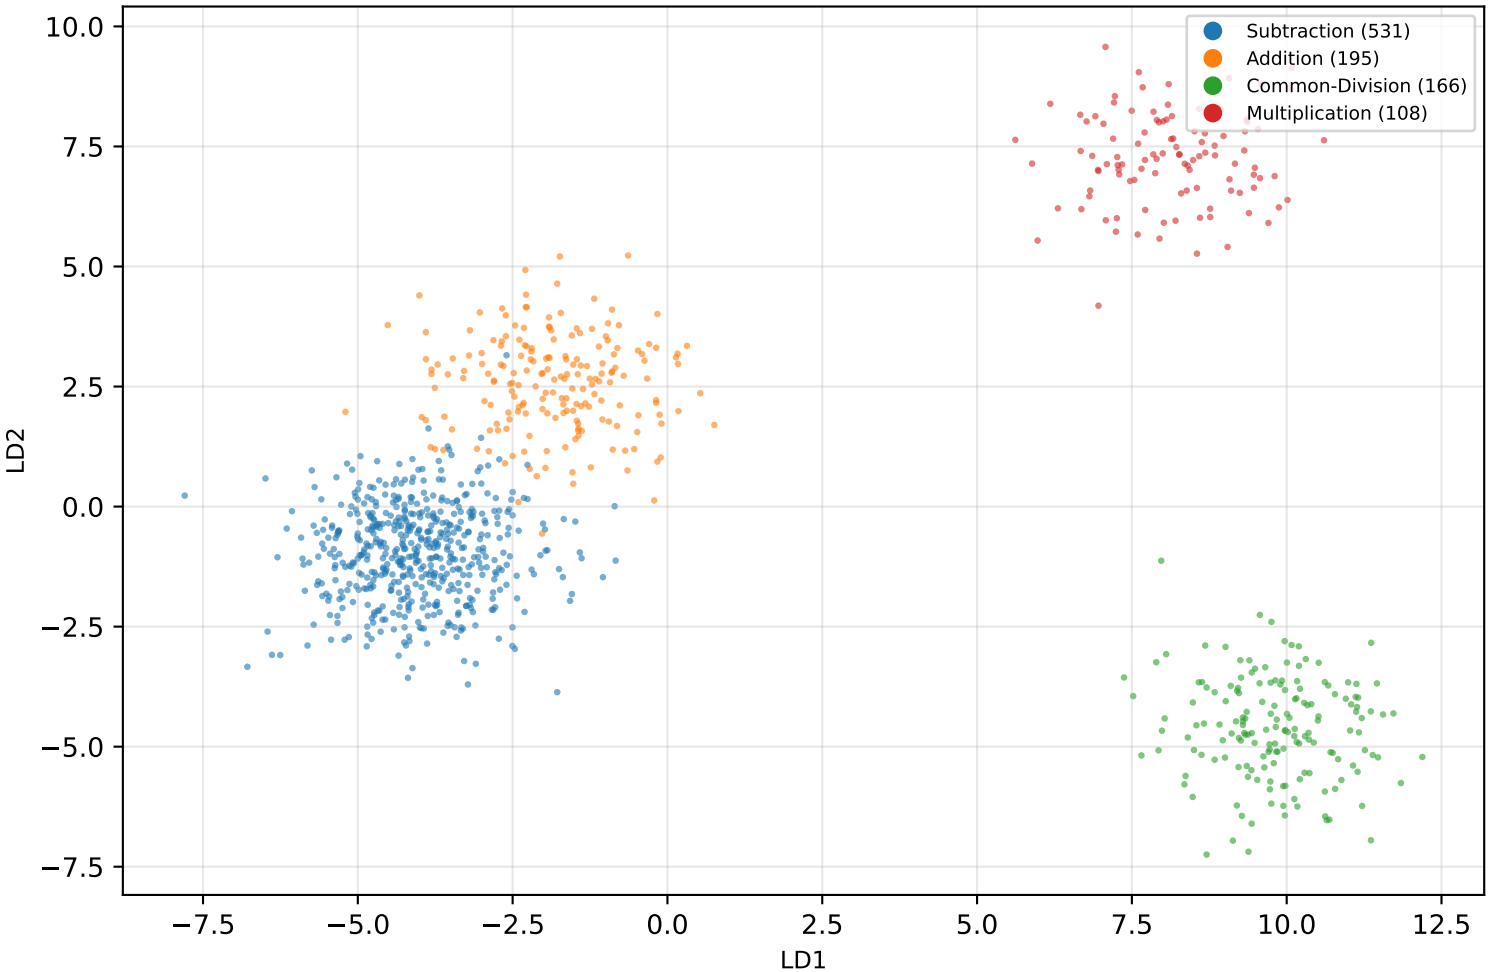

2 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: problem_type (in-sample acc=10

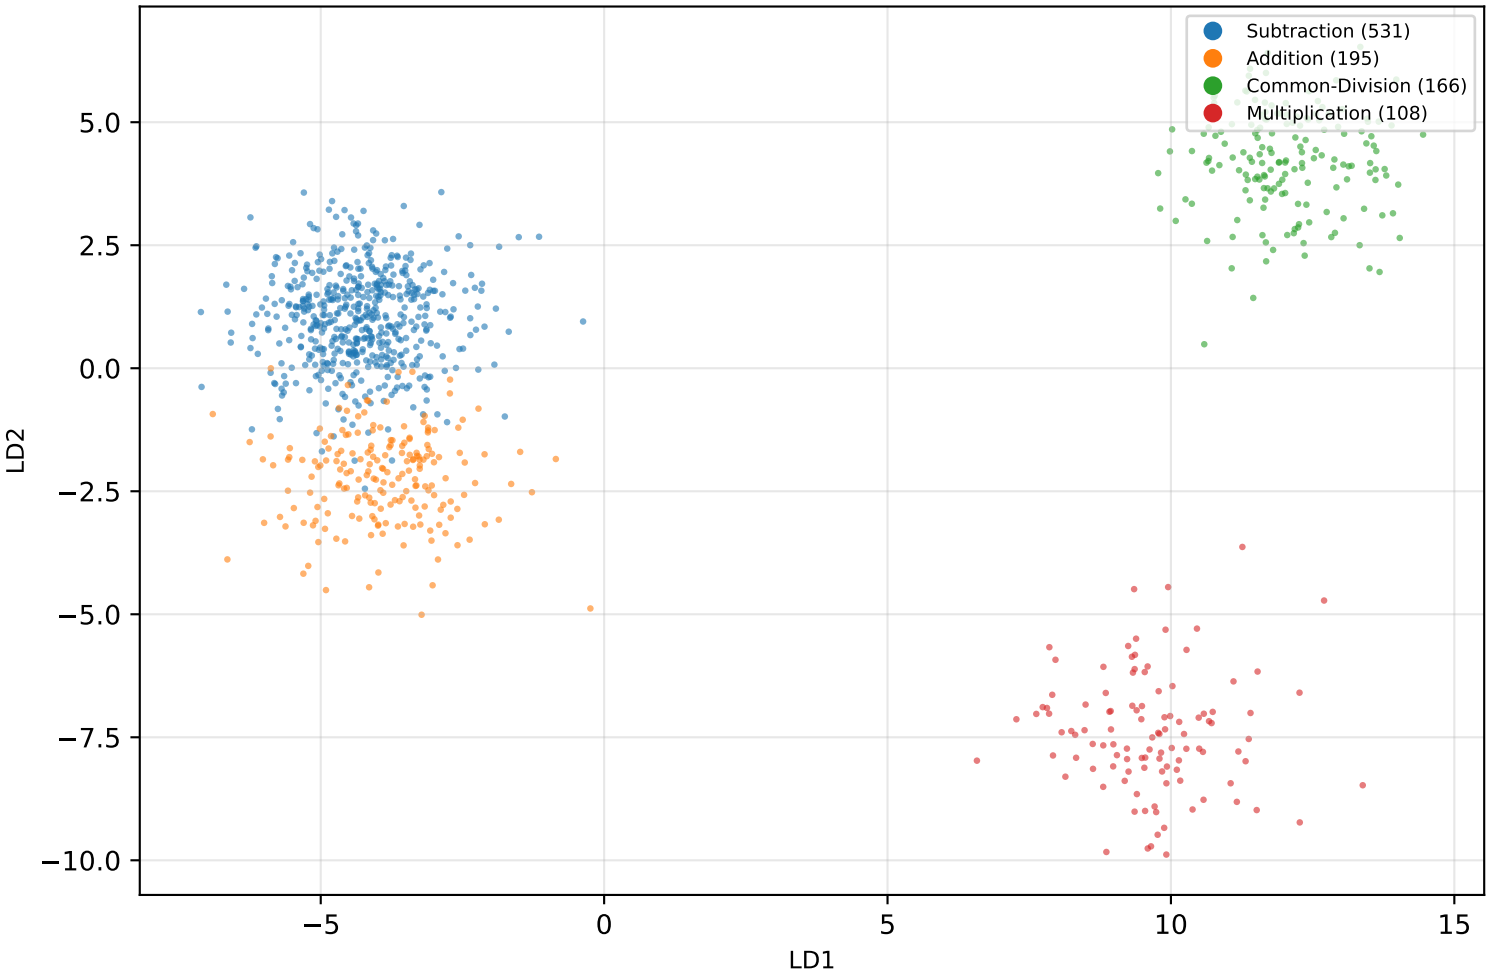

r 3 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: problem_type (in-sample acc=99

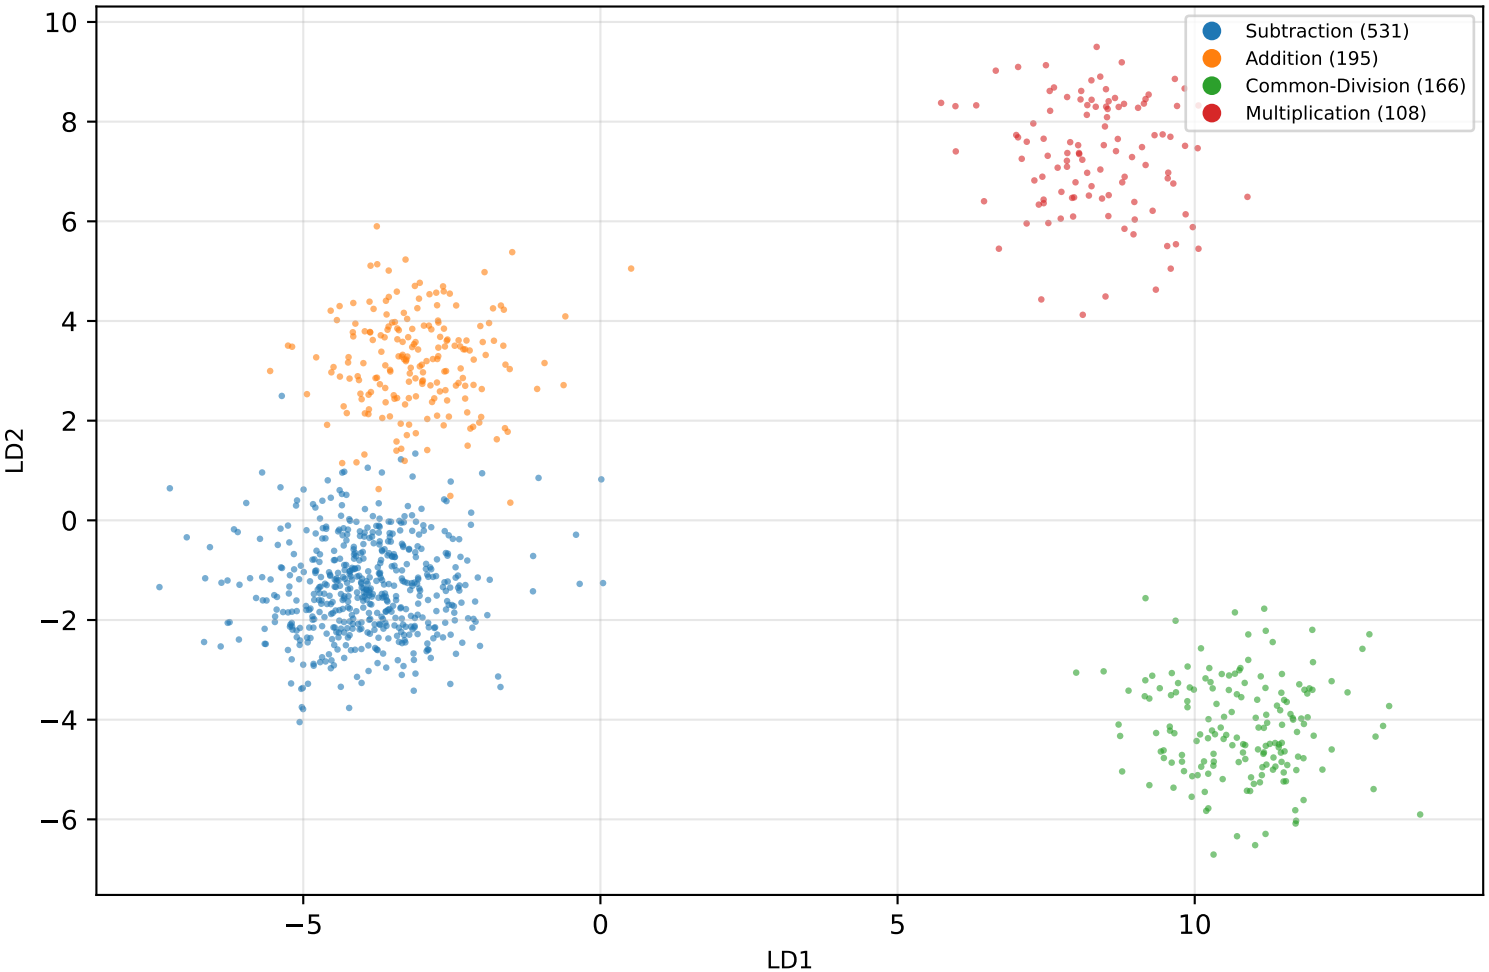

r 4 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: problem_type (in-sample acc=99

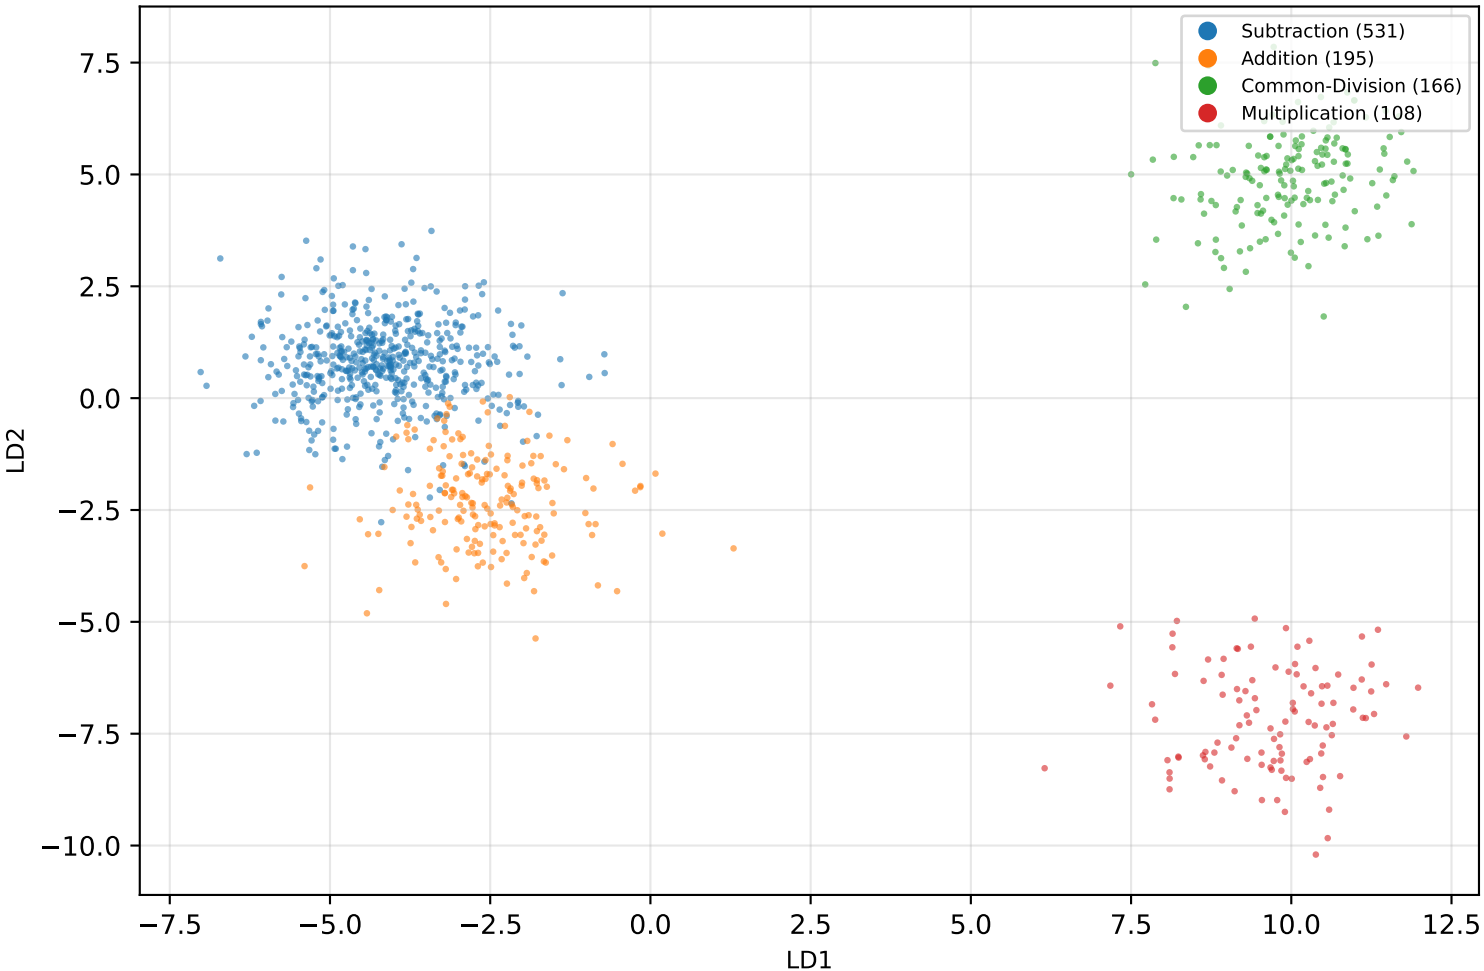

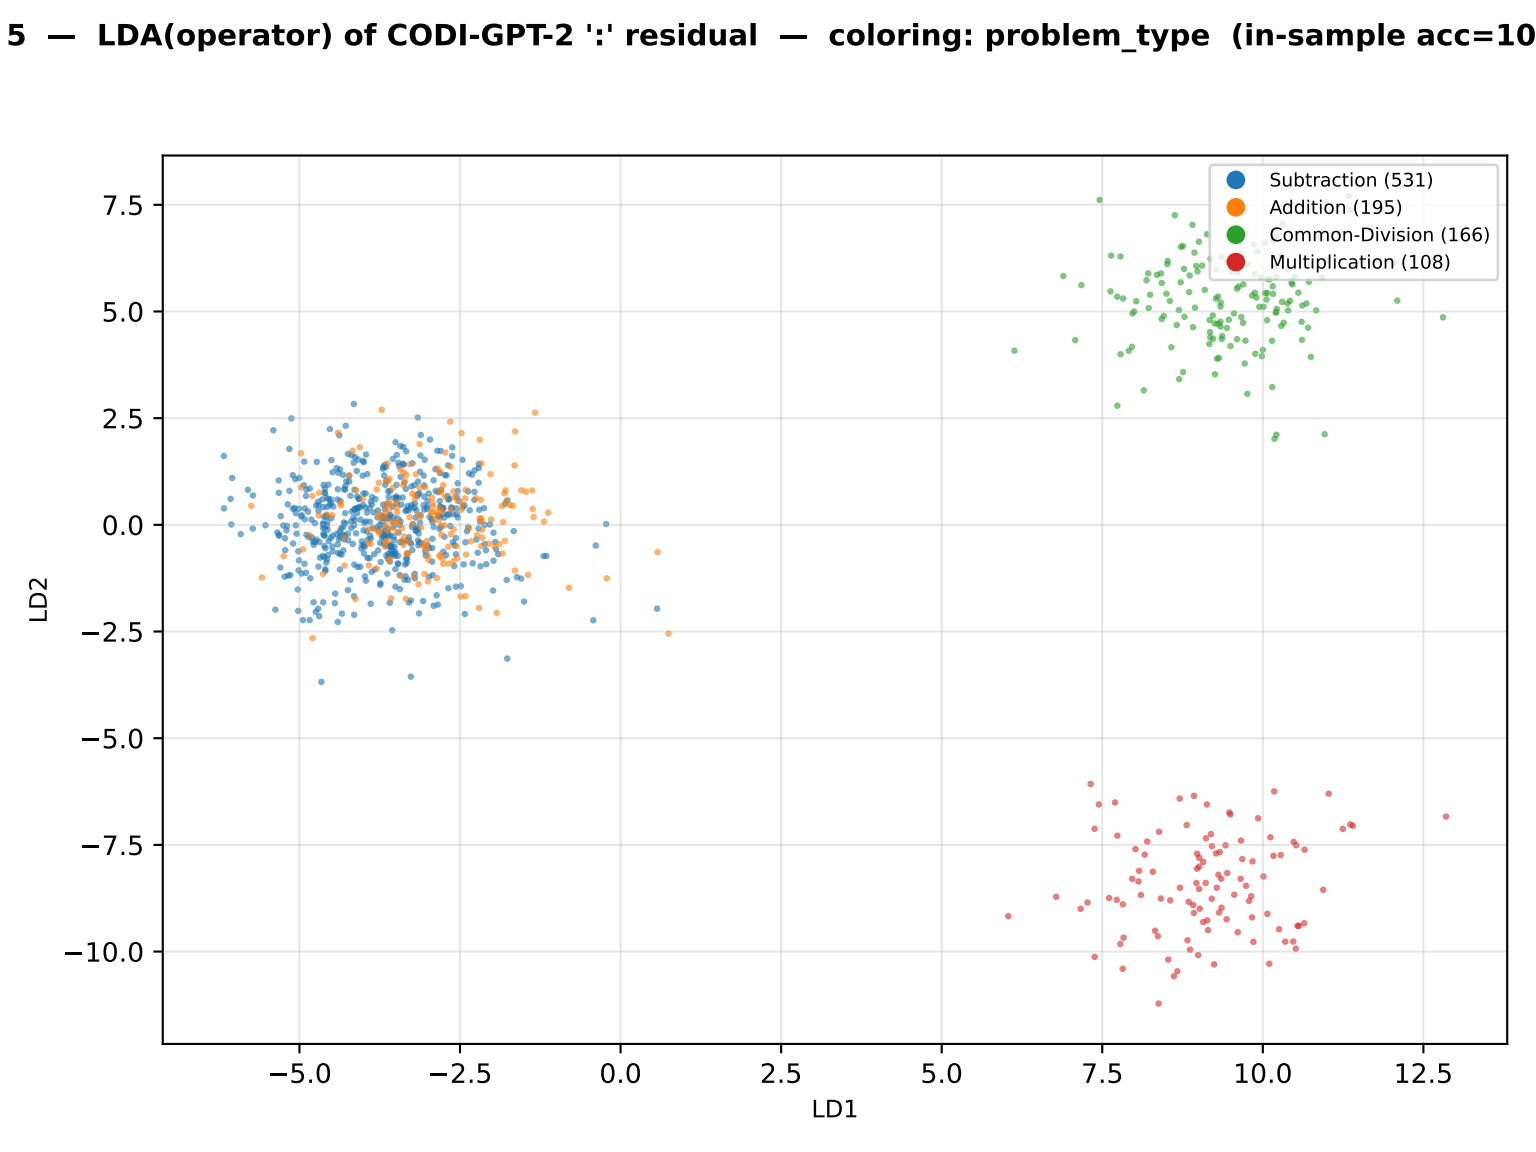
5 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: problem_type (in-sample acc=10
Subtraction (531)
Addition (195)
Common-Division (166)
Multiplication (108)
LD1
LD2
−5.0
−2.5
0.0
2.5
5.0
7.5
10.0
12.5
7.5
5.0
2.5
0.0
−2.5
−5.0
−7.5
−10.0

6 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: problem_type (in-sample acc=10

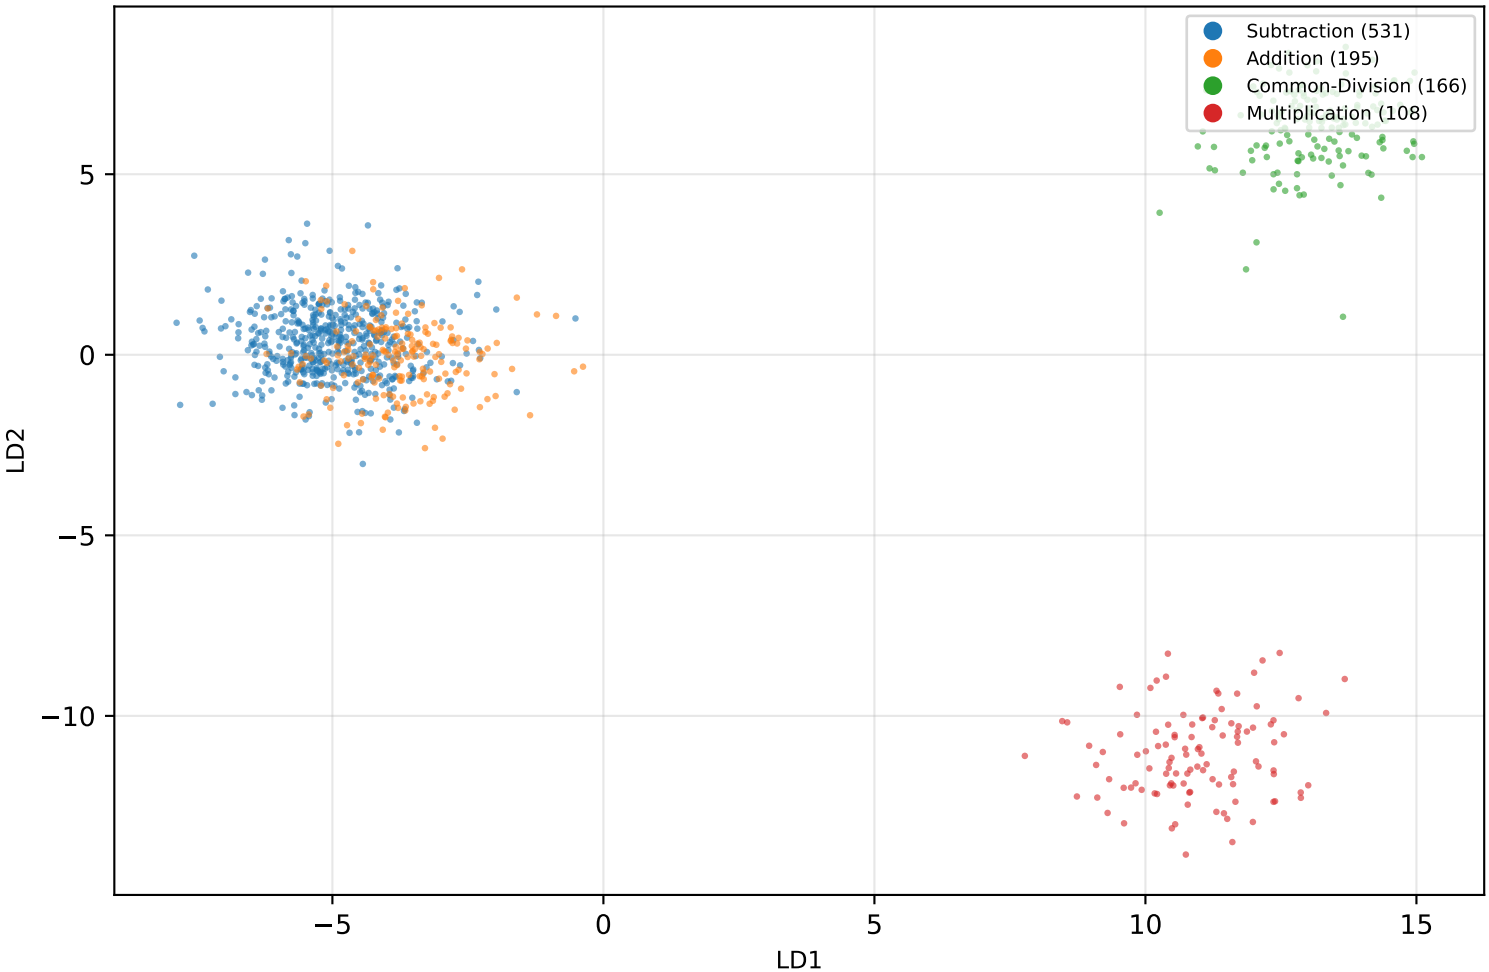

7 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: problem_type (in-sample acc=10

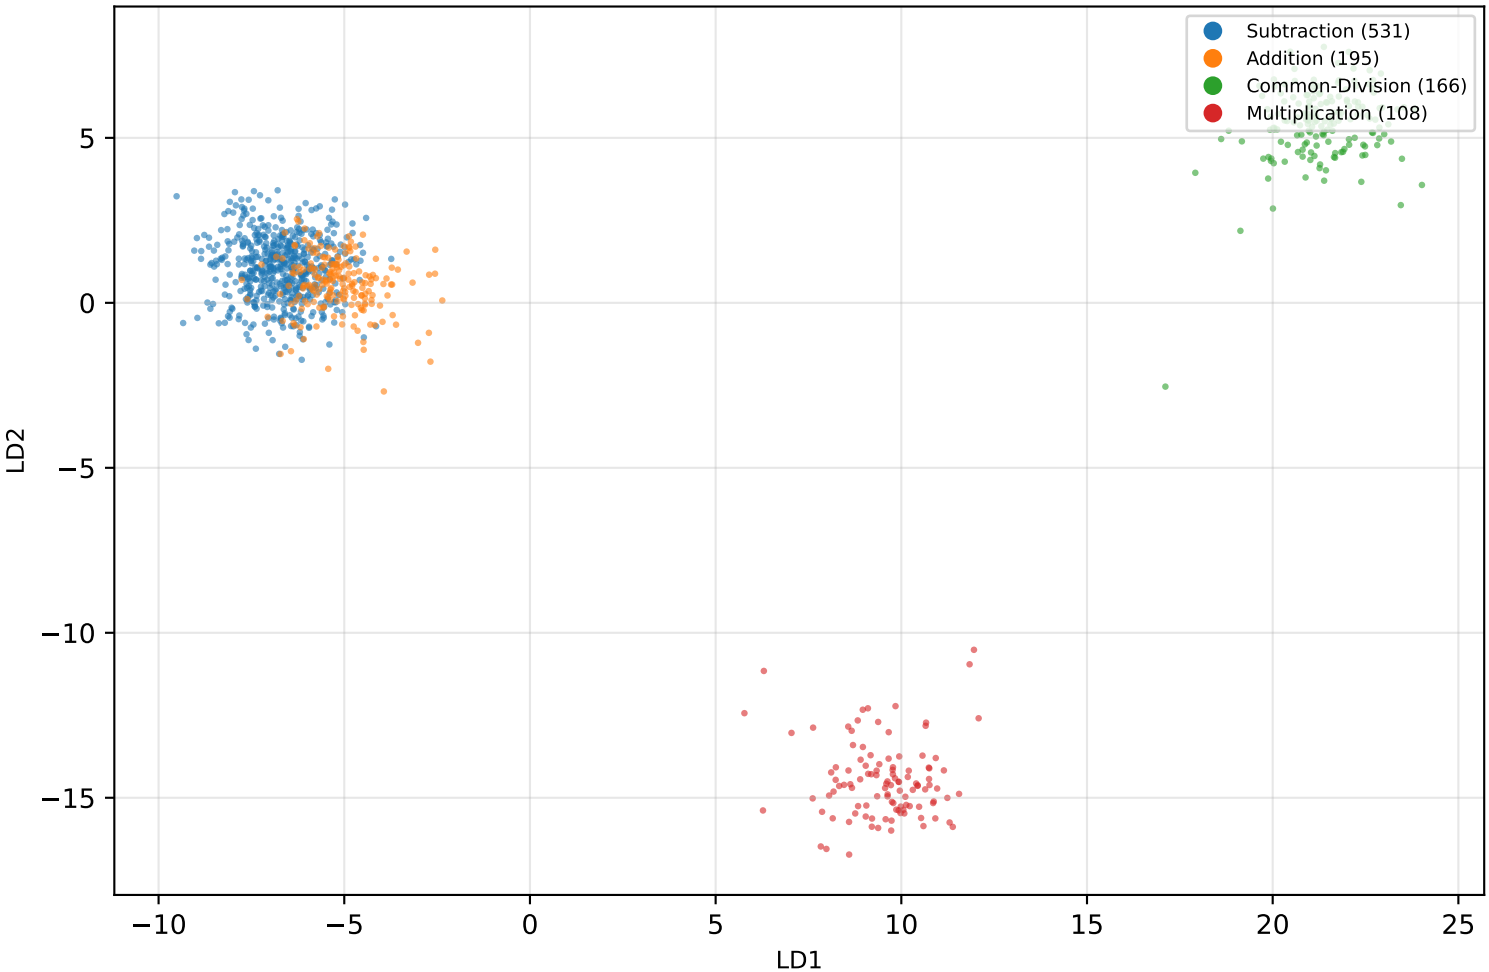

8 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: problem_type (in-sample acc=10

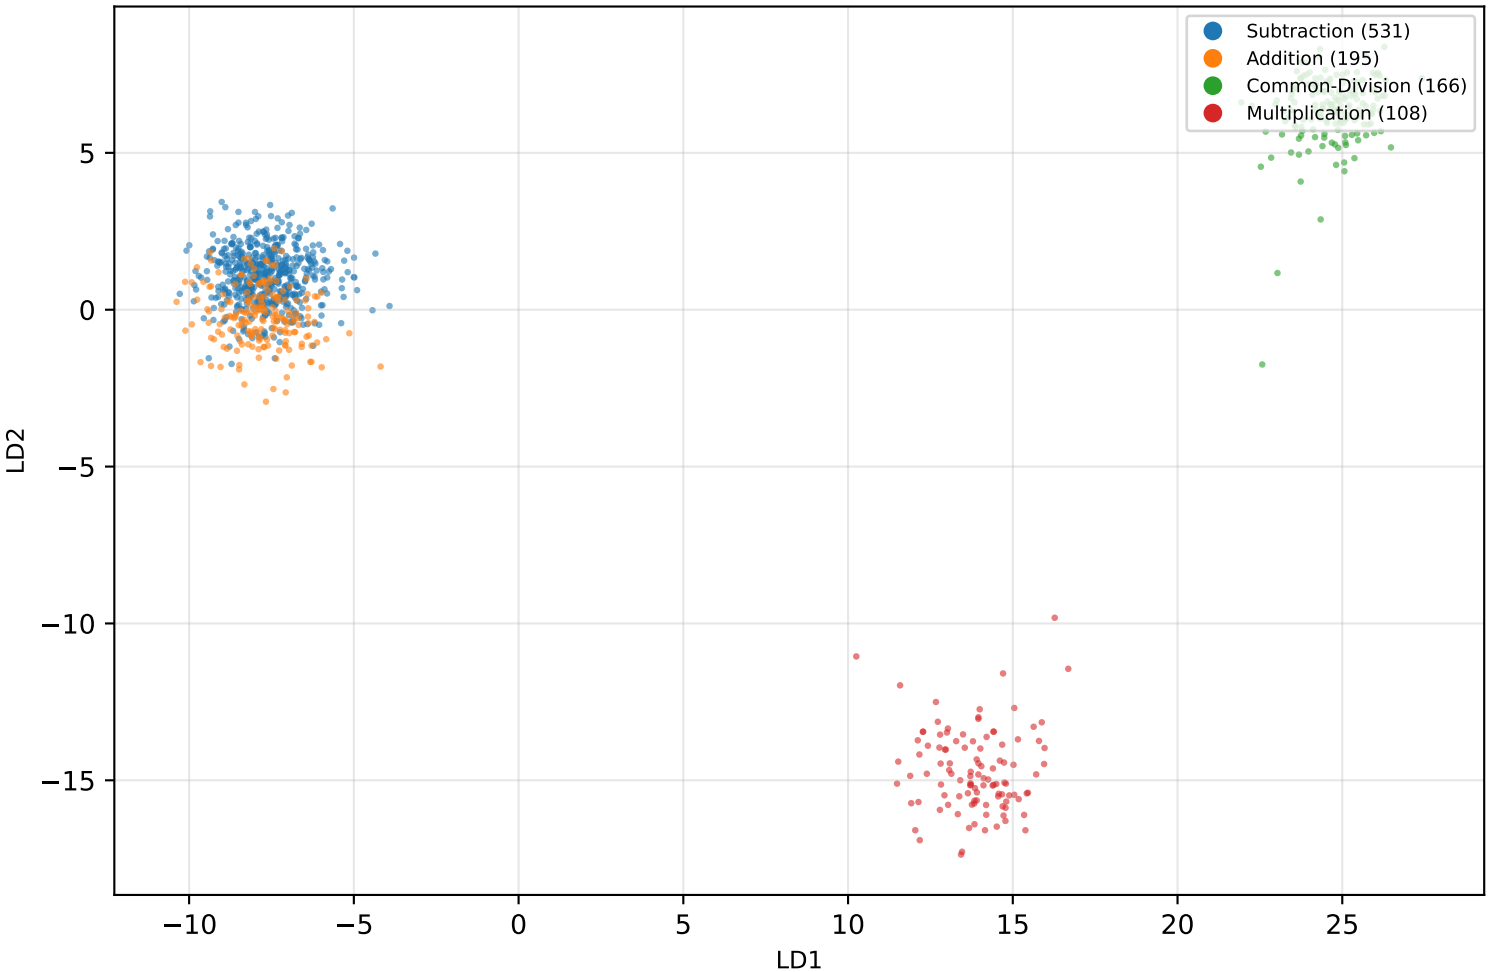

9 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: problem_type (in-sample acc=10

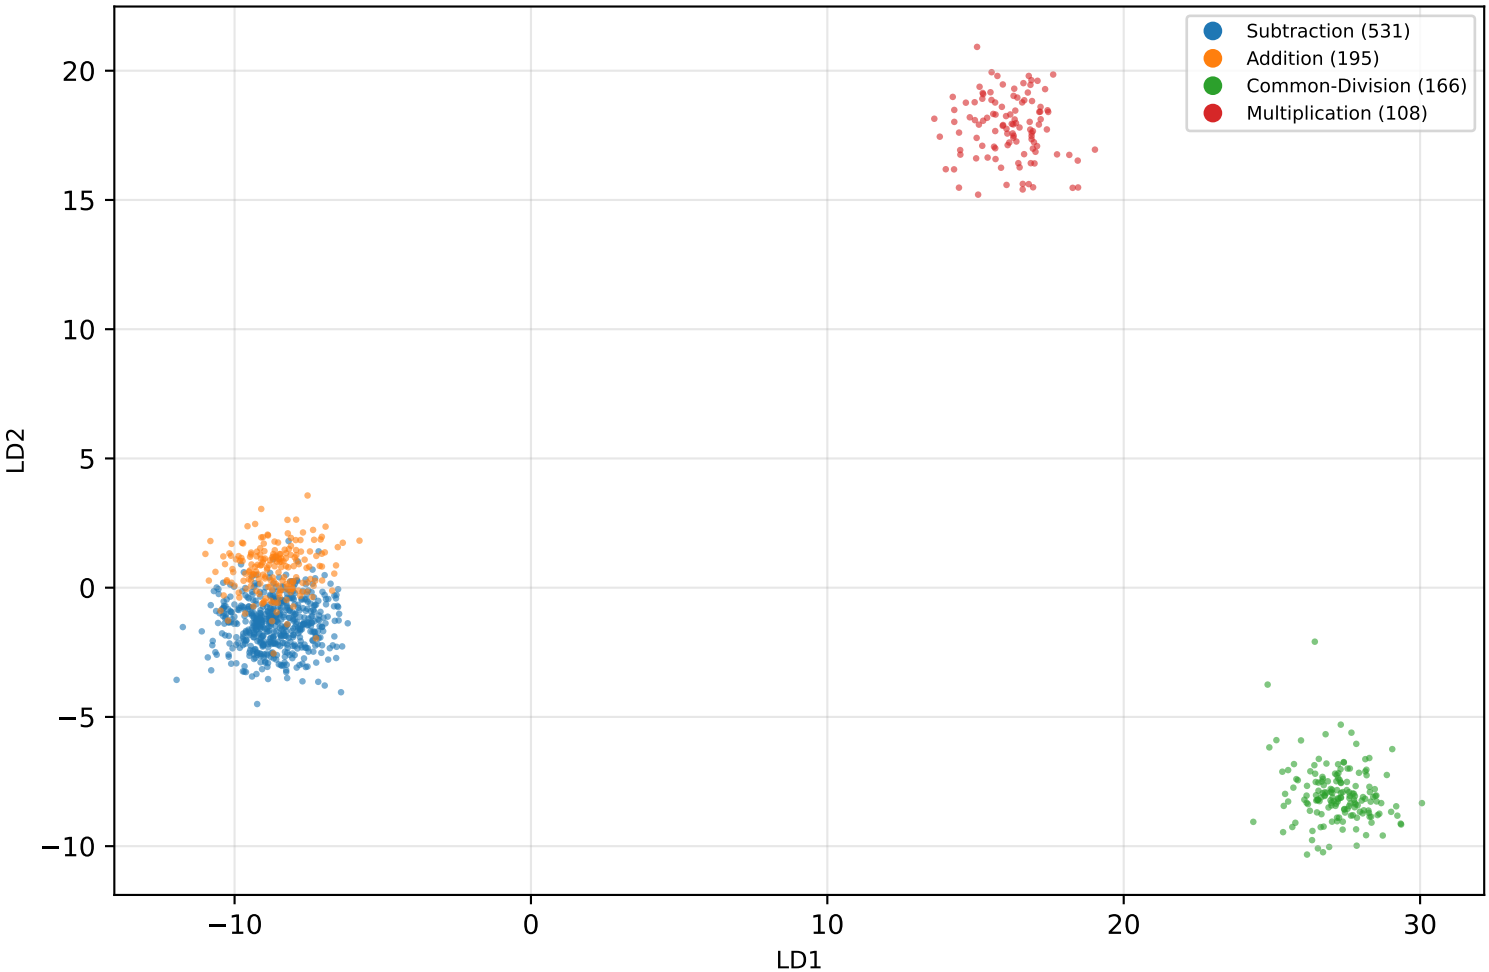

10 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: problem_type (in-sample acc=10

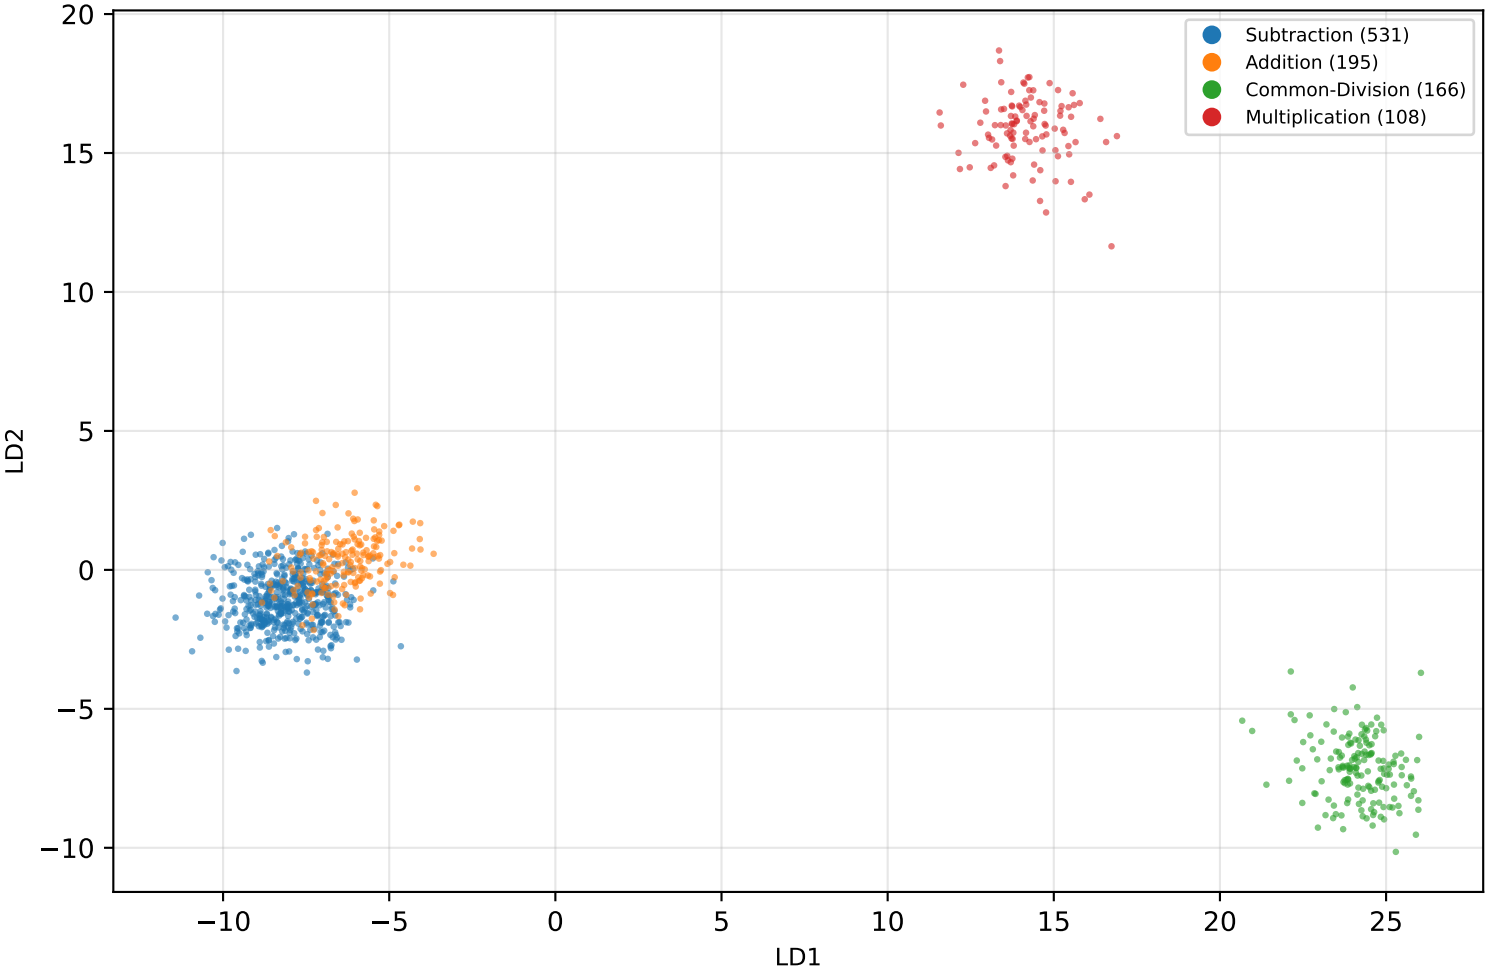

11 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: problem_type (in-sample acc=10

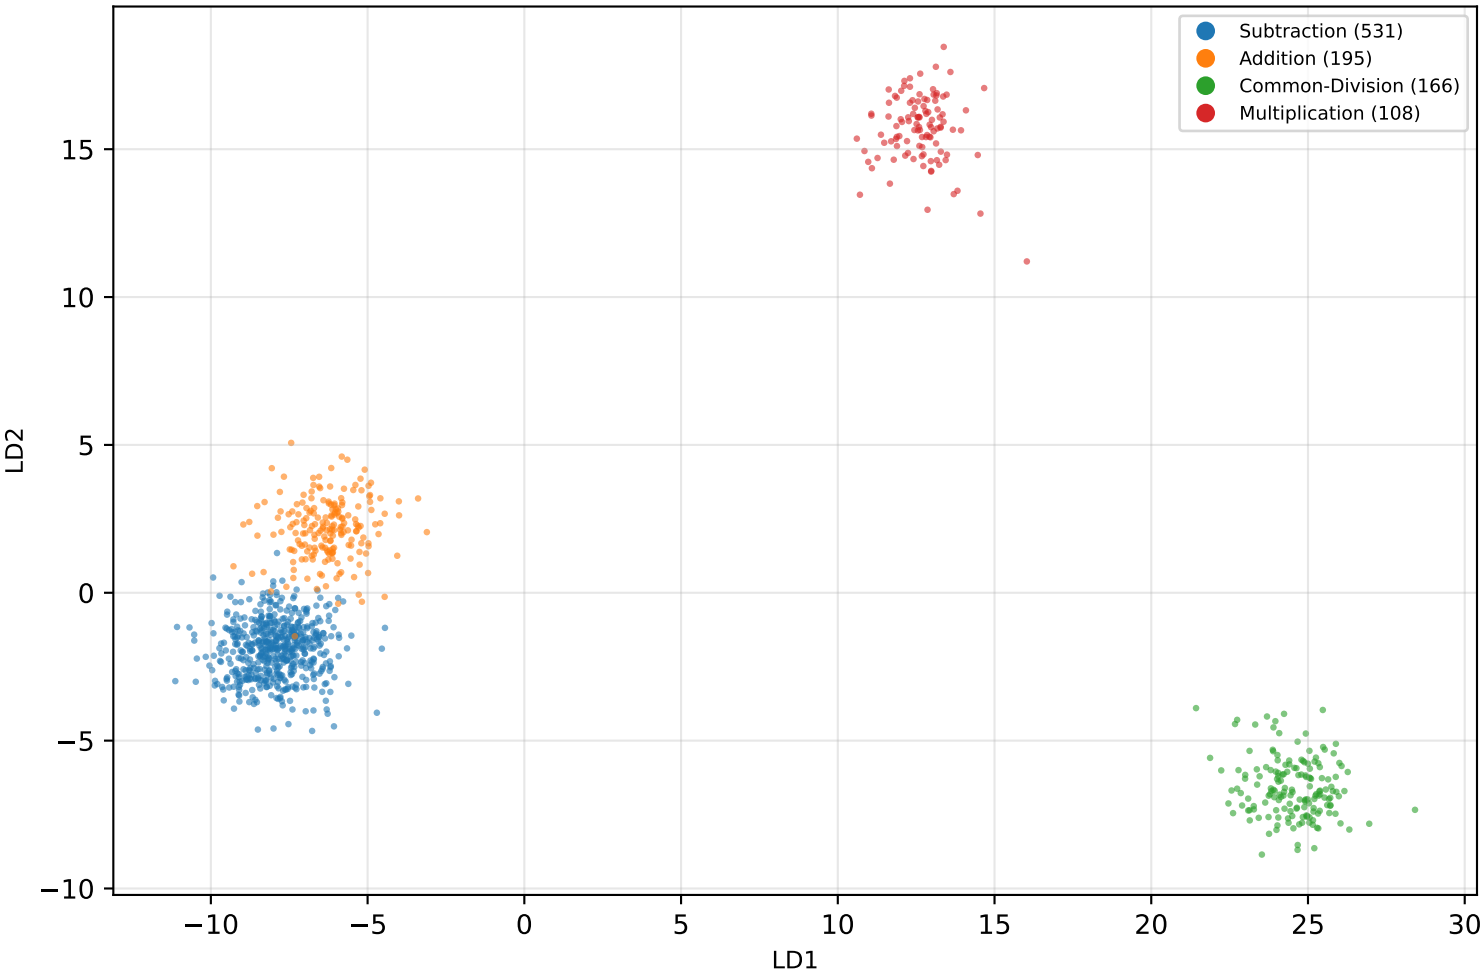

12 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: problem_type (in-sample acc=10

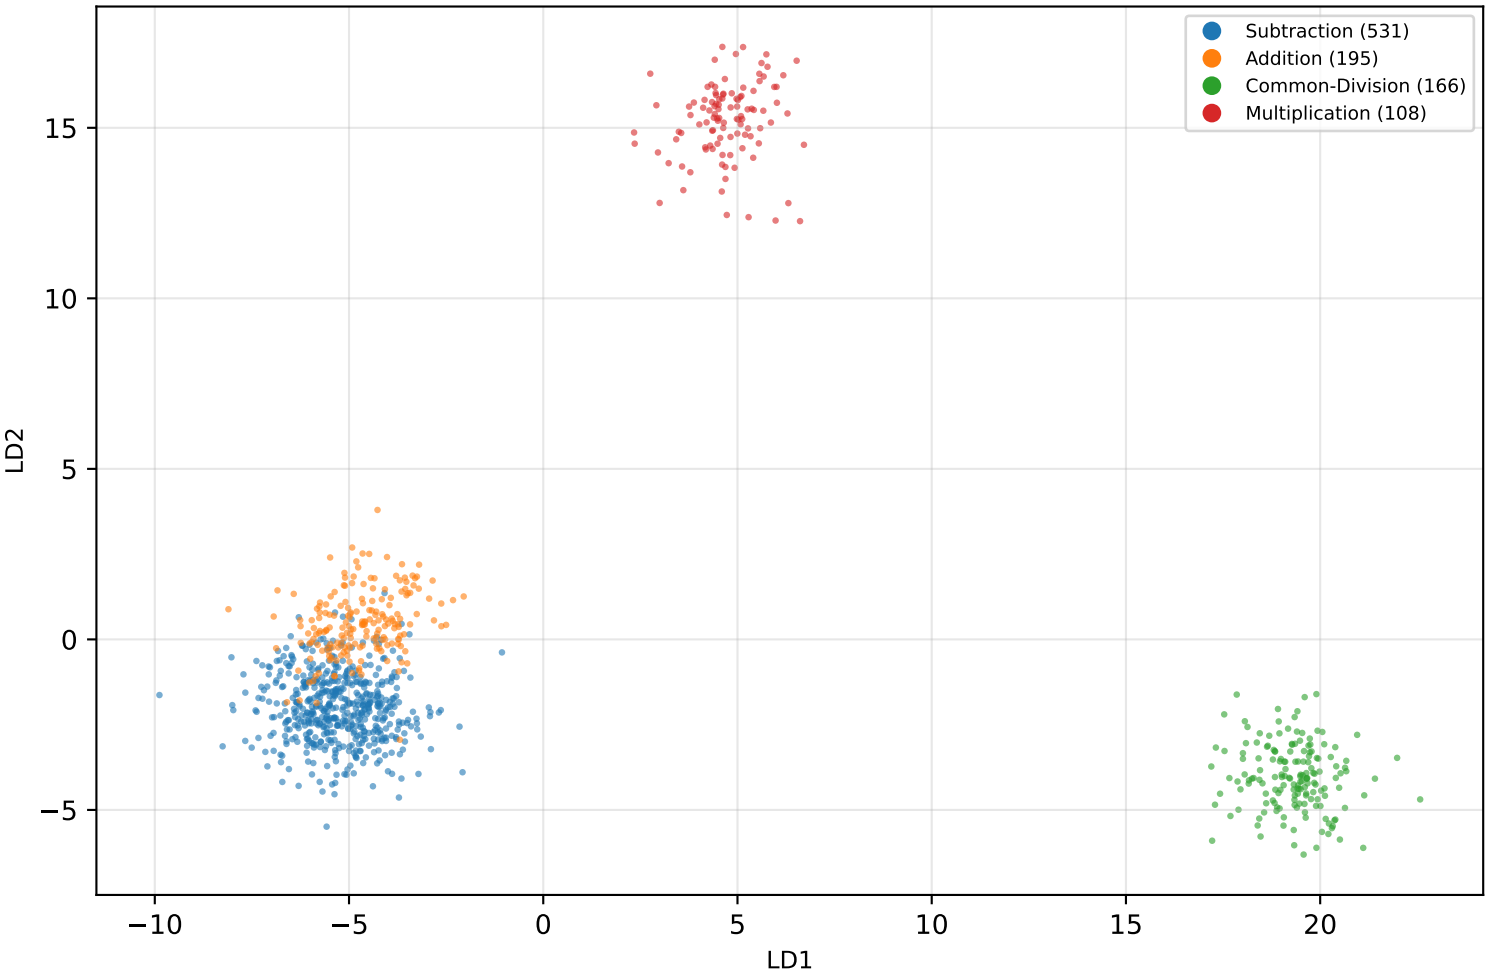

er 0 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: magnitude (in-sample acc=53.

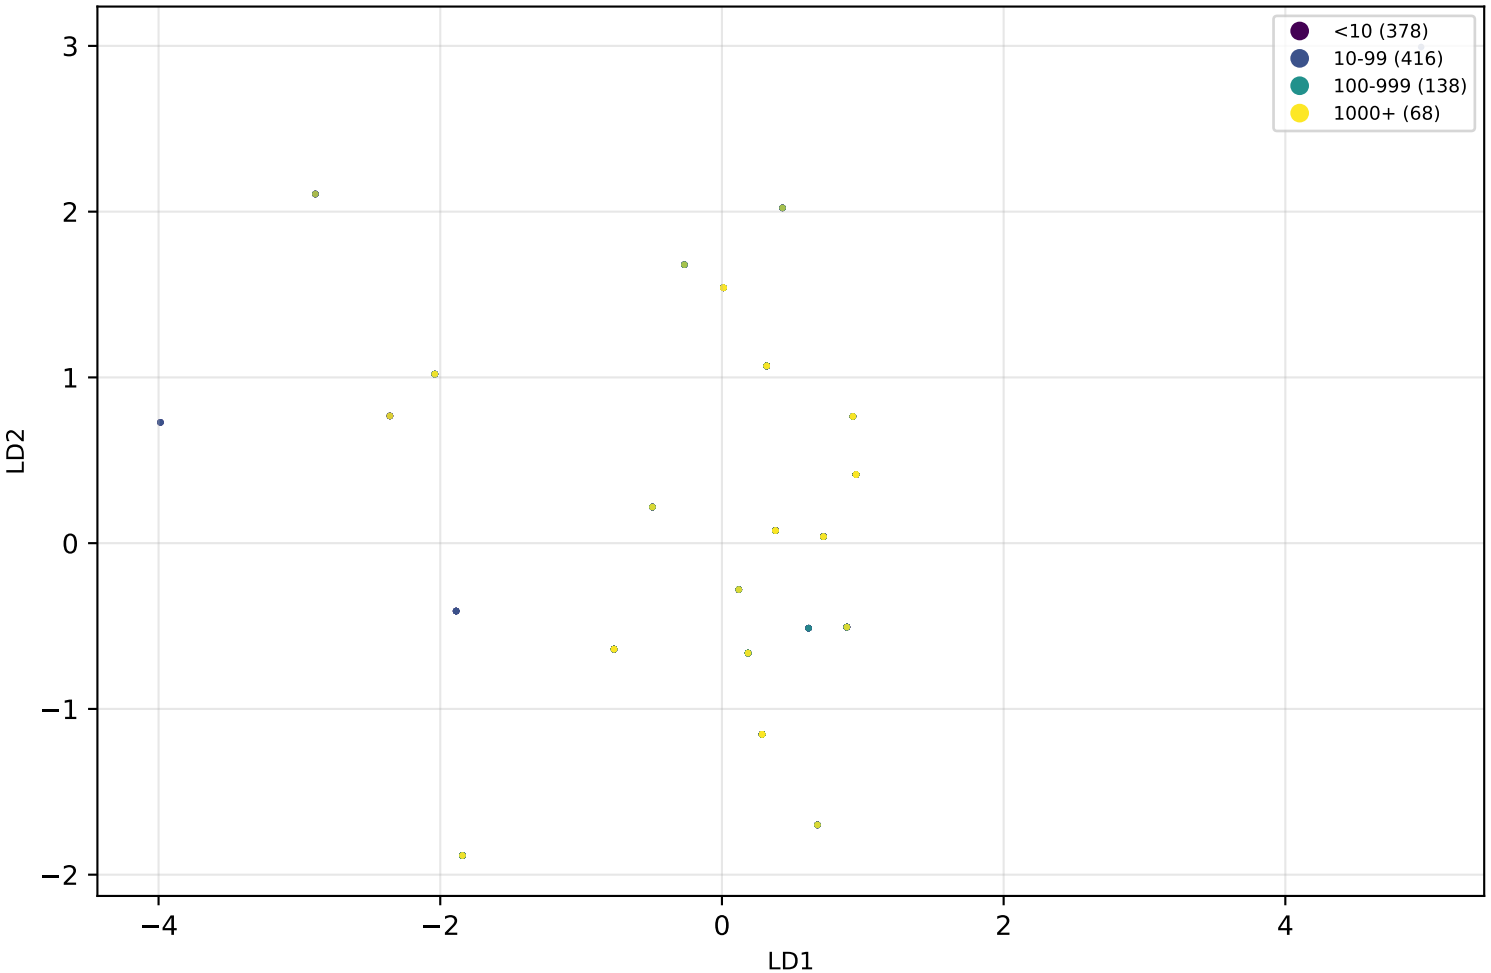

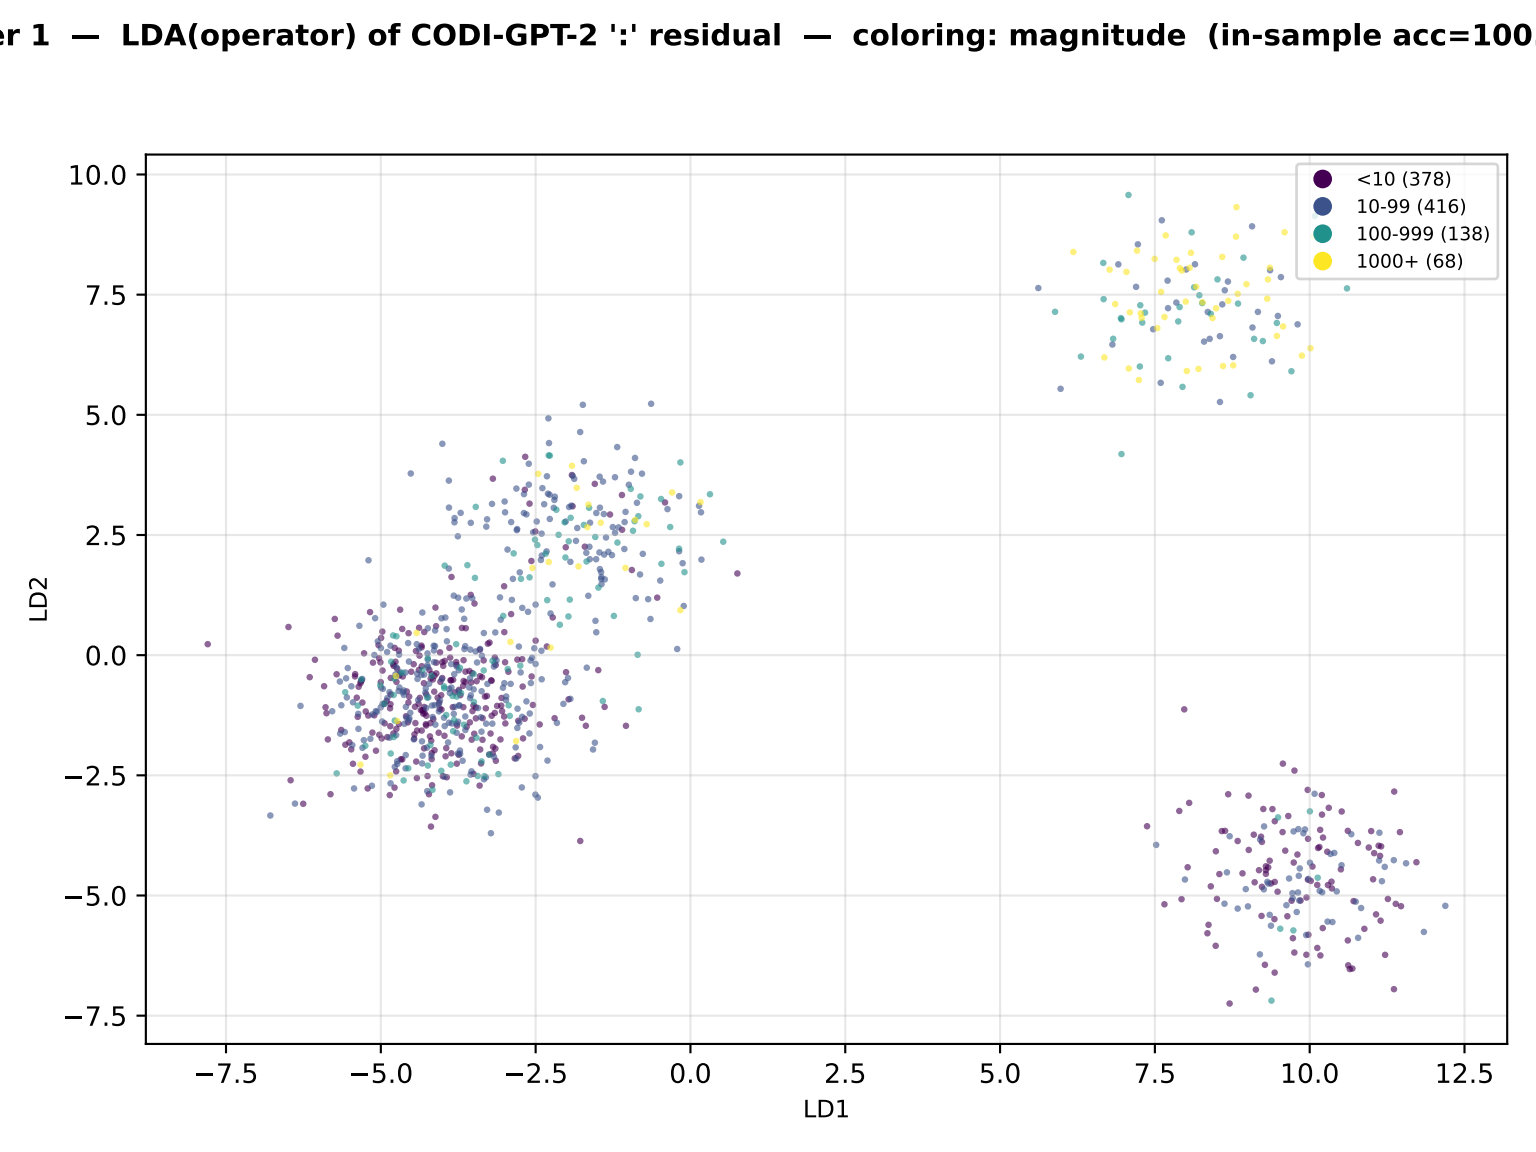
er 1 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: magnitude (in-sample acc=100
<10 (378)
10-99 (416)
100-999 (138)
1000+ (68)
LD1
LD2
10.0
7.5
5.0
2.5
0.0
−2.5
−5.0
−7.5
−7.5
−5.0
−2.5
0.0
2.5
5.0
7.5
10.0
12.5

er 2 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: magnitude (in-sample acc=100

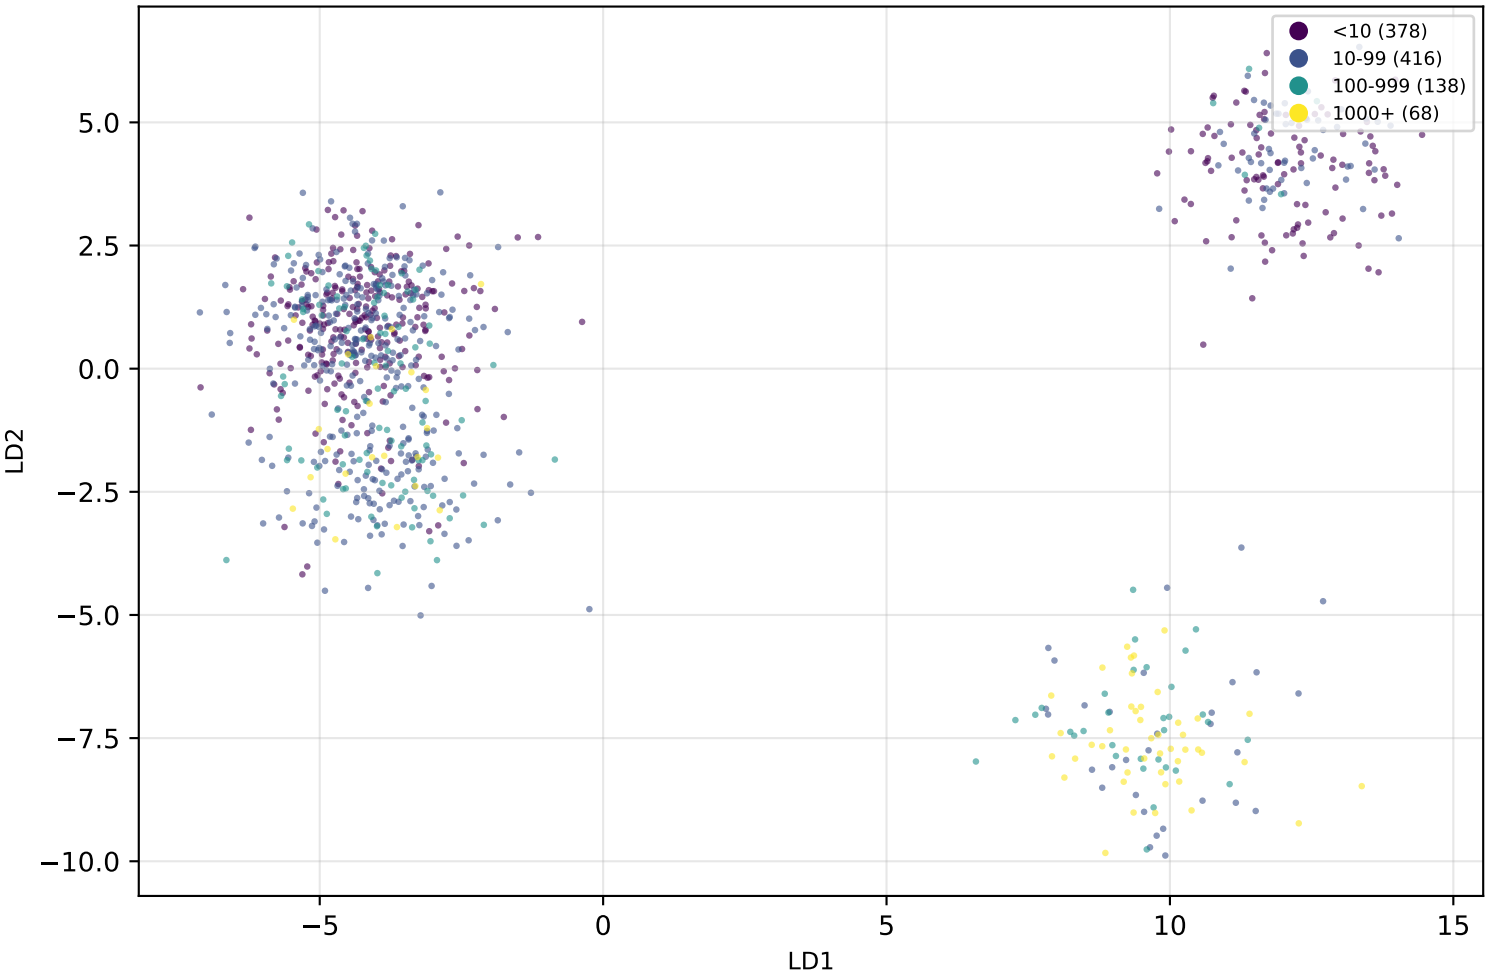

er 3 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: magnitude (in-sample acc=99.

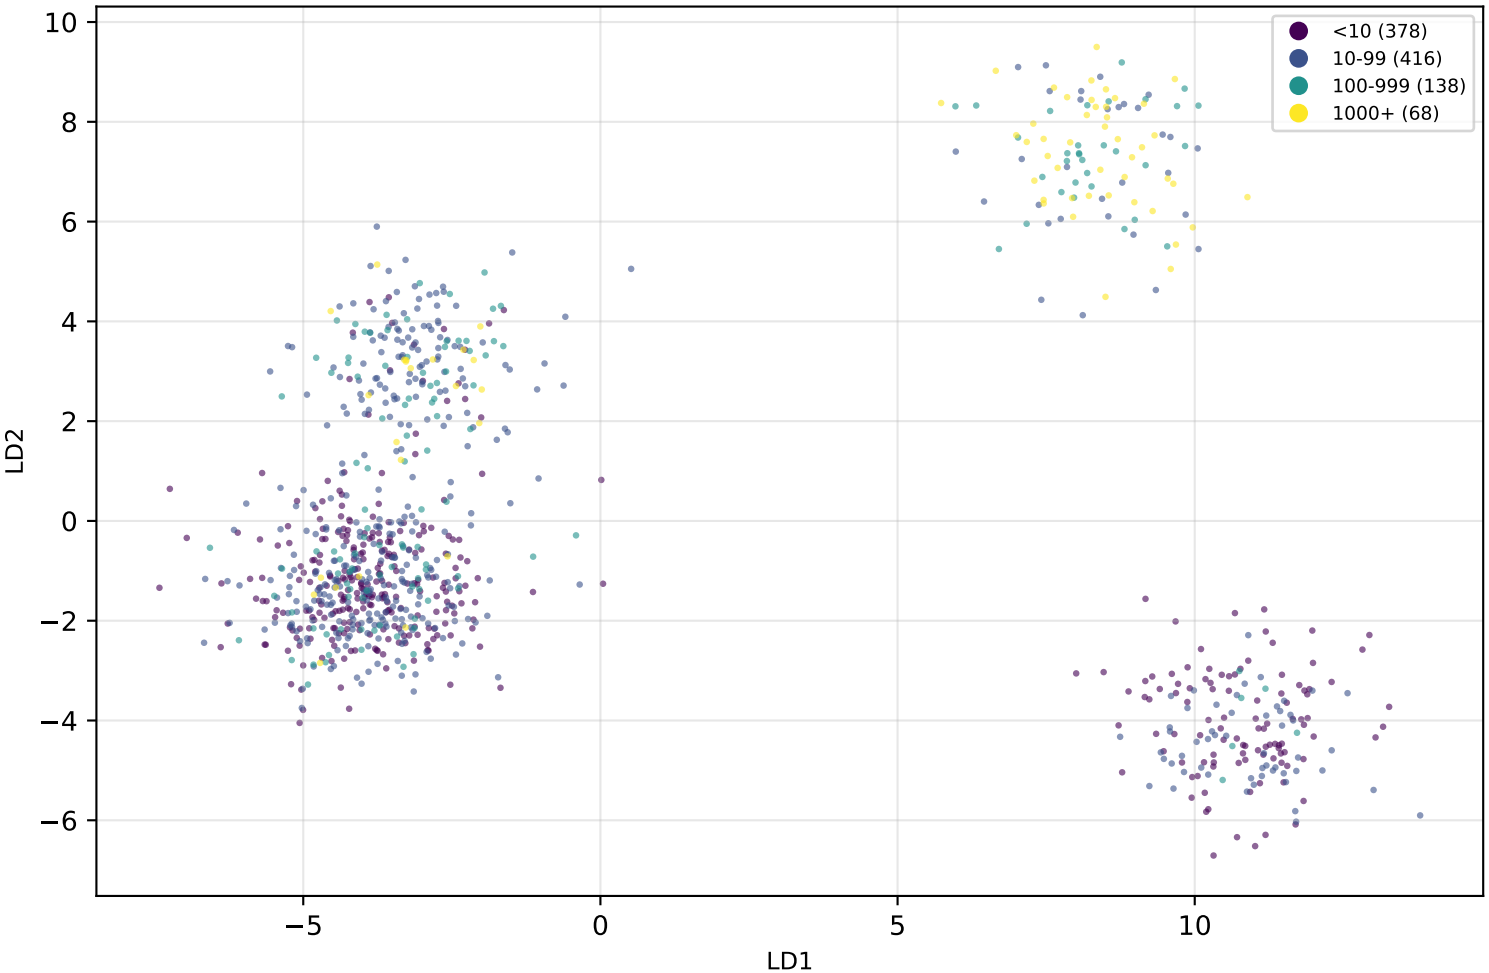

er 4 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: magnitude (in-sample acc=99.

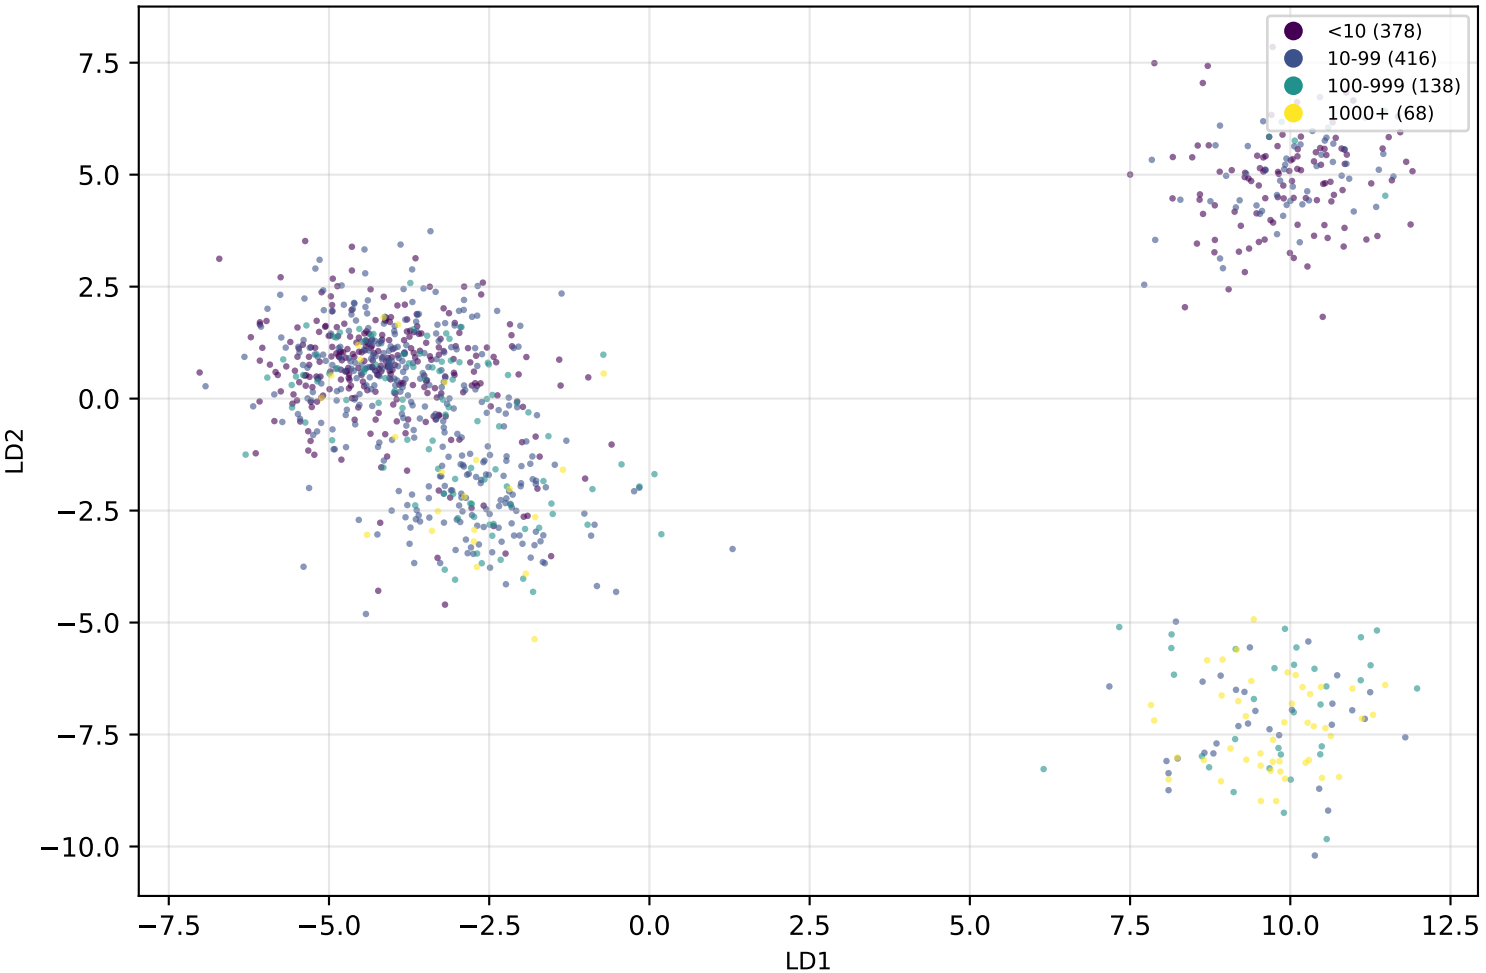

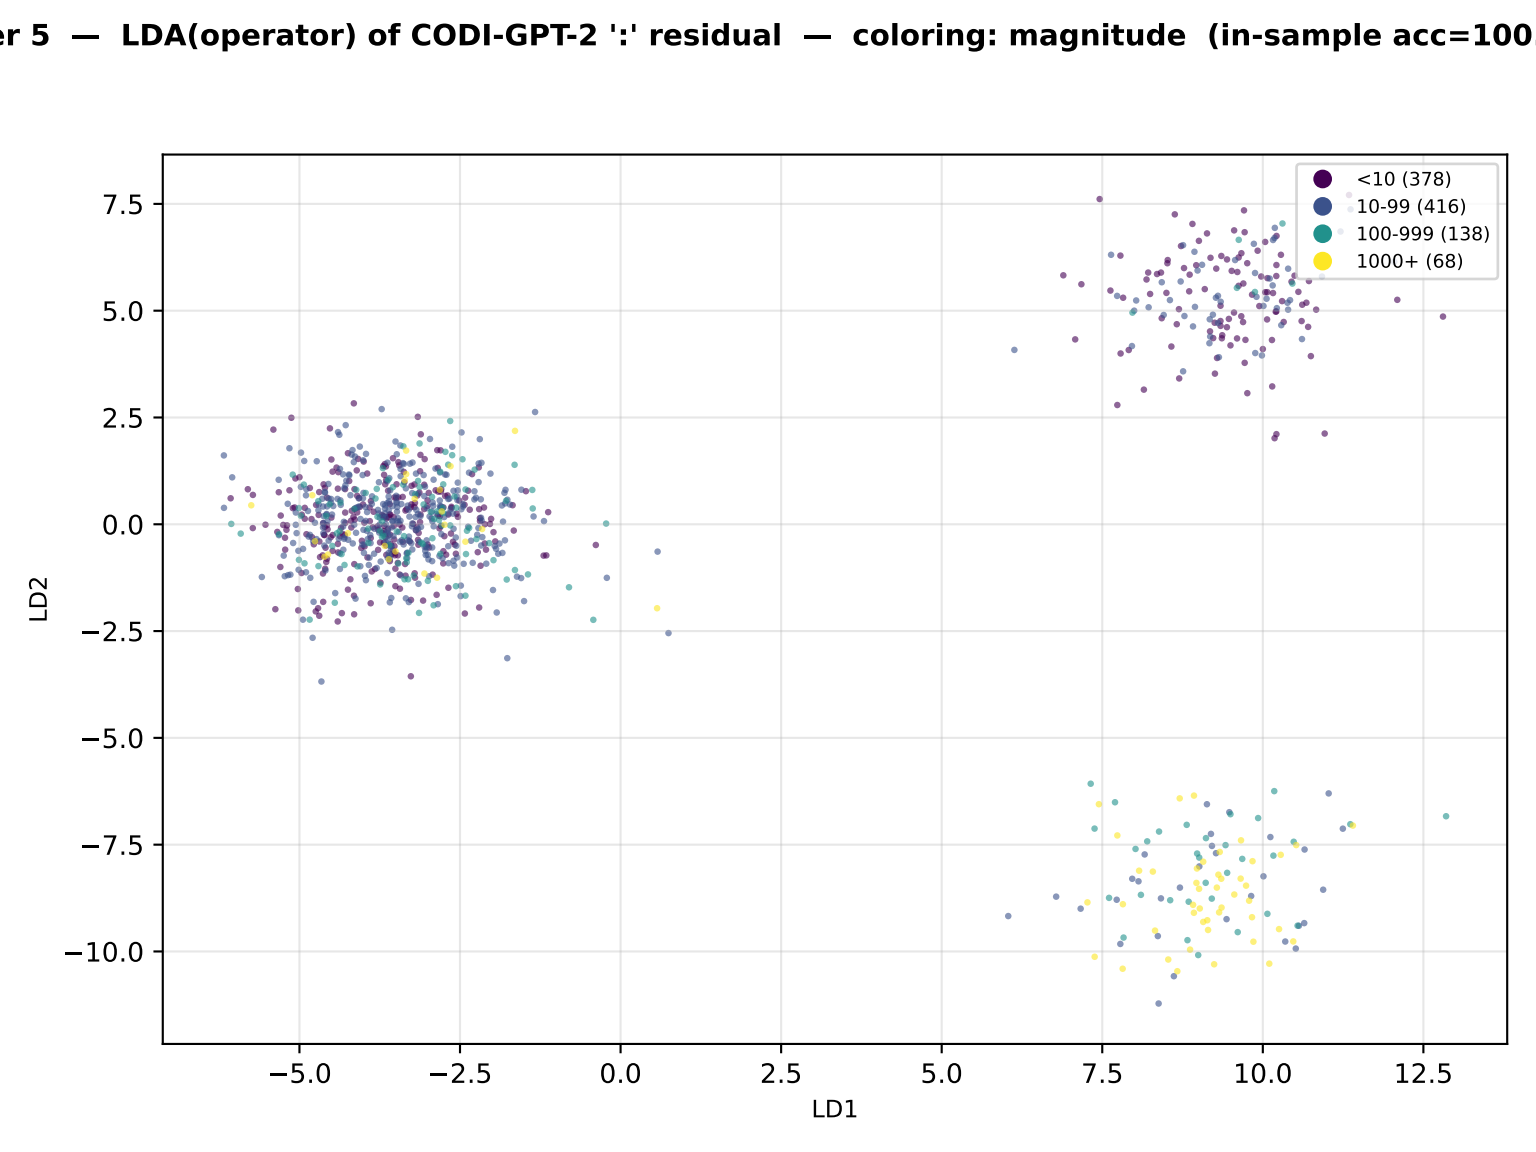
er 5 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: magnitude (in-sample acc=100
<10 (378)
10-99 (416)
100-999 (138)
1000+ (68)
LD1
LD2
−5.0
−2.5
0.0
2.5
5.0
7.5
10.0
12.5
−10.0
−7.5

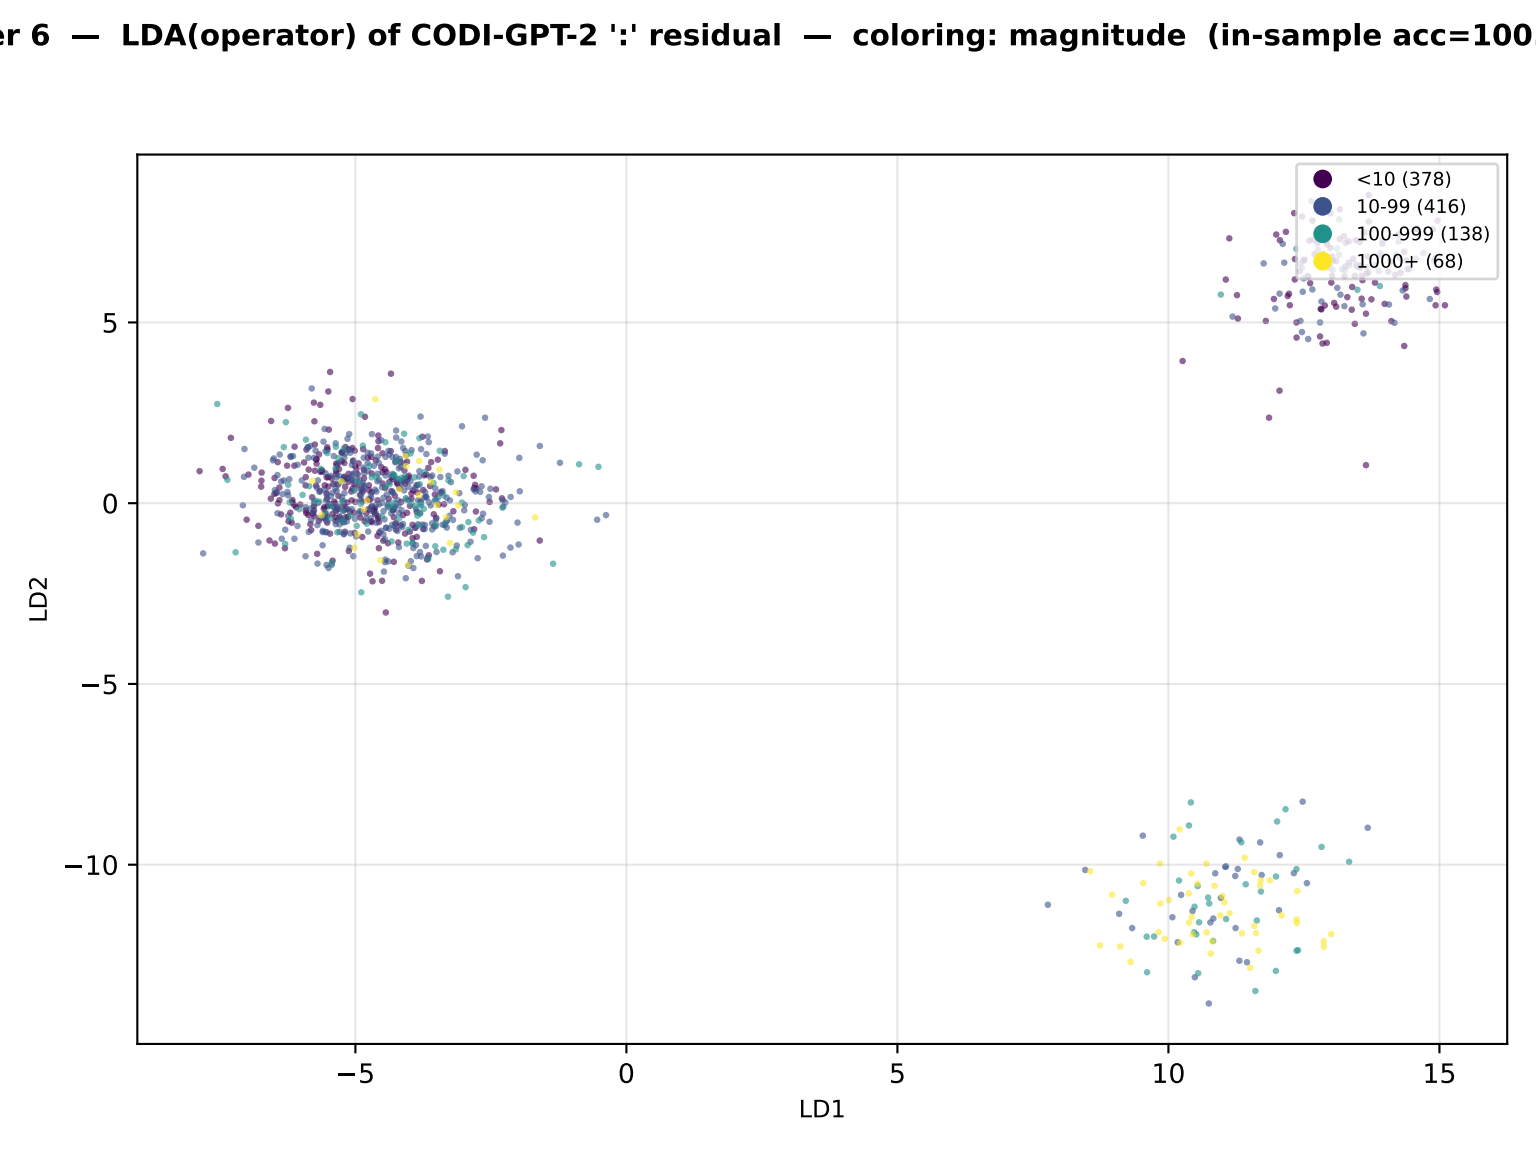
er 6 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: magnitude (in-sample acc=100
<10 (378)
10-99 (416)
100-999 (138)
1000+ (68)
LD2
LD1
5
0
−5
−10
−5
0
5
10
15

er 7 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: magnitude (in-sample acc=100

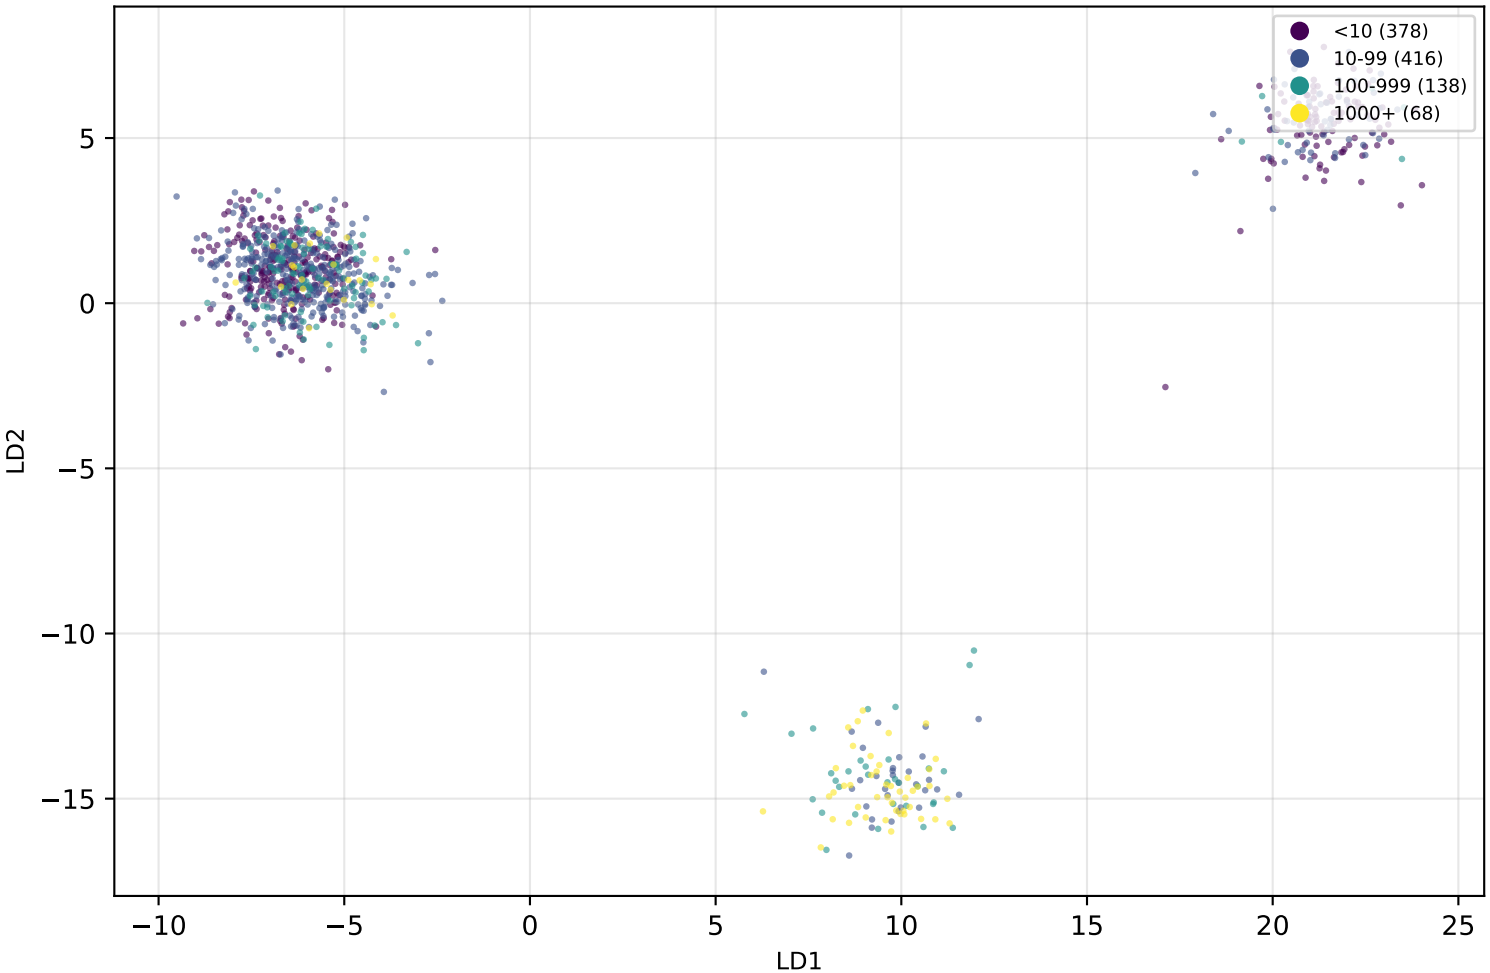

er 8 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: magnitude (in-sample acc=100

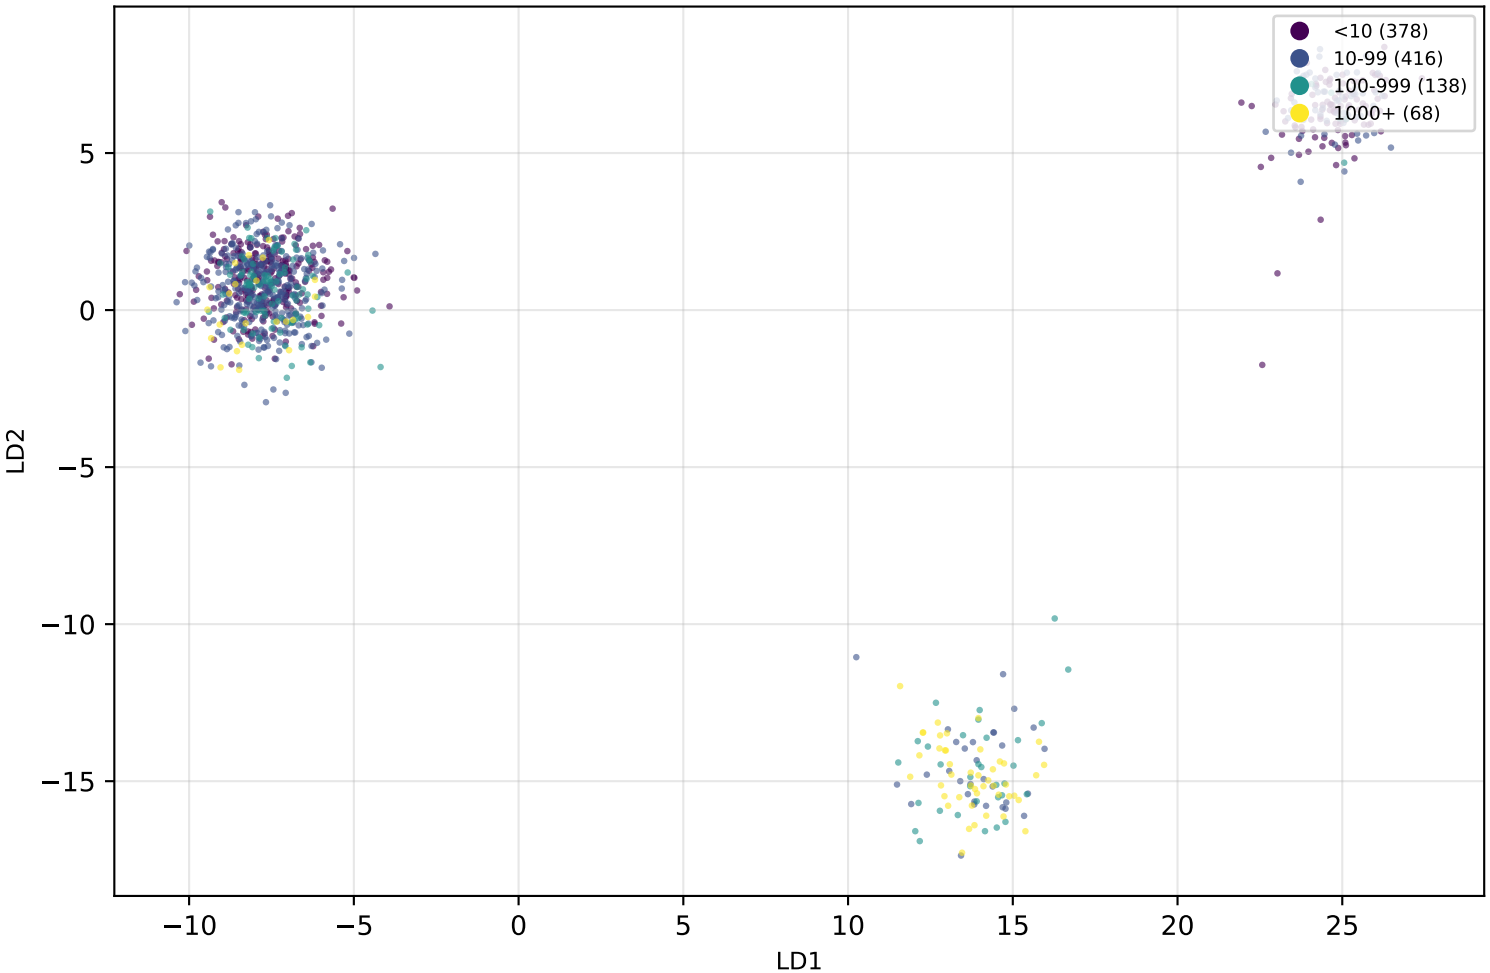

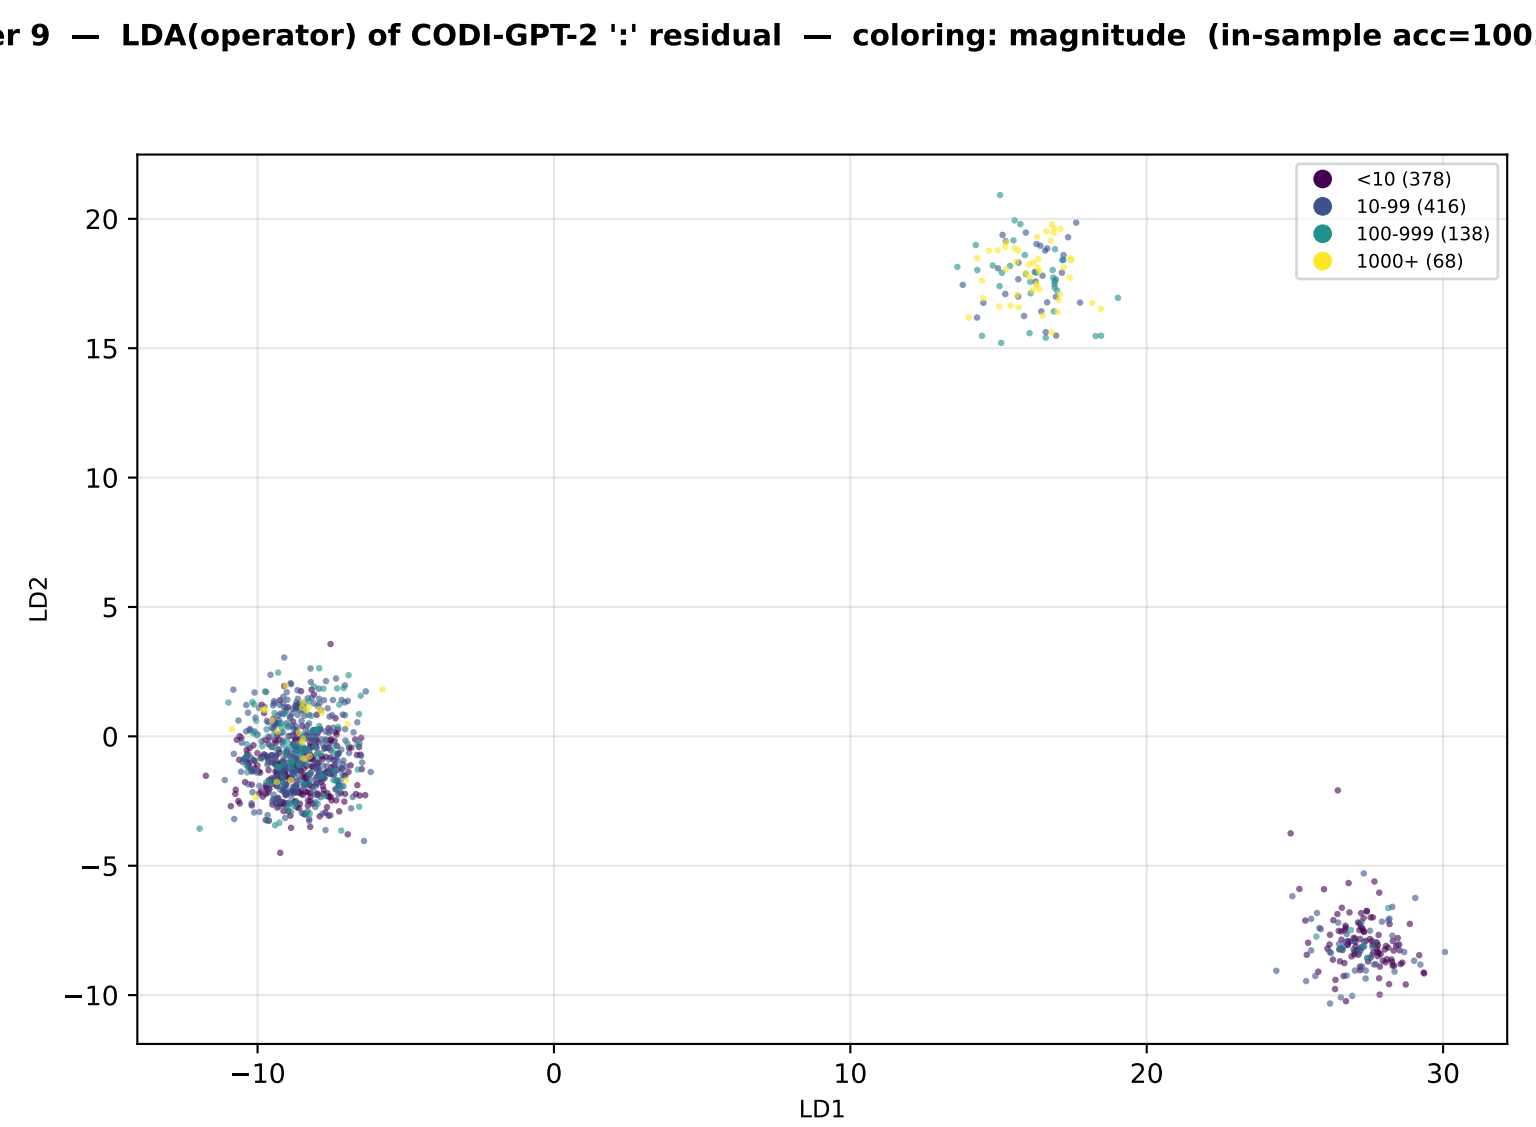
er 9 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: magnitude (in-sample acc=100
<10 (378)
10-99 (416)
100-999 (138)
1000+ (68)
LD1
LD2
−10
0
10
20
30
−10
−5
0
5
10
15
20

r 10 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: magnitude (in-sample acc=100

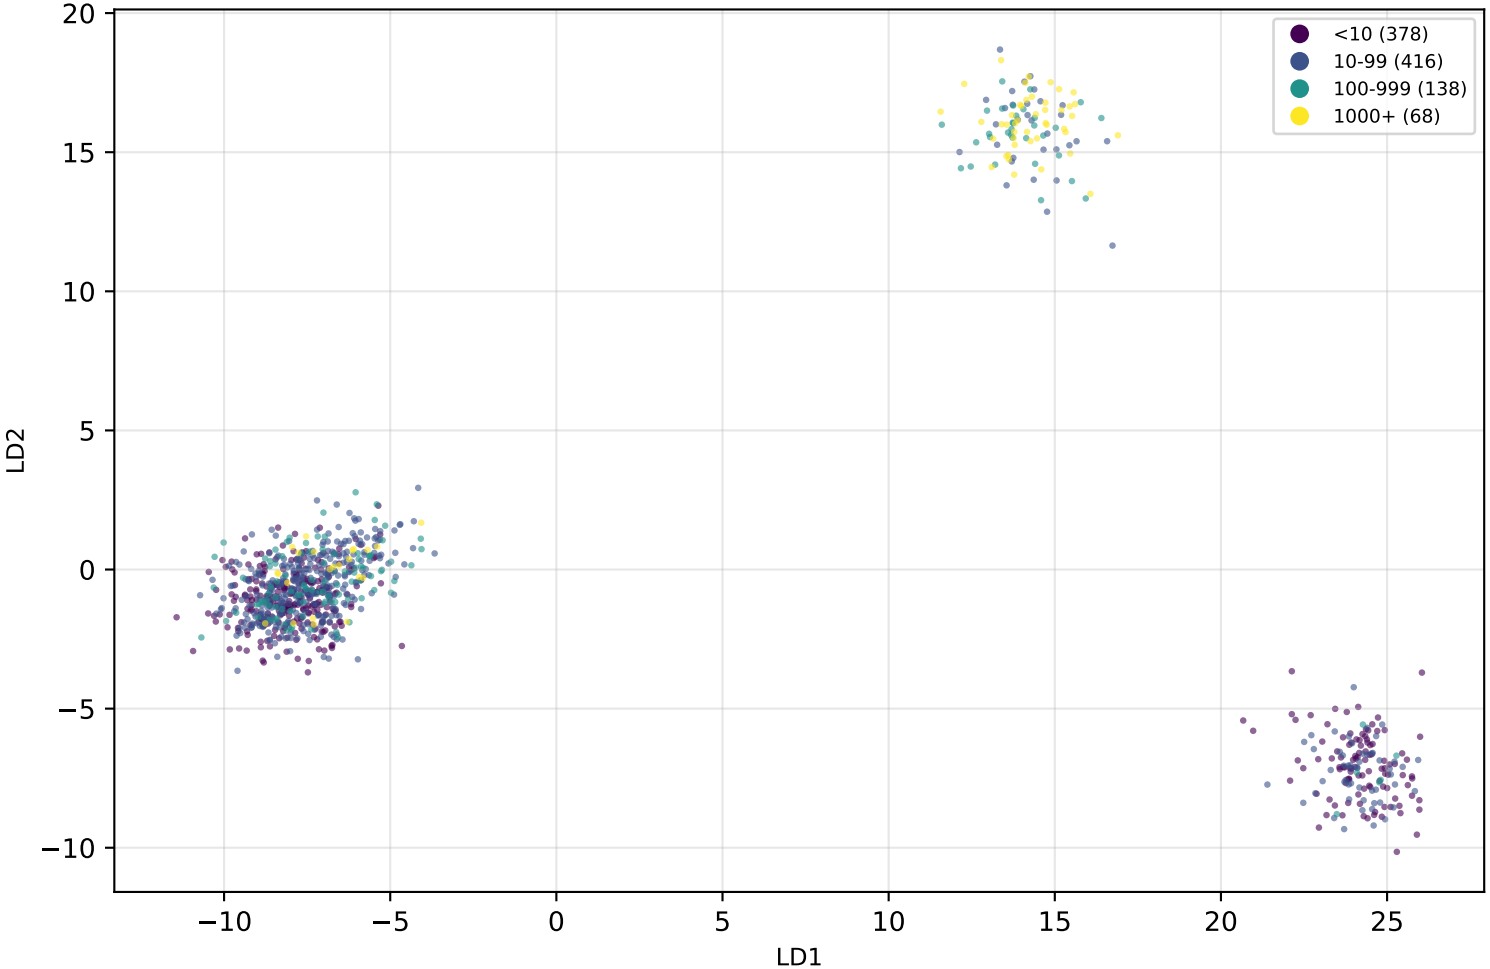

r 11 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: magnitude (in-sample acc=100

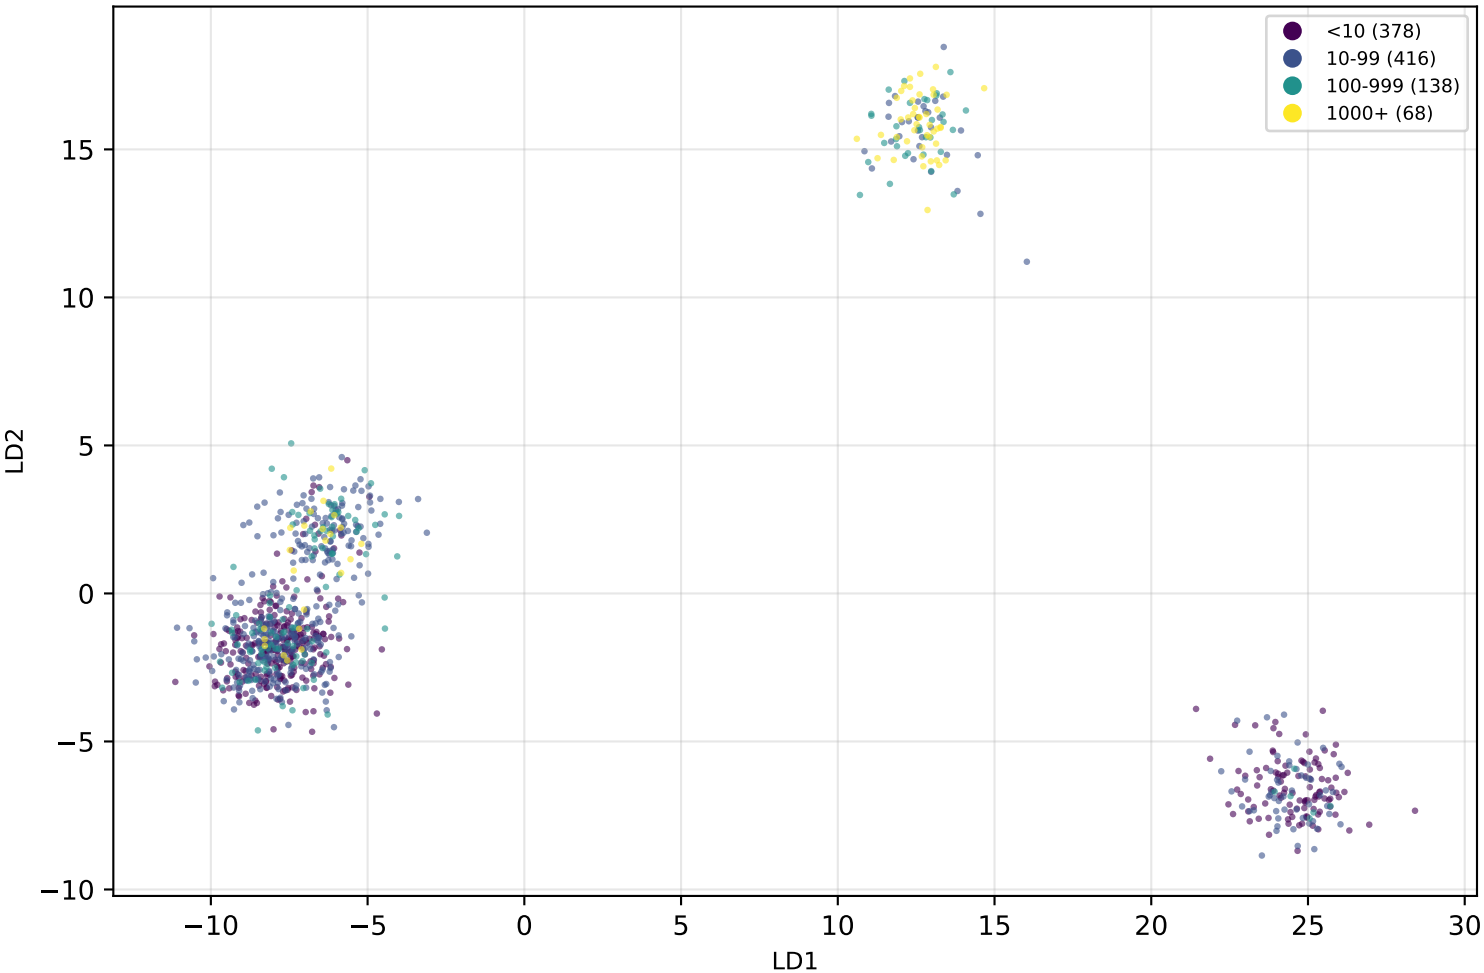

r 12 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: magnitude (in-sample acc=100

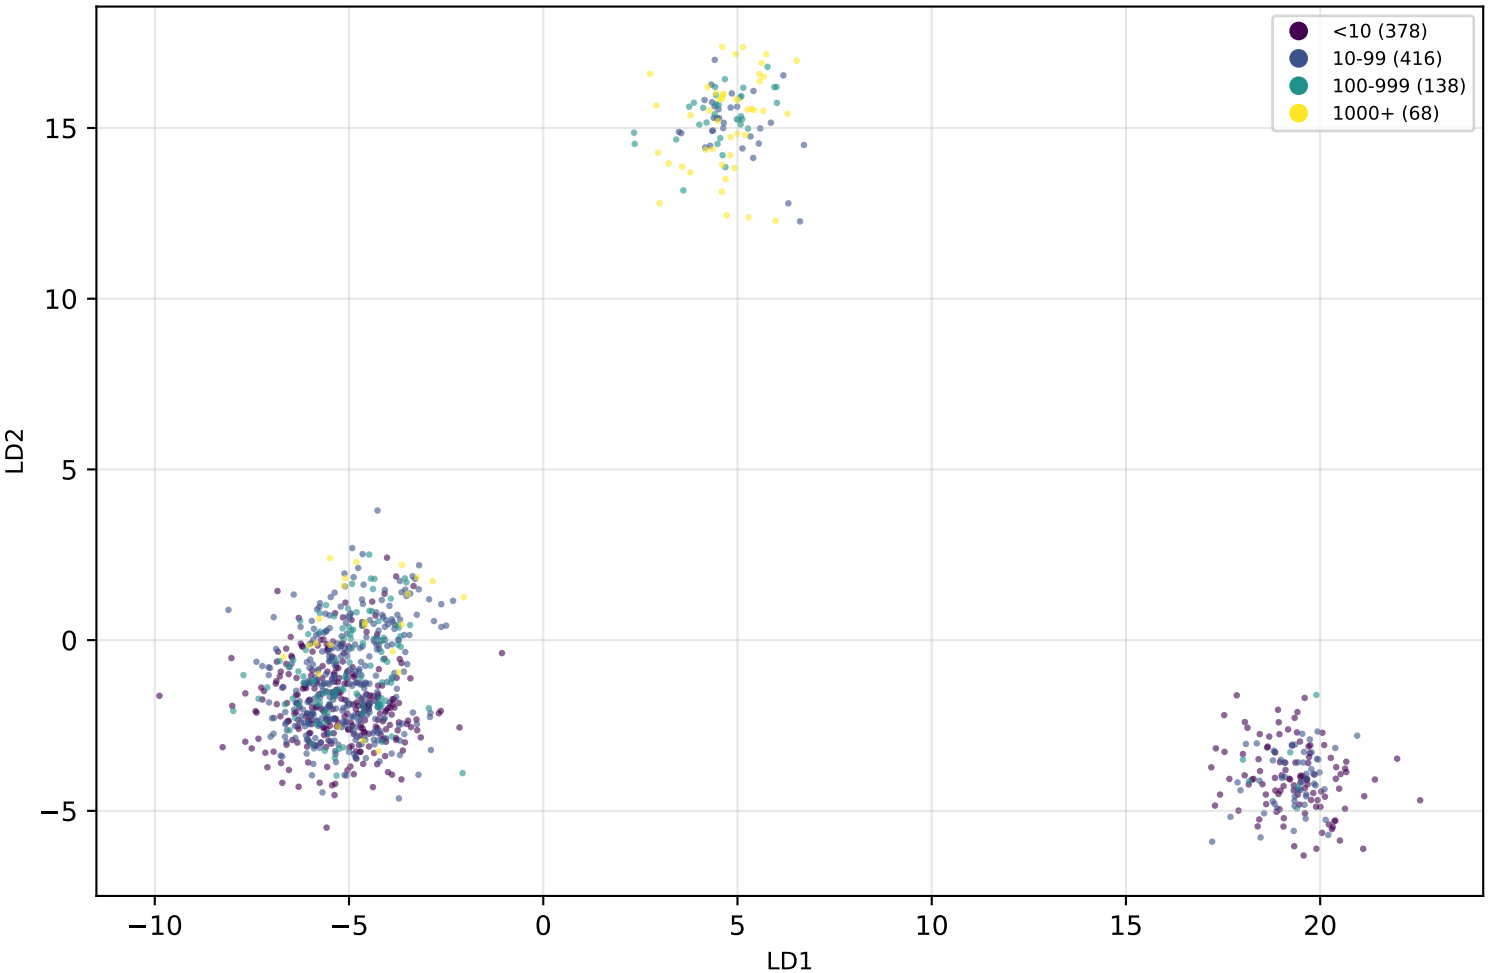

er 0 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: log_answer (in-sample acc=53.

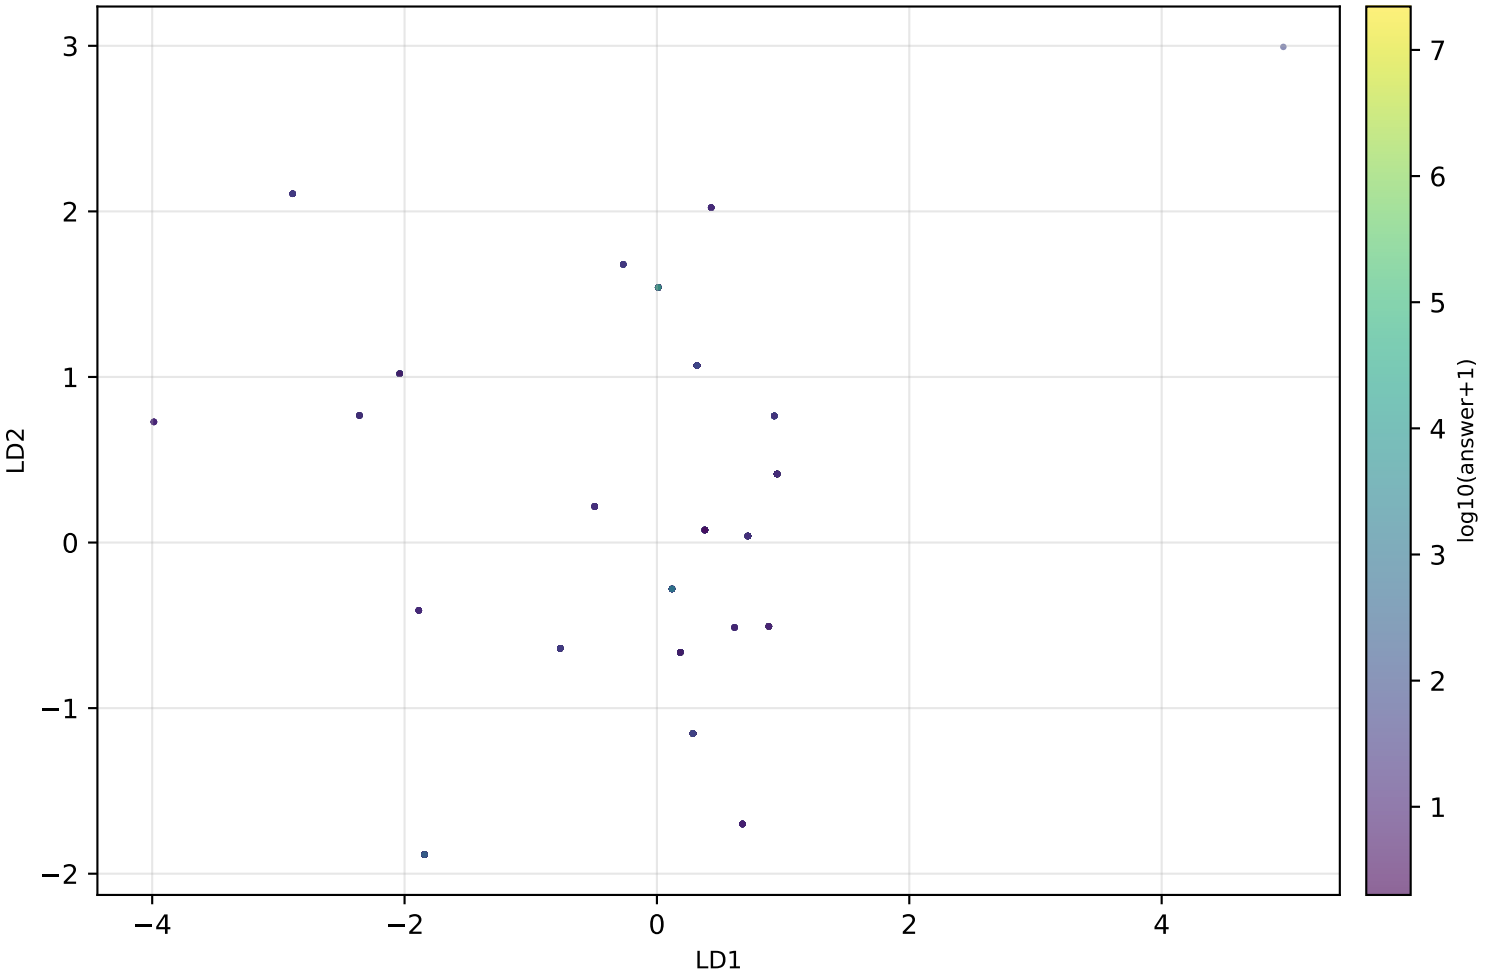

r 1 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: log_answer (in-sample acc=100

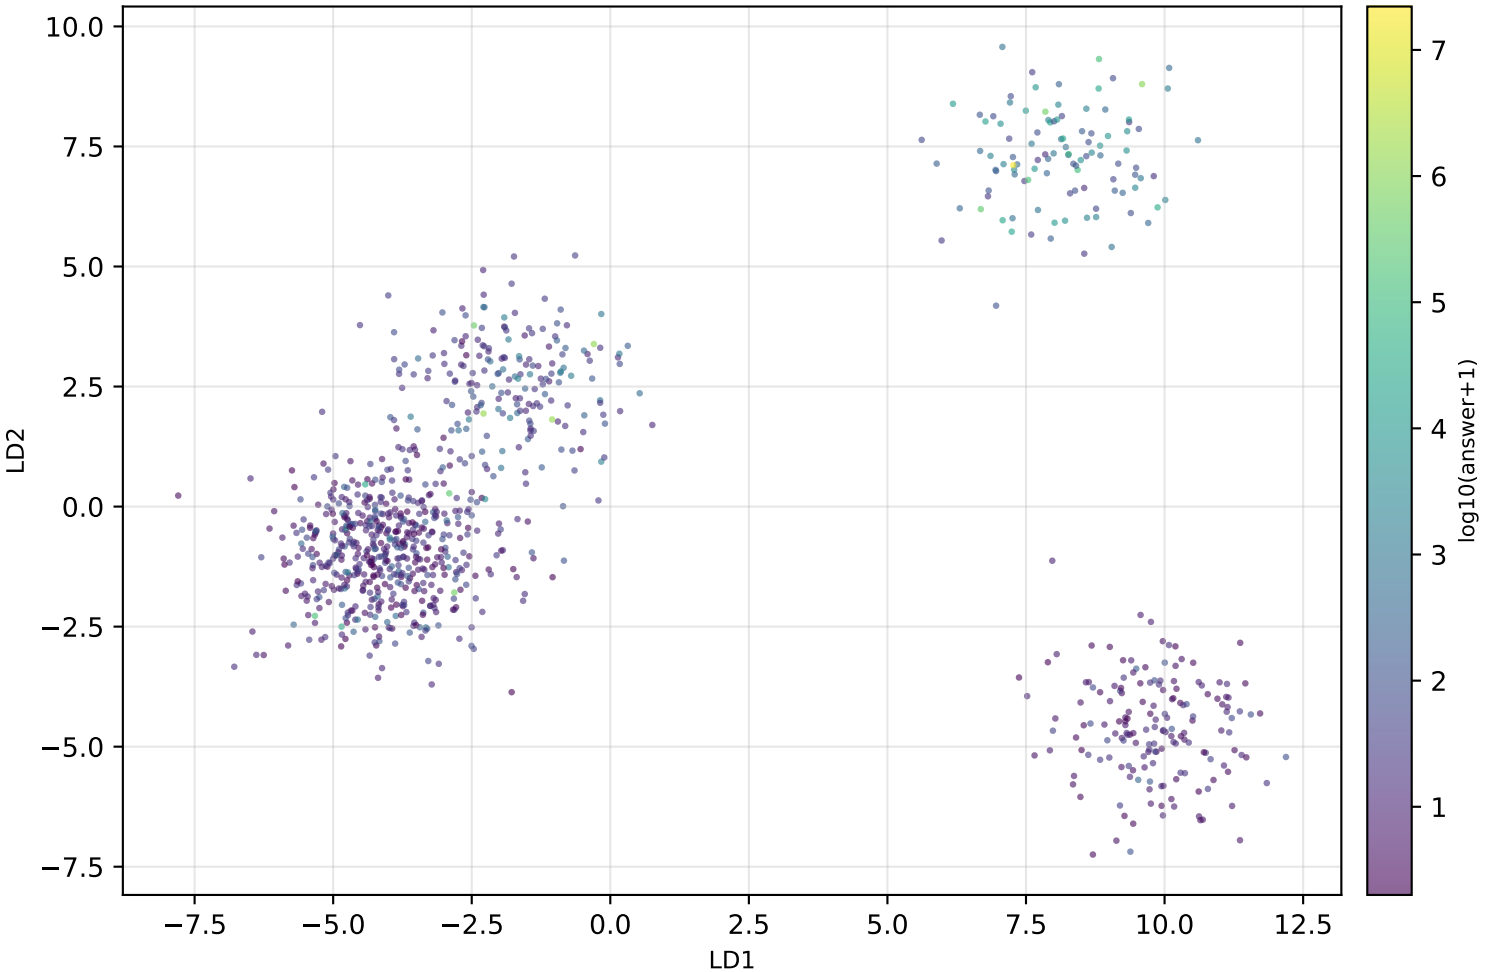

r 2 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: log_answer (in-sample acc=100

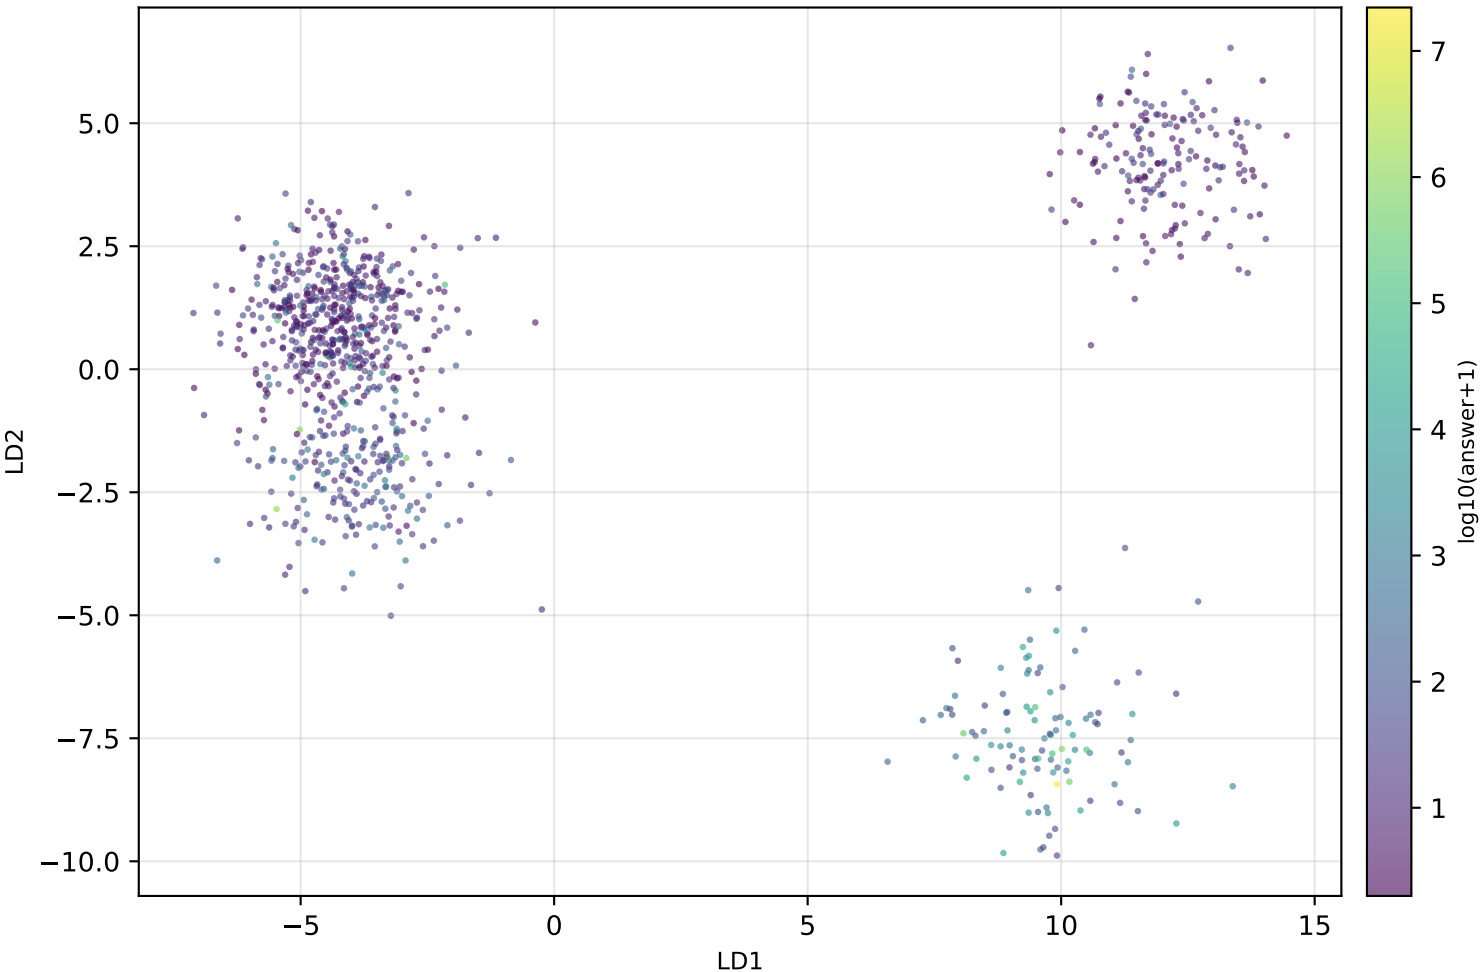

er 3 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: log_answer (in-sample acc=99.

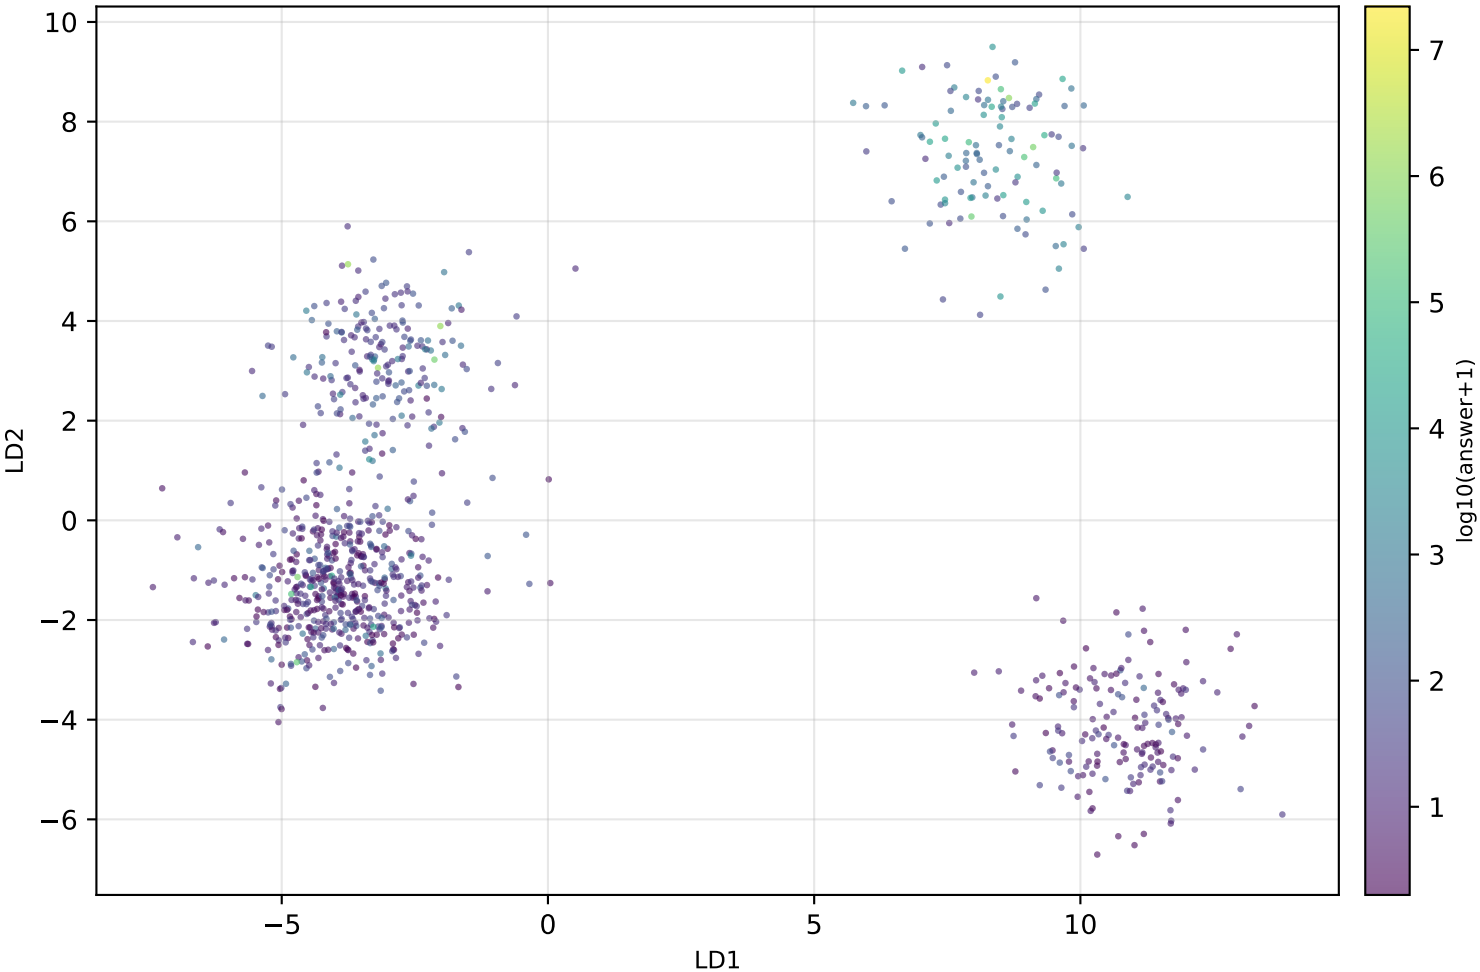

er 4 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: log_answer (in-sample acc=99.

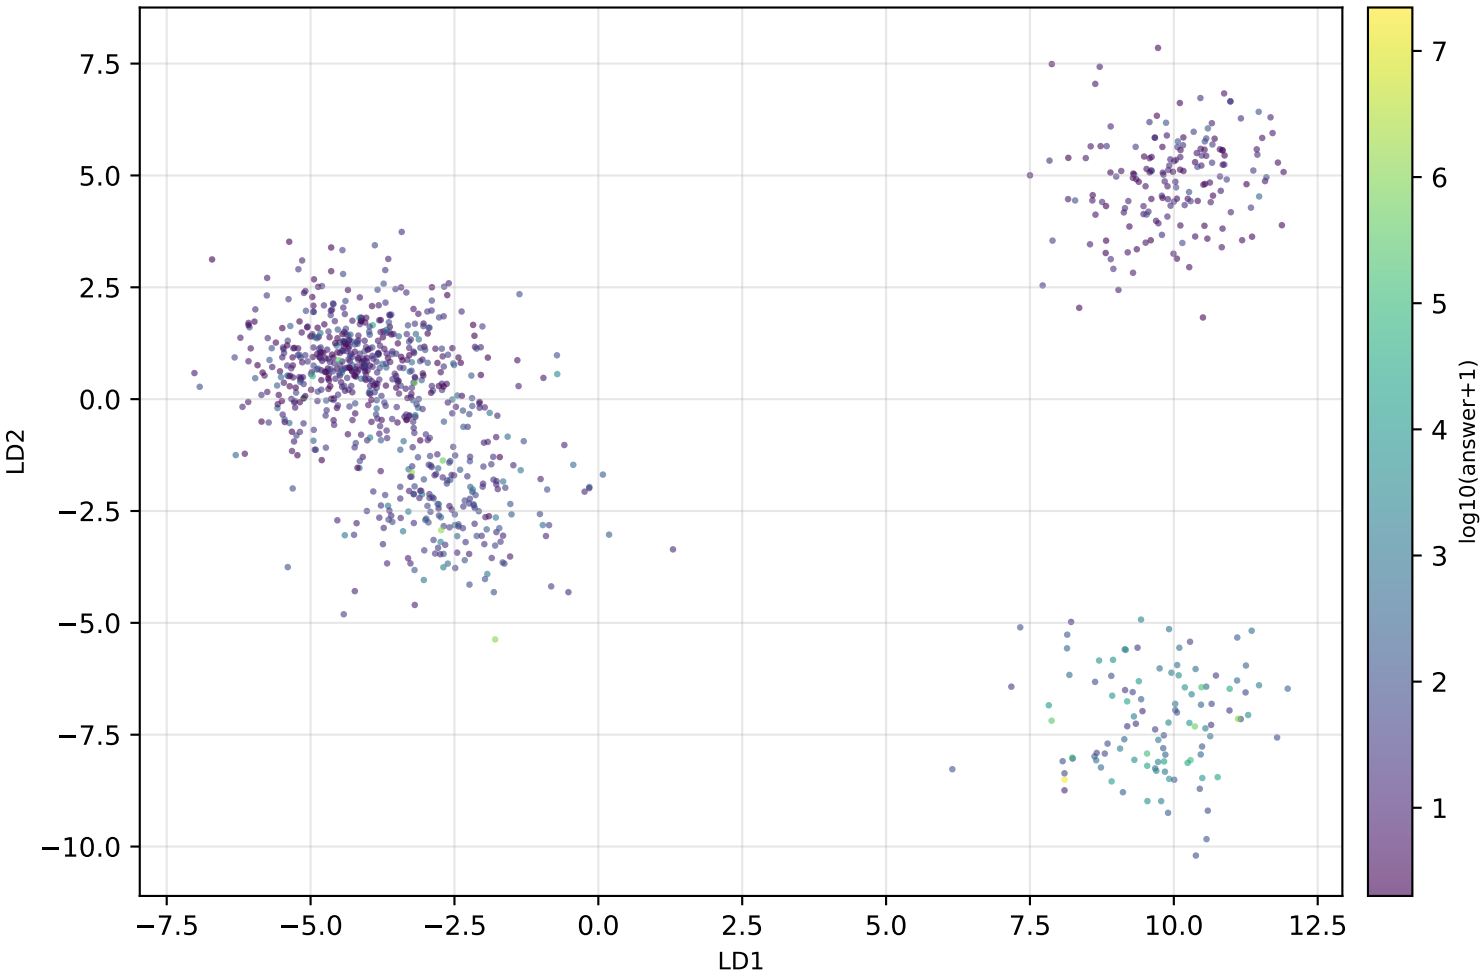

r 5 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: log_answer (in-sample acc=100

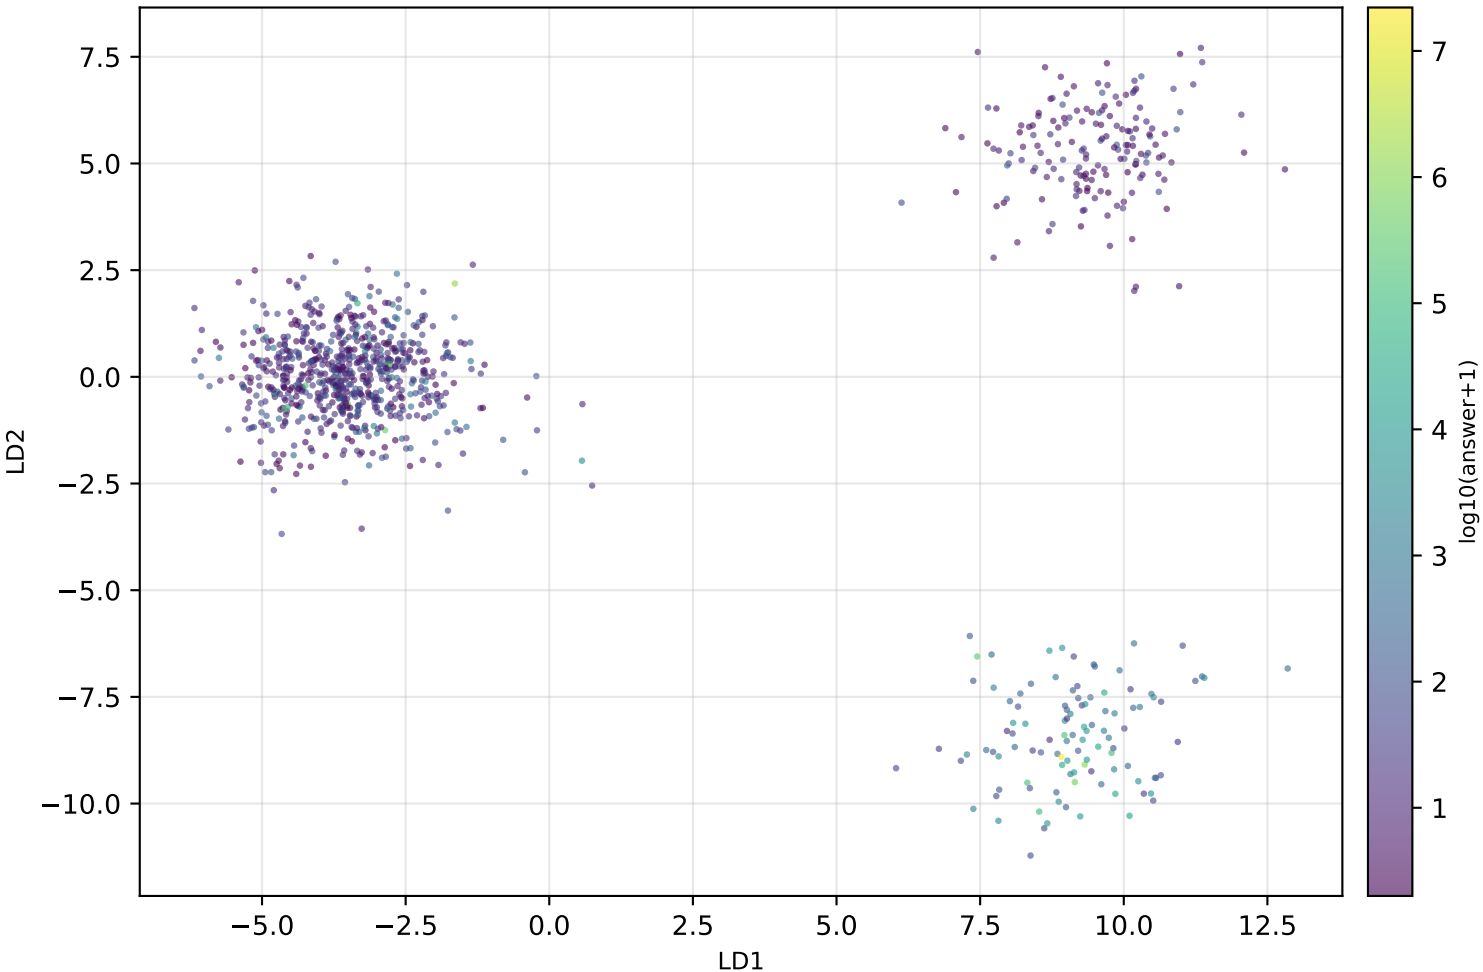

r 6 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: log_answer (in-sample acc=100

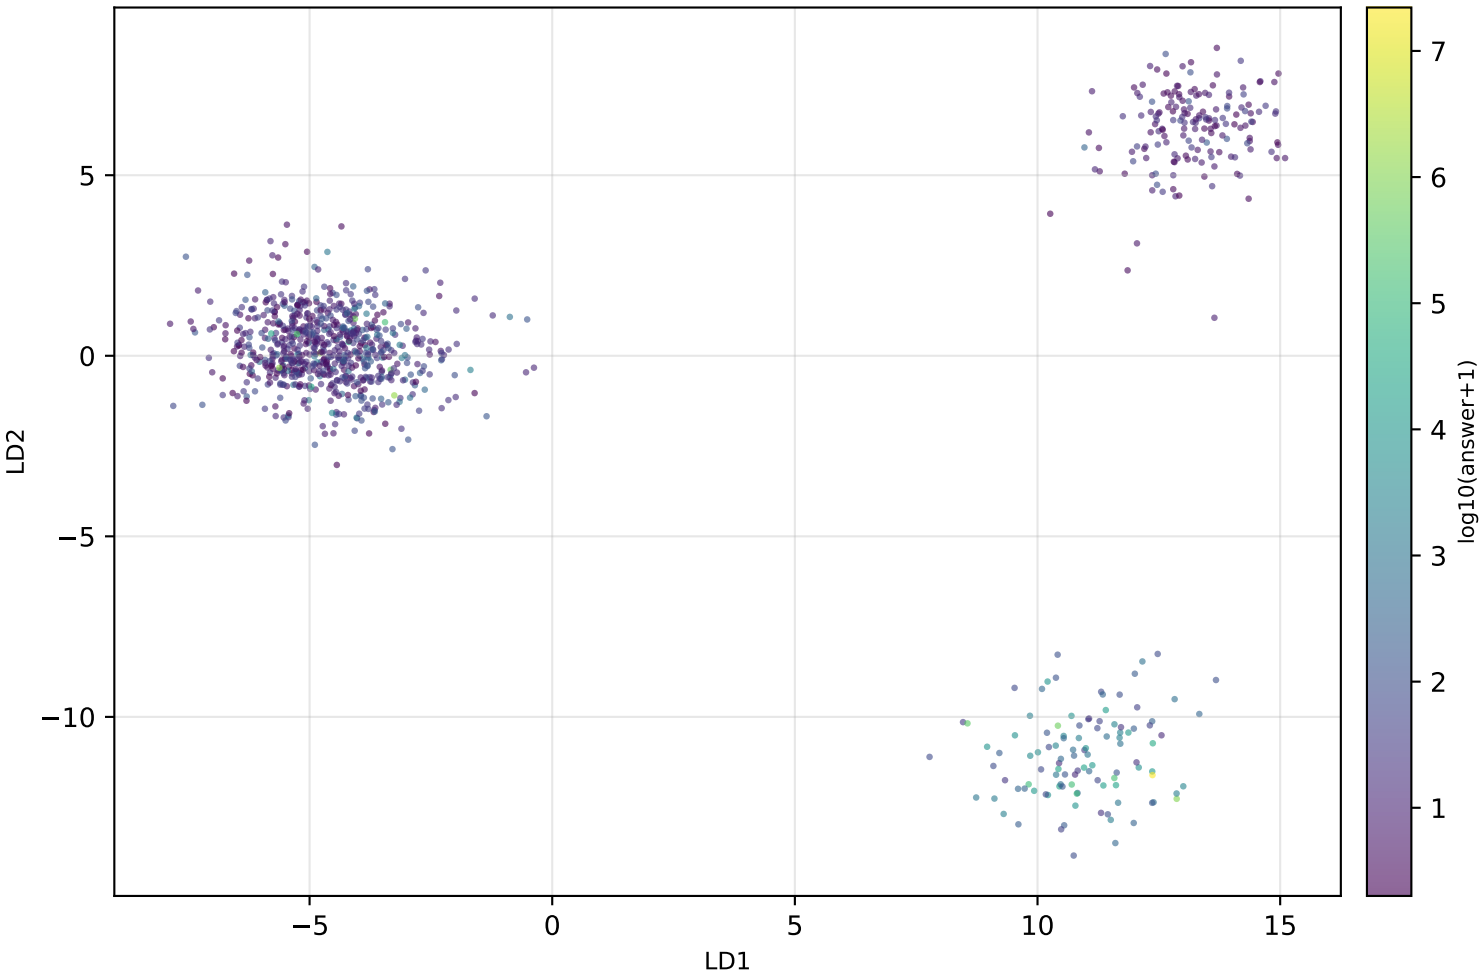

r 7 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: log_answer (in-sample acc=100

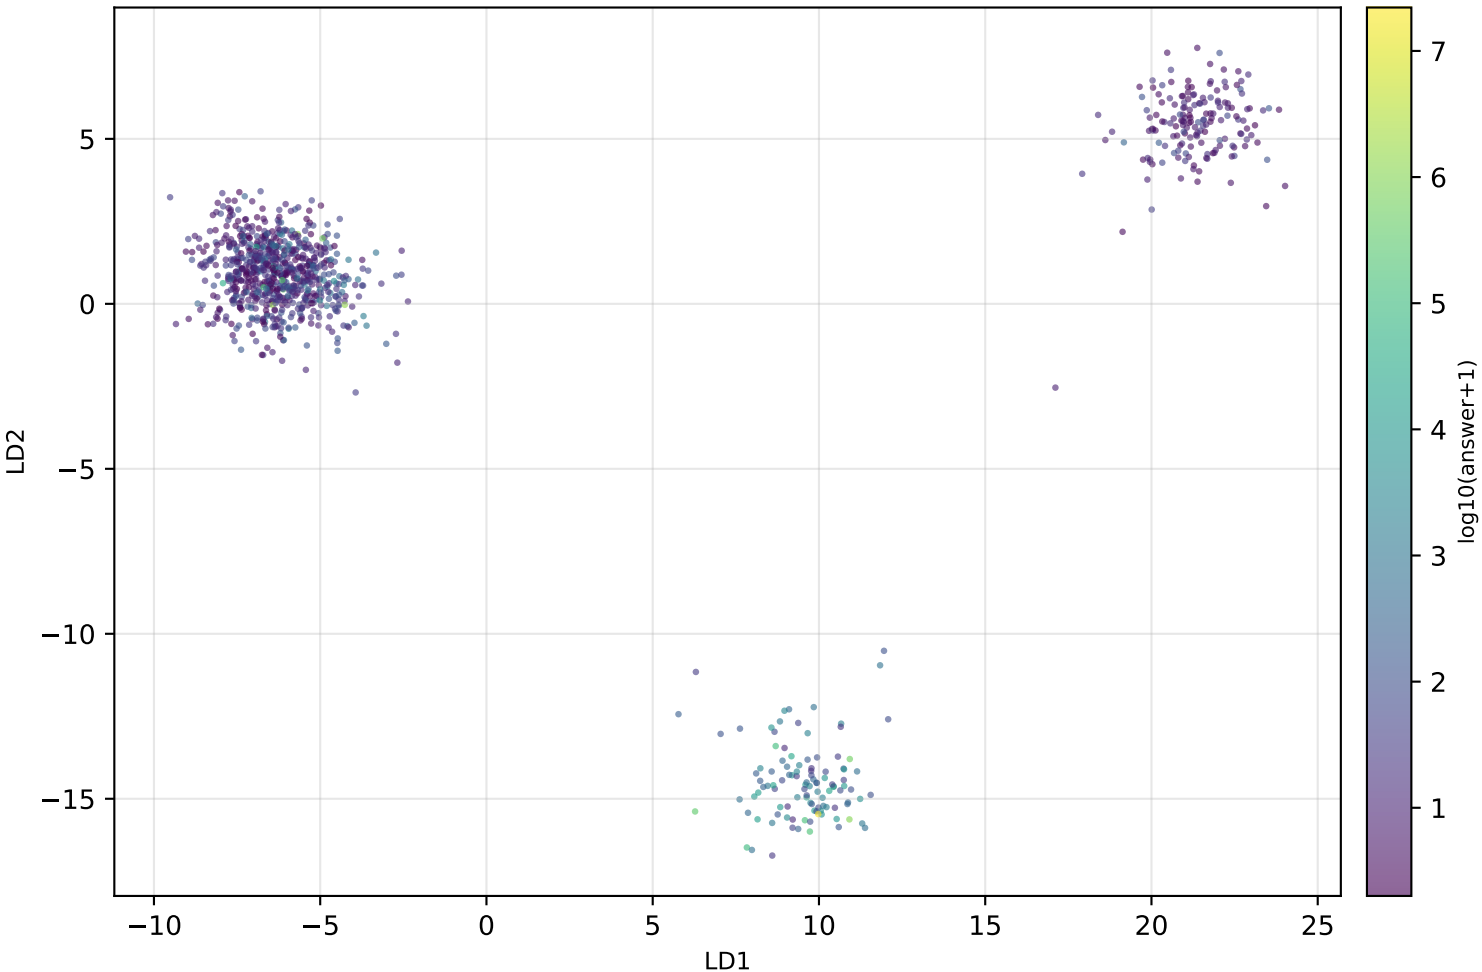

r 8 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: log_answer (in-sample acc=100

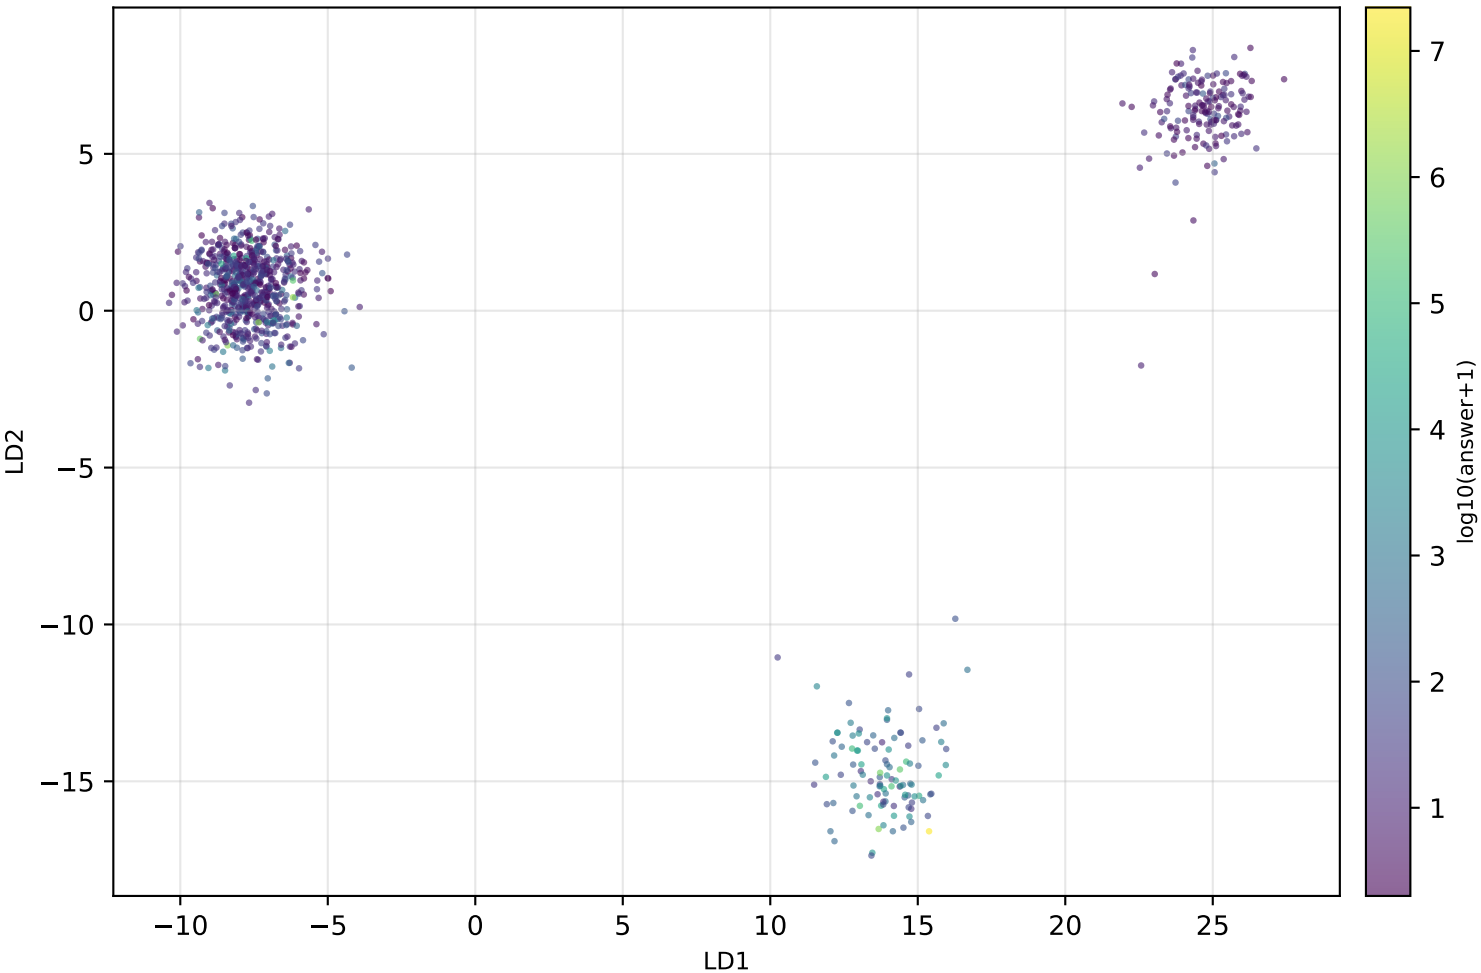

r 9 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: log_answer (in-sample acc=100

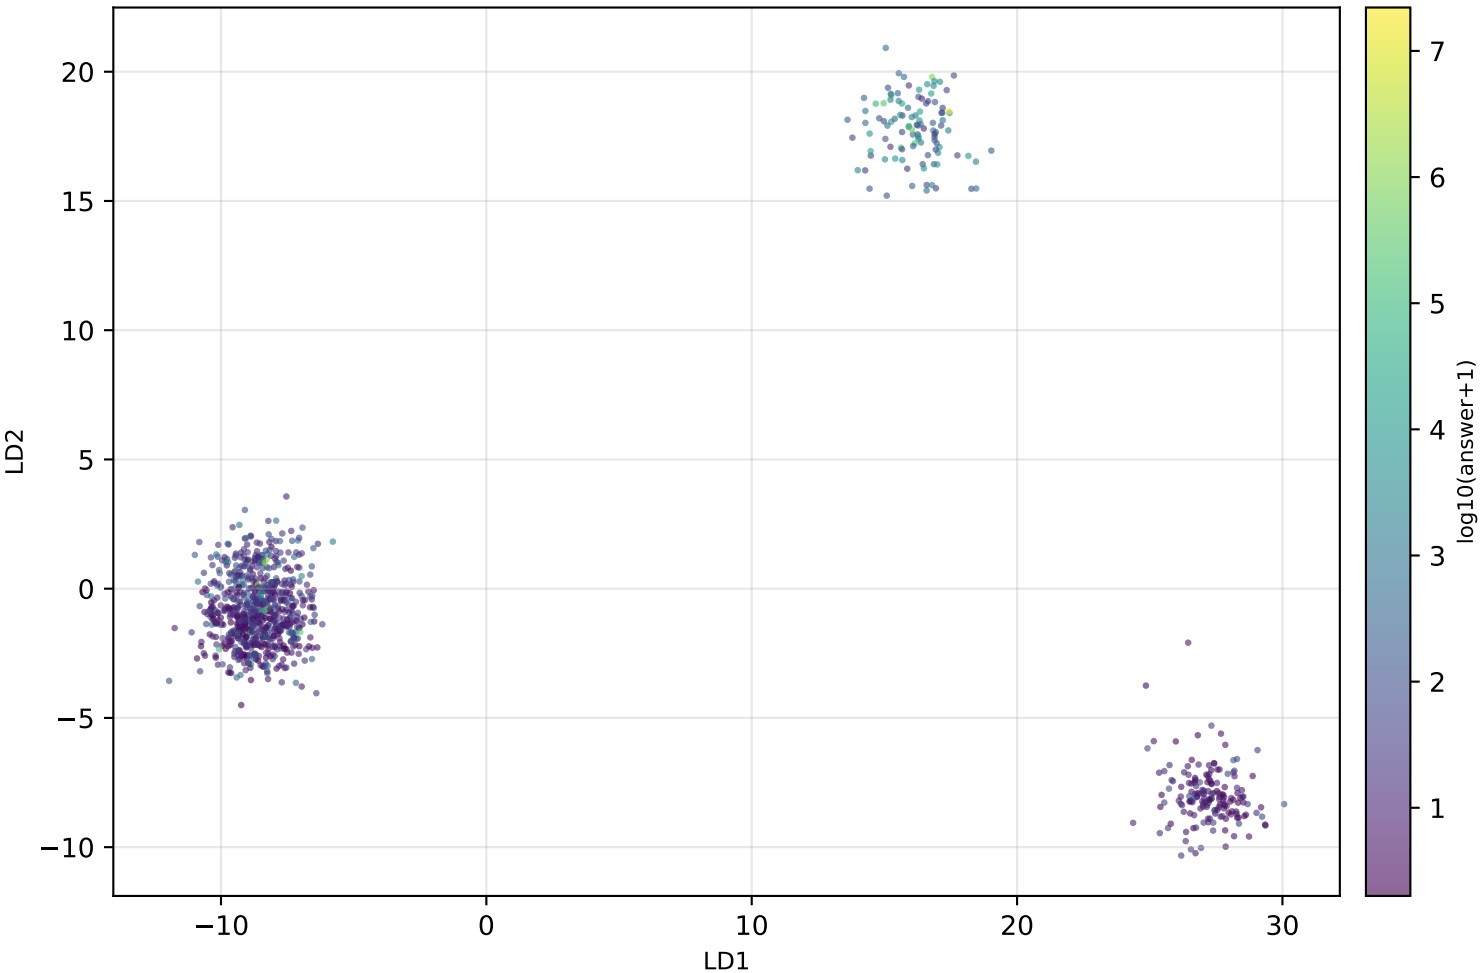

r 10 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: log_answer (in-sample acc=100

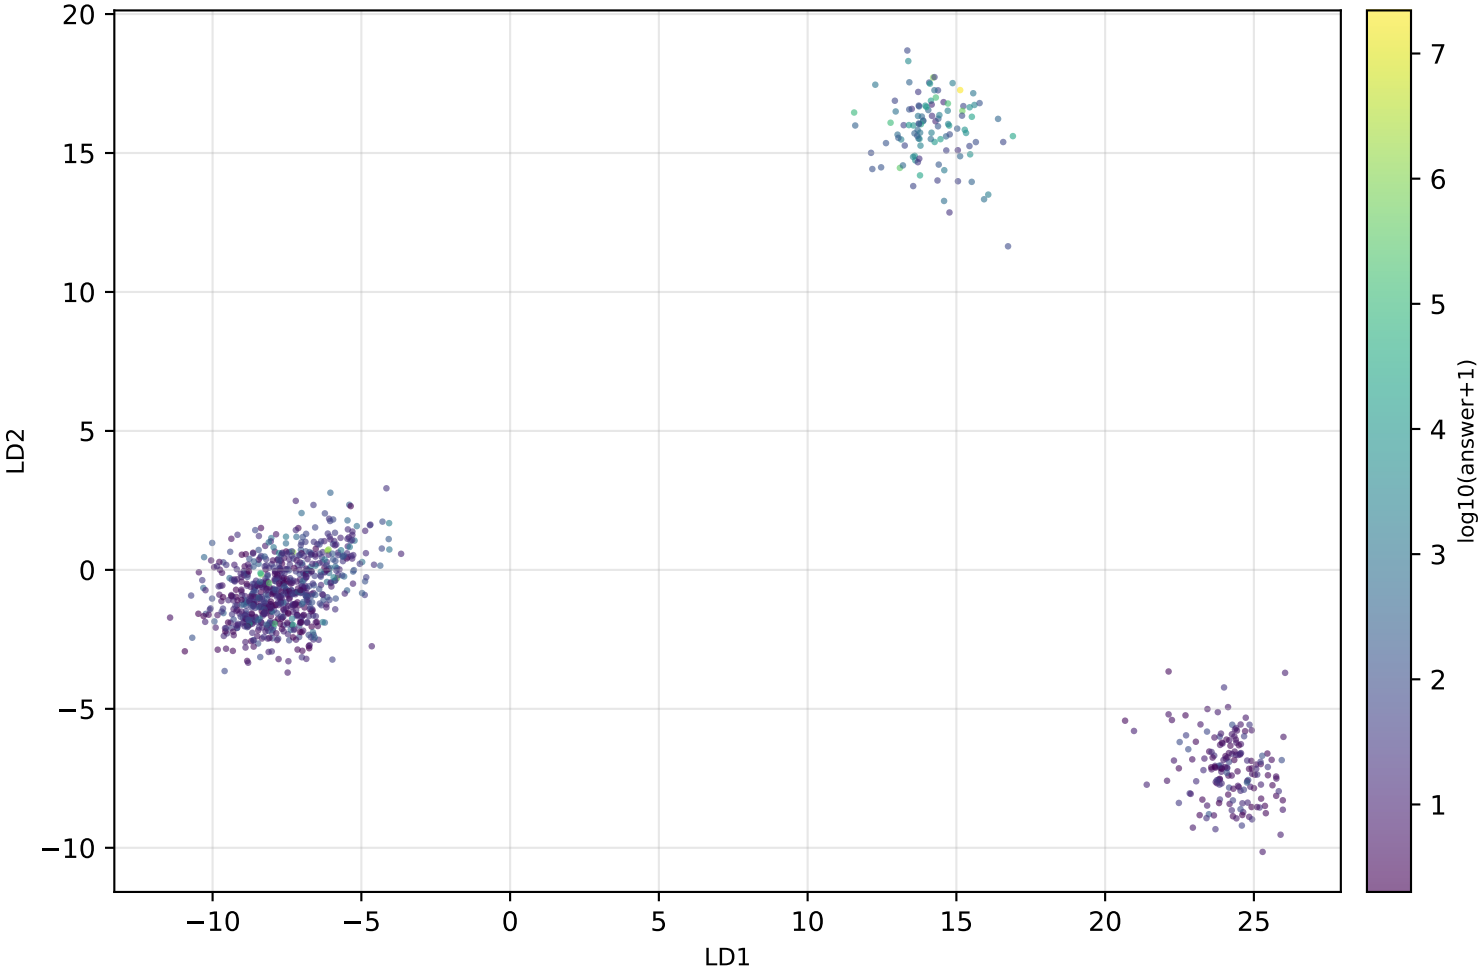

r 11 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: log_answer (in-sample acc=100

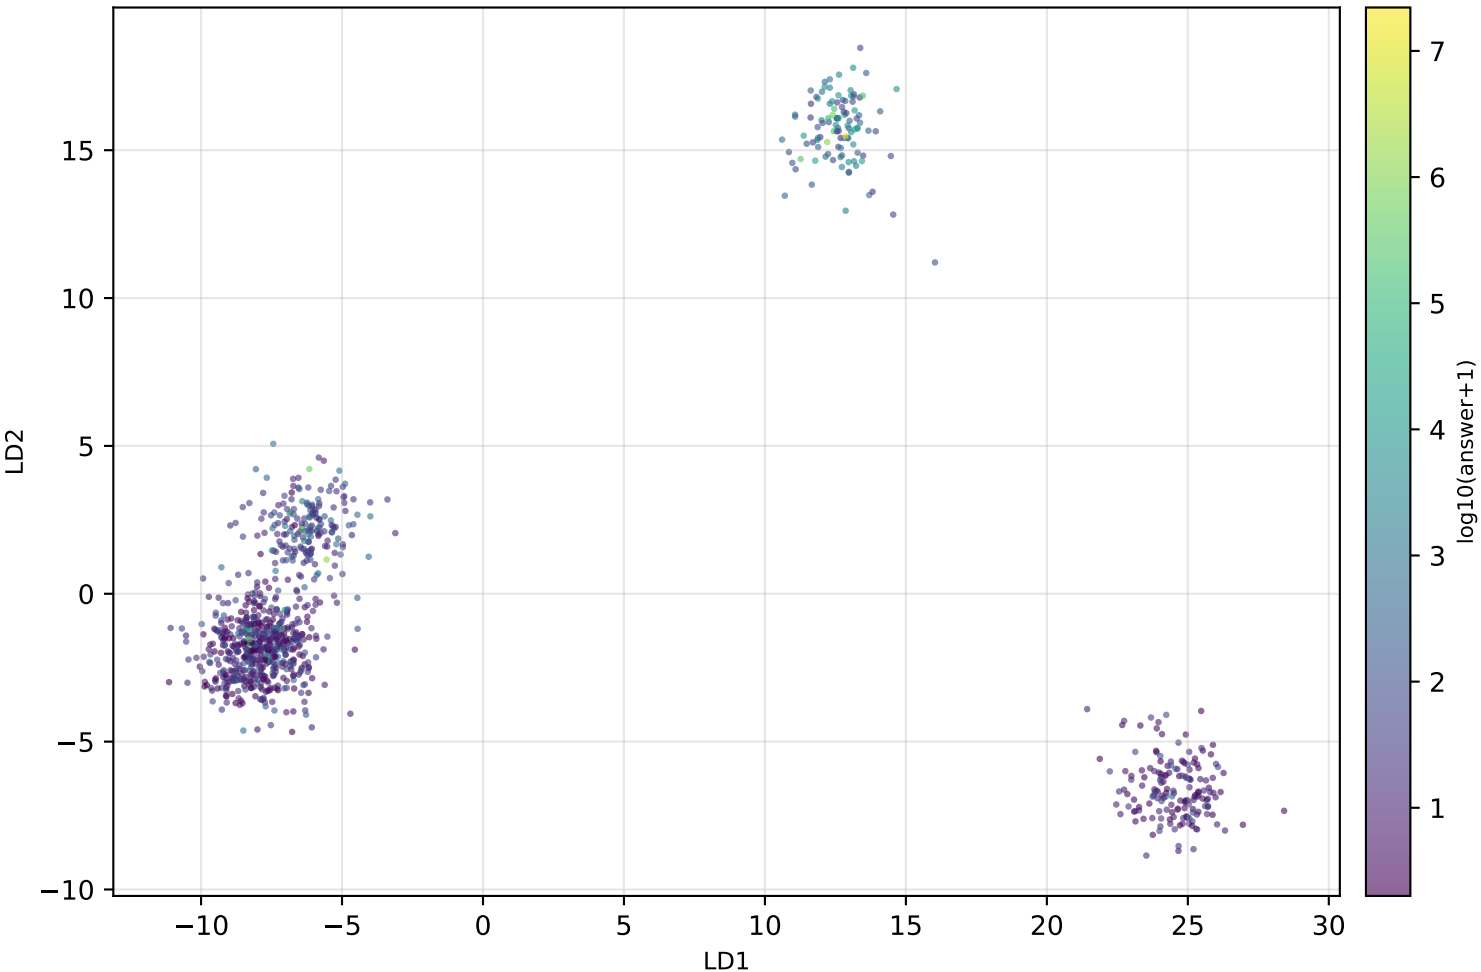
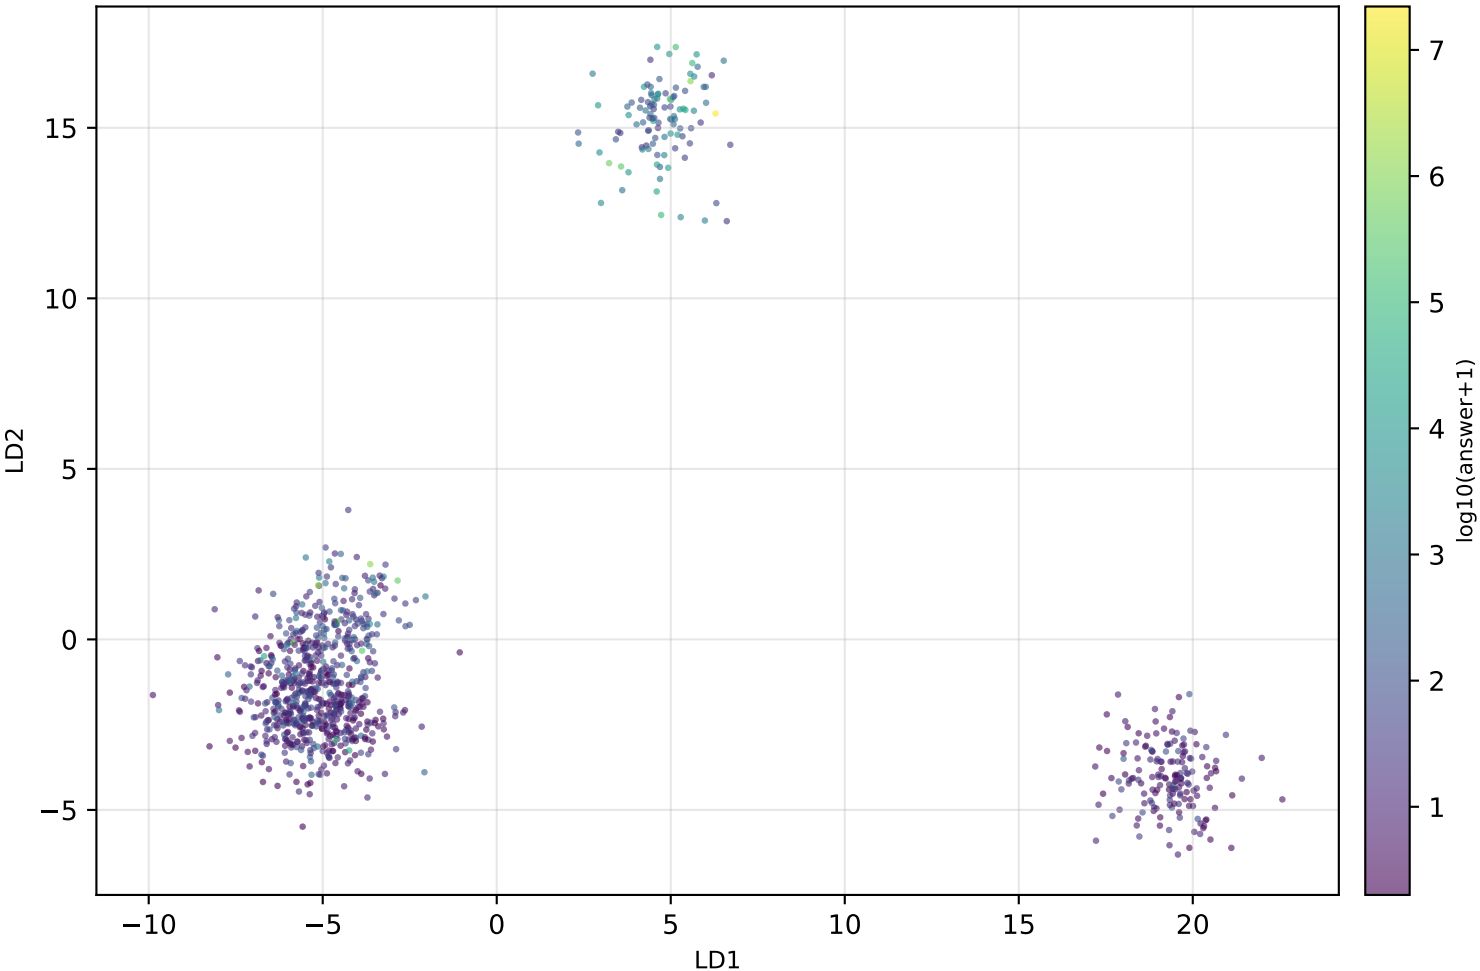
r 12 — LDA(operator) of CODI-GPT-2 ':' residual — coloring: log_answer (in-sample acc=100